

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 August 2006 (10.08.2006)

PCT

(10) International Publication Number
WO 2006/083261 A2

(51) International Patent Classification: Not classified

(21) International Application Number:
PCT/US2005/014966

(22) International Filing Date: 29 April 2005 (29.04.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/567,271 30 April 2004 (30.04.2004) US

(71) Applicant (for all designated States except US): **LOCKHEED MARTIN CORPORATION** [US/US]; Intellectual Property Law Dept., Bldg. 400, Mail Drop 043, 9500 Godwin Drive, Manassas, Virginia 20110 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ROOT, George, Raymond, Jr.** [US/US]; 2032 Huntwood Drive, Gambrills, Maryland 21054 (US).

(74) Agents: **BREYER, Wayne, S.** et al.; Demont & Breyer, LLC, Suite 250, 100 Commons Way, Holmdel, New Jersey 07733 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: RECONFIGURABLE ATTACK AND RECONNAISSANCE VESSEL I

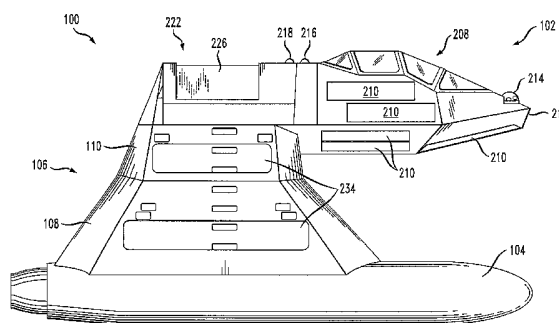

(57) Abstract: A reconfigurable marine vessel is disclosed. The marine vessel includes an upper hull, two propulsion hulls, and two struts for coupling the propulsion hulls to the upper hull. The struts are segmented and are capable of reconfiguring the marine vessel. In one configuration, the vessel can be folded for launch and recovery. In a second configuration, the struts can be extended downwardly for cruising and surveillance. In a third configuration, the struts can be extended laterally from the upper hull to provide a minimum-draft configuration for approaching a beach.

RECONFIGURABLE ATTACK AND RECONNAISSANCE VESSEL I

Statement of Related Cases

[0001] This case claims priority of U.S. provisional patent application 60/567,271, which was filed on April 30, 2004 and is incorporated by reference herein.

Field of the Invention

[0002] The present invention relates generally to high-speed attack and reconnaissance vessels.

Background of the Invention

[0003] When maneuvering in restricted conditions, moored, or at anchor, Navy vessels are particularly vulnerable to attack from a group of small, fast boats. Due to their size, speed, and maneuverability, these small boats can attack and then run and hide from larger navy vessels. To make matters worse, hostiles will often be operating in their own waters where they will typically enjoy a significant numerical advantage and superior knowledge of the waterways. This type of attack, which is referred to as a "small-boat-swarm," is the tactic of choice for terrorists.

[0004] Small-boat-swarm is best countered by similarly-sized, stealthy, fast, heavily-armed craft. An appropriately outfitted Zodiac-type raft has been used for this service. But even highly-trained navy personnel have a limited capability to withstand the repeated shock to their bodies that occurs when traveling in such craft at high speed in moderately high sea states.

[0005] Another type of craft that could be used for this type of engagement is an attack helicopter. The primary attributes of the attack helicopter include its tactical agility (*e.g.*, speed, horizon masking, and engagement geometry), assortment of weaponry, and its ability to engage multiple targets. Its primary limitations are (1) a relatively limited sortie time (*e.g.*, about 2 hours) and (2) that it is not particularly stealthy; that is, it has substantial radar, infrared, visual and audible signatures.

[0006] There is a need, therefore, for a vessel that is fast, maneuverable, and suitably equipped to engage and counter a small-boat-swarm or reconnoiter undetected in littoral waters.

Summary

[0007] The present invention provides a relatively small, stable, low-signature, fast, heavily-armed marine vessel that can sortie from a larger ship and conduct surface warfare functions in shallow littoral environments.

[0008] One of the key features of a marine vessel in accordance with the illustrative embodiment of the present invention is that it is *reconfigurable* into any of a variety of different configurations. At least one of the configurations possesses the characteristics of, and can be operated as, a SWATH craft. To provide background for the description of the illustrative embodiment, attributes of a conventional SWATH craft are described below.

[0009] "SWATH" is an acronym for "small waterplane area twin hull." A SWATH craft consists of one or two lower hulls or pontoons that are connected to an upper hull by fixed struts. The lower hulls are completely submerged such that they ride below the surface of the water. A SWATH craft does not rely on dynamic lift (*i.e.*, the hydrofoil principle) to support the vessel or augment buoyancy; all lift is provided by the buoyancy of the craft.

[0010] The struts, which lift the upper hull completely above the water, have a small waterplane area (*i.e.*, the cross sectional area at the waterline). This results in longer natural periods and reduced buoyancy-force changes. The submerged hulls of a SWATH craft do not follow surface wave motion. Control planes, which depend from the submerged hulls, provide additional motion damping and dynamic stabilization when underway. The net result of the SWATH configuration and mode of operation is extraordinary stability. That is, a SWATH craft is typically much more stable in high sea-state conditions than conventional hulls of the same length.

[0011] The stability advantage of a SWATH craft is lost, however, if the upper hull comes into contact with waves. As a consequence, the greater the distance between the lower and upper hulls, the higher the sea state in which the SWATH craft can maintain stable operation. Of course, as the distance between the lower and upper hulls increases, so does the difficulty of launching, recovering, and handling a SWATH craft aboard a mother ship. Thus, SWATH craft that are small enough to operate from a mother ship do not remain stable in relatively higher sea states, while those that are large enough to be stable in significant sea states are too large to be routinely taken aboard other vessels.

[0012] This size-related difficulty is one of a number of the issues that are addressed by the reconfigurable marine vessel disclosed herein. In fact, due to its ability to

reconfigure, the subject marine vessel possesses an extraordinarily useful but otherwise highly improbable combination of attributes, as described further below.

[0013] The ability of the marine vessel disclosed herein to reconfigure is provided by "articulating" the struts that couple the lower hulls to the upper hull. The struts are segmented and are operatively coupled to a mechanism that enables the segments to move relative to one another and relative to the upper hull.

[0014] Within the range of movement of the struts, the vessel is infinitely reconfigurable. The marine vessel will, however, typically adopt one of three primary configurations, as described below:

- **A launch/recovery** configuration, wherein the struts are folded. This enables the vessel to "fold" in upon itself so that it is small enough to be launched, recovered and housed aboard a mother ship. When folded, the vessel is about 2/3 the height, 2/3 the width, and occupies less than 1/2 the storage volume as when the struts are fully extended.
- **A cruise and surveillance** configuration, wherein the struts are fully extended downward and slightly outward from the upper hull. In this configuration, the distance between the lower hulls and the upper hull is at a maximum and is sufficient to enable operation in significant sea states. The marine vessel can be operated as a SWATH in this configuration.
- **A minimum draft** configuration, wherein the struts are laterally extended relative to the upper hull so that the lower hulls and the upper hull are substantially co-planar and all are partially submerged. In this configuration, the vessel requires minimum draft (about 0.9 meters), and is essentially able approach a beach, etc.

[0015] It is notable that in some of its primary configurations, the marine vessel is not, *per se*, consistent with the definition of "SWATH" that was provided above. Moreover, even when configured in what is nominally a SWATH form, the marine vessel can be operated in a manner that is not consistent with a SWATH craft (*e.g.*, partially submerging the upper hull, etc). In other words, a marine vessel in accordance with the illustrative embodiment is capable of physically reconfiguring or changing its mode of operation to be consistent with, or inconsistent with, a SWATH craft, as suits the mission.

[0016] The marine vessel disclosed herein is advantageously equipped with close-in offensive weapons that are capable of destroying or otherwise neutralizing most small vessels. Furthermore, the vessel is advantageously hardened to survive multiple hits from the small arms or other weapons that are likely to be fired at it.

[0017] Its articulating struts, weapons complement, hardened structure, and other features described herein endow a marine vessel in accordance with the illustrative embodiment with one or more of the following attributes, among others:

- *High-Speed capabilities*, so that littoral areas can be patrolled and controlled very rapidly, and to provide a rapid threat response.
- *Stability in Elevated Sea States* so that both weapons and sensors can be used to their full capability and so that crew members are tactically viable for extended periods.
- *An Ability to Reconfigure* to a configuration that is mission-appropriate, including an ability to “fold” itself, thereby reducing the volume required for storage and transport.
- *An Ability to partially submerge* to enable its visual, IR and radar signatures to be reduced so that it can hide, loiter, observe, and attack with the element of surprise.
- *Offensive capabilities*, essentially those of an attack-helicopter, to assure superior lethality against a wide range of hostile littoral vessels.

[0018] The foregoing attributes enable the marine vessel disclosed herein to support a variety of covert naval operations and enjoy a significant tactical advantage when conducting such operations. Likely operations will include, for example, over-the-horizon control of UAVs, monitoring and patrolling potential threat sanctuaries, reconnoitering narrow passages for high-value units, interception and engagement of hostile surface craft, and clandestine small-force insertion.

Brief Description of the Drawings

[0019] **Figures 1A** through **1C** depict reconfigurable marine vessel **100** in accordance with the illustrative embodiment of the present invention. These Figures depict a bow-end view of marine vessel **100** in one of its three primary configurations: cruise-and-surveillance (Figure 1A); minimum-draft (Figure 1B); and launch-and-recovery (Figure 1C).

[0020] **Figure 2** depicts a side-view of marine vessel **100** in the cruise-and-surveillance configuration.

[0021] **Figure 3** depicts a top view of marine vessel **100** in the cruise-and-surveillance configuration.

[0022] **Figure 4A** depicts a bow-end view of marine vessel **100** in the cruise-and-surveillance configuration.

[0023] **Figure 4B** depicts a stern-end view of marine vessel **100** in the cruise-and-surveillance configuration.

[0024] **Figures 5A** through **5C** depict a representation of one of segmented struts **106** in each of the primary configurations: cruise-and-surveillance (Figure 5A minimum-draft (Figure 5B); and launch-and-recovery (Figure 5C).

[0025] **Figure 6A** depicts a bow-end view of marine vessel **100** in the cruise-and-surveillance configuration, and in a slow-speed mode.

[0026] **Figure 6B** depicts a bow-end view of marine vessel **100** in the cruise-and-surveillance configuration, and in a high-speed, SWATH mode.

[0027] **Figure 6C** depicts a bow-end view of marine vessel **100** in the cruise-and-surveillance configuration, and in a loitering mode.

[0028] **Figure 7** depicts a bow-end view of marine vessel **100** in the minimum-draft configuration.

[0029] **Figure 8** depicts a side view of marine vessel **100** in the minimum-draft configuration.

[0030] **Figure 9** depicts a bow-end view of marine vessel **100** in the launch-and-recovery configuration.

[0031] **Figure 10** depicts a side view of marine vessel **100** in the launch-and-recovery configuration.

[0032] **Figure 11** depicts a side view of a mother ship and marine vessel **100**, wherein marine vessel **100** is shown in its three primary configurations and three primary modes.

Detailed Description

[0033] The illustrative embodiment of the present invention is reconfigurable marine vessel **100**. This marine vessel, and various alternative embodiments of it, incorporate a number of important features in addition to the ability to reconfigure. This disclosure, however, focuses primarily on the ability of marine vessel **100** to reconfigure. Other features, attributes, and capabilities of marine vessel **100** are disclosed in U.S. Patent Application Serial No. _____ (Atty Dkt. 711-055) entitled "Reconfigurable Attack and Reconnaissance Vessel II," which is incorporated by reference herein.

[0034] Marine vessel **100** is particularly well suited for military applications, but its the basic hull form and ability to reconfigure can be adapted for non-military applications.

[0035] In the illustrative embodiment, marine vessel **100** is manned. There are, however, alternative embodiments in which a marine vessel in accordance with the present invention is unmanned. The unmanned vessel, which is not depicted herein, has substantially the same form as the manned vessel. The unmanned vessel can, of course, be smaller than the manned version, and in some embodiments is about one half of the length and one half of the width (in the cruise-and-surveillance configuration) of manned marine vessel **100**. The unmanned vessel is typically operated by a remote, airborne operator (in a helicopter, *etc.*).

[0036] INTRODUCTION TO THE THREE
PRIMARY CONFIGURATIONS
OF MARINE VESSEL 100

[0037] Referring now to the Drawings, Figures 1A through 1C depict, via bow-end views, three primary configurations of marine vessel **100**. As depicted in these Figures, marine vessel **100** includes upper hull **102**, lower hulls **104**, and struts **106**.

[0038] The struts are segmented into lower segment **108** and upper segment **110** by joints or hinges. Hinge **109** movably couples lower segment **108** to upper segment **110** and hinge **111** movably couples upper segment **110** to upper hull **102**. The three primary configurations of marine vessel **100** are obtained by changing the position of the segments with respect to one another, with respect to upper hull **102**, or both. It is to be understood that, within their range of motion, the segments of strut **106** are substantially infinitely positionable so that a variety of other configurations are possible as well. Further description of struts **106** and the other basic structural elements of marine vessel **100** is provided later in this Specification.

[0039] Figures 1A, 2, 3, 4A, 4B, and 6A-6C depict vessel **100** in a *cruise-and-surveillance* configuration. In this configuration, lower strut **108** and upper strut **110** are co-linear and are fully extended below and slightly outward of upper hull **102**. In this configuration, marine vessel **100** has its maximum height, which for the illustrative embodiment is about 5.6 meters (see Figure 4A: $H_F + D$).

[0040] In various operating modes of this configuration, which are described later in this Specification, lower hulls **104** can be completely submerged, as depicted in Figures 1A, 6B and 6C, or can partially breach the surface. In fact, in some operating modes of this configuration, as much as about 40 percent of the volume of upper hull **102** can be below the waterline. The operation of marine vessel **100** in the cruise-and-surveillance configuration is described in further detail later in this Specification.

[0041] Figures 1B, 7 and 8 depict marine vessel **100** in a *minimum-draft* configuration. In this configuration, lower strut **108** and upper strut **110** extend substantially laterally from upper hull **102**. In the nominal minimum-draft configuration, the bottom surface of lower hulls **104** and bottom surface of upper hull **102** are substantially co-planar. In this configuration, marine vessel **100** exhibits its minimum draft, which for the illustrative embodiment is about 0.9 meters (see Figure 7, D_M). Also, in this configuration, marine vessel **100** has its maximum width W , which for the illustrative embodiment, is about 9.5 meters (see Figure 7).

[0042] As depicted in Figures 1B, 7 and 8, in the minimum-draft configuration, a substantial portion of lower hulls **104** are above the water line and a substantial portion of upper hull **102** is below the water line. The operation of marine vessel **100** in this configuration is described further later in this Specification.

[0043] Figures 1C, 9, and 10 depict marine vessel **100** in a *launch-and-recovery configuration*. In this configuration, lower strut **108** and upper strut **110** are folded so that they are substantially parallel to one another. In the launch-and-recovery configuration, marine vessel **100** occupies its minimum storage volume. In this configuration, the manned version of marine vessel **100** has a width of about 3.7 meters and a height of about 3.7 meters.

[0044] DESCRIPTION OF THE
BASIC STRUCTURAL ELEMENTS
OF MARINE VESSEL 100

[0045] For pedagogical purposes, this Specification proceeds with the description of basic structural elements of marine vessel **100** (e.g., upper hull **102**, struts **106**, lower hulls **104**, etc.). Afterwards, this Specification continues with further description of the salient attributes of the primary configurations and operational modes of marine vessel **100**.

[0046] Figures 2, 3 and 4A-4B, which depict marine vessel **100** in the cruise-and-surveillance configuration, will be referenced for the description of the basic structural elements. Figure 2 depicts a side view, Figure 3 depicts a top view, Figure 4A depicts a bow-end view, and Figure 4B depicts a stern-end view of marine vessel **100**.

[0047] *Upper Hull 102*

Referring now to Figures 2 through 4B, upper hull **102** includes cockpit **208**, which typically accommodates a crew of 1 to 3 persons. Upper hull **102** also houses above-water sensors, most of the weapons and weapons control systems, the vehicle control systems, RF communications, and most of the countermeasures.

[0048] The core weapons supported by upper hull **102** are essentially those of an attack helicopter. Weapons include, without limitation, forward-firing, line-of-sight missiles, such as Hellfire, small caliber (*e.g.*, 20 millimeter, *etc.*) machine guns/cannons, 40 millimeter automatic grenade launchers, short-range air-to-air missiles, and, in some embodiments, non line-of-sight missiles.

[0049] The core weapons that are carried by upper hull **102** are advantageously stowed internally in fully-retractable weapons bays **210** that rotate open for firing. The retractable bays reduce both drag and radar signature and are similar to those used in advanced attack helicopters.

[0050] The core sensors supported by upper hull **102** include navigation and avoidance radar **212**, IR/EO search & targeting sensor **214**, deployable RF communications antennae **216**, and deployable sensors **218**. The deployable antennae **216** and sensors **218** are disposed on two retractable/extendable masts that reside within upper hull **102**. The masts, which retract to a length of about 1.2 meters, are capable of raising antennae **216** and sensors **218** to a height of about 3.7 meters above upper hull **102**.

[0051] Snorkels **320** (Figure 3) are disposed aft of cockpit **208**. As described later in this Specification, snorkels **320** draw in air. The air is routed through ducting, as necessary, to the engines. In the illustrative embodiment, the engines are disposed in each lower hull **104**.

[0052] Marine vessel **100** supports two types of mission systems: core systems and mission-specific payloads. Core systems are those that are carried on most missions and include, without limitation, the types of systems described above (*e.g.*, navigation, communications, standard weapons and sensors, *etc.*).

[0053] As the name implies, mission-specific payloads are not normally carried on marine vessel **100** and are used, rather, in the context of specific missions. Examples of mission-specific payloads include, without limitation, certain types of weapons, specialized sensors, expendables, and even personnel.

[0054] In the illustrative embodiment, mission-specific payloads are carried in removable mission module **226**. The mission module resides in mission-module bay **222**, which is disposed toward the aft end of marine vessel **100**. Mission module **224** is inserted into and removed from upper hull **102** through opening **324** at the stern of marine vessel **100** (*see, e.g.*, Figure 4B). Insertion and removal of mission module **226** can be performed, for example, while marine vessel **100** is aboard a mother ship. This accommodates changing missions without the need to outfit multiple vessels with a different complement of equipment.

[0055] Once inserted into marine vessel **100**, the back of mission module **226** seals opening **324**. Hatch **328** provides access to the interior of mission module **226**. Additionally, in some embodiments, various hatches or ports (not depicted) are disposed on the top and sides of mission module **226**. These hatches and ports are used for any of variety of purposes, including, for example, the deployment of mission-specific sensors, weapons, or expendables (e.g., sonobuoys, countermeasures, etc.).

[0056] In the illustrative embodiment, when mission module **226** is disposed in mission bay **224**, the exterior of the mission module forms a portion of upper hull **102**. Mission module **226** is configured with standard mechanical, electrical, and data interfaces that couple to appropriate interfaces within upper hull **102**. In some embodiments, marine vessel **100** can operate with or without mission module **226**. Further detail concerning mission module **226** is provided in U.S. Patent Application Serial No. _____ (Atty Dkt. 711-055), as previously referenced.

[0057] *Struts 106*

Struts **106** depend from upper hull **102** and couple it to lower hulls **104**. In the illustrative embodiment, each strut **106** is structurally segregated into lower segment **108** and upper segment **110**. These two segments are movably coupled to one another and the upper segment is movably coupled to upper hull **102**. As previously disclosed, it is these segmented, movable struts that enables marine vessel **100** to reconfigure.

[0058] Figures 5A through 5C depict a simplified representation of one of segmented struts **106** in each of the primary configurations as an aid to description of the operation of the struts. In particular, Figure 5A depicts the cruise-and-surveillance configuration, Figure 5B depicts the minimum-draft configuration, and Figure 5C depicts the launch-and-recovery configuration.

[0059] Using Figure 5A as a reference or zero position, the arrows depict the direction of movement for each of the segments as marine vessel **100** reconfigures. In particular, lower segment **108** pivots around hinge **109** toward upper segment **110** in a counterclockwise direction. Upper segment **110** pivots around hinge **111** toward upper hull **102** in a clockwise direction. Angle α is defined as the angle between segment **108** and segment **110** and angle β is defined as the angle between segment **110** and the side of upper hull **102**. It is to be understood that the direction of movement indicated for lower segment **108** and upper segment **110** is relative to the reference position that is depicted in Figure 5A. That is, lower segment **108** is capable of moving in a clockwise direction and upper segment **110** is capable of moving in a counterclockwise direction. The direction of movement is simply a function of the starting and ending configurations.

[0060] Referring now to Figure 5A —the cruise-and-surveillance configuration— segments **108** and **110** are co-linear. That is, angle α between segment **108** and segment **110** is 180 degrees. Furthermore, angle β between segment **110** and the side of upper hull **102** is advantageously 180 degrees. Orienting segment **110** at 180 degrees relative to upper hull **102** results in a smooth, continuous surface, which reduces the signature (radar, *etc.*) of marine vessel **100**.

[0061] Figure 5B depicts strut **106** in the minimum-draft configuration. In this configuration, angle α is about 120 degrees and angle β is about 55 degrees. As a consequence, to reconfigure from the nominal cruise-and-surveillance configuration to the nominal minimum-draft configuration, segment **110** pivots clockwise toward upper hull **102** through about 125 degrees. Segment **108** pivots counterclockwise toward segment **110** through about 60 degrees.

[0062] Figure 5C depicts strut **106** in the launch-and-recovery configuration. In this configuration, angle α is about 0 degrees and angle β is about 15 degrees. As a consequence, to reconfigure from the nominal cruise-and-surveillance configuration to the nominal launch-and-recovery configuration, segment **110** moves clockwise toward upper hull **102** through about 165 degrees and segment **108** moves counterclockwise toward segment **110** through about 180 degrees.

[0063] It is to be understood that in other embodiments, angles α and β can have other values. Also, to the extent that marine vessel **100** is placed in intermediate configurations, these angles will have other values. Furthermore, the range of movement of segments **108** and **110** might be limited or expanded by any number of factors, including the choice of hinge mechanism, physical attributes of segments **108** and/or **110**, *etc.* Those skilled in the art, after reading this disclosure, will be able to select suitable values for angles α and β for a particular configuration and define a suitable overall range of motion for strut segments **108** and **110**.

[0064] In the illustrative embodiment, the mechanisms that are required for repositioning the upper and lower sections of the strut are housed primarily within upper strut segment **110**. In some alternative embodiments, at least some of the mechanisms (*e.g.*, motors, linear actuators, *etc.*) are disposed elsewhere in marine vessel **100** (*e.g.*, in upper hull **102**, *etc.*).

[0065] Any of a variety of different mechanisms can be used for repositioning segments **108** and **110** of strut **106**. For example, in some embodiments, a power hinge, such as are used at the wing-folds of carrier aircraft can be used. The power hinge is essentially a tubular planetary-gear assembly that generates very high mechanical advantage and is

driven by either a closed circuit (no voluminous reservoir) hydraulic motor or an electric motor. The power hinge is commercially available from Moog, of East Aurora, NY, or others.

[0066] In some other embodiments, a mechanism comprising relatively long hinges that are powered by linear hydraulic actuators can be used. Those skilled in the art, after reading this disclosure, will be able to design and build mechanisms that are suitable for repositioning segments **108** and **110** of strut **106**.

[0067] In addition to the presence of strut-repositioning mechanisms, both lower **108** and upper **110** segments of strut **106** house conduits for electrical power and data cabling, as well as air ducts for channeling intake air from snorkels **320** in upper hull **102** to engines (e.g., diesel engines, etc.) in lower hulls **104**. Furthermore, while some of the internal volume of lower segment **108** of strut **106** is free flooding, other portions of the internal volume accommodates air/water ballast tanks (not depicted). These tanks are flooded or deflooded ("blown") with compressed air to maintain vessel **100** in a desired state of buoyancy.

[0068] *Lower Hulls 104*

Unmanned lower hulls **104** provide most of the buoyancy that enables marine vessel **100** to float, for all configurations. The lower hulls also support forward **430** and aft **432** control planes. These control planes control the attitude, depth and stability of marine vessel **100** while it's underway. In some embodiments, marine vessel **100** incorporates a two-degree of freedom rudder/stabilizer instead of one set or both sets of control planes **430** and **432**. The two-degree of freedom rudder/stabilizer is described in U.S. Pat. No. 6,880,478 B2, and incorporated by reference herein.

[0069] In the illustrative embodiment, lower hulls **104** houses most of the buoyancy controls of marine vessel **100** and houses the propulsion system(s). In the illustrative embodiment, each lower hull **104** contains a diesel engine that drives a water jet to propel marine vessel **100**. As previously disclosed, air is conducted from snorkels **320** (on top of upper hull **102**) through ducting in struts **106**, to the engines.

[0070] In some embodiments, the water jet can be electrically driven at slow speeds. In such embodiments, electrical power is stored in batteries that are charged by the diesel engines when they are running. Electricity can also be generated by a reformer/fuel-cell system that generates electricity directly from the diesel-fuel stores of marine vessel **100**.

[0071] In some further embodiments, each lower hull **102** contains an electrically driven, retractable propulsor (in addition to the diesel engines). The propulsor is used to propel the vessel at very slow speeds for quiet missions, docking and launch maneuvering.

[0072] As previously indicated, the height and width of marine vessel **100** is variable as a function of its configuration. Its length **L** is, however, substantially invariant and is dictated by the size of lower hulls **104** (see, e.g., Figure 2). Length **L** of marine vessel **100** is within a range of about 11 to 12.2 meters and the length of the unmanned version is about half —6.7 meters— of the length of vessel **100**. It will be appreciated that a vessel in accordance with the illustrative embodiment can be built to have a different size than vessel **100**, but for the functionality described herein, the stated sizes are expected to be suitable and desirable.

[0073] *Ancillary Structural Considerations*

[0074] The hull form of marine vessel **100** is adapted to reduce its visual, infrared, and radar signatures, which are quite low compared to those of most surface combatants. Submerged lower hulls **104** vent exhaust below the surface of the water and low reflectivity surface designs (e.g., stealth design, etc.) on both upper hull **102** and struts **106** reduce emissions and reflectivity at most detection frequencies. The hulls, struts, and most of the equipment housed in vessel **100** will be formed of non-magnetic materials to reduce the vessel's magnetic signature. Furthermore, the hull lines are advantageously optimized to reduce acoustic noise in known fashion.

[0075] As marine vessel **100** approaches another vessel for inspection or boarding, or is deploying a force, it is desirable for crew members to be outside of the vessel, in position to board or otherwise disembark. To that end, utility platforms **234** are included on struts **106**. The platforms fold flush with the surface of the struts when not in use and rotate away from the surface of the struts for use.

[0076] Marine vessel **100** also has wheels **936**, which are housed in lower hulls **106**. The wheels are deployed when marine vessel **100** is in its launch-and-recovery configuration.

[0077] For the purposes of this Description and the appended claims, the term "propulsion hull" means a hull, pontoon, etc., that contains a propulsion device. As a consequence, lower hulls **104** are propulsion hulls. For marine vessel **100**, lower hulls **104** are always at least partially submerged when the vessel is in the water. It is to be understood, however, that the term "propulsion hull" is more general and can, in some embodiments, refer to a hull that contains a propulsion device and that operates completely *above* the water line.

[0078] OPERATION

[0079] Having described the salient structural elements of marine vessel **100**, further description of the various operational configurations and modes is now presented.

[0080] Referring again to Figures 2, 3, and 4A-4B, and also to Figures 6A through 6C, various operating modes of the cruise-and-surveillance configuration are now described.

[0081] The various modes of the cruise-and-surveillance configuration are obtained by changing the draft of marine vessel **100**, as follows. During normal operations, autopilot or pilot control inputs are translated into movements of control planes **430** and **432** that raise and lower vessel **100**. Buoyancy tanks are automatically flooded or vented to maintain a neutrally-buoyant condition.

[0082] During normal high and moderate speed operations, the lower limit of control is the point at which upper hull **102** is just entering the water and the upper limit is the point at which the upper portion of lower hulls **104** are just out of the water. As a consequence, during forward movement, the height of vessel **100** can be quickly changed with little change in speed, so that it can quickly transition from one mode to another.

[0083] Figure 6A depicts marine vessel **100** in a relatively slow-speed mode of the cruise-and-surveillance configuration. In this mode, marine vessel is floating with about 10 to 15 percent of the volume of lower hulls breaching the water line **WL**. In this mode, the marine vessel's sea keeping is adequate only in relatively less-stressing sea states (*i.e.*, sea state 1 or 2). This mode is typically used for traversing relatively calm waters, approaching piers and sheltered mooring facilities. The draft for this mode is about 1.4 meters, which is the minimum draft for the cruise-and-surveillance configuration. For marine vessel **100**, clearance **C** between water line **WL** and the bottom of upper hull **102** is about 2.1 meters in this mode.

[0084] Figure 6B depicts marine vessel **100** in SWATH mode. Lower hulls **104** are completely submerged but upper hull **102** is above water line **WL**. In this mode, marine vessel **100** provides stable, high-speed operation when operating in relatively higher sea states. The submerged lower hulls provide vessel buoyancy that does not change appreciably when subjected to moderate wave action on the surface. As the sea state increases, stability is maintained by further submerging the lower hulls (using the ballasting system) together with control plane reactions. This mode of operation is used in both calm and high sea states to provide speed in both tactically offensive and defensive situations. The maximum draft for this mode (for marine vessel **100** having the nominal size previously indicated) is about 3.5 meters.

[0085] Figure 6C depicts marine vessel **100** in a loitering and reconnaissance mode. In this mode, lower hulls **104** and struts **106** are completely submerged, and about 30 to 40 percent of the volume of upper hull **102** is below the water line. Marine vessel **100** is stable in high sea states in this mode (but not at speed). Draft for marine vessel **100** approaches about 4.9 meters (for the manned version).

[0086] This mode of operation is used primarily for intelligence gathering, surveillance, and reconnaissance missions that would require the ability to loiter in contested littoral environments in which mission success is dependent on being able to remain undetected for an extended period of time.

[0087] As implied above, marine vessel **100** has the ability to partially submerge—and to do so at speed—when necessary. This capability is a fundamental survival technique on any battlefield, including littorals. Soldier “duck,” tanks and artillery “defilade,” and both attack helicopters and strike aircraft fly “nape of the earth” all to avoid detection and engage the enemy on their own terms. But very few naval vessels, with the exception of submarines of course, have this capability. Those few special ships that have an ability to partially submerge or “duck” (mostly SOF vessels) must typically do so at very slow speeds.

[0088] The ability of marine vessel **100** to change depth enables it to change the height of its sensor at the top of upper hull **102**. In the illustrative embodiment, the extendable mast raises the sensors about 3.7 meters above upper hull **104**. When marine vessel **100** is in the loitering and reconnaissance mode (Figure 6C), the sensors are raised to about 4.6 meters above the waterline. When, marine vessel **100** is in its slow-speed mode (Figure 6A), the sensors are about 7.6 meters above the surface of the water, which facilitates over-the-horizon sensing.

[0089] Thus, during patrol, marine vessel **100** can operate in slow-speed mode with its sensor at maximum height until sensors detect another surface craft of interest. Once the other craft is detected and its position is fixed, marine vessel **100** descends and proceeds toward the other craft undetected because of the masking provided by the visual and radar horizons. When vessel **100** is within optimum engagement range of its own weapons, it can rapidly ascend to elevate upper hull **102** to engage the other craft, as appropriate.

[0090] Figures 7 and 8 depict marine vessel **100** in the minimum-draft configuration. As previously described, in this configuration, struts **106** are extended laterally relative to upper hull **102** such that the bottom of the upper hull is substantially co-planar with the bottom of lower hulls **104**.

[0091] In this configuration, marine vessel **100** exhibits, as the name implies, its minimum draft D_m , which for the illustrative embodiment is about 0.9 meters. Also, in this configuration, marine vessel **100** has its maximum width W , which for the illustrative embodiment is about 9.5 meters. The highest part of upper hull **102** — cockpit **208** — is about 1.2 meters above water line WL , as depicted in Figure 8 (*i.e.*, $H_F = 1.2$ meters).

[0092] The minimum-draft configuration is a relatively slow-speed mode in which marine vessel **100** is stable only in relatively less-stressing sea states. This mode would typically be used for traversing the surf zone and approaching the beach for the insertion or extraction of personnel or cargo.

[0093] Figures 9 and 10 depict marine vessel **100** in the launch-and-recovery configuration. In this configuration, lower segment **108** and upper segment **110** of struts **106** fold flat against one another in a substantially vertical orientation. This reduces the overall width W of vessel **100** to about 3.7 meters or less in the illustrative embodiment. As depicted in Figure 9, the control planes are folded when marine vessel **100** is in this configuration (only front control planes **430** are depicted in Figure 9).

[0094] When marine vessel **100** is in its launch-and-recovery configuration, wheels **936**, which are housed in lower hulls **104**, are deployed. This facilitates moving marine vessel **100** about the operation decks of its mother ship without additional handling equipment (*e.g.* cranes, *etc.*).

[0095] Figure 11 depicts marine vessel **100** in all three of its primary configurations and operating modes near mother ship **1100**.

[0096] The launch-and-recovery configuration, which is used for transportation, launch and recovery, is depicted at points **1**, **2**, and **3**. Point **1** depicts marine vessel **100** in mother ship **1100**, point **2** depicts marine vessel **100** ascending or descending ramp **1102**, and point **3** depicts the marine vessel preparing to reconfigure for operation.

[0097] The cruise-and-surveillance mode is depicted at points **4** through **6**. At point **4**, marine vessel **100** has reconfigured and is substantially submerged for surveillance. Point **5** depicts marine vessel **100** patrolling in its slow-speed mode, and point **6** depicts the marine vessel at an intermediate height for high-speed cruising.

[0098] The minimum-draft configuration is depicted at point **7**. Marine vessel **100** has reconfigured to this configuration while underway, in preparation for entering very shallow water.

[0099] It is understood that the various embodiments shown in the Figures are illustrative, and are not necessarily drawn to scale. Reference throughout the specification to "one embodiment" or "an embodiment" or "some embodiments" means that a particular feature, structure, material, or characteristic described in connection with the embodiment(s) is included in at least one embodiment of the present invention, but not necessarily all embodiments. Furthermore, it is to be understood that the above-described embodiments are merely illustrative of the present invention and that many variations of the above-described embodiments can be devised by those skilled in the art without departing from the scope of the invention. It is therefore intended that such variations be included within the scope of the following claims and their equivalents.

I claim:

- 1.** A marine vessel comprising:
 - an upper hull;
 - two propulsion hulls, wherein said two propulsion hulls are coupled to said upper hull; and
 - an arrangement for changing a spatial relationship of said two propulsion hulls to said upper hull, thereby reconfiguring said marine vessel.
- 2.** The marine vessel of claim 1 wherein said arrangement comprises:
 - a first articulated strut and a second articulated strut, wherein each of said articulated struts movably couples one of said two propulsion hulls to said upper hull; and
 - a motor for moving each of said articulated struts.
- 3.** The marine vessel of claim 2 wherein each of said articulated struts are segregated into two segments.
- 4.** The marine vessel of claim 3 further comprising:
 - a first hinge, wherein said first hinge pivotably couples said two segments of said first strut to one another; and
 - a second hinge, wherein said second hinge pivotably couples said two segments of said second strut to one another.
- 5.** The marine vessel of claim 4 further comprising a third hinge and a fourth hinge, wherein said third hinge pivotably couples said first strut to said upper hull and said fourth hinge pivotably couples said second strut to said upper hull.
- 6.** The marine vessel of claim 1 wherein said arrangement is operable to configure said marine vessel in a SWATH configuration.
- 7.** The marine vessel of claim 1 wherein said arrangement is operable configure said marine vessel in a SWATH configuration, and wherein in said SWATH configuration, said marine vessel has an inverted v-shape with said upper hull above and said two struts, said two struts extending downward and outward of said upper hull and terminating in said propulsion hulls.

8. The marine vessel of claim 1 further comprising a depth-control mechanism, wherein said depth-control mechanism is operable to change a draft of said marine vessel between a first position wherein all of said upper hull is above a water line and a second position wherein some portion of said upper hull is below said water line.

9. The marine vessel of claim 3 wherein said arrangement is operable to place said marine vessel into the following two configurations:

a first configuration wherein said articulated struts extend downward and outward from said upper hull; and

a second configuration wherein said articulated struts extend substantially laterally from said upper hull.

10. The marine vessel of claim 9 wherein said marine vessel has a third configuration in which:

said two segments of said first articulated strut are substantially parallel to one another; and

said two segments of said second articulated strut are substantially parallel to one another.

11. The marine vessel of claim 1 wherein said upper hull comprises a removable module, and wherein said removable module forms a portion of said upper hull.

FIG. 1A

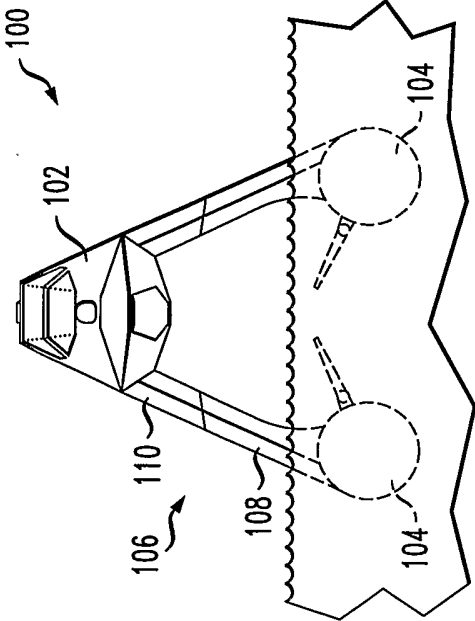


FIG. 1B

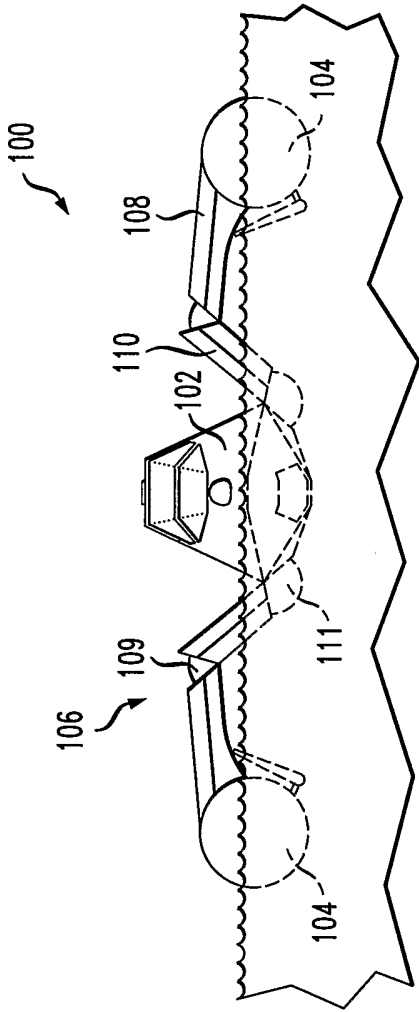


FIG. 1C


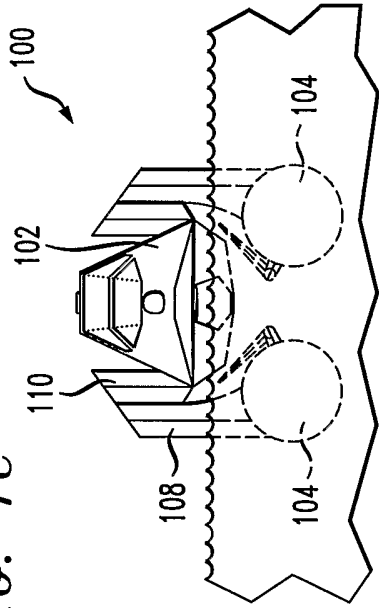


FIG. 2

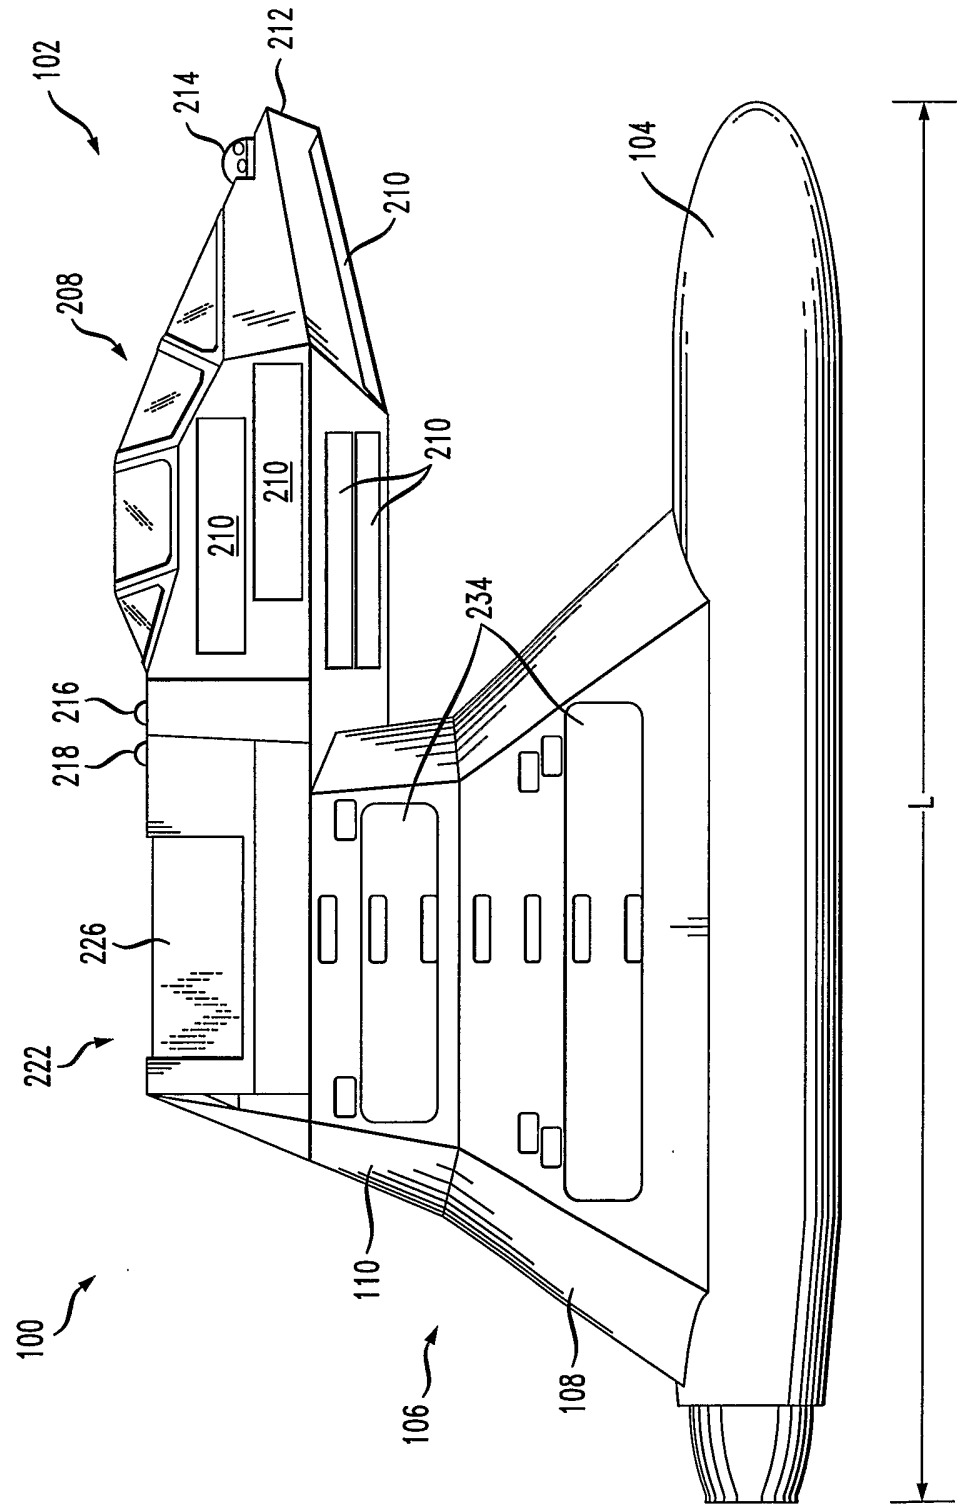

3/10

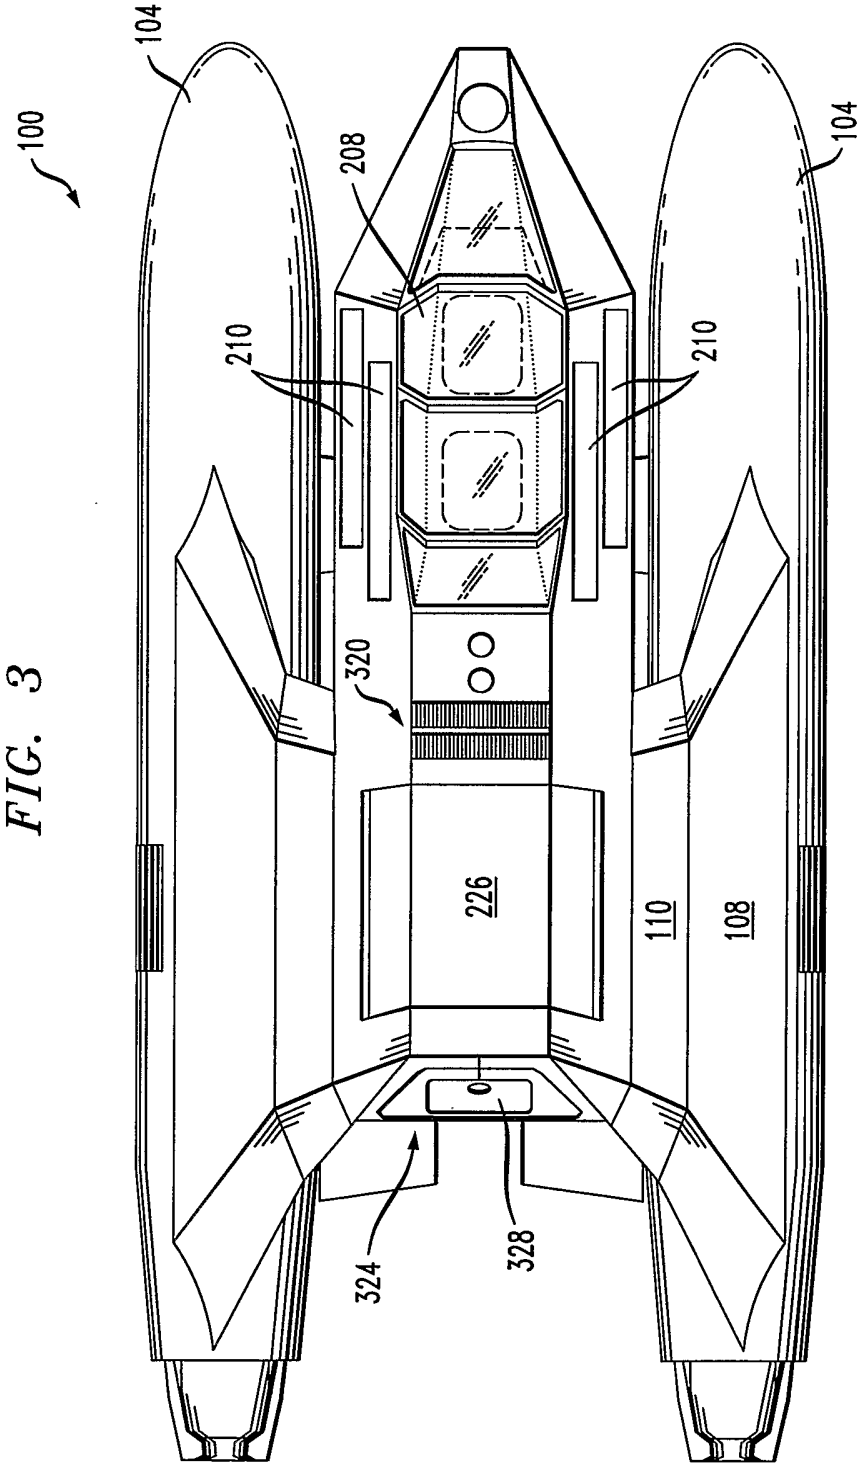


FIG. 4B


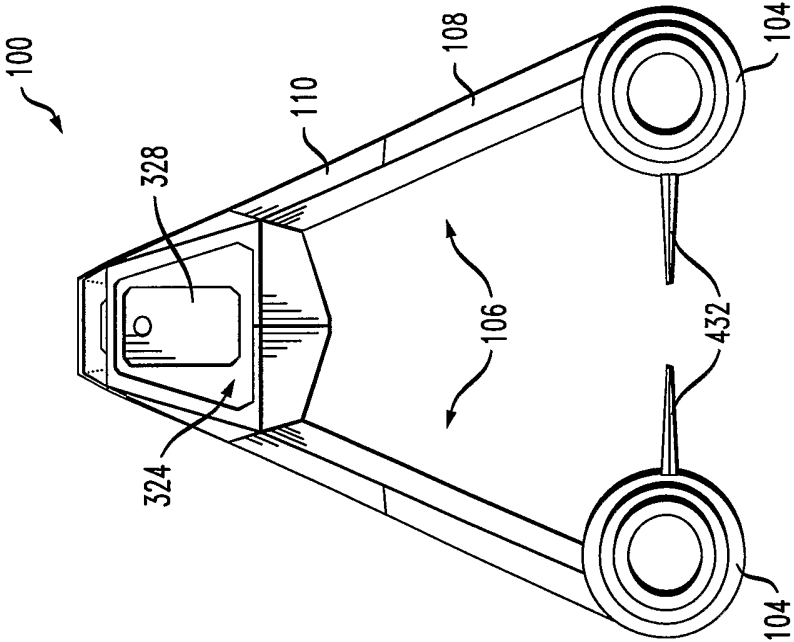


FIG. 4A

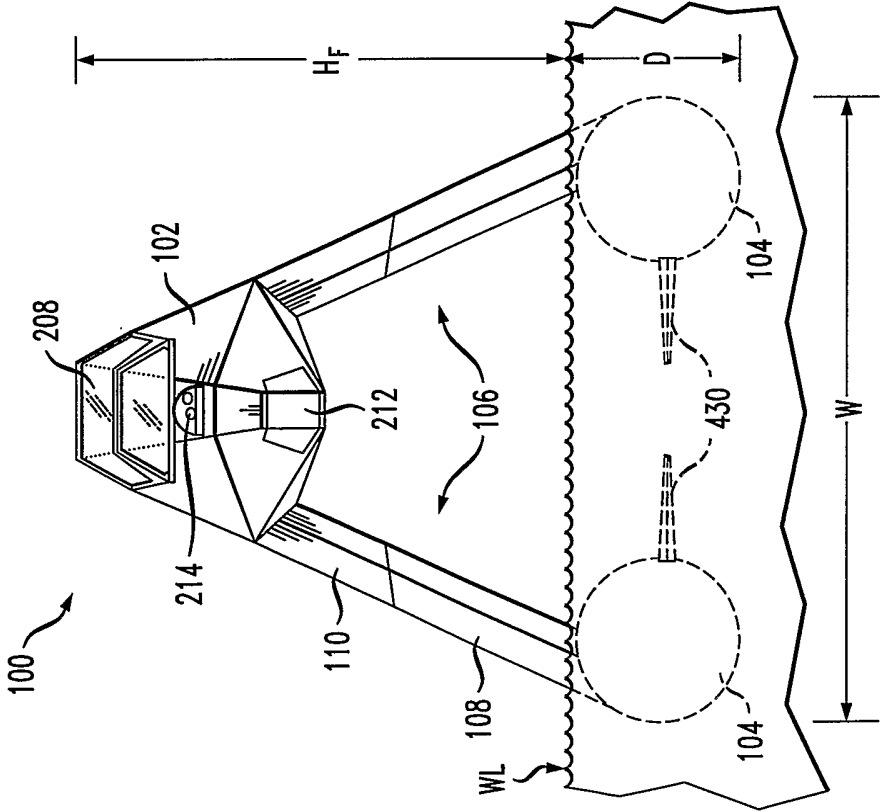

5/10

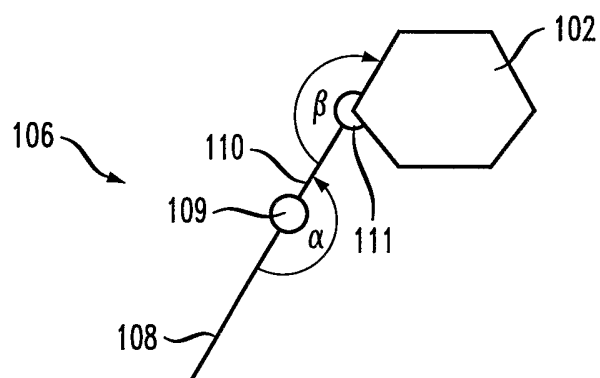
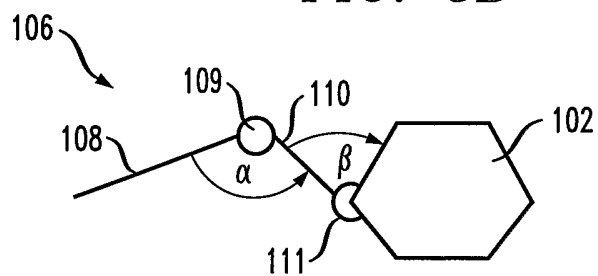
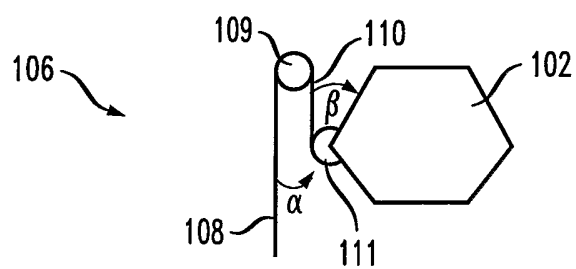
FIG. 5A*FIG. 5B**FIG. 5C*

FIG. 6C

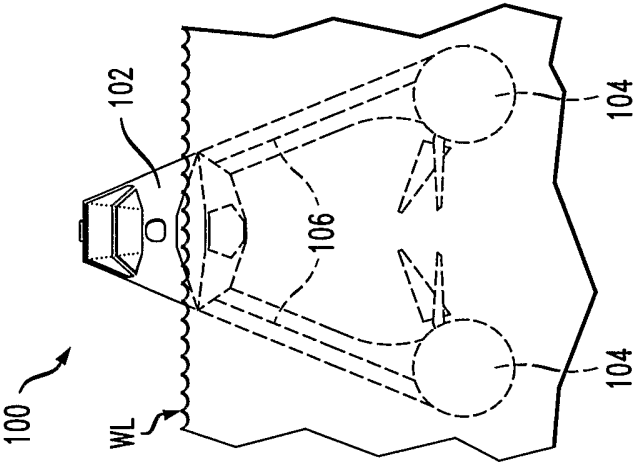


FIG. 6B

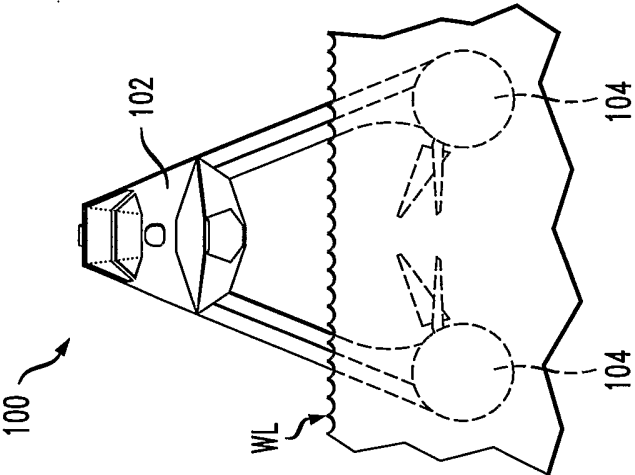


FIG. 6A

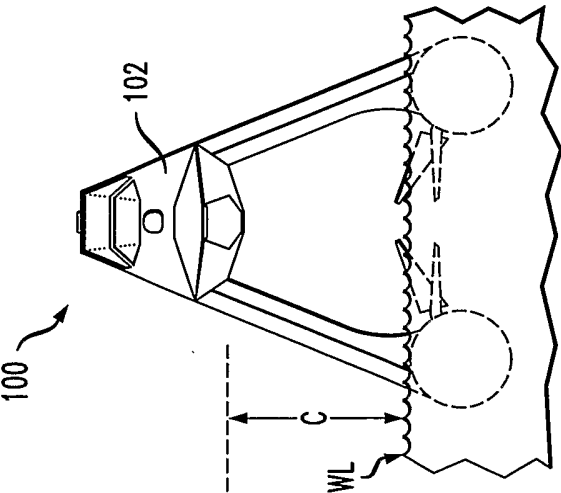


FIG. 7


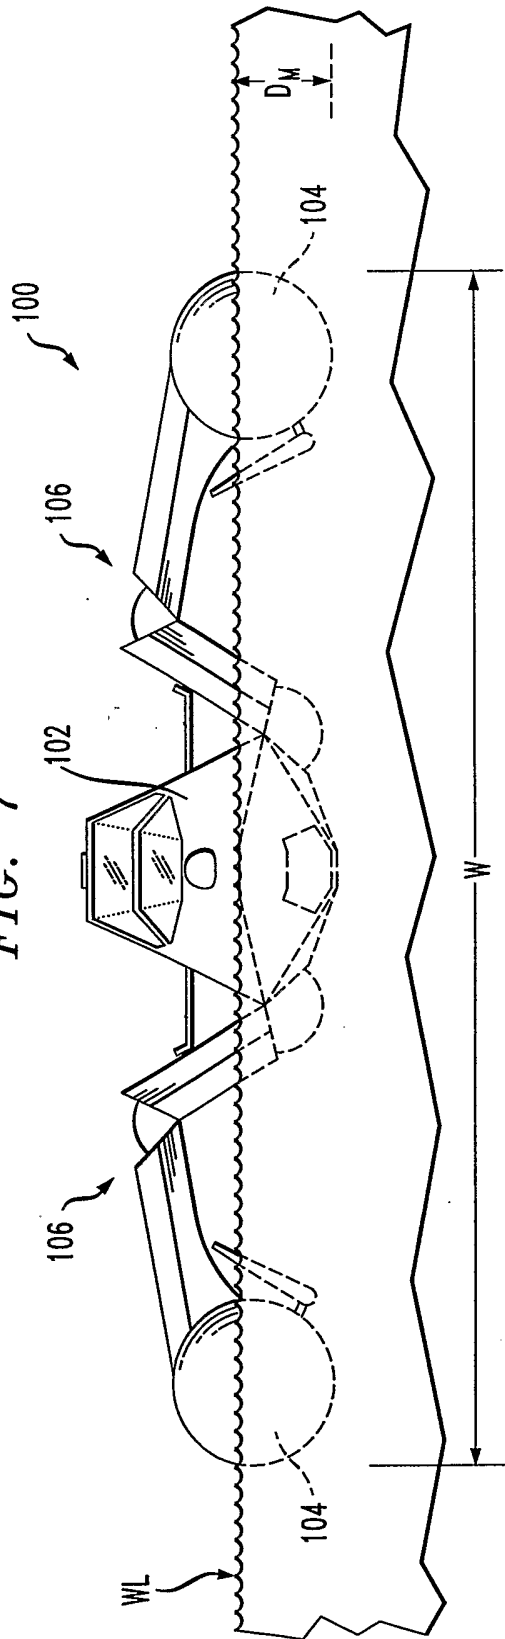


FIG. 8

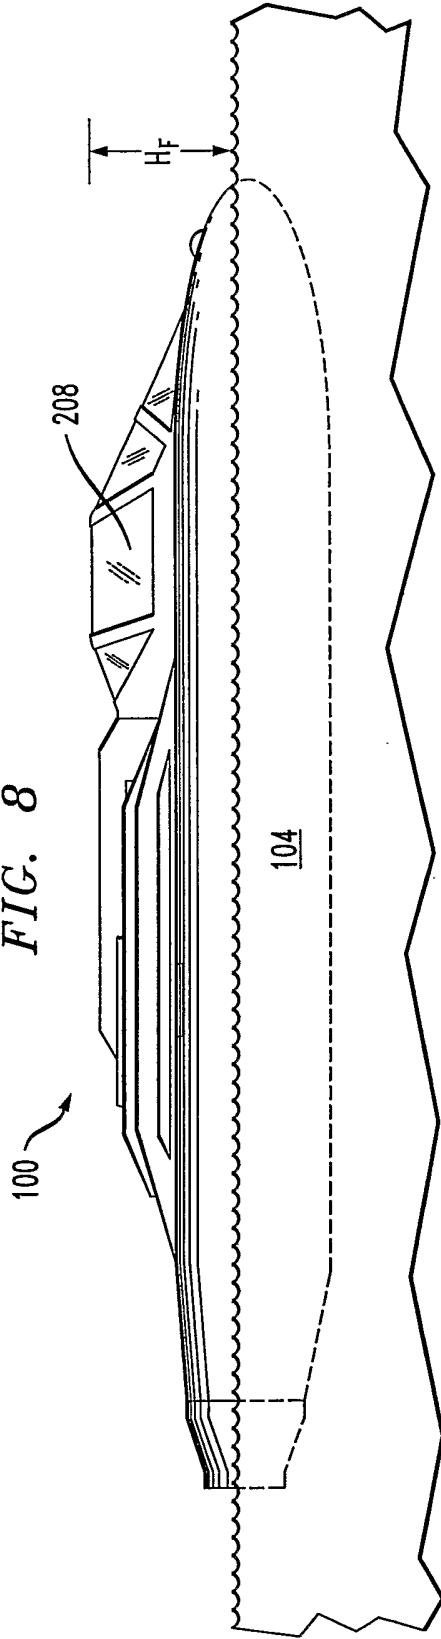

8/10

FIG. 9

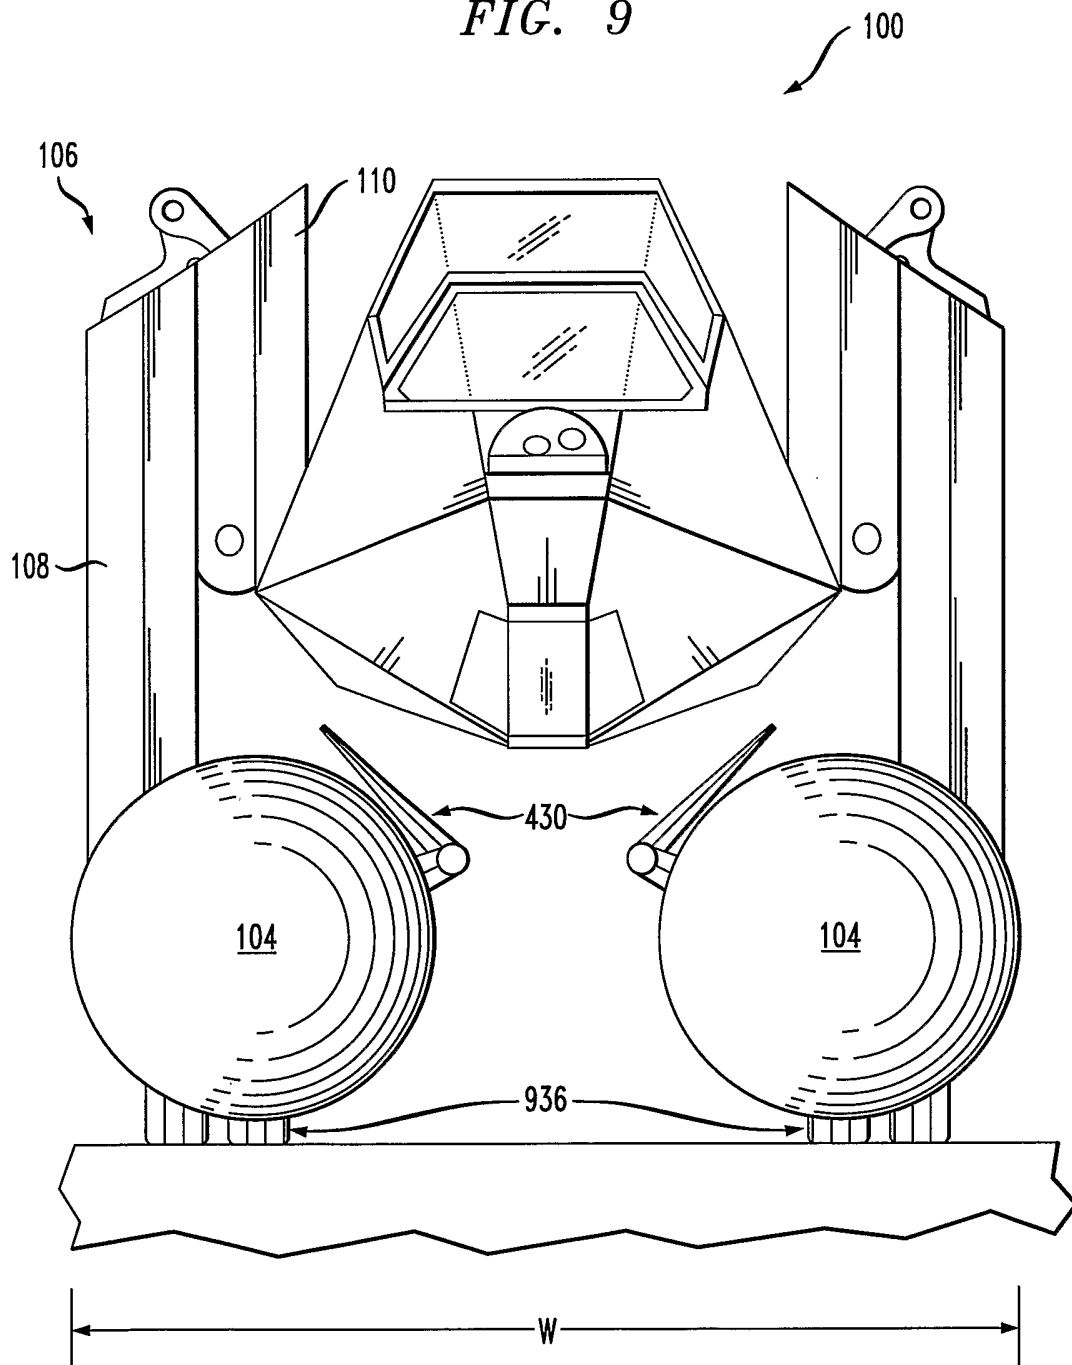


FIG. 10

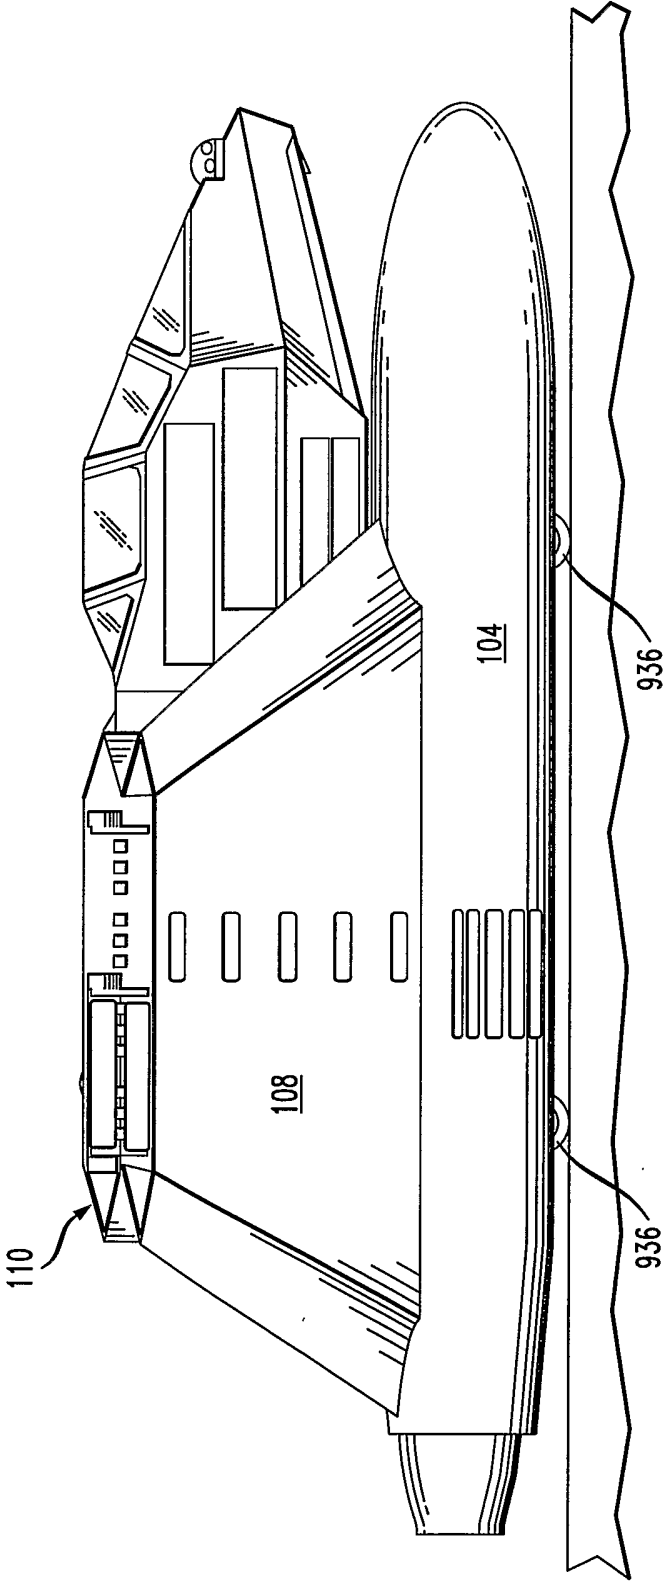


FIG. 11

