

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 October 2006 (05.10.2006)

PCT

(10) International Publication Number
WO 2006/103286 A1

(51) International Patent Classification:
B60K 15/035 (2006.01)

(21) International Application Number:

PCT/EP2006/061218

(22) International Filing Date: 31 March 2006 (31.03.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
05102570.8 1 April 2005 (01.04.2005) EP

(71) Applicant (for all designated States except US): **IN-ERGY AUTOMOTIVE SYSTEMS RESEARCH** (Société Anonyme) [BE/BE]; Rue De Ransbeek, 310, B-1120 Brussels (BE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HILL, David** [US/US]; 8467 Arlis, Commerce Township, MI 48382 (US). **GARABEDIAN, Scott** [US/US]; 5148 Linda, Warren, MI 48092 (US). **MEHTA, Saurin** [IN/US]; 3525

Sherwood Drive, Troy, MI 48083 (US). **MCCLEARY, Scott** [US/US]; 506 Deer Run, White Lake, MI 48386 (US).


(74) Agents: **JACQUES, Philippe** et al.; SOLVAY (Société Anonyme), Intellectual Property Department, Rue De Ransbeek, 310, B-1120 Brussels (BE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: ELECTRONIC VENTING AND MECHANICAL ROLL OVER VALVE

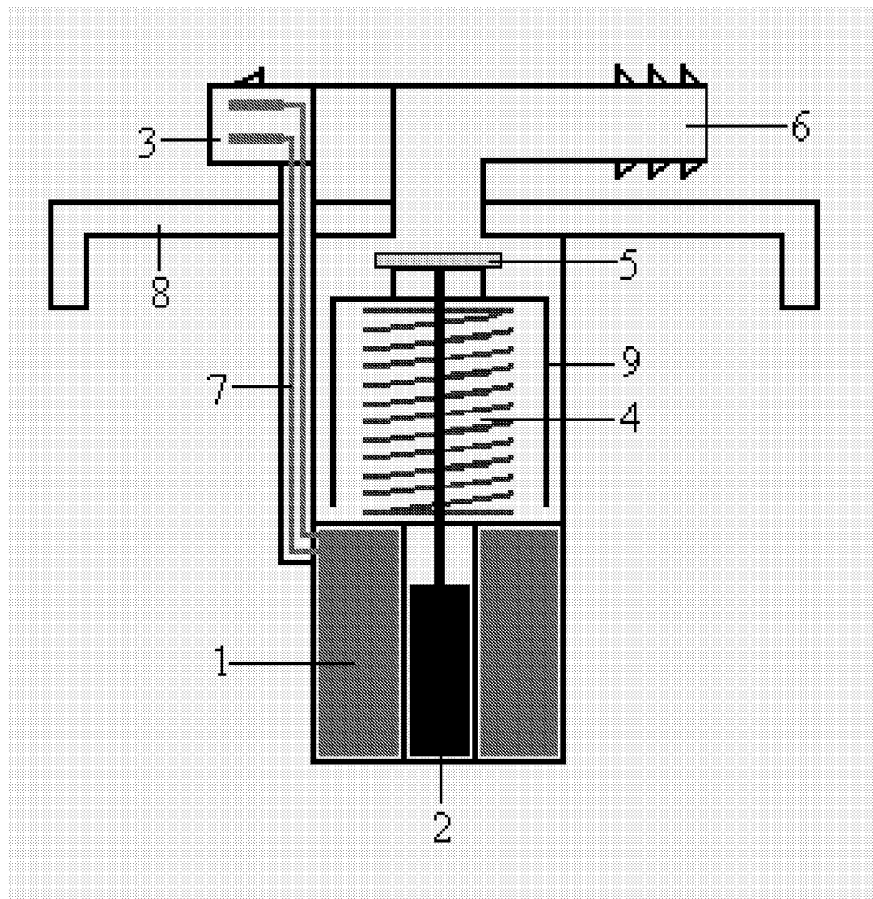

(57) Abstract: Valve including a mechanical part (preferably, a float) for performing a ROV function (Roll Over Valve) and an electronic part (electronically controlled solenoid valve) for performing a venting function.



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Electronic Venting and Mechanical Roll Over Valve

Increasingly stringent environmental standards have resulted in the passage of regulations which necessitate a significant reduction in fuel vapors escaping from a vehicle fuel tank during refueling and normal operation. These regulations generally strive to essentially eliminate fuel vapor escaping to the atmosphere. The resultant emission control systems are referred to as onboard
5 refueling vapor recovery (ORVR) systems.

In a typical ORVR system, at least one control valve is placed in the vapor transmission path between the fuel tank and the canister. The primary purpose of the control valve is to enable the transmission of vapor while preventing the
10 transmission of liquid fuel to the collection canister. If liquid fuel reaches the canister, a situation referred to as liquid carryover (LCO), fuel can collect within the canister, saturating it (and making it inefficient).

Most of the existing ORVR control valves are mechanical valves which are normally open, providing a vapor path between the fuel tank and the canister.
15 However, these normally open valves must be adaptable to close off the vapor path between the fuel tank and the canister during conditions such as vibration, slosh, and vehicle tilting which might otherwise result in a LCO condition. Typical valves include a buoyant member with a bias toward an open position. The valve is responsive to slosh, vibration, and tilting conditions to close the
20 vapor passage. Therefore, it is generally called a ROV or Roll Over Valve. Roll over valves have been in use for several years and have traditionally been operated by only the physical tilting action of the tank with no electronic controls.

Besides the ROV, ORVR systems generally also include a FLVV or Fill
25 limit Venting Valve which closes off the passage to the canister when the tank is at full level. Both valves may be combined in one assembly. Such a combined (integrated) valve allows what normally would be two parts molded onto a fuel tank to be combined into one molded on part. The cost of production is slightly lower since there is only one part to make instead of two. There also is a
30 reduction in the amount of fuel vapor lines needed. The FLVV (Fill Limit venting Valve) is the valve being eliminated in this process.

- 2 -

However, the above described mechanical valves (even integrated) are often slow to respond and include many moving parts which eventually deteriorate, thereby adversely affecting operation of the refueling valve.

To solve that problem, solenoid valves have been developed like the ones
5 described in US 4,887,578 and US 6,601,617.

US '578 describes (in figure 4) a valve which combines, in one assembly, a solenoid valve which opens when a supply nozzle is inserted in the fill neck of the tank, and a ROV which closes off the passageway to the canister in the case of waves, tilting of tank.

10 The valve of US '617 is selectively opened and closed in connection with whether a fueling event occurs and whether the fuel tank is full. In one embodiment (pictured in figure 5), the solenoid valve assembly also comprises a buoyant member acting as a ROV.

One disadvantage of both integrated valves (integrating a mechanical
15 ROV in a solenoid valve assembly) is that since the buoyant member is only moving owed to physical tilting action of the tank or of the liquid inside of it, fine tuning of the refueling process is not possible. This means that these valves cannot handle anomalies due to turbulence in the tank; neither can they provide early venting after refueling at full level. Another disadvantage is the number of
20 parts used in these assemblies (both ROV and solenoid valves having their own moving part) and hence, their size and cost.

The present invention namely aims at solving these problems by providing an integrated and compact valve capable of safely and finely adjusting venting during refueling, and even during normal operation of the tank. Besides
25 limiting or even eliminating the risk of LCO, the valve of the invention allows to eliminate any anomalies due to turbulence in the tank and to reopen the valve to vent pressure directly after the refueling operation, further refining the refueling process and mitigating the risk of fuel vapor escaping out the nozzle. Other advantages of the present invention will appear in view of the detailed
30 description which follows.

Detailed Description

The object of the present invention is thus a safety valve for a liquid tank comprising a buoyant member that is actuated both mechanically for roll over protection and electronically to selectively vent fuel vapors.

35 More specifically, the present invention concerns a valve comprising :
— a housing having at least one inlet orifice and at least one outlet orifice;

- 3 -

- a buoyant member moving inside said housing in response to the presence of liquid inside the housing and able of closing the outlet orifice when in a high position; and
 - a solenoid or magnetic coil able to act on the position of the buoyant member
- 5 when energized.

In other words, the buoyant member is free to move (under the action of liquid) when the solenoid is not energized, but forced in a given position – generally to close the valve but in certain circumstances, to open it – when the solenoid is energized i.e. when current is made to circulate in the coil.

10 The safety valve of the invention is intended for the ventilation circuit of a tank capable of containing any liquid. In particular, the liquid can be a fuel, a brake fluid or a lubricant. More particularly, the liquid is a fuel and the valve is an ORVR valve as described above. The tank can be intended for any use, especially for equipping a vehicle and, more especially, for equipping a motor

15 vehicle.

The valve of the invention comprises a housing with at least one inlet orifice and at least one outlet orifice in order to allow vapor to flow through it. By “vapor” is meant particularly the outside air to be introduced into the tank or the gaseous mixtures which are contained in the tank and the discharge of which

20 is to be made possible. As regards a fuel tank, these gaseous mixtures comprise essentially air and fuel vapor.

The outlet orifice is generally located in the upper part of the valve and makes it possible, when shut off, to close the valve. This orifice may be equipped with a gasket, for example with a flat gasket of the elastomeric

25 diaphragm type.

The valve of the invention also comprises a buoyant member, which is often of float, which may be of any shape but is generally a cylinder provided with a head or closure plug – which may be flat, conical, in the shape of a needle... - capable of closing the outlet orifice. The float is associated with the

30 float head in any conventional way. Preferably, it is integral with it. The float and the float head can be produced in one piece or be produced separately and assembled. The float head may be equipped with a gasket, for example with an elastomeric diaphragm gasket, assisting the sealing of the valve in the closed position.

35 The valve housing generally comprises a lower casing where the buoyant member must be capable of sliding, and an upper casing or cover. The lower

- 4 -

casing generally comprises a bottom or support for the buoyant member (or float).

In the case of an ORVR valve, the cover is generally provided (or integrated with) a tube connected to the vent line which leads to the canister.

5 Both pieces (lower casing and cover) can be molded in one piece, or they can be separate pieces assembled for instance by means of clipping, snap fitting, welding...

The housing can have any shape, often adapted internally to the sliding of the buoyant member. Most often, it has, for this purpose, a constant inner cross-
10 section, at least in the lower casing. It is, in particular, at least in this part, internally cylindrical.

In the valve of the invention, the buoyant member (float) plays the role both of ROV element and of moving part cooperating with the solenoid in order to close off the valve when instructed to (through electronic signals coming from
15 a processor).

To perform the ROV function, the buoyant member (float) may be assisted by a weighted element (see for instance US 5,971,002, the content of which is incorporated by reference in the present application). This element is used for helping displacing the said float in the event of an inclination of the casing. It
20 may be a ball of high-density material (like metal for instance). This ball is generally movable on a support. In the event of an inclination of the tank, the ball is displaced on or off the support, drives the float upwards and causes the outlet orifice of the valve to be shut off by the head of the float, even before the level of liquid rises in the valve, thus completely preventing liquid from passing
25 into the ventilating circuit.

In the event that the tank is overturned, the ball of high-density material likewise pushes the float towards the valve-closing position and keeps it in this position by gravity. In the event of a rise in the level of liquid in the tank, this liquid enters the valve via the lower casing generally through apertures in the
30 support of the float, drives the float upwards and likewise causes the outlet orifice of the valve to be shut off.

The valve of the invention may also use a spring in order to balance out the weight of the float and/or the weighted element (the case being) so that the mechanical roll over function operates properly.

35 Advantageously, the sliding of the float (buoyant member) inside the casing is carried out by means of fitted guidance. Thus, the float virtually cannot

- 5 -

be displaced at all in a direction other than the vertical direction. This fitted guidance may be brought about, in particular, by the appropriate radial dimensioning of the two parts in contact and/or by means of a set of longitudinal ribs on the float and/or on the casing.

5 The valve of the invention also comprises a solenoid or magnetic coil able to act on the position of the float when energized. This solenoid is electrically connected to a power source, through adequate wires and connections. It is preferably also connected to a processor aimed at controlling it i.e. at energizing it in response to at least one electronic signal.

10 The solenoid may be located anywhere on/in the valve, provided in can act on the position of the float. In a preferred embodiment, the solenoid is located at the bottom of the float and acts as support for the float.

 The solenoid may directly act on the position of the float in the case said float comprises at least one magnetic part. Alternatively, the solenoid may act
15 on the position of a magnetic part which in turn acts on the position of the float. In one preferred embodiment, a magnetic shaft is integrated or linked to the float, said shaft being able to force the float upwards (to close the valve), and eventually also downwards (to re-open the valve, in response to energizing the solenoid. Preferably, the magnetic part moves independently of the float in the
20 downward direction, so as not to weigh down the float, and diminish its buoyancy.

 In this embodiment, the magnetic shaft – which is generally a rather heavy part – may play the role of the metallic ball described above. Also, in this embodiment, the solenoid is preferably located under the float – acting as its
25 support - and comprises an opening through which the shaft can slide.

 The component elements of the valve may be produced from any material. Preferably, the housing (cover and lower casing) is produced from a thermoplastic-based material. In this case, it is, of course, expedient to select the material or materials in such a way that they withstand the stresses of use. In
30 particular, of course, the selected materials preferably are inert towards the liquids with which they are likely to be in contact, especially towards fuels. Since these parts are preferably made by injection molding, said plastics are also preferably chosen in order to be suitable for that processing technique. Such plastic materials are well known to a person of ordinary skill in the art.

- 6 -

As to the solenoid and the shaft, they are preferably metallic. They may respectively be overmolded by the material of the lower casing or of the float. Overmolding of the solenoid allows it to be isolated from the fuel.

5 The invention also relates to an ORVR system using such a valve, to a method for ventilating a fuel tank using said system and to a fuel tank equipped with such a valve/system.

More specifically, the present invention also relates to an ORVR system comprising a fuel tank, a canister and a vent line from the tank to canister, said vent line being equipped at the tank side, with a valve as described above.

10 The method and location for fastening the valve to the fuel tank may be selected in any conventional way suitable for the specific conditions. Preferably, the valve is assembled directly on the upper wall of the tank or on the flange of the pump-gauge module by any known technique (welding, snapping...).

As explained earlier, the solenoid of the valve is preferably connected to a processor aimed at controlling it i.e. at energizing it in response to at least one electronic signal. This processor may be the CPU (or central processing unit of the vehicle), the FSCU (or fuel system control unit, for vehicles equipped with such a device) or any other processor available on board of the vehicle. In vehicles equipped with an intelligent fuel system (IFS or fuel system equipped with an FSCU), it preferably is the FSCU.

15 In a method using such a system, during refueling, the valve preferably remains open until a fuel level sensor indicates that the fuel in the tank has met a specified level (generally the maximum level). In this case, the valve is powered, shutting off communication to the canister and causing the filling nozzle's actuator to trip, ending the refueling operation. In other words, in such a method, the afore mentioned electronic signal is coming from a fuel level sensor and during refueling, the solenoid is not energized and allows the valve to remain open until the fuel level reaches a specified level, at which moment the solenoid forces the valve to close.

20 There are mainly 2 embodiments of this method as related to normal operation (i.e. non refueling conditions).

According to a first one, during normal operation, the solenoid is energized and forces the valve to close unless a given pressure is exceeded, upon which the solenoid forces the valve to open.

35 In this embodiment :

- 7 -

- the float acts as a failsafe in case of a malfunction of the solenoid or its controller. In this case the float would prevent liquid fuel from reaching the canister.
- a pressure sensor would be actuating the valve via communication through an electronic controller of some sort (processor) : see above.

According to a second embodiment, during normal operation, the solenoid is not energized, except right after refueling, where it may be energized to force the valve to re-open.

In this embodiment, the solenoid allows to adjust the characteristics of the fueling process. For example, by using the level sensor signal, any anomalies due to turbulence in the tank may be eliminated. The valve could also be re-opened to vent pressure directly after the refueling operation, further refining the refueling process and mitigating the risk of fuel vapor escaping out the nozzle.

Drawing / Illustration

Figure 1 is a cut away view of the inside of a valve according to one embodiment of the present invention.

It is a schematic view, on which the vapor inlet and some other well known valve features have not been represented (since they are very well known to a person of ordinary skill in the art).

Part number 1 is calling out the magnetic coil that is used to electronically force the valve closed. Part number 2 is the main shaft of the electronic valve. The end of the shaft sits below the sealing plunger (part 5). It pushes upward when energized to close the valve. Part number 3 is the wire harness connector that is necessary for connecting to the coil. Part number 4 is the spring. This helps balance out the weight of the valve shaft (part 2) and the float (part 9) so that the mechanical roll over function of this valve still operates properly. Part number 5 is the sealing plunger. It will provide a leak proof seal when it is forced upward to close the valve. Part number 6 is the main port for the fuel vapor outlet. It may not have a barbed type of connection, but something is necessary for it to retain the hose that will be attached. Part number 7 is the electrical connection that is needed from the coil (part 1) to the wire harness connector (part 3). Part number 8 is the top of the outer valve housing that will sit on top of the fuel tank. Part number 9 is the float. When the fuel level is high enough, this is what will mechanically shut the valve.

In this embodiment, the weight of the shaft (part 2) has become somewhat of a replacement for the weighted metal ball that sat at the bottom of some roll

- 8 -

over valves. Not all roll over valves have that weight designed into them though. Another feature is that this valve could ideally be mounted inside the flange (which bears most of the accessories of tank like the pump, gauge...) to eliminate another weld on the tank (and the risk of leak associated).

CLAIMS

1. Safety valve for a liquid tank comprising a buoyant member that is actuated both mechanically for roll over protection and electronically to selectively vent fuel vapors.
- 5 2. Valve according to the preceding claim, comprising :
 - a housing having at least one inlet orifice and at least one outlet orifice;
 - a buoyant member moving inside said housing in response to the presence of liquid inside the housing and able of closing the outlet orifice when in a high position; and
 - 10 — a solenoid or magnetic coil able to act on the position of the buoyant member when energized.
3. Valve according to the preceding claim, wherein the solenoid acts as support for the buoyant member.
4. Valve according to claim 2 or 3, wherein a magnetic shaft is integrated
15 or linked to the buoyant member, said shaft being able to force said member upwards, in response to energizing the solenoid.
5. Valve according to claims 3 and 4, wherein the solenoid comprises an opening though which the shaft can slide.
6. ORVR system comprising a fuel tank, a canister and a vent line
20 extending from the tank to canister, said vent line being equipped at the tank side, with a valve according to any of the preceding claims, and said system also comprising a processor to which the solenoid of the valve is connected and which is aimed at energizing said solenoid in response to at least one electronic signal.
- 25 7. ORVR system according to the preceding claim, wherein the fuel tank is part of a fuel system equipped with a FSCU (fuel system control unit) and wherein the processor is said FSCU.

- 10 -

8. Method for venting a fuel tank using an ORVR system according to claim 6 or 7, wherein the electronic signal is coming from a fuel level sensor and wherein during refueling, the solenoid is not energized and allows the valve to remain open until the fuel level reaches a specified level, at which moment the
5 solenoid forces the valve to close.

9. Method according to the preceding claim, wherein during normal operation, the solenoid is energized and forces the valve to close unless a given pressure is exceeded, upon which the solenoid forces the valve to open.

10. Method according to claim 8, wherein during normal operation, the
10 solenoid is not energized, except right after refueling, where it may be energized to force the valve to re-open.

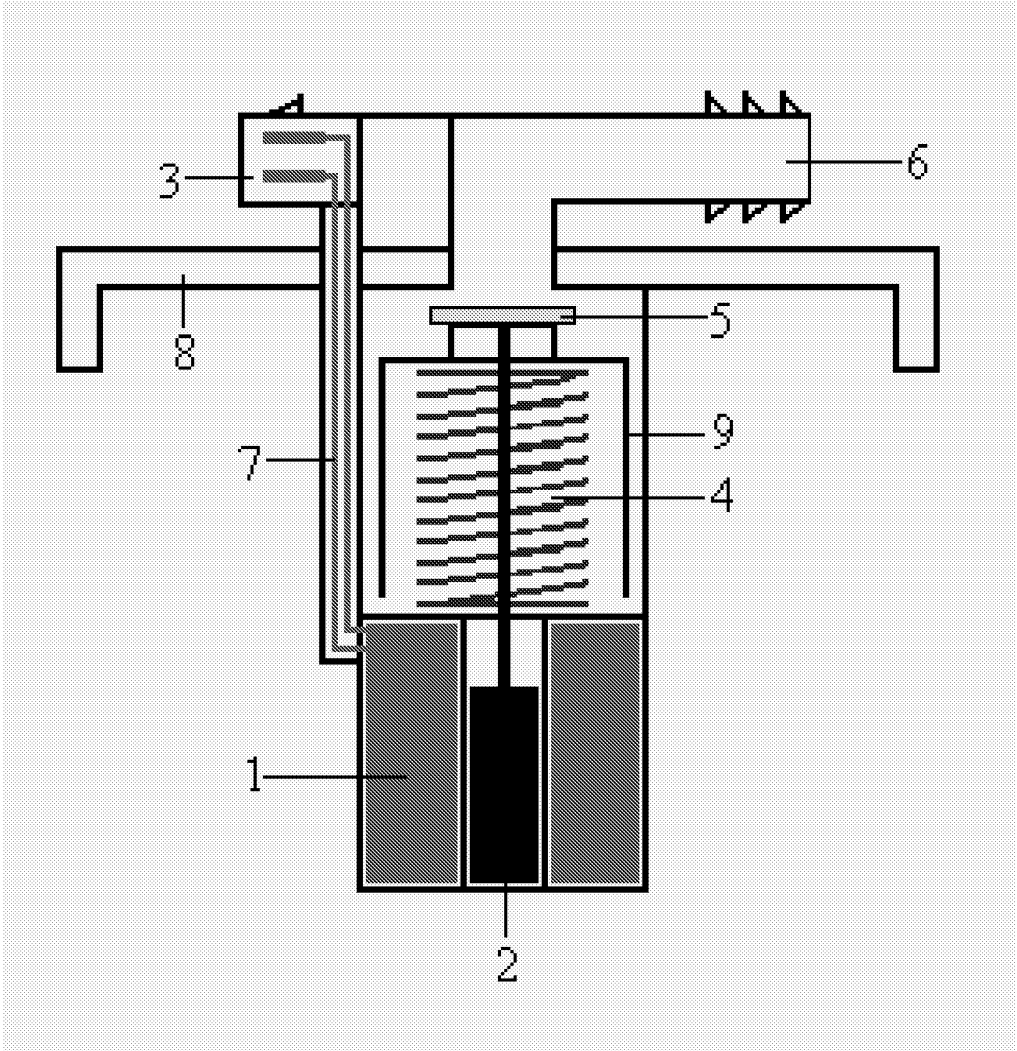


Figure 1

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2006/061218

A. CLASSIFICATION OF SUBJECT MATTER

INV. B60K15/035

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B60K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2001/020487 A1 (ROSSEEL ALEXIS) 13 September 2001 (2001-09-13)	1-4
Y	paragraphs [0085] - [0100]; figures 6,7	5-10
X	US 5 054 528 A (SAITOH ET AL) 8 October 1991 (1991-10-08)	1-4
Y	the whole document	5-10
X	US 4 991 615 A (SZLAGA ET AL) 12 February 1991 (1991-02-12)	1,6-10
	column 11, lines 1-46; figure 8	
X	US 3 703 165 A (KAI H. HANSEN) 21 November 1972 (1972-11-21)	1,6-10
	the whole document	
	----- -/--	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

21 June 2006

Date of mailing of the international search report

31/07/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Matos Gonçalves, M

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2006/061218

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 257 731 A (BORG-WARNER AUTOMOTIVE, INC) 2 March 1988 (1988-03-02) claim 1; figures 1,4 -----	1-10
A	DE 199 22 453 A1 (ALFMEIER PRAEZISION AG BAUGRUPPEN UND SYSTEMLOESUNGEN) 27 January 2000 (2000-01-27) claims 1,6; figure 2 -----	1-10

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2006/061218

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2001020487 A1	13-09-2001	AT 267720 T DE 60011025 D1 DE 60011025 T2 EP 1110789 A1 FR 2802861 A1 US 6626156 B2	15-06-2004 01-07-2004 11-08-2005 27-06-2001 29-06-2001 30-09-2003
US 5054528 A	08-10-1991	DE 4012368 A1 GB 2230767 A JP 2136716 U JP 7052744 Y2	25-10-1990 31-10-1990 14-11-1990 06-12-1995
US 4991615 A	12-02-1991	NONE	
US 3703165 A	21-11-1972	GB 1340660 A	12-12-1973
EP 0257731 A	02-03-1988	AU 7151187 A BR 8701937 A DE 3765601 D1 JP 63005153 A US 4679580 A	24-12-1987 02-02-1988 22-11-1990 11-01-1988 14-07-1987
DE 19922453 A1	27-01-2000	NONE	