

1 567 792

(21) Application No. 34211/77 (22) Filed 15 Aug. 1977 (19)  
 (31) Convention Application No. 26911 (32) Filed 6 Sept. 1976 in  
 (33) Italy (IT)  
 (44) Complete Specification Published 21 May 1980  
 (51) INT. CL.<sup>3</sup> F02D 5/00 17/00  
 (52) Index at acceptance  
 G3N 288A 382 402 E1X  
 F1B B102 B206 B208 B210 B226 B228 B316 BE



(54) FUEL-INTERMITTENT-INJECTION INSTALLATION FOR INTERNAL-COMBUSTION ENGINES

(71) We, ALFA ROMEO, S.p.A., a body corporate organised under the laws of Italy, of Via Gattamelata, 45, Milan, Italy, do hereby declare the invention, for 5 which we pray that a patent may be granted to us, and the method by which it is to be performed, to be particularly described in and by the following statement: —

In all the internal combustion engines, 10 the delivered power is adjusted, at present, by the driver himself who acts on the density of the charge of air and gasoline (engines fed by carburetors) or of air (engines fed by injection) drawn by the 15 cylinders by the agency of a throttling valve which is connected to the accelerator pedal.

This invention relates to a novel system 20 for adjusting the power delivered by an explosion engine, which is based on the control of the delivery of the fuel rather than on the adjustment of the density of the charge drawn by the engine. According to the invention, the fuel feed to the cylinders follows a particular law of variation which 25 is composed by a model of intermittency in the delivery of the injectors of the several cylinders. The injection of the fuel into one or more cylinders of the engine is either permitted or discontinued at every cycle of 30 the engine and, for an appropriate number of cycles, according to a preselected scheme, correlated to the power requested for the engine since the power delivered by the engine is the algebraic sum of the contributions of the active cycles and of that of 35 the nonactive or passive cycles.

Obviously, in order not to impair the 40 periodical regularity of the engine, it is necessary that the intermittence pattern in the delivery of fuel is performed according to a well defined "intermittency plan" for all the cylinders of the engine.

Stated another way, the law of the intermittency of the inflow of gasoline into a 45 cylinder must be a function of the power demand, whereas the phase shift of the intermittency laws in the several cylinders

must be studied in such a way as to be 50 enabled to take into account the degree of periodical irregularity of the angular speed of the engine.

This invention thus provides a system, 55 which is preferably embodied by an electronic circuitry, which is capable of detecting the working conditions of the engine and of giving (or not), consistently with the power demand of the driver, the consent to an injector for the delivery of fuel.

The principal advantages stemming from 60 such a system of adjustment of the engine power are substantially the following:

(a) inasmuch as the density of the charge 65 in the active cylinders is always the same and is equal to the maximum value which substantially corresponds to the atmospherical pressure, the inflammability of the charge and the propagation of the flame are brought to an optimum all the field of the operation of the engine throughout.

(b) on account of the fact that there is 70 no throttle, the pressure drops along the intake ducts are reduced and thus the volumetric efficiency of the engine is improved. In addition, the power losses during the pumping stage are reduced since the minimum pressure in the cylinder during the intake phase is increased.

This situation is such as to improve the 75 efficiency of the engine and the result is a reduced fuel consumption.

According to this invention there is provided an intermittent fuel injection installation 80 for an internal combustion engine, comprising an injector for each cylinder of the engine, a circuit for feeding the fuel to the injector under a preselected pressure, a pulse generator which is rotated at a speed which is proportional to that of the engine and is capable of delivering as many trains of first pulse signals as there are injectors, a processing circuit which is operatively connected to the pulse generator and is capable of converting said trains of first pulse signals into as many trains of second

5 pulse signals having a preselected intensity and duration, a control circuit also operatively connected to said pulse generator and further connected to drive means which

10 5 can be actuated by a driver, in the control circuit there having been stored preselected different models of intermittency for the delivery of fuel by the injectors as a function of the conditions of operation of the

15 10 engine, the control circuit carrying out the combination of said first pulse signals and of the drive signal to generate control signal sequences for each injector consistently with the stored models in the same control

20 15 circuit, the installation further comprising logical circuits in a number equal to that of the injectors and operatively connected to injector-actuating means and also operatively connected to said processing circuit and to said control circuit, each logical circuit carrying out the comparison between the pulse signal associated with a cylinder coming from the processing circuit and the control signal coming from the control circuit associated with the same cylinder in order to generate a consent or an inhibition signal for the means of actuation of the injector which feed the same cylinder, the energization of the several logical circuits

25 20 being commanded by the control circuit and by the processing circuit according to a sequence which has been preselected on the basis of the ignition sequence of the cylinders.

30 25 45 The properties of the invention can be better understood by examining Figures 1 and 2 in which a block diagram is shown of a preferred embodiment of the present invention.

35 30 40 Fig. 1 shows a diagram of the installation as embodied for an electronic injection system.

45 40 It comprises a hydraulic circuit which delivers the fuel to the injectors 6, 7, 8, 9 under a predetermined constant pressure and comprises a tank 3, a pump 2, a filter 4 and a pressure-adjusting valve 5.

50 45 The injectors are electromagnetic valves which are energized by an electric signal as delivered via the final stages 10, 11, 12, 13.

55 50 The rate of flow of fuel as delivered by the injectors is determined, since the feeding pressure is a constant, by the opening time of the electrically operated injectors.

60 55 65 The signal for the driving of each electrically operated injector is a train of rectangular wave pulses the intensity and duration of which are preselected and is supplied by the processing circuit of the station 1, the task of which is to process the signals coming from the pulse generator 20 and which are composed by as many pulse trains as there are electrically actuated injectors (in the case in point, these are four since a 4-cylinder engine is shown). The station 1

70 65 also receives, through the sensors 21, 22, 23, signals of correction relative to particular working conditions of the engine, such as start, warmup, ambient air temperature, etc. These correction signals are such as to vary the duration of the pulses of the output signals of the station 1, so as correspondingly to modify the delivery of the injectors.

75 70 From the signals composed by pulse trains coming from the generator 20, the latter being mechanically connected to the engine crankshaft, there are also drawn phasing signals for determining the beginning of the delivery by the injectors in the intake stage of each cylinder.

80 75 85 The pulse trains delivered by the generator 20 are sent not only to the station 1, but also to a second station 18, which is fitted with a control circuit in which are stored several preselected intermittency models for the delivery of fuel by the injectors. The control circuit of station 20 delivers as outputs the signals which correspond to the intermittency model as indicated by the decoding device 19 on the basis of the drive signal A which represents the power demand coming from the vehicle driver.

90 85 95 The station 18 delivers control signals for the injectors in phase with those coming from the generator 20 and reach the AND circuits 14, 15, 16, 17 together with the signals coming from the station 1, in such a way that to the same final stages 10, 100 11, 12, 13 can arrive the complete information both as to the model of intermittency and the injection time. To each AND circuit, which is connected to the energization stage of an electrically actuated injector, came two signals, one supplied by the station 1 and the other supplied by the station 18, both associated to a cylinder.

100 95 105 Consistently with the relative voltage levels of these two signals each AND circuit generates a signal which drives to conduction or to cutoff the energization stage of the corresponding electrically actuated injector.

110 105 115 The action of the different logical circuits is controlled by the station 18 according to a sequence which has been preselected consistently with the ignition sequence of the cylinders.

120 115 125 The station 18 as shown in one possible configuration in the block diagram of Figure 2, is essentially composed by a storage 28 which contains all the intermittency models for the delivery of the fuel by the injectors as forecast for covering all the field of operation of the engine, from maximum throttling to full power. The selection of one of these models or patterns is made by a decoding circuit 29, 19 which converts a voltage signal A, which is proportional to 130

the power requested by the driver to the engine, into a number which is the address of the storage compartment in which the relevant intermittency model is stored. The 5 operation substantially consists of the following sequence of operations: the signals formed by the four pulse trains coming from the pulse generator 20 enter the circuit 24 which equalizes all of them and conveys them sequentially towards the single 10 output of the same circuit.

These signals then enter a counter 25 which, through the counting of the incoming 15 signals determines the number of cycles carried out by the engine by utilizing a certain intermittency model. Once the maximum of the number of the engine-cycles attributed to a certain intermittency model (for example 30 engine cycles), the intermittency model can be repeated or it can be changed consistently with the magnitude 20 of the drive signal A.

To reset the counter after that the maximum number has been attained, the resetting 25 circuit 26 is energized. The number emerging from the counter 25 is shifted by the automatic shifter 27 to the storage compartment 28 as identified by the signal A, which contains the preselected intermittency 30 model.

Each number entering in the storage 28 corresponds to a 1-bit storage position in which a signal is stored (a voltage level) having a value of 1 or  $\phi$  (zero) which indicates whether in the considered cycle an 35 electrically actuated injector must enter action or must be cut off.

The signal emerging from the storage (1 or  $\phi$ ) is then delivered to a circuit 30 which 40 is in a position to send to each electrically operated injector the appropriate signal on the basis of the sequence of action of the four electrically actuated injectors as determined (consistently with the ignition 45 sequence of the cylinders) by the signals at the input to the station 18. At every engine cycle, an electrically actuated injector may receive a consent or cutoff signal according to what has been provided 50 for by the intermittency model used under the particular working condition.

More particularly, in the station 18 there 55 can be stored an appropriate intermittency model which enables the engine to run with very reduced fuel consumption under working conditions such as a motorway run of a motor car fitted with that engine. This mode of use can be assimilated to that of a conventional engine in the case of a 60 motor car having an overdrive speed change gear.

In this case, the station 18 receives the 65 signals (shown in Figure 1 by the two dash-and-dot arrows 31 and 32) which are delivered by appropriate sensors which are

capable of detecting the preselected engine working conditions and the preselected conditions of use of the car in which it is provided for using the optimized intermittency model so as to achieve a minimum fuel 70 consumption.

WHAT WE CLAIM IS: --

1. An intermittent fuel injection installation for an internal combustion engine, comprising an injector for each cylinder of the engine, a fuel-feeding circuit for such injectors under a preselected pressure, a pulse generator rotatable at a speed proportional to that of the engine, capable of emitting as many trains of first pulse signals as there are injectors, a processing circuit operatively connected to the pulse generator, capable of converting said trains of first pulse signals into as many trains of second pulse signals of a preselected magnitude and duration, a control circuit also operatively connected to said pulse generator and further connected to drive means actuatable a driver, in the control circuit there being stored preselected and pre-established models of intermittency for the delivery of the fuel by the injectors as a function of the conditions of use of the engine, the control circuit carrying out the combination of the aforesaid first pulse signals with the drive signal for generating sequences of control signals for each injector consistently with the models stored in the same control circuit, the installation further comprising logical circuits in a 100 number equal to that of the injectors, operatively connected to actuation means for the same injectors and also operatively connected to said processing circuit and said control circuit, each logical circuit effecting the comparison between the pulse signal associated with a cylinder as coming from the processing circuit and the control signal coming from the control circuit associated with the same cylinder for generating a 105 consent or inhibition signal for the actuation means of the injector of that cylinder, the action of the several logical circuits being commanded by the control circuit and the processing circuit according to a 110 sequence which has been preselected on the basis of the ignition sequence of the cylinders.

2. An injection installation according to claim 1, wherein the processing circuit is 115 operatively connected to sensors which are capable of detecting parameters indicative of particular working conditions of the engine such as start, warmup, temperature and pressure of the ambient air.

3. An injection installation according to claim 1, wherein the control circuit contains stored therein a particular intermittency pattern which is an optimum for the operation of the engine with a minimum 125 130

fuel consumption under preselected working condition of the engine and under preselected conditions of use of a car which is fitted with said engine, the control circuit


5 being operatively connected to means capable of detecting said preselected working conditions of the engine and said preselected conditions of use of the car in order to generate under such same conditions the

10 control signals for the injectors of the several cylinders consistently with said particular intermittency pattern.

4. An intermittent fuel injection installation for an internal combustion engine, substantially as hereinbefore described with 15 reference to and as illustrated in the accompanying drawings.

STEVENS, HEWLETT & PERKINS,  
Chartered Patent Agents,  
5 Quality Court,  
Chancery Lane,  
London, W.C.2.

Printed for Her Majesty's Stationery Office by Burgess & Son (Abingdon), Ltd.—1980.  
Published at The Patent Office, 25 Southampton Buildings, London, WC2A 1AY,  
from which copies may be obtained.

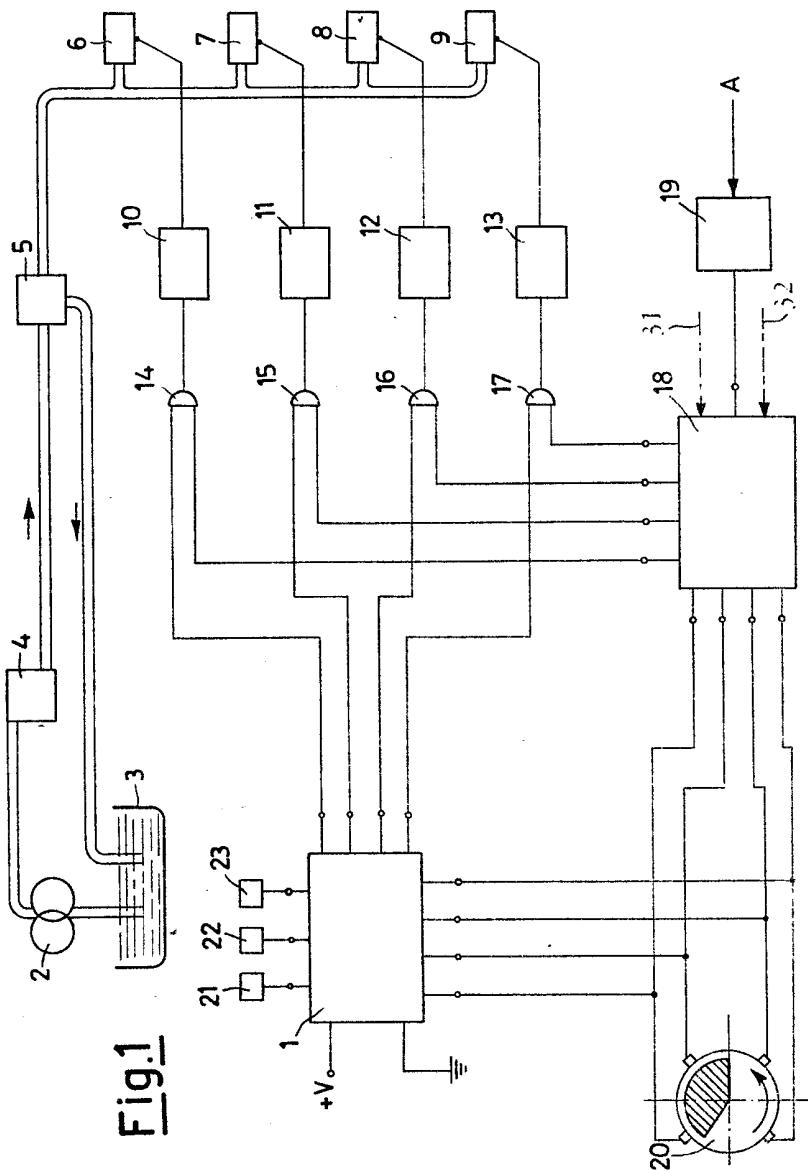

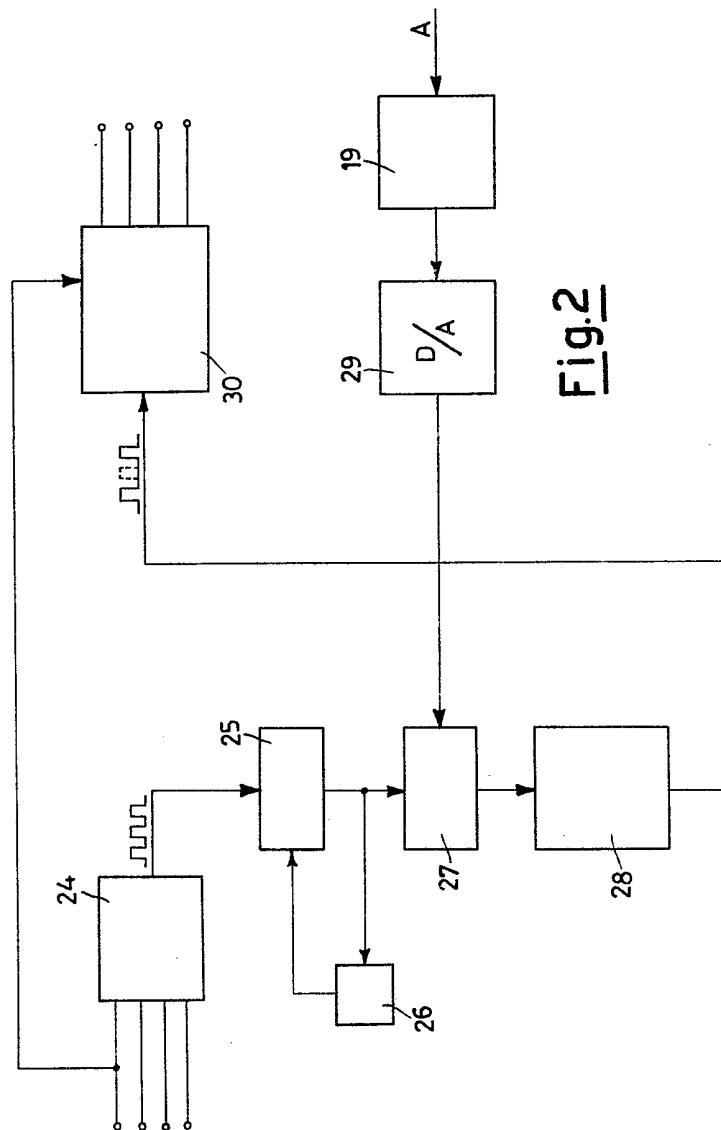


Fig.2