



EUROPEAN PATENT SPECIFICATION

Date of publication of patent specification :
30.11.94 Bulletin 94/48

Int. Cl.⁵ : **G07F 15/06**

Application number : **90309892.9**

Date of filing : **10.09.90**

Commodity metering systems.

Priority : **09.09.89 GB 8920446**

Date of publication of application :
27.03.91 Bulletin 91/13

Publication of the grant of the patent :
30.11.94 Bulletin 94/48

Designated Contracting States :
AT BE CH DE ES FR GR IT LI NL SE

References cited :
FR-A- 2 548 803
GB-A- 1 603 648
GB-A- 2 062 324
GB-A- 2 070 897
GB-A- 2 102 169
GB-A- 2 145 303
GB-A- 2 153 573
GB-A- 2 191 622
GB-A- 2 191 883
GB-A- 2 225 471

Proprietor : **SCHLUMBERGER INDUSTRIES LIMITED**
124 Victoria Road
Farnborough Hampshire, GU14 7PW (GB)

Inventor : **Clarke, David John**
The Grove,
Packard Place
Bramford, Nr. Ipswich, Suffolk, IP8 4HA (GB)
Inventor : **Seddon, Trevor Ronald**
2 The Grove,
Church Road,
Brightlingsea
Nr. Colchester, Essex, CO7 0QX (GB)

Representative : **Stoole, Brian David et al**
Schlumberger plc,
Patent Department,
1 Kingsway, First Floor
London WC2B 6XH (GB)

EP 0 419 106 B1

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

This invention relates to commodity metering systems, and is more particularly but not exclusively concerned with electricity metering systems which can be arranged to operate as prepayment systems.

At the present time, many domestic electricity consumers are provided with a credit electricity meter, that is a meter which measures the amount of electricity they consume, and which is periodically read by the electricity supplier so that a bill for the electricity consumed can be prepared and sent to the consumer. However, in some circumstances, e.g. in premises where the consumers change fairly frequently, or for consumers who are a bad credit risk, the electricity supplier prefers to provide a prepayment electricity meter, that is a meter into which a token (e.g. a magnetic card or an electronic key), paid for in advance, has to be inserted to secure a supply of electricity. A typical example of such a prepayment electricity meter is described in GB-A-2 153 573, while a prepayment electricity meter having an optical port via which the meter can be programmed by a hand-held optical programming device is disclosed in GB-A-2 145 303.

With current designs of electricity meters, a given consumer usually has one kind of meter or the other, and it is difficult and expensive to change between them. For example, GB-A-2 062 324 describes a credit electricity meter of the electromechanical kind, which is provided with an output shaft so that it can be converted into a prepayment meter by the addition of a prepayment unit driven by the output shaft. However, the described conversion process is not suitable for use with a credit meter which is already installed in a consumer's premises. It is an object of the present invention to alleviate this problem.

According to the present invention, there is provided a commodity metering system comprising a commodity meter connected to meter a supply of a commodity to a consumer and having an optical port via which the measurements made by the meter can be accessed, and a separate prepayment unit comprising an optical link communicating with the optical port of the meter, means for accepting prepayment tokens, a circuit responsive to accepted prepayment tokens and the measurements accessed via the optical link to interrupt the supply of the commodity to the consumer once an amount of the commodity authorized by one or more accepted tokens has been supplied, and an optical port communicating via said circuit and the optical link with the optical port of the meter, whereby the measurements made by the meter can be accessed via the optical port of the prepayment unit.

Thus in the system of the present invention, the meter, which may typically be a programmable credit electricity meter, has been relatively easily converted

into a prepayment meter by the addition of the separate prepayment unit, but can readily be converted back to a credit metering system by removal of the prepayment unit. However, with the prepayment unit in place, the meter can still be interrogated and programmed, by coupling a standard optical interrogation and programming device to the optical port of the prepayment unit.

Preferably the optical link is connected to the optical port of the meter by a sealed connection, that is a connection which is sealed by the supplier so that disconnection and/or tampering therewith is readily apparent.

Advantageously, the system includes means for interrupting the supply of the commodity in response to unauthorized disconnection of the optical link.

The supply of the commodity may be interrupted by means within the prepayment unit and/or by means within the meter.

The optical link preferably comprises an optical head which couples to the optical port of the meter and which comprises at least one light emitting device for directing light into the optical port, at least one light responsive device for receiving light from the optical port, and an electrical lead connecting said devices to the prepayment unit.

The invention also comprises a prepayment unit of the kind described in the principal statement of invention, adapted for connection to a meter having an optical port via which its measurements can be accessed.

The invention will now be described, by way of example only, with reference to the accompanying drawings, in which :

Figure 1 is a block-circuit diagram of a first part of an electricity metering system in accordance with the present invention; and

Figure 2 is a block circuit diagram of a further part of the system of Figure 1.

The part of the electricity metering system in accordance with the present invention shown in Figure 1 consists principally of a twin-element, multi-rate, optically readable and programmable credit electricity meter, which is indicated generally at 10. The meter 10 comprises a housing 12 containing a live input terminal 14 connected to a live input wire 16 of an AC electricity power distribution network, whose neutral and earth wires have been omitted from the drawing for the sake of simplicity. The live input terminal 14 is connected via a first measurement shunt 18 to a first live output terminal 20, and via a second measurement shunt 22 and a contactor 24 in series to a second live output terminal 26.

The two shunts 18 and 22 are responsible for the designation of the meter 10 as a "twin-element" meter, and it will be appreciated that the meter provides two separate metered electricity supplies, an unswitched one at the live output terminal 20 and a

switchable one at the live output terminal 26, the switchable supply typically being available at off-peak hours only.

The shunts 18 and 22 are directly connected to respective solid state meter circuits 30, 32 of the kind disclosed in United Kingdom Patent No. 1 603 648, providing the Circuits with input signals representative of the respective currents flowing to the live output terminals 20 and 26. As described in UK Patent No. 1 603 648, the circuits 30, 32 also receive respective input signals representative of the voltage between the live and neutral wires, and multiply their respective input signals together to produce respective output signals representative of the power being supplied to the terminals 20 and 26 respectively. These two power-representative output signals are supplied to respective inputs of a microcomputer 34.

The microcomputer 34 comprises in known manner a central processing unit (CPU) 36, a read only memory (ROM) 38 containing its program, and a random access memory (RAM) 40 in which it accumulates, inter alia, the power representative output signals produced by the metering circuits 30, 32 in locations corresponding to times of day at which different charging rates (or tariffs) apply, and an output which closes the contactor 24 for one or more selected time periods per day. The times of day at which the different charging rates or tariffs begin and end, and at which the contactor 24 is to be opened and closed, are also stored in the RAM 40. Current or actual time of day information is provided by a 50Hz or 60Hz clock signal derived from the electricity distribution network, with battery back-up (not shown) for maintaining timing information in the event of power outage, and/or from a radio teleswitch (not shown) of the kind described in the United Kingdom Patent No. 2 070 897. In the latter case, not only can the time of day information in the microcomputer 34 be periodically corrected by broadcast radio signals (ie the microcomputer can have its "internal clock" periodically reset to the correct time of day), but also the times of day at which the various tariffs apply and at which the contactor 24 opens and closes can be reprogrammed by broadcast radio signals.

The microcomputer 34 further comprises, again in known manner, a display driver 42 for driving a liquid crystal display (LCD) 44, and inputs for receiving input signals from push buttons 46 which can be used to cause the display 44 to display the stored energy readings constituted by the accumulated power representative signals mentioned earlier in a predetermined sequence.

In addition, the microcomputer 34 has an interrupt port 48 at which it receives the aforementioned 50Hz or 60Hz clock signal and power fail and reset signals from a power fail watchdog circuit 50, an output connected to apply a watchdog confirm signal to an input of the watchdog circuit from time to time, to

confirm its continued operative status, as well as respective inputs and outputs coupled to a non-volatile memory 52 in the form of an EEPROM. Upon detection of the onset of a power outage, the watchdog circuit 50 causes the microcomputer 34 to transfer the readings and time-of-day information stored in its RAM 40 into the EEPROM 52. Additionally, at the end of a power outage, the watchdog circuit 50 initiates the transfer of the information saved in the EEPROM 52 back into the RAM 40.

Finally, the microcomputer 34 is provided with a serial input/output port 54, which is coupled to a ZVEI optical port 56 provided in the housing 12 of the meter 10. The optical port 56 includes a light emitting device 58 in the form of a light emitting diode (LED), and a light responsive device 60 in the form of a photodetector, which are respectively positioned to direct light outwardly through and receive light via a window 61 sealed into the housing 12 of the meter 10.

The meter 10 as described so far is of known (albeit rather sophisticated) form, and used alone constitutes a credit meter. It can be programmed and/or read by a hand-held optical device (not shown) which is held in registration with the optical port 56. The hand-held device includes a ZVEI head comprising light emitting and light responsive devices which co-operate with the devices 60 and 58 respectively, to send serial signals to and receive serial signals from the microcomputer 34. This enables new times of day, stored in non-volatile memory in the hand-held device, to be entered into the RAM 40, and/or permits meter readings stored in the RAM 40 to be read out into the non-volatile memory in the hand-held device.

However, the present invention enables the credit meter 10 to be converted into a prepayment meter, simply by sealingly coupling a prepayment unit in accordance with the present invention to its optical port 56 by means of an optical link. Such an optical link is indicated at 62 in Figure 1, while such a prepayment unit is indicated at 64 in Figure 2.

The optical link 62 comprises a ZVEI head 66, which is sealingly coupled to the optical port 56 of the meter 10. The head 66 includes a light emitting device 68 in the form of an LED, and a light responsive device 70 in the form of a photodetector, positioned to co-operate with the devices 60 and 58 respectively. The devices 68, 70 in the head 66 are coupled via an electrical lead 72 constituting a two way serial link to the prepayment unit 64 of Figure 2.

The prepayment unit 64 comprises a housing 72 containing a live input terminal 74, which is externally connected to receive the metered but unswitched electricity supply available at the live output terminal 20 of the meter 10. The live output terminal 74 is connected via a contactor 76 to a live output terminal 78, thus converting the unswitched supply from the meter 10 into a switchable supply.

The prepayment unit 64 also includes a micro-

computer 80, which is basically similar to the micro-computer 34 of the meter 10. Thus the microcomputer 80 comprises a CPU 82, a ROM 84, and RAM 86, an output which operates the contactor 76, a display driver 88 coupled to an LCD 90, inputs coupled to push buttons 92, an interrupt port 94 coupled to receive a 50Hz or 60Hz clock signal and to a power fail watchdog circuit 96, and inputs and outputs coupled to an EEPROM 98. However, it has two serial input/output ports 100 and 102, the former being connected to the devices 68, 70 in the lead 66 via the electrical lead 72 and the latter being connected to a ZVEI optical port 104 identical to the port 56 in the meter 10. Additionally, it has inputs and outputs coupled to an electronic token interface 106, which comprises circuitry for co-operating with electronic prepayment tokens : such circuitry and tokens are described in our United Kingdom Patents Nos. 2 153 573, 2 191 622, 2 191 883 and 2 225 471 (although the tokens can be magnetic cards rather than keys containing EEPROMs if desired). Finally, it has a further output connected to a buzzer 108.

The installation of the prepayment unit 64 is typically carried out by a member of the electricity supplier's service personnel, who, having sealingly connected the head 66 to the port 56 of the meter 10, programs both the prepayment unit 64 and the meter 10 with a hand-held device of the kind mentioned earlier, applied to the optical port 104 of the prepayment unit.

The programming of the meter 10 is achieved via the microcomputer 80, which is itself programmed to route appropriately addressed signals from the hand-held unit via the optical link 62 to the optical port 56 of the meter 10. One of the onwardly routed programming signals sets a particular bit in the RAM 40 of the microcomputer 34 to indicate to the microcomputer 34 that a prepayment unit is coupled to the optical port 56 of the meter 10, ie it tells the meter 10 that it is no longer a credit meter, but now forms part of a prepayment meter. Other onwardly routed programming signals, if required, update the various times of day stored in the RAM 40 to define the various tariff periods and switching times of the contactor 24.

The prepayment unit 64 is programmed with information concerning the price per unit of energy for each of the various tariff periods of the meter 10, as well as debt recovery information if appropriate (ie if the consumer in whose premises the meter 10 is installed already owes money to the electricity supplier, the amount and rate of recovery are entered). All this information is stored in the RAM 86, but can be transferred to and from the EEPROM 98 in the event of a power outage, as described earlier in relation to meter 10.

In operation, the consumer purchases credit from the electricity supplier, which credit is stored electronically or magnetically in an electronic key, smart card or like prepayment token, and then entered into the

prepayment unit 64 via the electronic token interface 106, e.g. as described in the aforementioned United Kingdom Patent No. 2 153 573. The buzzer 108 assists in the credit entering process, by providing an audible signal when credit is validly entered and accepted, and a different audible signal if credit is not validly entered or accepted (e.g because the token is an already used one, or is damaged in some way).

The prepayment unit 64 interrogates the meter 10 at regular intervals, reading the various energy consumption readings contained in the RAM 40 of the microcomputer 34 in the meter into the RAM 86 of the microcomputer 80 in the prepayment unit. Upon each such reading, the microcomputer 80 calculates how much credit is left, and when the credit is exhausted, opens the contactor 76. At this point, the prepayment unit 64 stops interrogating the meter 10, which, in the absence of receiving interrogation signals for a predetermined period of time, opens its own contactor 24. The consumer's supply of electricity is therefore completely cut-off. However, to prevent hardship, one of the push buttons 92 is effective to call up a predetermined amount of emergency credit (to be recovered, or paid for, out of the credit in the next token to be inserted in the prepayment unit 64). Additionally, and again to prevent undue hardship, if credit becomes exhausted near the start of the warm-up period of storage heating, the microcomputer 80 can be arranged not to interrupt the electricity supply until the warm-up period is completed.

It will be noted that the prepayment unit 64 does not write information to the meter 10 in normal operation : it merely interrogates (or reads) the meter. This has the advantage of minimizing the possibility of corruption of the information stored in the meter 10, and enabling the prepayment unit 64 to be used with meters of different manufacture as long as they use a common format for storing their readings.

It will also be noted that the method of telling the meter 10 that credit is exhausted, viz the cessation of interrogation signals from the prepayment unit 64, has the advantage that unauthorized removal or breakage of the optical link 62 produces the same effect at the meter 10 as credit exhaustion, so that the meter 10 opens its contactor 24. The prepayment unit 64 is programmed such that if it is unable to interrogate the meter 10 because the optical link 62 has been removed or broken, it opens its contactor 76.

Many modifications can be made to the described embodiment of the invention. For example, the devices 68 and 70 can be disposed inside the prepayment unit 64, with the electrical lead 72 being replaced by an optical fibre coupling for conveying the optical signals produced by the devices 58 and 68 to the devices 70 and 60.

Although the invention has been described with reference to the electricity metering system, it is also applicable to the metering of other commodities, such

as water and gas. In those cases, the water and gas meters involved are preferably electronic, but this is not strictly necessary, as it is possible to envisage water and gas meters in which the positions of movable indicator discs or wheels displaying the readings of the meters are optically readable by a suitable optical read head (e.g. a parallel rather than serial read head) using light emitting and sensing devices similar to the devices 68 and 70 to direct light to and sense light reflected from the indicator discs or wheels.

Claims

1. A commodity metering system comprising a commodity meter (10) connected to meter a supply of a commodity to a consumer and having an optical port (56) via which the measurements made by the meter can be accessed, characterised by a separate prepayment unit (64) comprising an optical link (62) communicating with the optical port (56) of the meter (10), means for accepting prepayment tokens (106), a circuit (80) responsive to accepted prepayment tokens and the measurements accessed via the optical link (62) to interrupt the supply of the commodity to the consumer once an amount of the commodity authorised by one or more accepted tokens has been supplied, and an optical port (104) communicating via said circuit (80) and the optical link (62) with the optical port (56) of the meter (10), whereby the measurements made by the meter (10) can be accessed via the optical port (104) of the prepayment unit (64).
2. A system as claimed in claim 1, wherein the optical link (62) is connected to the optical port (56) of the meter (10) by a sealed connection.
3. A system as claimed in claim 1 or claim 2, further including means (24, 34; 76, 80) for interrupting the supply of the commodity in response to unauthorised disconnection of the optical link (62).
4. A system as claimed in any preceding claim, wherein the prepayment unit (64) is arranged to access the meter measurements Periodically, and to calculate after each such access, on the basis of price information stored in the prepayment unit (64), the amount of credit remaining.
5. A system as claimed in claim 3 and claim 4, wherein at least part (24, 34) of the interrupting means (24, 34; 76, 80) is in the meter, and is arranged to interrupt the commodity supply controlled thereby if the meter (10) detects that the prepayment unit (64) has failed to access the meter measurements for a predetermined amount of

time.

6. A system as claimed in claim 3 and claim 4, wherein at least part (76,80) of the interrupting means (24,34; 76,80) is in the prepayment unit (64), and is arranged to interrupt the commodity supply controlled thereby if the prepayment unit (64) fails to access the meter measurements for a predetermined amount of time.
7. A system as claimed in any one of claims 1 to 4, wherein the supply of the commodity is interrupted by means (76,80) within the prepayment unit (64) and/or by means (24,34) within the meter (10).
8. A system as claimed in any preceding claim, wherein the optical link (62) comprises an optical head (66) which couples to the optical port (56) of the meter (10) and which comprises at least one light emitting device (68) for directing light into the optical port (56), at least one light responsive device (70) for receiving light from the optical port (56), and an electrical lead (72) connecting said devices to the prepayment unit (64).
9. A prepayment unit for use with a commodity meter (10) connected to meter a supply of a commodity to a consumer and having an optical port (56) via which the measurements made by the meter (10) can be accessed, the prepayment unit comprising an optical link (62) communicating with the optical port (56) of the meter (10), means (106) for accepting prepayment tokens, a circuit (80) responsive to accepted prepayment tokens and the measurements accessed via the optical link (62) to interrupt the supply of the commodity to the consumer once an amount of the commodity authorised by one or more accepted tokens has been supplied, and an optical port (104) communicating via said circuit (80) and the optical link (62) with the optical port (56) of the meter (10), whereby the measurements made by the meter (10) can be accessed via the optical port (104) of the prepayment unit.
10. A unit as claimed in claim 9, further including means (76,80) for interrupting the supply of the commodity in response to unauthorised disconnection of the optical link (62).
11. A unit as claimed in claim 9 or claim 10, the unit being arranged to access the meter measurements periodically, and to calculate after each such access, on the basis of price information stored in the unit, the amount of credit remaining.
12. A unit as claimed in claim 10 and claim 11, where-

in the interrupting means (70,80) is arranged to interrupt the commodity supply controlled thereby if the unit fails to access the meter measurements for a predetermined amount of time.

13. A unit as claimed in any one of claims 9 to 12, wherein the optical link (62) comprises an optical head (66) which couples to the optical port (56) of the meter (10) and which comprises at least one light emitting device (68) for directing light into the optical port (56), at least one light responsive device (70) for receiving light from the optical port (56), and an electrical lead (72) connecting said devices to the remainder of the unit.

Patentansprüche

1. Ein Verbrauchsgut-Erfassungssystem, umfassend ein Verbrauchsgut-Meßgerät (10), das angeschlossen ist zum Erfassen einer Abgabe eines Verbrauchsguts an einen Verbraucher und versehen mit einem optischen Eingang (56), über welchen die von dem Meßgerät vorgenommenen Messungen zugänglich sind, gekennzeichnet durch eine separate Vorauszahlungseinheit (64), umfassend eine optische Verbindung (62), die mit dem optischen Eingang (56) des Meßgerätes (10) kommuniziert, Mittel für das Akzeptieren von Vorauszahlungsbelegen (106), eine Schaltung (80), die auf die akzeptierten Vorauszahlungsbelege reagiert und auf die Messungen, die über die optische Verbindung (62) abgelesen werden zum Unterbrechen der Abgabe des Verbrauchsguts an den Verbraucher, sobald eine Menge des Verbrauchsguts, autorisiert durch einen oder mehrere akzeptierte Belege, ausgeliefert worden ist, und einen optischen Eingang (104), der über den Schaltkreis (80) und die optische Verbindung (62) mit dem optischen Eingang (56) des Meßgerätes (10) kommuniziert, so daß die von dem Meßgerät (10) vorgenommenen Messungen über den optischen Eingang (104) der Vorauszahlungseinheit (64) abgelesen werden können.
2. Ein System nach Anspruch 1, bei dem die optische Verbindung (62) mit dem optischen Eingang (56) des Meßgerätes (10) über eine versiegelte Verbindung verbunden ist.
3. Ein System nach Anspruch 1 oder Anspruch 2, ferner umfassend Mittel (24, 34; 76, 80) für das Unterbrechen der Abgabe des Verbrauchsguts in Reaktion auf unautorisierte Unterbrechung der optischen Verbindung (62).
4. Ein System nach einem der vorangehenden Ansprüche, bei dem die Vorauszahlungseinheit (64)

ausgebildet ist zum periodischen Zugänglichmachen der Messungen des Meßgerätes und zum Berechnen nach jedem solchen Zugang der Menge an verbleibendem Kredit auf der Basis von Preisinformation, die in der Vorauszahlungseinheit (64) abgespeichert ist.

5. Ein System nach Anspruch 3 und Anspruch 4, bei dem mindestens ein Teil (24, 34) der Unterbrechungsmittel (24, 34; 76, 80) sich in dem Meßgerät befindet und ausgebildet ist zum Unterbrechen der Verbrauchsgutabgabe, die dadurch gesteuert wird, wenn das Meßgerät (10) erkennt, daß die Vorauszahlungseinheit (64) während eines vorbestimmten Zeitraums die Meßgerätmessungen nicht abgelesen hat.
6. Ein System nach Anspruch 3 und Anspruch 4, bei dem zumindest ein Teil (76, 80) der Unterbrechungsmittel (24, 34; 76, 80) sich in der Vorauszahlungseinheit (64) befindet und ausgebildet ist zum Unterbrechen der dadurch gesteuerten Verbrauchsgutabgabe, wenn die Vorauszahlungseinheit (64) die Meßgerätmessungen während eines vorbestimmten Zeitraums nicht abgelesen hat.
7. Ein System nach einem der Ansprüche 1 bis 4, bei dem die Abgabe des Verbrauchsguts durch Mittel (76, 80) innerhalb der Vorauszahlungseinheit (64) und/oder durch Mittel (24, 34) innerhalb des Meßgerätes (10) unterbrochen wird.
8. Ein System nach einem der vorangehenden Ansprüche, bei dem die optische Verbindung (62) einen optischen Kopf (66) umfaßt, der mit dem optischen Eingang (56) des Meßgerätes (10) gekoppelt ist und zumindest eine Lichtabstrahlkomponente (68) umfaßt für das Richten von Licht in den optischen Eingang (56), mindestens eine auf Licht reagierende Komponente (70) umfaßt für den Empfang von Licht von dem optischen Eingang (56), und eine elektrische Leitung (72) umfaßt, welche die Komponenten mit der Vorauszahlungseinheit (64) verbindet.
9. Eine Vorauszahlungseinheit zur Verwendung mit einem Verbrauchsgut-Meßgerät (10), angeschlossen zum Erfassen einer Abgabe eines Verbrauchsguts an einen Verbraucher und mit einem optischen Eingang (56) versehen, über den die von dem Meßgerät (10) vorgenommenen Messungen abgelesen werden können, wobei die Vorauszahlungseinheit eine optische Verbindung (62) umfaßt, die mit dem optischen Eingang (56) des Meßgerätes (10) kommuniziert, Mittel (106) umfaßt für das Akzeptieren von Vorauszahlungsbelegen, einen Schaltkreis (80) umfaßt, der auf

akzeptierte Vorauszahlungsbelege reagiert und auf die Messungen, die über die optische Verbindung (62) abgelesen werden zum Unterbrechen der Abgabe des Verbrauchsguts an den Verbraucher, sobald eine durch einen oder mehrere akzeptierte Belege autorisierte Menge an Verbrauchsgut abgegeben worden ist, und mit einem optischen Eingang (104), der über den genannten Schaltkreis (80) und die optische Verbindung (62) mit dem optischen Eingang (56) des Meßgerätes (10) kommuniziert, wodurch die von dem Meßgerät (10) vorgenommenen Messungen über den optischen Eingang (104) der Vorauszahlungseinheit abgelesen werden können.

10. Eine Einheit nach Anspruch 9, ferner umfassend Mittel (76, 80) für das Unterbrechen der Abgabe des Verbrauchsguts in Reaktion auf unautorisiertes Unterbrechen der optischen Verbindung (62).

11. Eine Einheit nach Anspruch 9 oder Anspruch 10, welche Einheit ausgebildet ist zum periodischen Ablesen der Messungen des Meßgerätes und zum Berechnen nach jeder solchen Ablesung der Menge an verbleibendem Kredit auf der Basis von Preisinformation, die in der Einheit abgespeichert ist.

12. Eine Einheit nach Anspruch 10 und Anspruch 11, bei der das Unterbrechungsmittel (70, 80) ausgebildet ist zum Unterbrechen der von ihm gesteuerten Verbrauchsgutabgabe, wenn die Einheit die Meßgerätmessungen während eines vorbestimmten Zeitraumes nicht abliest.

13. Eine Einheit nach einem der Ansprüche 9 bis 12, bei der die optische Verbindung (62) einen optischen Kopf (66) umfaßt, der mit dem optischen Eingang (56) des Meßgerätes (10) gekoppelt ist, und mindestens eine Lichtabstrahlkomponente (68) umfaßt für das Richten von Licht in den optischen Eingang (56), mindestens eine auf Licht reagierende Komponente (70) umfaßt für den Empfang von Licht von dem optischen Eingang (56), und eine elektrische Leitung (72) umfaßt, welche die Komponenten mit dem Rest der Einheit verbindet.

Revendications

1. Système de comptage d'élément consommable comprenant un compteur d'éléments consommables (10) connectés pour compter la fourniture d'un élément consommable à un consommateur et ayant un accès optique (56) par l'intermédiaire duquel on peut accéder à des mesures effectuées par le compteur, caractérisé par une unité

de prépaiement séparée (64) comprenant une liaison optique (62) communiquant avec l'accès optique (56) du compteur (10), un moyen pour accepter des jetons de prépaiement (106), un circuit (80) sensible aux jetons de prépaiement acceptés et aux mesures auxquelles on accède par l'intermédiaire de la liaison optique (62) pour interrompre la fourniture de l'élément consommable au consommateur une fois qu'une quantité d'élément consommable autorisée par un ou plusieurs jetons acceptés a été fournie, et un accès optique (104) communiquant par l'intermédiaire dudit circuit (80) et de la liaison optique (62) avec l'accès optique (56) du compteur (10) de sorte qu'on puisse accéder aux mesures effectuées par le compteur (10) par l'intermédiaire de l'accès optique (104) de l'unité de prépaiement (64).

2. Système selon la revendication 1, dans lequel la liaison optique (62) est connectée à l'accès optique (56) du compteur (10) par une connexion scellée.

3. Système selon la revendication 1 ou 2, comportant en outre un moyen (24, 34; 76, 80) pour interrompre la fourniture de l'élément consommable en réponse à une déconnexion non autorisée de la liaison optique (62).

4. Système selon l'une quelconque des revendications précédentes, dans lequel l'unité de prépaiement (64) est conçue pour accéder périodiquement aux mesures du compteur, et pour calculer après chacun de ces accès, sur la base d'informations de prix stockées dans l'unité de prépaiement (64), la quantité de crédit restante.

5. Système selon les revendications 3 et 4, dans lequel au moins une partie (24, 34) du moyen d'interruption (24, 34; 76, 80) se trouve dans le compteur et est adaptée à interrompre la fourniture de l'élément consommable commandée par celui-ci si le compteur (10) détecte le fait que l'unité de prépaiement (64) n'est pas parvenue à accéder aux mesures du compteur pendant un temps prédéterminé.

6. Système selon les revendications 3 et 4, dans lequel au moins une partie (76, 80) du moyen d'interruption (24, 34; 76, 80) se trouve dans l'unité de prépaiement (64) et est adaptée à interrompre la fourniture de l'élément consommable commandée par celui-ci, si l'unité de prépaiement (64) ne parvient pas à accéder aux mesures du compteur pendant un temps prédéterminé.

7. Système selon l'une quelconque des revendications 1 à 4, dans lequel la fourniture de l'élément

consommable est interrompue par un moyen (76, 80) se trouvant dans l'unité de prépaiement (64) et/ou par un moyen (24, 34) se trouvant dans le compteur (10).

8. Système selon l'une quelconque des revendications précédentes, dans lequel la liaison optique (62) comprend une tête optique (66) qui se relie à l'accès optique (56) du compteur (10) et qui comprend au moins un dispositif (68) émetteur de lumière pour diriger de la lumière dans l'accès optique (56), au moins un dispositif (70) sensible à la lumière pour recevoir de la lumière de l'accès optique (56), et un conducteur électrique (72) connectant lesdits dispositifs à l'unité de prépaiement (64). 15
9. Unité de prépaiement destinée à être utilisée avec un compteur (10) d'élément consommable connecté pour compter la fourniture d'un élément consommable à un consommateur et ayant un accès optique (56) par l'intermédiaire duquel on peut accéder aux mesures effectuées par le compteur (10), l'unité de prépaiement comprenant une liaison optique (62) communiquant avec l'accès optique (56) du compteur (10), un moyen (106) pour accepter des jetons de prépaiement, un circuit (80) sensible à des jetons de prépaiement acceptés et aux mesures auxquelles on accède par l'intermédiaire de la liaison optique (62), pour interrompre la fourniture de l'élément consommable au consommateur une fois qu'une quantité d'élément consommable autorisée par un ou plusieurs jetons acceptés a été fournie, et un accès optique (104) communiquant par l'intermédiaire dudit circuit (80) et de la liaison optique (62) avec l'accès optique (56) du compteur (10), de sorte qu'on puisse accéder aux mesures effectuées par le compteur (10) par l'intermédiaire de l'accès optique (104) de l'unité de prépaiement. 20 25 30 35 40
10. Unité selon la revendication 9, comportant en outre un moyen (76, 80) pour interrompre la fourniture de l'élément consommable en réponse à une déconnexion non autorisée de la liaison optique (62). 45
11. Unité selon la revendication 9 ou 10, cette unité étant adaptée à accéder périodiquement aux mesures du compteur et à calculer après chacun de ces accès, sur la base d'informations de prix stockées dans l'unité, la quantité de crédit restante. 50 55
12. Unité selon les revendications 10 et 11, dans laquelle le moyen d'interruption (70, 80) est adapté à interrompre la fourniture d'élément consomma-

ble commandée par celui-ci si l'unité ne parvient pas à accéder aux mesures du compteur pendant un temps prédéterminé.

- 5 13. Unité selon l'une quelconque des revendications 9 à 12, dans laquelle la liaison optique (62) comprend une tête optique (66) qui se relie à l'accès optique (56) du compteur (10) et qui comprend au moins un dispositif (68) émetteur de lumière pour diriger de la lumière dans l'accès optique (56), au moins un dispositif (70) sensible à la lumière pour recevoir de la lumière de l'accès optique (56), et un conducteur électrique (72) connectant lesdits dispositifs au reste de l'unité. 10 15

Fig.1

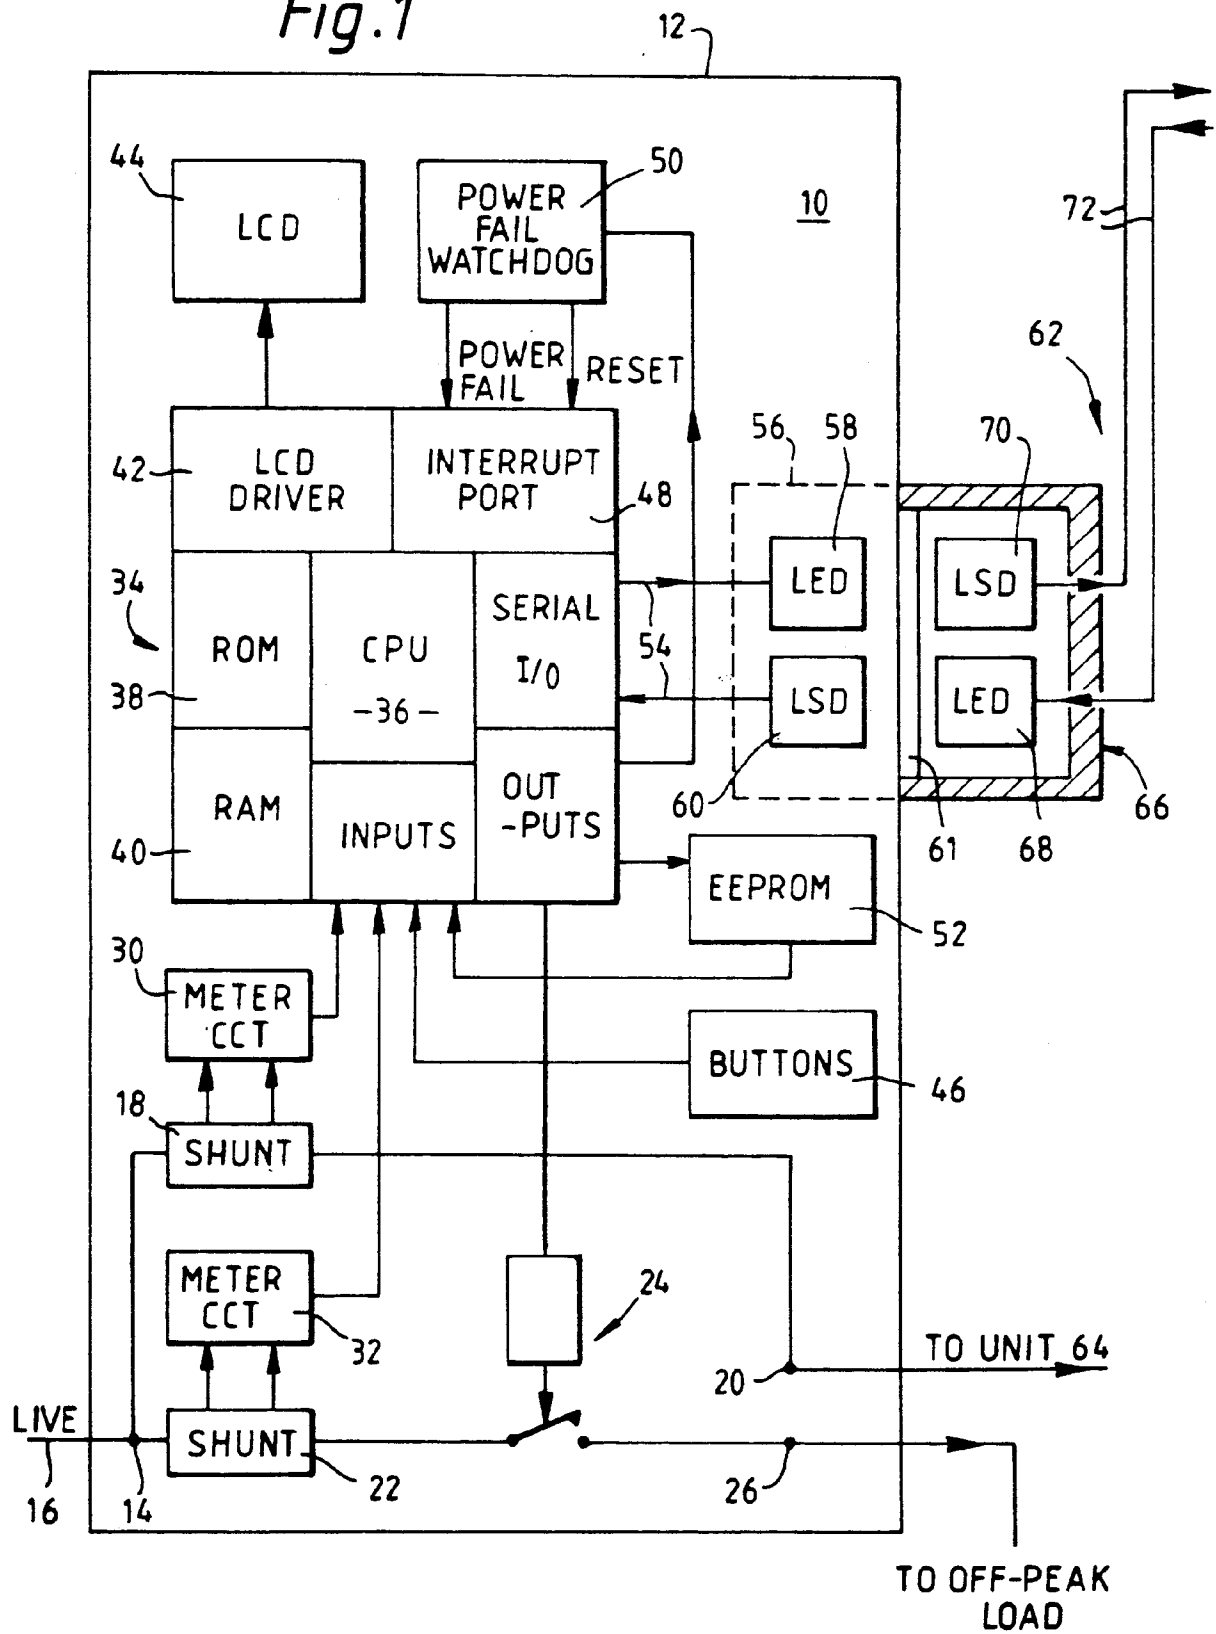


Fig. 2

