

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 November 2007 (15.11.2007)

PCT

(10) International Publication Number
WO 2007/129123 A1

(51) International Patent Classification:
B41M 3/00 (2006.01) **B41M 7/00** (2006.01)

(21) International Application Number:
PCT/GB2007/050246

(22) International Filing Date: 9 May 2007 (09.05.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0609261.3 10 May 2006 (10.05.2006) GB

(71) Applicant (for all designated States except US): **OP-TAGLIO LIMITED** [GB/GB]; Meridian House, Greenwich Way, Andover Hampshire SP10 4DU (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **JOHN, Drinkwater** [GB/GB]; 46 Guildford Road, Fleet Hampshire GU51 3EY (GB).

(74) Agent: **GILL, David, Alan**; W.P. Thompson & Co., 55 Drury Lane, London WC2B 5SQ (GB).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DATA PROTECTION STRUCTURE

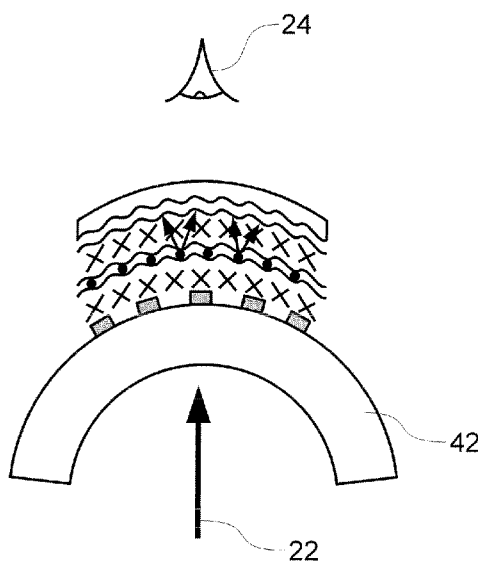

(57) Abstract: The present invention provides for a data protection device comprising an optically variable diffractive scratch-layered structure overlying data to be protected, wherein the device includes at least first and second opaque metallic layers separated by a flexible light-absorbing separation layer.

WO 2007/129123 A1

Data Protection Structure

Optically variable diffractive structures and devices such as holograms and optical interference based devices are now used to prove the authenticity of items of value and to prevent their fraudulent duplication for example for banknotes, plastic cards, value documents such as fiscal stamps, travel documents such as passports and for the authentication of valuable goods as an anti-counterfeit measure. Scratch-off inks, scratch-off hot foils and scratch-off labels are used to protect hidden numbers which can be revealed by scratching off the soft adhesive or ink layer – for example on lottery tickets for number protection and for protecting secure validation numbers on validation cards, such as pre-pay telephone cards. Scratch-off diffractive and holographic hot stamping foil is also used in this type of application with the advantage that the holographic foil is hard to replicate or obtain and therefore protects the number from alteration or prior use and re-sale.

This invention relates to an optically variable diffractive scratch-off foil with very high opacity designed to defeat number reading of scratch cards by transmissive techniques particularly useful in the area of anti-counterfeit and authentication by the diffractive image and data protection using scratch-off foils. These scratch-off foils are also tamper evident against removal and alteration as the holographic image is destroyed by any attempt to remove the device. These techniques can also be used to provide increased opacity scratch-off labels.

These applications are particularly applicable to scratch cards for phone-cards and lottery tickets, vouchers and other items of value where a PIN number is protected by a scratch-off foil and revealed by scratching off the foil.

Devices based on the principle of optical diffraction are often used for anti-counterfeit and security purposes because they can produce, by the process of optical diffraction, an optically variable image with characteristic features such as depth and parallax (holograms) and movement features and image switches (purely diffraction grating devices and some holographic devices). Such diffractive, optically variable image forming devices are used as anti-counterfeit devices both because their effects are highly recognisable and cannot be duplicated by print technologies, and because specific and difficult to replicate optical and engineering techniques are required for their production.

These diffractive optically variable image forming devices form their effects base on holographic or pure diffraction grating techniques and are often manufactured as embossed surface relief structures as known in the art (for example, Graham Saxby, Practical Holography Prentice Hall 1988). They are typically applied to documents of value, plastic cards and articles of value to be protected in the form of holographic or diffractive hot stamping foil applied to a numbered paper or plastic card base using the known method from the printing industry of the technique of hot stamping of decorative foils.

There are various forms of pure diffraction grating devices in use as such security devices, examples include US 4568141, which reveals a diffraction optical authenticating element and US 5034003 which reveals another form of optical security device using diffraction gratings. Another form of pure diffraction grating security device can be produced by direct writing by an electron beam and examples are WO 9318419, WO 9504948 and WO 9502200. Teachings on methods of origination useful for dot screen hidden image for example using electron beam lithography can be found in PCT/GB/2002/003257, useful teachings on methods of recording and replaying covert laser readable features using both laser interference and direct write origination can be found in WO 02/03323 A1, WO 02/02351 A1 and WO 02/03109 A1 and useful methods for originating achromatic structures can be found in WO 02/06858 A2 - the teachings of all which are incorporated by reference. Diffractive optical variable image forming devices can also be produced by holographic methods and are known by their use in security applications for example on credit cards, secure documents and product authentication - examples of such teachings are US 5694229, US 5483363, WO 995903.

Currently various approaches have been used for securing PIN data on product and documents. These include tamper evident security scratch-off foils and scratch-off security labelling using anti-counterfeit features such as holograms, diffractive devices, or various forms of security print.

It is often advantageous and known in the art to protect hidden numbers on pre-pay cards or lottery tickets by scratch-off ink systems, where the ink covering the ticket or validation number can be scratched-off using for example a coin but which keeps the number or information completely hidden until usage. Scratch-off diffractive and holographic hot stamping foil is used in this type of application to protect information of

value from prior disclosure or alteration - with the advantage that the holographic foil is hard to replicate or obtain and therefore protects the number from alteration or prior use and re-sale. In these applications the hot stamping device would be opaque to prevent viewing of underlying data – usually metallised with aluminium or a similar reflective and opaque metal which can be scratched off to reveal the data. Scratch off ink systems can be combined with an overlaid metallic or holographic metallic layer and some types are described for example in WO 2006/005156 A1 (Taylor et al) which describes a scratch card system consisting of a secure number overlaid by a printed varnish, a soft adhesive and with a metallic or holographic foil applied on top, one method of application being foil stamping or cold foil transfer. Other such systems are described in CA 2 471 024 A1 (Hamilton et al).

Another class of scratch-off protection is provided by scratch-off hot stamping foils, either printed or scratch-off holographic foil, applied and transferred over the number to form a thin frangible layer where the hologram is destroyed by tampering and where the holographic scratch foil is opaque to read-through by optical techniques relying on the transmission of high intensity light sources. Scratch-off hot stamping foils including holographic scratch off foils are routinely commercially available from a number of sources including Leonhard Kurz GmbH and Optaglio Limited and these devices typically include a holographic layer, a heat activated soft scratch off adhesive designed to be heat applied to the card substrate under typical hot foil stamping parameters. In these scratch-off holographic foils, the adhesive can be high opacity (black) using typically graphite powders or lower opacity (white, using alternative fillers) to reduce smear as the adhesive breaks up on removal as noted and described in WO 02/093474 A1. Often the aluminium reflective layer is used to provide enhanced opacity and is produced by vacuum metallising relatively thick layers of aluminium to increase the light blocking capability. Multi layer scratch off foils (where different adhesive or foil layers have different properties) are well known in the general foil and hot stamping foils field - for example banknote or cards grades of hot stamping contain scratch resistant hard layers, emboss lacquer layers and then optionally hard protective layers underneath the emboss and metallization layers and then often a multi-layer adhesive consisting of a first, or primer, layer and a main heat-activated adhesive layer. A commercially available holographic scratch off foil from Leonhard Kurz comprises a layer structure containing an emboss lacquer, metallisation layer then a layered adhesive consisting of a soft easily removed scratch off layer, followed by a hard durable layer to protect the underlying data from damage followed by a heat activated adhesive layer to bind the structure onto the

PIN panel area during transfer.

One known form of attempted number-compromise of scratch cards, such as phone-cards, is to use an intense light source which in some cases can allow the numbers to be read in transmission. This is regarded as a serious form of potential compromise since the secure number potentially can be read and used non-destructively and then the card sold on as genuine.

It is known in the field to produce improved scratch foils with high opacity by using very high opacity metallised layers typically aluminium, sometimes produced by multiple passing of the foil through a metalliser to increase the overall thickness of the aluminium layer to increase the opacity. It is known by this method to produce enhanced opacity scratch foils to defeat light transmission compromise and it is also known to conduct forensic tests that will measure the resistance of the card to light transmission typically conducted on flat cards.

A typical manufacturing technique for a current generation high opacity foil involves embossing a holographic hot stamping foil, aluminising the foil in a vacuum metalliser to give a high opacity aluminium layer and then coating the foil with scratch-off adhesive in a wet coating machine using typical solvent and other coating techniques such as meyer bar, direct gravure and reverse gravure. For more advanced structures the vacuum coating can potentially place an aluminium layer to increase the opacity of the foil, and the wet coating process potentially layering the scratch-off adhesive layers to give various properties on the scratch foil layer. This material would typically be slit and then applied by a process of hot stamping – which releases the hot stamped release layer from the PET carrier to transfer the scratch adhesive layer and the aluminium layer and holographic emboss lacquer and image onto a substrate to form a thin holographic scratch-off coating over a PIN number.

There is an additional light transmission test, or potential attack, that involves the card substrate being additionally bent (distorted). In some cases with scratch foils when the card and scratch foil is bent and curved and stretched (typically the card is curved to stretch and crack the metal reflector of the holographic scratch-off coating) causing a set of micro-cracks form in the aluminium layer can reduce the opacity of the metal layer and thus allow light leakage and visualisation of the data. Thicker aluminium films created by multiple aluminium coatings tend to increase the overall opacity but may still tend to

become cracked and crazed when sufficiently stretched by card distortion. This means that single layer aluminium layers can be prone to reduced opacity under bending by micro cracking the aluminium layer to allow a small amount of light transmission.

The present invention seeks to provide for a data protection structure having advantages over known such structures.

A particular further objection of the invention is to provide an improvement upon the above holographic scratch-off foil devices by providing a new type of holographic scratch foil structure with improved high opacity and a device which increases the opacity against one particular form of attack where existing holographic scratch foils have been shown to be weak allowing the number to be read through.

According to the first aspect of the present invention there is provided a data protection device comprising an optically variable diffractive scratch-layered structure overlying data to be protected, wherein the device includes at least first and second opaque metallic layers separated by a flexible light-absorbing separation layer.

Further, there can be provided a structure of scratch-off foil where the layers are adjusted to enable the foil to withstand severe bending of the foil by making the aluminised layer resistant to micro cracking and light transmission and so to enable a pass on a test involving light transmission when bent. This is achieved by using two or more separated aluminium layers within the structure separated by a few micron layer (3-8 micron) of high opacity black frangible scratch off coating which increase the flexibility of the structure and allows the aluminium layers to stretch and crack but ensures that because two (or more) aluminium films are involved the cracks tend not line up in transmission and hence the overall light through put though the cracks is greatly reduced. The black (high opacity) frangible scratch off adhesive interlayer serves to reduce the transmission of any light leakage through none aligned cracks in the two aluminium layers and keeps the overall structure capable of being easily broken up for scratch off and need to be of an optical density (for the 3-8 um layer) of at least O.D. 2.5 or above. The black light absorbing interlayer needs to be above a certain thickness to allow sufficient light blocking and also to impart some flexibility to the structure and to impart a cushion affect to allow the two aluminium films to move independently when

bend distorted and cracked. After the layered aluminium light blocking layer would be added standard scratch off adhesives as known in the art to adhere the scratch off transfer structure to the substrate,

In one embodiment, this first 'inter-layer' of scratch-off adhesive has a high optical density which is typically obtained through appropriate carbon dispersion in the adhesive. The inter-layer is as black as possible to eliminate light seepage by multiple reflections between the layers.

A typical exemplary construction would then be – hot stamping foil carrier (PET), release, then the layers transferred onto card namely emboss lacquer carrying micro replicated surface relief diffractive image, a first metallised aluminium layer (optionally multiple coated to increase opacity), first light absorbing high opacity intermediate black soft scratch-off adhesive spacer layer to add elasticity and absorption, of thickness in the region 0.5 – 6 microns or indeed 3 - 8 microns, typically one form of high opacity, high carbon loading black scratch-off adhesive is used, a second metallised aluminium layer (optionally one or more coatings) to add opacity under bending conditions, the second scratch-off adhesive layer to affix scratch foil over the PIN number, typically 4-13 um thickness.

The structure is characterised as containing two or more separate aluminium layers separate by a small distance using a flexible light absorbing separation layer to allow the aluminium layers to crack in different places under stretching and bending after application to maintain opacity under bending.

In various embodiments metals other than aluminium could give different effects, for example, copper for a gold effect, or alloys such as an alloy of copper – aluminium also for a gold effect or chrome for darker effect or chrome aluminium alloys.

The invention therefore provides for a high opacity scratch-off foil opaque to high intensity light transmission under bending, stretching, and general deformation conditions, characterised in that the foil construction consists of two (or more) separate aluminium layers, separated by a light absorbing separator layer of thickness 3-8 um layers typically, of high opacity light absorbing scratch-off adhesive with a final coating of standard scratch-off adhesive.

In particular, there is provided a construction similar to the above using more than two layers, for example three, of metal and spacer layers to further increase opacity.

The invention can provide for a scratch-off foil construction as above with an enhanced tape test protection to number access by ensuring that the first high opacity scratch-off adhesive layer on the holographic surface is less well bonded than the lower scratch-off layer, thus resulting at de-lamination or partial de-lamination at this layer when tape access to number is attempted to keep number still hidden under second metal layer.

Of course the invention also includes any scratch card, phone-card, lottery ticket, or any other value item employing such a scratch-off foil construction and which can provide for enhanced opacity under bending stresses.

The invention also provides for a scratch-off label comprising a scratch-off foil applied to a suitable tamper-evident substrate with an enhanced opacity when subjected to bending deformation and containing the same scratch-off layer structure as above.

It is noted that the invention provides metal layers with light absorbing scratch off spacer layers to provide a material of enhanced opacity and enhanced bend resistance and resistance to pin-holing typical of metallised films to form an extremely high opacity light-blocking layer.

Yet further, the invention can provide for a manufacturing technique for high opacity scratch-off foils made by using alternating layers of metal and light absorbing scratch-off adhesive, with for example a minimum of two layers of each, to give enhanced optical density and retained optical density and retained opacity when bent or otherwise deformed. As such, the invention provides for a scratch-off foil or scratch card made using this method or containing this structure.

Preferably, the first layer of scratch-off adhesive (the interlayer) can have a high optical density – typically obtained with carbon dispersion in the adhesive – as black as possible.

It should be appreciated that the relatively soft scratch-off coating can achieve its relatively softness through inclusion of a soft compound such as latex or wax

Yet further, the scratch-off coating can comprise a heat-activated adhesive which can be either solvent or water-based and the fillers employed can comprise relatively large fillers such as ditania and/or ceramics having dimensions in the order of 2- 5 microns.

The invention is now described further, by way of example only, with reference to the accompanying drawings in which:

Figure 1a shows a conventional scratch card with a conventional single aluminium layer scratch foil protecting a PIN number and Figure 1b shows the result of aluminium layer cracking on bending and resulting number read out under bending test.

Figure 2a illustrates an improved scratch card with the new multiple aluminium layer and light blocking scratch off adhesive layers protecting a PIN number and Figure 2b shows the result of bending but wherein cracking in aluminium layers doesnot occur and any light leakage is absorbed by the light absorbing interlayer in the same place so maintaining opacity and defeating number read out under extreme bend test; and

Figure 3 shows the construction of new high opacity scratch-off foil.

Turning first to Fig. 1a, there is illustrated a data protection device 10 according to an embodiment of the present invention and which comprises a holographic layer 12, located on a single aluminium layer 14 which serves, by way of a scratch-off adhesive layer 16 cover PIN numbers 18 printed on a substrate card 20.

Referring to Fig. 1b, the device of Fig. 1a is shown in a manner in which the substrate card 20 is deformed, i.e. bent such that when a high intensity light 22 is directed through the structure, the deformation of the structure serves to cause microcracks within the aluminium layer 14 such that light 26 can escape therethrough such that, when viewed from a viewing position 24, light 26 escaping through the microcracks can serve to provide an image 28 indicative of the PIN number 18.

Turning now to Figs. 2a and 2b, there is illustrated an embodiment according to an example of the present invention.

Here the structure 30 again comprises an holographic layer 32 on a first aluminium layer 34, but which first aluminium layer 34 is separated from a second aluminium layer 38 by

way of a blackened and generally a opaque scratch off adhesive layer 36.

The second aluminium layer 38 likewise overlays, by way of a scratch-off adhesive layer 40, a PIN number 44 comprising the data to be secured.

This time, and with reference to Fig. 2b, when the substrate card 42 is deformed to bending, the light 22 directed thereto, and viewed from a viewing position 24 does not escape through the deformed layers of the structure since any microcracks appearing within both the first and second aluminium layers 34, 38, will not be aligned such that it does not prove possible to discern the data represented by the PIN number 44.

The overall structure of the embodiment illustrated in Figs 2a and 2b of the present invention is shown further with reference to Fig. 3.

Here, the layered structure 32-40 is shown bonded to a carrier layer 46 by way of a release layer 48.

As will be appreciated, the present invention provides for a new structure of scratch-off foil where the various layers are arranged to enable the foil to withstand and pass a test involving light transmission coupled with bending of the foil-bearing item. This is done by using two aluminium layers within the structure separated by a few micron layer of light blocking high opacity scratch off coating which increase the flexibility of the structure and allows the aluminium layers to stretch and crack but ensures that because two (or more) aluminium films are involved the cracks tend not line up in transmission and hence the overall light through put though the cracks is greatly reduced and this new structure of card now has improved opacity retention on bending tests

The typical construction according to the invention can be – hot stamping foil carrier (PET), release, then the layers transferred onto card namely emboss lacquer carrying micro replicated surface relief diffractive image, first metallised aluminium layer, first intermediate scratch-off adhesive spacer layer to add elasticity – typically a few microns (3 - 8 um) of one form of scratch off adhesive, typically a high opacity black light absorbing scratch-off adhesive, second metallised aluminium layer to add opacity under bending conditions, the second scratch-off adhesive layer to affix scratch foil over the PIN number, typically 4 – 13 um thickness. Such an example of this invention is characterised as containing two separate aluminium layers separated by a small

distance using a flexible high opacity light absorbing separation layer to allow the aluminium layers to crack in different places under stretching and bending and so as to maintain opacity under bending.

As noted, in various embodiments metals other than aluminium could give different effects, for example, copper for a gold effect, or alloys such as an alloy of copper – aluminium also for a gold effect or chrome for a darker effect or chrome aluminium alloys.

In the illustrated embodiment the first layer of scratch-off adhesive (the interlayer) has a high optical density to ensure it is light absorbing – typically obtained with carbon dispersion in the adhesive – so the adhesive is made as high optical density (i.e. as black) as possible.

Also provided is a material of enhanced optical opacity, having such a construction, and employing such a technique of layering metal layers with spacer layers to provide a material of enhanced opacity and enhanced bend resistance and resistance to pin-holing typical of metallised films to form an extremely high opacity light blocking layer.

To summarise therefore, the invention provides for an optically variable diffractive scratch-off foil with very high opacity designed to reduce the light transmission of holographic scratch off foils under bending transmissive techniques particularly useful in the area of anti-counterfeit and authentication by the diffractive image and data protection using scratch-off foils. These scratch-off foils are also tamper evident against removal and alteration as the holographic image is destroyed by any attempt to remove the device. These techniques can also be used to provide increased opacity scratch-off labels. The invention provides for a new structure of scratch-off foil where the layers are adjusted to enable the foil to withstand and pass a test involving light transmission coupled with bending of the card. This is done by using multiple metallic for example aluminium layers within the structure separated by for example a few micron layer of high opacity light absorbing scratch-off coating which increase the flexibility of the structure and allows the aluminium layers to stretch and crack but ensure that because two (or more) aluminium films are involved the cracks tend not line up in transmission and hence the overall light through put though the cracks is greatly reduced and this new structure of foil now has increased opacity against a light transmission test including bending

Claims

1. A data protection device comprising an optically variable diffractive scratch-layered structure overlying data to be protected, wherein the device includes at least first and second opaque metallic layers separated by a flexible light-absorbing separation layer.
2. A device as claimed in Claim 1, wherein the said flexible separation layer comprises a scratch-off layer.
3. A device as claimed in Claim 1 or 2, wherein the said flexible separation layer is of relatively high opacity.
4. A device as claimed in any one or more of Claims 1-3, wherein the flexible separation layer comprising an adhesive layer.
5. A device as claimed in any one or more of Claims 1-4, wherein the flexible separation layer achieves its opacity by way of carbon dispersion therein.
6. A device as claimed in any one or more of Claims 1-5 and comprising a high opacity holographic scratch-off foil device consisting of a first layer containing an embossed diffractive image, a second reflective layer consisting of a vacuum deposited opaque metallic coating, a third high opacity light absorbing soft black frangible scratch-off layer, a second opaque metallic layer and a second scratch off adhesive layer, the structure being such that the opacity of the combination of layers is not degraded by deformation and micro cracking of the opaque metallic layers, wherein the various scratch off adhesive are designed to be frangible and easily removed to reveal underlying data
7. A device as claimed in Claim 6, wherein the soft black frangible scratch

off layer has a thickness in the range of 3 to 8 microns.

8. A structure as claimed in Claim 6 or 7, wherein the light absorbing black frangible scratch off layer is also of an optical density of 1.5 or greater.
9. A device as claimed in Claims 6, 7 or 8 and containing a multiple number of combination structures of opaque metallic layers and high opacity frangible soft scratch off layer combinations to provide a further enhancement to the optical density of the structure and the maintenance of optical density with bending of the holographic scratch off layer.
10. A structure as claimed in any one or more of the preceding claims wherein the opaque metallic material is any of aluminium, chromium or copper.
11. A scratch card containing a scratch off layer protecting data thereof, and comprising a data protection device as claimed in any one or more of Claims 1 to 10.

1/3

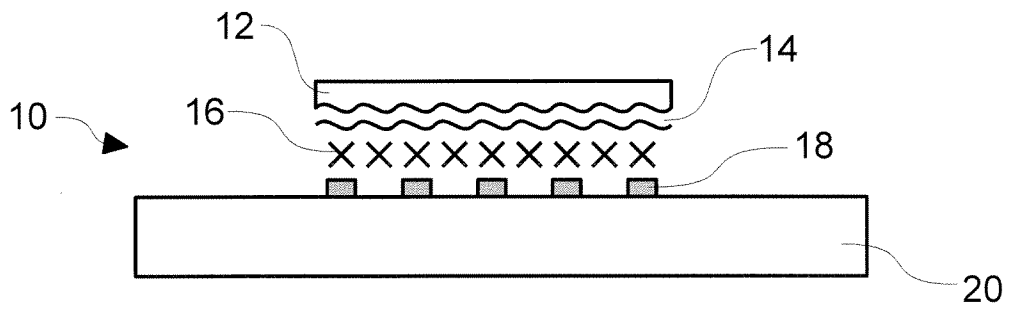


Fig.1A

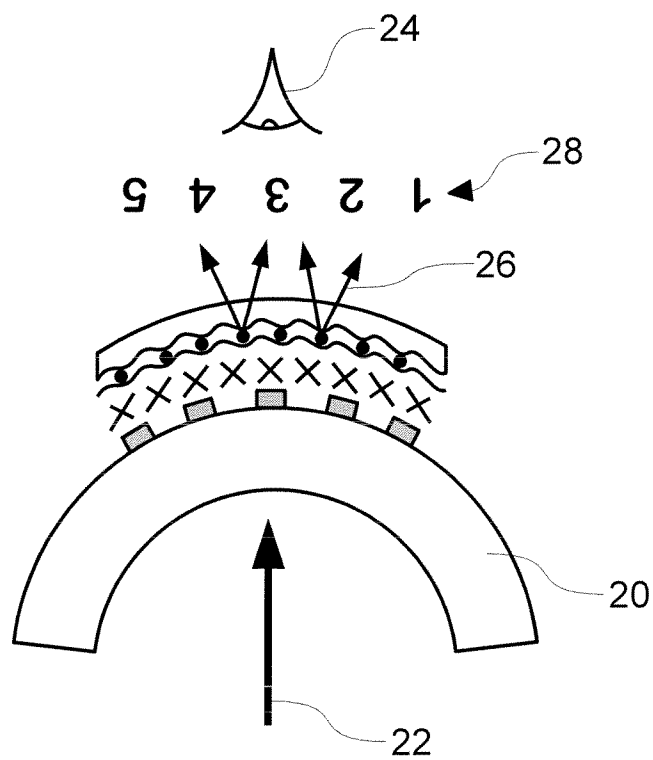


Fig.1B

2/3

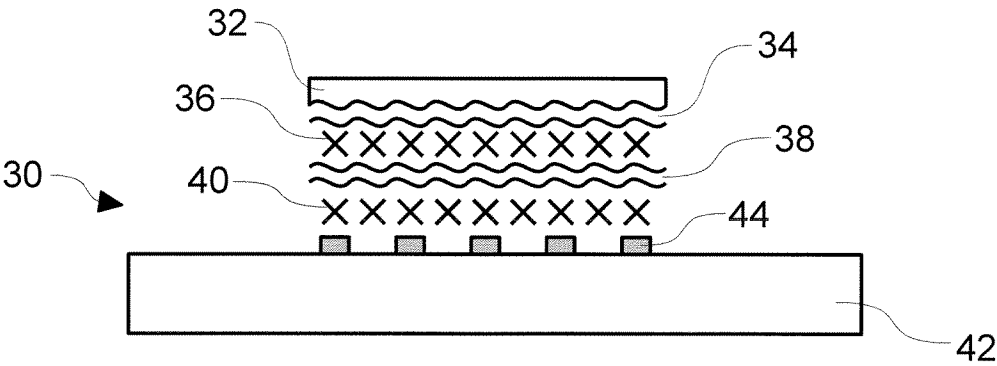


Fig.2A

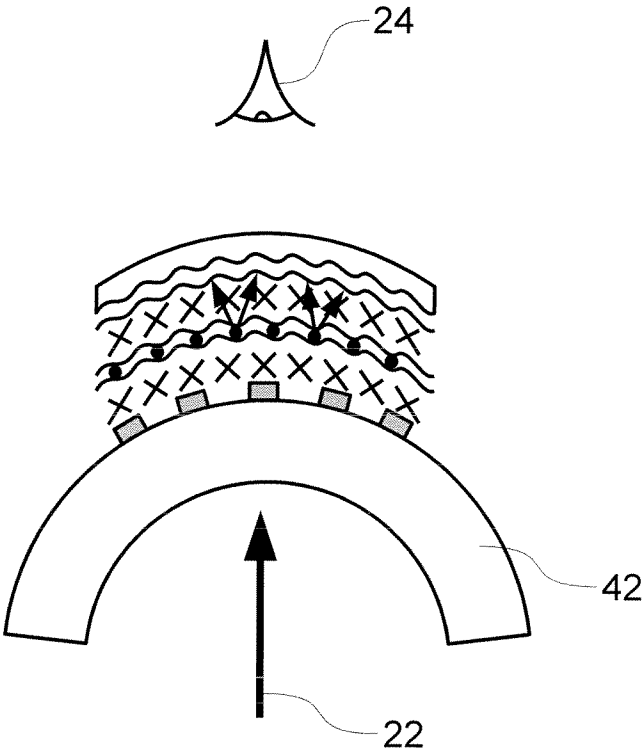


Fig.2B

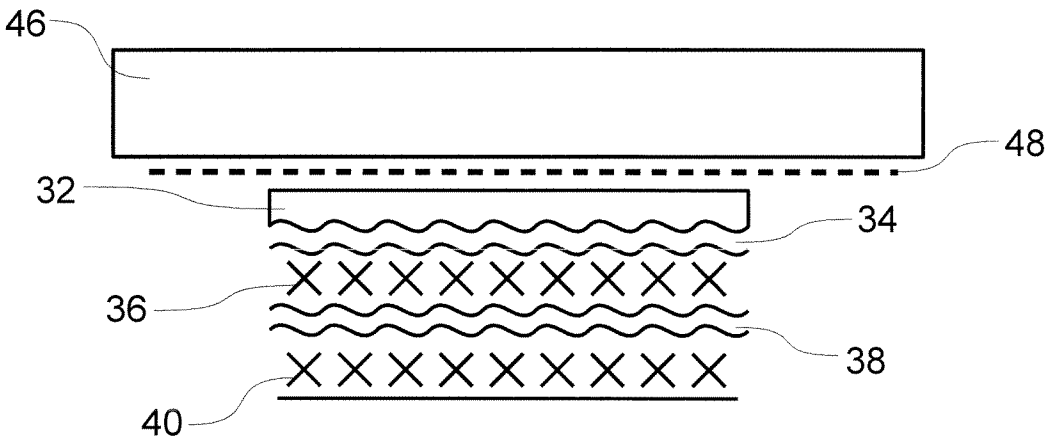


Fig.3

INTERNATIONAL SEARCH REPORT

International application No

PCT/GB2007/050246

A. CLASSIFICATION OF SUBJECT MATTER
 INV. B41M3/00 B41M7/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B42D G07D B41M A63F B32B G09F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 102 11 213 A1 (WITTE SAFEMARK GMBH [DE]) 23 October 2003 (2003-10-23) column 3, paragraph 10 - column 4, paragraph 26; figures 1,2 -----	1-11
A	CA 2 471 024 A1 (POLLARD BANKNOTE LTD [CA]) 20 September 2004 (2004-09-20) page 9, line 7 - page 12, line 8; figures 1-3 -----	1-11
A	WO 02/093474 A (RUE DE INT LTD [GB]; HOLMES BRIAN WILLIAM [GB]; HARRIS PAUL GREGORY [G] 21 November 2002 (2002-11-21) cited in the application page 9, line 15 - page 11, line 12; figures 1-15 -----	1-11



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

8 document member of the same patent family

Date of the actual completion of the international search

17 July 2007

Date of mailing of the international search report

13/08/2007

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo.nl,
 Fax: (+31-70) 340-3016

Authorized officer

Kelliher, Cormac

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/GB2007/050246

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 10211213	A1	23-10-2003	NONE	
CA 2471024	A1	20-09-2004	WO 2006005156 A1 EP 1802380 A1	19-01-2006 04-07-2007
WO 02093474	A	21-11-2002	EP 1386282 A1 US 2004150220 A1	04-02-2004 05-08-2004