




- (51) International Patent Classification:  
*E04B 2/86* (2006.01)      *E04G 9/05* (2006.01)
- (21) International Application Number:  
PCT/AU2017/050938
- (22) International Filing Date:  
01 September 2017 (01.09.2017)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
2016903502      01 September 2016 (01.09.2016) AU
- (71) Applicant: **RISE FORM PTY LTD.** [AU/AU]; c/- Davies Collison Cave Pty Ltd, Level 14, 255 Elizabeth Street, Sydney, New South Wales 2000 (AU).
- (72) Inventor: **PSZCZONKA, Daniel**; c/- Davies Collison Cave Pty Ltd, Level 14, 255 Elizabeth Street, Sydney, New South Wales 2000 (AU).
- (74) Agent: **DAVIES COLLISON CAVE PTY LTD**; Level 14, 255 Elizabeth Street, Sydney, New South Wales 2000 (AU).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: IMPROVEMENTS IN FORMWORK

Figure 21

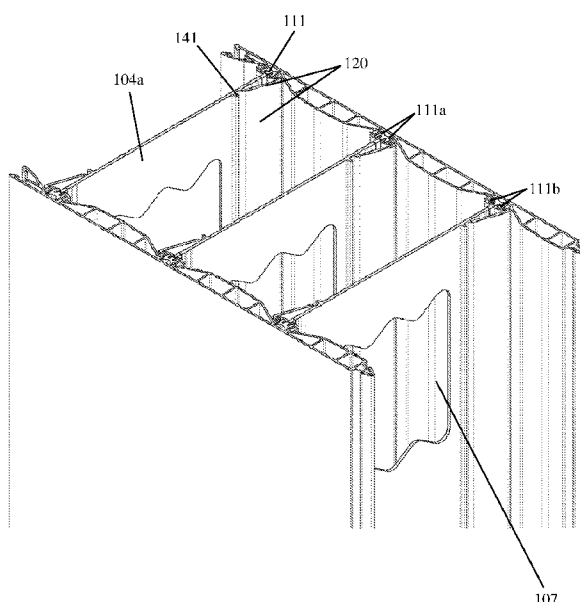

(57) Abstract: A collapsible formwork element, the element including: a pair of opposing side wall panels; and at least one connector member extending between the side wall panels, wherein the formwork element is movable between an expanded configuration, wherein the opposing panels are spaced apart, and a collapsed configuration, wherein the opposing panels are relatively closer together.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
KM, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report (Art. 21(3))*

## IMPROVEMENTS IN FORMWORK

### Field of the Invention

[001] The present invention relates to improvements in formwork and in particular, to collapsible formwork elements that may be used for "lost" formwork.

### Background of the Invention

[002] The reference in this specification to any prior publication (or information derived from it), or to any matter which is known, is not, and should not be taken as an acknowledgment or admission or any form of suggestion that the prior publication (or information derived from it) or known matter forms part of the common general knowledge in the field of endeavour to which this specification relates.

[003] Formwork is used for shaping concrete structures. For example, when constructing a building or the like, a temporary formwork structure is first constructed, and then concrete is poured into the formwork. The concrete then sets in line with the formwork structure. In some forms, the formwork is "lost" formwork, and is not removed after the concrete has set. "Lost" formwork is rather left in place to become part of the final concrete structure.

[004] Conventional "lost" formwork is not typically economical as it is usually produced from injection moulded parts, made from multiple materials, and/or requires significant manual labour to assemble. Furthermore, conventional "lost" formwork has other disadvantages in that it can be bulky and difficult to transport. As it cannot be readily reduced in size, practical use is often limited to sites within a certain distance of a production/manufacturing facility. Conventional "lost" formwork also often includes foam panels, which can be damaging to the environment, and difficult to use in combination with adhesives/glues.

[005] The present invention seeks to address at least some of the above mentioned disadvantages associated with conventional "lost" formwork.

### Summary of the Invention

[006] In one broad form, the present invention provides a collapsible formwork element,

- 2 -

the element including: a pair of opposing side wall panels; and at least one connector member extending between the side wall panels, wherein the formwork element is movable between an expanded configuration, wherein the opposing panels are spaced apart, and a collapsed configuration, wherein the opposing panels are relatively closer together.

[007] In one form, the at least one connector member includes at least one hinge portion that permits movement of the element between the expanded and collapsed configurations. In one form, the at least one connector member includes two hinge portions.

[008] In one form, the at least one connector member is hingedly connected to the opposing side wall panels.

[009] In a further broad form the present invention provides, a collapsible formwork element, the element including: a pair of opposing side wall panels; and at least one connector member extending between the side wall panels, wherein the at least one connector member includes at least two hinge portions that permit movement of the element between an expanded configuration, wherein the opposing panels are spaced apart, and a collapsed configuration, wherein the opposing panels are relatively closer together.

[0010] In one form, the at least one connector member includes a centre panel between a pair of hinged ends provided by the hinge portions. In one form, the hinged ends are configured to be engaged with the side wall panels.

[0011] In one form, the hinge portions are formed of a material that is more flexible than the material forming the remainder of the connector member, which is substantially rigid, so as to provide a hinge type action. In one form, the connector members are produced via co-extrusion, with a first extrusion material forming the hinge portions and a second extrusion material forming the remainder of the connector member.

[0012] In one form, the hinge portions are provided by a narrowing or thinning in the connector member. In one form, the hinge portions are provided by a relative reduction in connector member thickness so as to provide a fold line that permits bending of the connector member.

- 3 -

[0013] In one form, the at least one connector member is realisablely attachable between the opposing side panels. In one form, the opposing side wall panels include slots therein to respectively receive the hinged ends of the least one connector member via a sliding engagement. In one form, the hinged ends of the at least one connector member are shaped fit the slots so as to provide a frictional engagement therein.

[0014] In one form, in the expanded configuration, the centre panel/s of the at least one connector member extend substantially perpendicular to the opposing side wall members.

[0015] In one form, the formwork element includes a plurality of connector members.

[0016] In one form, the formwork element is configured to snap lock into the expanded configuration. In one form, snap locking is provided a hook tab that extends from the at least one connector member and is configured to engage a corresponding catch projection on one of the opposing side wall members as the formwork element moves into the expanded configuration.

[0017] In one form, the side wall panels include one or more channels therein extending substantially vertically therethrough. In one form, the one or more channels include an insulating material therein.

[0018] In one form, the lateral ends of the opposing side wall panels include engagement portions for engagement with like collapsible formwork elements so as to allow formation of a formwork structure comprised of a plurality of the collapsible formwork elements. In one form, the engagement portions are configured to provide snap lock engagement between neighbouring formwork elements.

[0019] In one form, in the collapsed configuration, the distance between the opposing walls panels is less than  $\frac{1}{3}$  the distance between the opposing wall panels in the expanded configuration. In one form, in the collapsed configuration, the distance between the opposing walls panels is less than  $\frac{1}{4}$  the distance between the opposing wall panels in the expanded configuration. In one form, in the collapsed configuration, the distance between the opposing walls panels is less than  $\frac{1}{5}$  the distance between the opposing wall panels in the expanded configuration.

- 4 -

[0020] In one form, the at least one connector member and side wall panels are each separately formed as single extruded pieces.

[0021] It will be appreciated that, in a further aspect, the present invention is also embodied in the connector members and/or a side wall panels when provided separately, for use in the collapsible formwork elements as described herein.

### **Brief Description of the Drawings**

[0022] An example of the present invention will now be described with reference to the accompanying drawings, in which:

Figure 1 is a top view of one example of a collapsible formwork element in the expanded configuration;

Figure 2 is a top view of the collapsible formwork element of figure 1 in a partly collapsed configuration;

Figure 3 is a top view of the collapsible formwork element of figure 1 in the collapsed configuration;

Figure 4 is a top view of the collapsible formwork element of figure 1 in the expanded configuration with end pieces attached;

Figure 5 is an isometric view of the collapsible formwork element of figure 1 in the expanded configuration;

Figure 6 is an isometric view of the collapsible formwork element of figure 1 in a partly collapsed configuration;

Figure 7 is an isometric view of the collapsible formwork element of figure 1 in the expanded configuration;

Figure 8 is a top view of a further example of a collapsible formwork element in the expanded configuration wherein connector members are hingedly connected to the side wall panels;

Figure 9 is a top view of the formwork element of figure 8 in the collapsed configuration;

Figure 10 is an enlarged view of the hinged connection between a sidewall panel and a connector member of the formwork element of figure 8;

Figure 11 is a side view of the connector member of the formwork element of figure 8.

Figure 12 is a top view of a single side wall panel of the formwork element of figure 1;

Figure 13 is a top view of a connector member of the formwork element of figure 1;

Figure 14 is a top view of one example of a collapsible formwork element in the expanded

- 5 -

configuration;

Figure 15 is a top view of the collapsible formwork element of figure 14 in the collapsed configuration;

Figure 16 is a close up top view of engagement between connector member and side wall panel of the element as shown in figure 15;

Figure 17 is a close up top view of engagement between connector member and side wall panel of the element as shown in figure 14;

Figure 18 is a close up top view of engagement between connector member and side wall panel of the element with hinge portion provided by a narrowing in the connector member;

Figure 19 shows a top view of the connector member of figures 14 and 15;

Figure 20 shows a top view of the side wall panel of figures 14 and 15;

Figure 21 is an isometric view of the collapsible formwork element as shown in figure 14 in the expanded configuration;

Figure 22 is an isometric view of the collapsible formwork element as shown in figure 15 in the collapsed configuration;

Figure 23 is a close up top view showing one example of snap engagement between neighbouring formwork elements;

Figure 24 is an isometric view of one example of a side wall panel with holes in the outer surface; and

Figure 25 is an isometric view of one example of a side wall member including an insulating material therein.

### **Detailed Description of the Drawings**

[0023] A first set of embodiments of the present invention provides a collapsible formwork element. The element includes a pair of opposing side wall panels and at least one connector member extending between the side wall panels. The formwork element is movable between an expanded configuration, wherein the opposing panels are spaced apart, and a collapsed configuration, wherein the opposing panels are relatively closer together.

[0024] Being collapsible, the presently described formwork element provides significant space saving advantages. For example, in use, the formwork element may be transported/delivered in the collapsed configuration, allowing more elements to be transported per trip. Once on site, the element(s) may be expanded to provide a concrete

- 6 -

receiving cavity and positioned in place. The element(s) may also be stored on site in the collapsed state, requiring less space than conventional non-collapsible formwork elements.

[0025] Generally, the collapsible formwork element includes a plurality of connector members extending between the side wall members. In one form, the connector member/s include at least one hinge portion that permits movement of the formwork element between the expanded and collapsed configuration. In one example, the connector member/s include two hinge portions.

[0026] Generally, the connector members include a centre panel between a pair of hinged ends, that are respectively configured to be engaged with the side wall panels. In the expanded configuration, the connector member panels typically extend substantially perpendicular to the opposing side wall members to provide rectangular channels in the concrete receiving cavity of the formwork element. In the fully collapsed configuration, the connector members bend at the hinge portions and the connector member centre panel extends substantially parallel to the opposing side walls, and is sandwiched therebetween.

[0027] The hinge portion/s may be provided by a thinning or narrowing in the connector member/s. For example, the hinge portion/s may be provided by a relative reduction in connector member thickness so as to provide a fold line that permits bending of the connector member. In such examples, the connector members may be produced from a plastic or polymer material, which, when sufficiently thin, has enough flexibility to allow bending. In one example, the connector members are produced from a polymer material, such as, for example polypropylene or polyvinylchloride. It will be appreciated that a range of materials may be used to produce the connector member/s (i.e. not only polymers/plastics), and that the hinge portions/mechanism may also vary.

[0028] In other examples, the hinge portions are not provided by a thinning/narrowing, but rather, by incorporating a more flexible material. For example, the hinge portions may be formed of a material that is more flexible than the material forming the remainder of the connector members so as to allow a hinge type action. It will be appreciated that apart from the hinge portions, the connector members are generally substantially rigid to adequately support the side wall panels in the expanded configuration. The connector members may be produced via co-extrusion, with a first extrusion material forming the

- 7 -

more flexible hinge portions and a second extrusion material forming the more rigid remainder of the connector members.

[0029] In other forms, instead of the connector member/s including the hinge portion/s, the connector member/s may be hingedly connected to the side wall members so as to permit movement between the expanded and collapsed configurations.

[0030] Generally the connector member panels include apertures therein so as to form webs between the side wall panels. During filling, concrete poured into the concrete receiving cavity of the element is thereby permitted to flow between the rectangular channels defined by the connector members. The connector member panels, whilst facilitating expansion/collapse of the formwork element, may therefore also contribute to reinforcement of the finished concrete product via composite action with the concrete.

[0031] Typically, the connector member/s are realisable attachable to the opposing side wall panels, such as, for example, via a sliding engagement. For example, each of the opposing side wall panels may include slots therein to respectively receive opposite hinged ends of the connector member/s. In other examples, the connector member/s and side wall panels may be formed of a unitary construction. Generally, the formwork elements as described herein also typically snap lock into the expanded configuration. This can help to avoid the formwork elements collapsing unintentionally after placement. It will be appreciated that in some instances, snap locking may be disengaged with human interaction. It will also be appreciated that the structures/elements that provide snap locking may vary. It will also be appreciated that in some forms, the elements may be mechanically maintained or locked in the expanded configuration by means other than snap locking, such as, for example, by a plug and recess type engagement wherein, for example, a plug on the connector member clicks or plugs into a corresponding recess in a side wall member on expansion. Generally, the formwork element is configured such that maintenance or locking in the expanded configuration is achieved automatically on expansion without additional fasteners. It will be appreciated that locking or maintenance may be permanent or semi-permanent such that the element may be collapsed again after expansion.

[0032] Individual formwork elements are also typically configured to be connected together to provide larger formwork structures (like walls or the like) as desired. Generally, to allow engagement between like elements, the lateral ends of the opposing side wall panels include engagement portions. The engagement portions of neighbouring formwork elements engaging with one another to provide the connection between individual elements. Typically the engagement portions are configured to provide snap lock engagement between the elements. It will be appreciated that a larger formwork structure may include any number of individual formwork elements connected together. Additionally, end pieces may be provided to cap unused ends of the elements/formwork structure. The end pieces also typically being configured for snap lock engagement with the engagement portions of the formwork elements. In addition to end pieces, junction pieces (e.g. T junctions) may also be provided to connect two or more formwork elements or to connect formwork elements in a configuration which differs from than if they were connected directly together (e.g. right angles). The junction pieces are also typically configured for snap lock engagement with the engagements portions of the formwork elements.

[0033] In some examples, the opposing side wall panels may include internal reinforcement to strengthen areas that may be prone to bulging when concrete is filled into the element. For example, areas of the side wall panels further from the connector members may be prone to bulging as they are not as well supported by the connector members. It will be appreciated that internal reinforcement may take a variety of forms.

[0034] In one example, internal reinforcement is provided by one or more internal walls located between connector member slots that define channels/voids in the side wall panel. The internal walls thus provide some spacing between the main concrete receiving cavity and the outer walls of the side wall panels. The internal walls are thus configured such that instead of exerting pressure on the portions the outer wall of the side wall panel between the two connector members (i.e. near the mid point, which is typically less supported and prone to bulging), concrete filled into the formwork exerts pressure on the internal walls of the panels. Due to the shape of the internal walls and connection points with the respective outer wall of the side wall panel, pressure from the concrete is redirected to the areas of the side wall panel near to the connector members, which are typically more supported and less likely to bulge (as the connector members themselves provide support).

- 9 -

[0035] In one example, the internal walls provide channels with a dome shaped cross section between neighbouring connector members. In other examples, internal reinforcement may be provided by braced internal walls that extend substantially between the slots for receiving the connector members. In such examples, supporting/bracing walls between the internal and outer walls helps distribute pressure from filled concrete across several points of the side wall and also provide additional support to areas prone to bulging.

[0036] Generally the channels defined by the internal walls extend in a substantially vertical direction. In some examples the one or more channels defined by the internal walls include an insulating material therein. Furthermore, in some forms the outer surfaces of the side wall panels may include holes therein or may be roughened to improve bonding of coating materials, like render.

[0037] One particular example of a collapsible formwork element as described herein is illustrated in figures 1 to 7.

[0038] Figure 1 shows a top view of a collapsible formwork element (1) according to one example. The formwork element (1) includes a pair of opposing side wall panels (2, 3) and a plurality of connectors (4) extending between the panels (2, 3). The formwork element (1) is movable between an expanded configuration (see figure 1), wherein the opposing panels (2, 3) are spaced apart, a collapsed configuration (see figure 3) wherein the opposing panels (2, 3) are relatively closer together.

[0039] Movement between the expanded and collapsed configurations is permitted by two hinge portions (5, 6) in the connector members (4). The hinged portions (5, 6) are provided by a thinning in the connector members (4). At each hinge portion (5, 6), there is a reduction in connector member (4) thickness so as to provide a fold line that permits bending of the connector member. Operation of the hinge portions (5, 6) is more clearly shown in Figure 2, which shows a top view of the formwork element (1) when part way expanded.

[0040] In this example the connector members (4) and side panels (2, 3) are formed of suitable polymer material such as, for example, polypropylene.

[0041] As is more clearly shown in figures 5 to 7, which are isometric views of the formwork element (1), the connector members (4) include apertured centre panels (or webs) having hinged ends (10, 11) that are configured to be engaged with the side wall panels (2, 3). In the expanded configuration, the panels (4a) extend substantially perpendicular to the side wall panels (2, 3) so as to provide substantially rectangular channels (18) in the concrete receiving cavity of the formwork element. During filling, the apertures (7) in the connector member panels (4a) provide a path for concrete to flow between the rectangular channels (18) of the element (1). The web like structure created by the apertured panels (4a), helps to provide reinforcement to the final concrete structure. As shown in figures 5 to 7, the connector member panels (4a) also extend substantially the entire height of the formwork element (1) i.e. from the top (1a) to the bottom (1b).

[0042] The connector members (4) are also releasably engaged to the opposing side panels (2, 3) via a sliding engagement with slots (8, 9) in the side wall panels (2, 3). The slots (8, 9) in the side wall panels (2, 3) being configured to receive respective opposite hinged ends of connector members (10, 11). It will be appreciated that this releasable engagement permits components of the formwork (e.g. connector members, side wall panels etc.) to be manufactured separately. Furthermore, it will be appreciated that as the components typically have a fixed cross sectional profile, and are typically formed of a polymer/plastic material, more cost effective manufacturing techniques may be used such as, for example, extrusion. Figures 12 and 13 show the side wall (e.g. 102, 103) and connector member (4) when separate.

[0043] When the formwork element (1) is moved into the expanded configuration, it snap locks into position such that it cannot easily be returned to the collapsed configuration without human intervention. Seen most clearly in figures 1 to 4, snap lock engagement is provided by hook (or barbed) tabs (20) that extend outwardly from one side of the connector member panels (4a). The hook tabs (20) are configured to engage with corresponding catch projections (21) at respective neighbouring side wall panels (3), as the connector member (4) moves into the expanded configuration. The hook tabs (20) being flexible yet resilient such that they slide over the lip of the catch projections (21) during movement into the expanded configuration (see figure 2), before snapping into place, hooking on to the catch projection (21). Movement into the collapsed configuration is thus substantially prevented by engagement between hook tabs (20) and catch projections (21).

- 11 -

It will be appreciated that the snap lock engagement may be disengaged by human intervention.

[0044] In the example of the figures, snap engagement with catch projections (21) is only shown to be used with the outer most connector members (4a, 4b). However, it will be appreciated that this may not always be the case, and they may form part of the side walls (2, 3) to engage all or a plurality of the connector members (4).

[0045] Furthermore, at the other end of the connector members (4) (i.e. opposite the snap engagement end), the connector members (4) are shaped to provide further support against collapse. These ends of the connector members (4) include a kink (42), which provides a stop ridge (43) that prevents over-rotation of the connector members (4) in the expansion direction by contacting stop wall portion (44) of side wall (2).

[0046] The opposing side wall panels (2, 3) also include internal reinforcement to help strengthen the side wall panels. In particular, internal walls (12) help redirect the pressure of from concrete received in concrete receiving cavity (18) away from less supported parts of the side walls (typically towards areas supported by connector members). This helps to prevent bulging at the parts of the side walls that are less supported by the connector members. The internal walls (12) provide channels/voids (14) in the side walls with a substantially dome shaped cross section. The internal walls (12) are rounded and have ends (12a, 12b) that join to the outer wall (13) of the side wall panels (e.g. 2 or 3) near to the connector members (4). The internal walls (12) thereby space the main concrete receiving cavity from the less supported parts of the outer wall (13). Pressure exerted on the rounded wall (12) from received concrete is redirected towards ends (12a, 12b) of the rounded wall (12) near to the connector members (4), where the outer wall (13) is more supported.

[0047] The rounded wall (12) also includes support projections (50, 51) thereon that contact the connector members (4) in the collapsed configuration. The support projections (50, 51) help to support the connector members (4) in the collapsed configuration. Additionally, the connector members (4) themselves also include substantially transversely extending projections (41) which support neighbouring connector members when in the collapsed configuration. In the collapsed configuration, the transverse projections (41) of

- 12 -

the connector members (4) align with projections (50, 51) provided on the rounded walls (12). It will be appreciated that the connector members (4) and/or side wall members (2, 3) may include other support projections to provide support in the collapsed configuration. This support helps to prevent damage to the connector members (e.g. at their thin hinge portions) in the collapsed configuration, such as, for example, during transport.

[0048] It will be appreciated that the formwork element as described herein is generally intended for connection with other like elements such that multiple elements may be connected to provide a larger formwork structure such as a wall or the like. Such connection is generally achieved by engagement portions (31, 32) at the lateral ends of the side wall panels (2, 3). At one lateral end, the side wall panels (2, 3) include grooves (32), whilst at the other end, the panels (2, 3) includes projections (31). The projections (31) of one element being configured for snap lock engagement within the grooves (32) of a neighbouring element (and vice versa). During connection, the projections (31) slide against angled surfaces (33) before snapping back into the grooves (32) to provide a secure engagement between neighbouring elements.

[0049] In addition to multiple elements being connected together, end pieces (60, 61) may also be secured to the engagement portions (31, 32). For example, after a particular formwork structure comprising a plurality of formwork elements (1) is constructed, end pieces (60, 61) may be used to cap exposed ends. As shown in figure 4, there are end pieces (60) configured to fit the grooves (32) of one side of the element (1) and end pieces (61) configured to fit the projections (31) of the other side of the element (1). Figures 4 and 7 show end pieces (60, 61) connected with the formwork element (1). In addition to end pieces, it will be appreciated that junction pieces may also be provided that allow connection between two or more individual formwork elements or that allow connection between elements in a configuration that differs from that when the formwork elements are connected directly together.

[0050] A further example of the collapsible formwork element is shown in figures 8 to 11. In this example, the formwork element (400) includes connector members (401) that are hingedly connected to the side wall panels (402, 403). In this example, the hinge connections are ball and socket like with the side wall panels (402, 403) including socket portions (420) that have substantially C-shaped cross-sectional profiles and which

- 13 -

pivotaly encircle substantially cylindrical portions (404) of the connector member (401) ends. Each of the socket portions (420) being mounted on a stem (405) that protrudes from a respective side wall panel (e.g. 402, 403) such that the socket portion (420) is divided to provide a short arc surface arm (406) and a relatively longer arc surface arm (407).

[0051] Each of the substantially cylindrical portions (404) of the connector member (401) ends is supported by a stem (408) which connects to a sleeve member (409). The sleeve member (409) also having a substantially C-shaped cross sectional profile with the stem (408) dividing the sleeve (409) so as to provide a short arc surface arm (410) and a relatively longer arc surface arm (411). The stem (408) spacing the sleeve (409) from the substantially cylindrical portion (40) such that a first recess (412) is provided by between the short arc surface arm of the sleeve (410) and the cylindrical portion (404) and a second recess (413) is provided by the larger arc surface arm of the sleeve (411) and the cylindrical portion (404). The outer convex side of the sleeve (409) being joined to the remainder of the connector member (401).

[0052] As the formwork element (400) moves between the expanded and collapsed configurations the cylindrical portions (404) pivot within the socket portions (420). In the collapsed configuration the short arc surface arm (406) of the socket member (420) is received in the first recess (412) with over rotation in the collapsing direction stopped by abutment of the end (406a) of short arc surface arm (406) with stem (408) of the cylindrical portion (404) and abutment of the end (410a) of short arc surface arm (410) of sleeve (409) with stem (405) of the socket portion (420).

[0053] Similarly, in the expanded configuration, longer arc surface arm portion (407) of the socket portion (420) is received in the second recess (413) and over-rotation in the expansion direction limited by abutment of the end (407a) of the longer arc surface arm (407) of the socket member (420) with the stem (408) of the of the cylindrical portion (404) as well as abutment of the end (411a) of the longer arc surface arm (411) of the sleeve (409) with the stem (405) of the socket portion (420).

[0054] In addition, the end of the longer arc surface arm (411) of the sleeve (409) includes a barb (414) that engages a ridge portion (415) on the socket portion (420) as the formwork element moved into the expanded configuration so as to provide snap lock engagement in

- 14 -

the expanded configuration such the element cannot be readily collapsed. It will be appreciated that the element may be collapsible with human intervention (i.e. to release the snap lock).

[0055] A further embodiment of the invention is shown in figures 14 to 25. The element (100) in this embodiment functions similarly to the element (1) shown in figures 1 to 7, however, there are some structural differences.

[0056] In particular, the opposing side wall panels (102, 103) include braced internal walls (119) that extend between the slots (109) for receiving the connector members (104). The internal walls (119) provide separation between the main concrete filling cavity (118) and the outer walls (113) of the panels. The internal walls (119) are connected to the outer walls (113) of the panels (102, 103) adjacent the walls of the slots (109) and via their bracing legs (119a). The brace legs (119a) extend substantially orthogonal from the outer wall (113) of side wall panels (102, 103), and divide the area between the internal wall (119) and outer wall (113) to provide multiple channels/voids (114). It will be appreciated the channel/voids (114) travel from top to bottom of the element (100) in the same direction as the slots (109). The braced internal wall (119) helps to redirect and/or distribute pressure from received concrete along the outer wall (113) so as to minimise bulging.

[0057] In some forms, the channels/voids (114) may be filled with an insulating material (190), such as insulating foam (see figure 25, for example). The insulating material may be deposited into the channels/voids (114) in a variety of ways.

[0058] In one example, the side wall panels (102, 103) are produced by an extrusion process whereby the main panel material (typically a polymer material like Polyvinylchloride) is extruded through a mould. In such examples, the insulating material (190) may be deposited into the channel voids (114) during the extrusion process. To allow this, an outlet/pipe is built into the mould head through which the insulating material is ejected at the same extrusion rate as the main panel material. After extrusion, there is a cooling process whereby the main panel material stiffens, and the insulating material expands to fill the channels/voids. Typically, the cooling process is provided by cooling water tanks.

- 15 -

[0059] When PVC is the main panel material, it typically takes about 3 minutes to stiffen during cooling, and typically, any expansion of the insulation material occurs more slowly and does not act to distort the shape of the side panels.

[0060] In some forms, the outer walls (113) of side panels (102, 103) of the element (100), also include a plurality of holes (200). Typically, these are provided by mechanical punching. The holes (200) help any coating/material applied to the outer surfaces of the panels (102, 103), like render, bond more effectively to the panels. Improved bonding is provided by partial penetration of panels (102,103), with surface coating/material 'grabbing' through the holes (200). The holes (200) provide more effective bonding when compared to a flat surface.

[0061] The holes (200) are typically included after extrusion of the panels (102, 103), once the panels (102, 103) have passed through the cooling tanks and dried. Typically, in the production line, the panels (102, 103) are passed through a separate hole punching machine. The holes (200) are generally equi-spaced, and in some examples, are spaced every 20mm.

[0062] Alternatively or additionally to the inclusion of the holes (200), the outer surfaces of the side wall panels (102, 103) may be roughened to improved bonding. For example, the panels may be treated with an etching/roughening formulation, such as, for example, a suitable solvent or acid. Reducing the smoothness (or roughening) the outer surface of the panels, provides an additional means to improve bonding. Typically, in the production line, a separate machine would apply etching/roughening foundation (and wash it off) after extrusion.

[0063] In another example, the insulation material (190) may be deposited into the channels/voids (114) via an injection process, whereby the insulating material is injected through the punched holes (200).

[0064] The connector members (104) of the element (100) also have several differences when compared to the connector members (4) of the element (1) of figures 1 to 7. As shown most clearly in figures 16 to 19, the connector members (104) have rotational symmetry, whereby hook tabs (120) are provided at both ends. Furthermore, the hinged

- 16 -

ends (111) of the connectors (104) also have a substantially 'M' shaped cross section (transverse to the plane of the panels (102, 103)), and the distal/outer vertices thereof extend to pointed tips (111a). The 'M' shaped ends are configured to be slidingly engaged within the slots (109) of the opposing side walls (102,103) in a 4 point contact/frictional engagement.

[0065] The tips (111a) are pointed/sharp such that on initial insertion into the slots (109), they wear in to the inner surface of the slots, providing additional frictional engagement. The wearing engagement also minimises the 'play' of the connector members (104) once located in the slots (109) (for example when compared to the ends (11) of the element (1)). The 'M' shaped cross sections also provide leg portions (111b) that are configured to fit within corresponding internal channels (150) in the slots (109).

[0066] In the connectors (104) of the element (100), the hinge portions (106) are not generally provided by a thinning in the panel/web (104a), although in some forms, they may be (see for example figure 18). Typically, the hinge portions (106) in the element (100) are provided by incorporating a second more flexible material at the hinge portion. Whilst the majority of the connector member (104) is formed of a substantially rigid material (e.g. PVC), the hinge portions (106) are provided by a relatively more flexible material to allow the hinge type action or bending. Generally, the second more flexible material is incorporated by using co-extrusion. Furthermore the apertures (107) of the panels/webs are more rectangular in nature, with a vary periphery when compared to rounder apertures (7) of connector member (4) from element (1).

[0067] An alternate connection means, for connection between like elements is also illustrated in figures 14 to 25. As shown, the element (100) includes engagement portions (131, 132) at the lateral ends of the side wall panels (102, 103). At one lateral end, the side wall panels (102, 103) include slots (132), whilst at the other end, the panels (2, 3) include projections (131) having an arrow shaped cross section (transverse to the plane of the panel). The projections (131) of one element being configured for snap lock insertion into the slots (132) of a neighbouring element (and vice versa). During connection, the arrow head type projections (131) are forced into the slots, the angled heads thereof temporarily separating the walls (132a) of the slots, before they snap back around the arrow head projections.

- 17 -

[0068] The catch projections (121) configured to snap engage with the hook tabs (120) (to provide snap locking in the expanded configuration) are also modified in formwork element (100) when compared with element (1). In the formwork element (100) the catch projections (121) are supplemented by a supporting or clamping projection (122) to engage the hook tab (100) from the opposite side as it is inserted.

[0069] It will be appreciated that the collapsible formwork elements as described herein provide several advantages over conventional formwork elements. In particular, they can be collapsed to fractions of their expanded size (e.g. down to 1/3, 1/4, 1/5 or 1/10 expanded size) allowing for space saving during transport and on site. Furthermore, their components can be manufactured as separate parts, and using cost effective extrusion machinery rather than injection moulding.

[0070] Typically, the components of the formwork element as described herein are formed of only extruded materials. In one example, the formwork element may expand from a collapsed configuration to an expanded configuration position which is up to 6 times larger, in one action. The elements as described herein are also generally automatically mechanically maintained in the expanded configuration on expansion, wherein the connector member panels/webs are fixed perpendicular (at 90 degrees) to the side wall panels without any additional fasteners, inserts or bracing.

[0071] In addition, snap lock connection between elements makes for quick and easy construction of larger formwork structures. The material of the components, which is typically a polymer such as polypropylene or PVC, allows the use of glues/adhesive which can be applied to create high strength joints to accessories or add on components such as floor tracks, window heads, corners, stops ends etc.

[0072] It will also be appreciated that various aspects of the formwork elements may be modified. For example, the expanded width may be adjusted by selecting wider connector members. Similarly, the opposing side wall panels may vary in size. Thus the overall size/dimensions of the formwork element may be configured/selected as required.

[0073] Optional embodiments of the present invention may also be said to broadly consist in the parts and features referred to or indicated herein, individually or collectively, in any

- 18 -

or all combinations of two or more of the parts or features, and wherein specific integers are mentioned herein which have known equivalents in the art to which the invention relates, such known equivalents are deemed to be incorporated herein as if individually set forth.

[0074] Although preferred embodiments have been described in detail, it should be understood that various changes, substitutions, and alterations can be made by one of ordinary skill in the art without departing from the scope of the present invention. It will also be appreciated that various forms of the invention may be used individually or in combination.

**The Claims:**

1. A collapsible formwork element, the element including:  
a pair of opposing side wall panels; and  
at least one connector member extending between the side wall panels,  
wherein the at least one connector member includes at least two hinge portions that  
permit movement of the element between an expanded configuration, wherein the  
opposing panels are spaced apart, and a collapsed configuration, wherein the  
opposing panels are relatively closer together.
2. A collapsible formwork element as claimed in any one of the preceding claims,  
wherein the at least one connector member includes a centre panel between a pair  
of hinged ends provided by the hinge portions.
3. A collapsible formwork element claimed in claim 2, wherein the hinged ends are  
configured to be engaged with the side wall panels.
4. A collapsible formwork element as claimed in any one of the preceding claims,  
wherein the hinge portions are formed of a material that is more flexible than the  
material forming the remainder of the connector member, which is substantially  
rigid, so as to provide a hinge type action.
5. A collapsible formwork element as claimed in claim 4, wherein the connector  
members are produced via co-extrusion, with a first extrusion material forming the  
hinge portions and a second extrusion material forming the remainder of the  
connector member.
4. A collapsible formwork element as claimed in any one of claims 1 to 3, wherein the  
hinge portions are provided by a narrowing or thinning in the connector member.
5. A collapsible formwork element as claimed in any one of claim 1 to 3, wherein the  
hinge portions are provided by a relative reduction in connector member thickness  
so as to provide a fold line that permits bending of the connector member.

- 20 -

6. A collapsible formwork element as claimed in any one of the preceding claims, wherein the at least one connector member is realisably attachable between the opposing side panels.
7. A collapsible formwork element as claimed in claim 3, wherein the opposing side wall panels include slots therein to respectively receive the hinged ends of the least one connector member via a sliding engagement.
8. A collapsible formwork element as claimed in claim 7, wherein the hinged ends of the at least one connector member are shaped fit the slots so as to provide a frictional engagement therein.
9. A collapsible formwork element as claimed in any one of claims 2 or 3, wherein, in the expanded configuration, the centre panel/s of the at least one connector member extend substantially perpendicular to the opposing side wall members.
10. A collapsible formwork element as claimed in any one of the preceding claims, wherein the formwork element includes a plurality of connector members.
11. A collapsible formwork element as claimed in any one of the preceding claims, wherein the formwork element is configured to snap lock into the expanded configuration.
12. A collapsible formwork element as claimed in claim 11, wherein snap locking is provided a hook tab that extends from the at least one connector member and is configured to engage a corresponding catch projection on one of the opposing side wall members as the formwork element moves into the expanded configuration.
13. A collapsible formwork element as claimed in any one of the preceding claims, wherein the side wall panels include one or more channels therein extending substantially vertically therethrough.
14. A collapsible formwork element as claimed in claim 13, wherein the one or more channels include an insulating material therein.

- 21 -

15. A collapsible formwork element as claimed in any one of the preceding claims, wherein the lateral ends of the opposing side wall panels include engagement portions for engagement with like collapsible formwork elements so as to allow formation of a formwork structure comprised of a plurality of the collapsible formwork elements.
16. A collapsible formwork element as claimed in claim 15, wherein the engagement portions are configured to provide snap lock engagement between neighbouring formwork elements.
17. A collapsible formwork element as claimed in any one of the preceding claims, wherein, in the collapsed configuration, the distance between the opposing walls panels is less than  $\frac{1}{3}$  the distance between the opposing wall panels in the expanded configuration.
18. A collapsible formwork element as claimed in any one of the preceding claims, wherein, in the collapsed configuration, the distance between the opposing walls panels is less than  $\frac{1}{4}$  the distance between the opposing wall panels in the expanded configuration.
19. A collapsible formwork element as claimed in any one of the preceding claims, wherein, in the collapsed configuration, the distance between the opposing walls panels is less than  $\frac{1}{5}$  the distance between the opposing wall panels in the expanded configuration.
20. A collapsible formwork element as claimed in any one of the preceding claims, wherein the at least one connector member and side wall panels are each separately formed as single extruded pieces.
21. A collapsible form work element as claimed in any one of claim 1 to 10 wherein, on expansion into the expanded configuration, the formwork element is mechanically maintained in the expanded configuration.

- 22 -

21. A connector member for a collapsible formwork element as claimed in any one of claims 1 to 21.
  
22. A side wall panel for a collapsible formwork element as claimed in any one of claims 1 to 21.

Figure 1

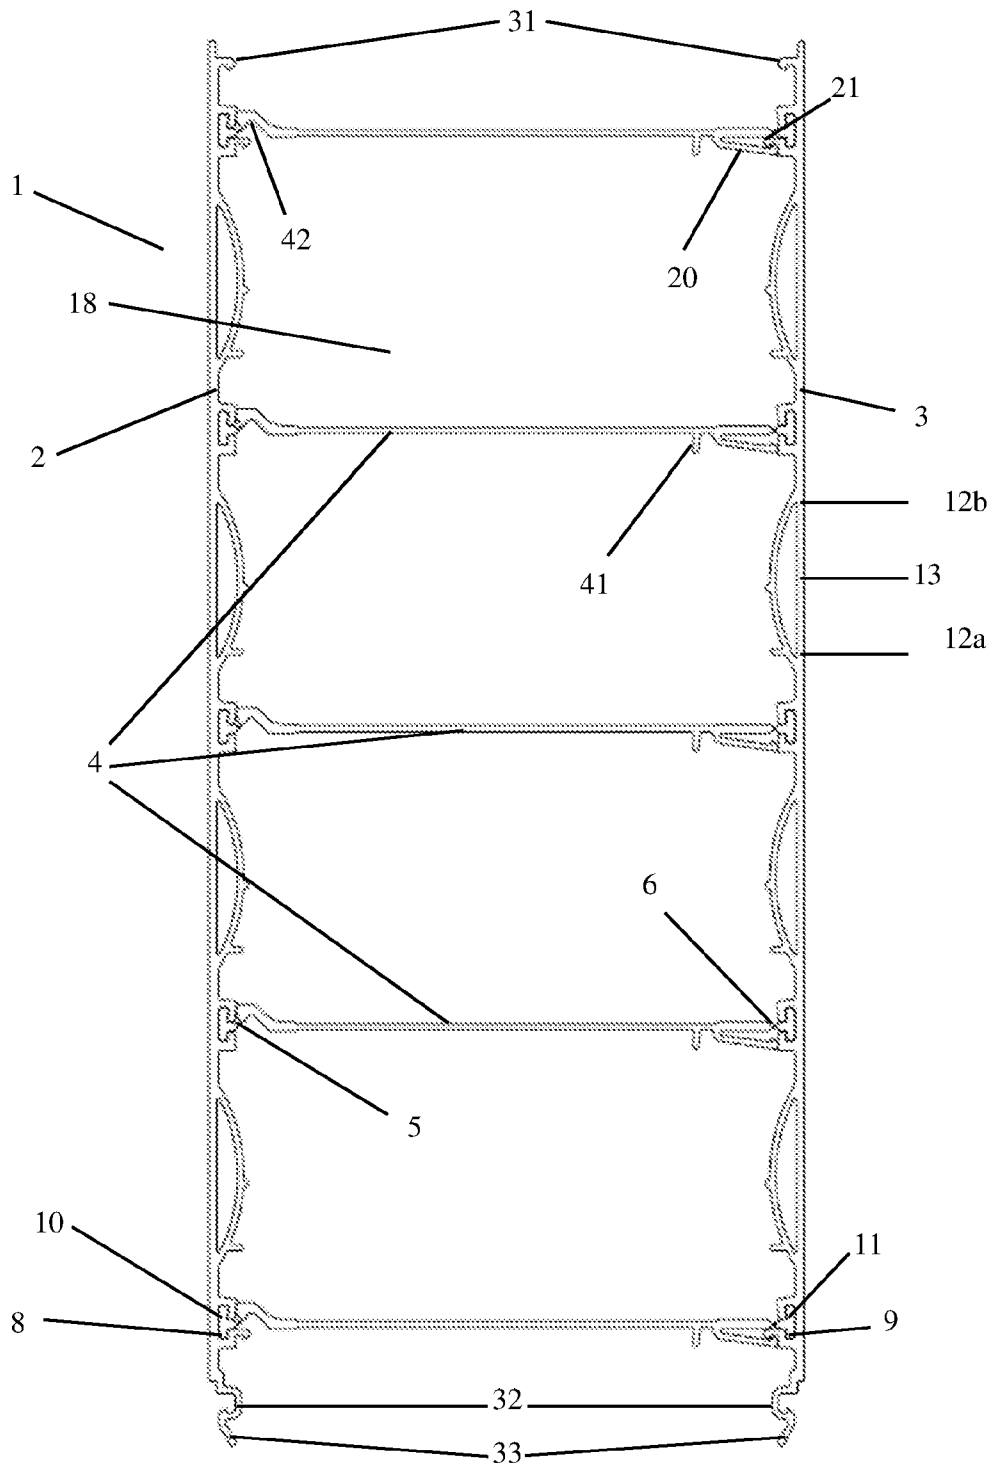


Figure 2

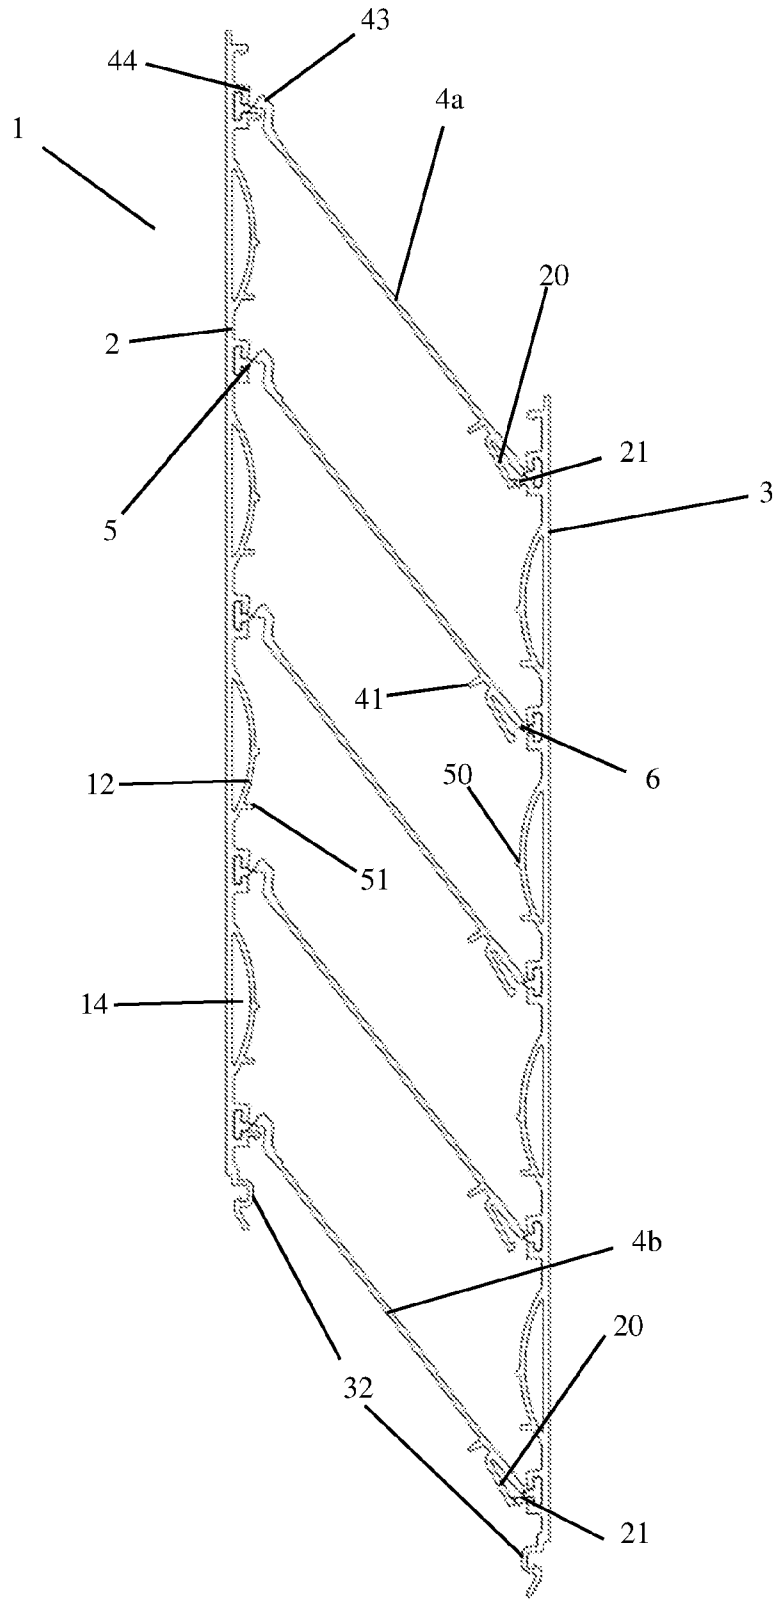


Figure 3

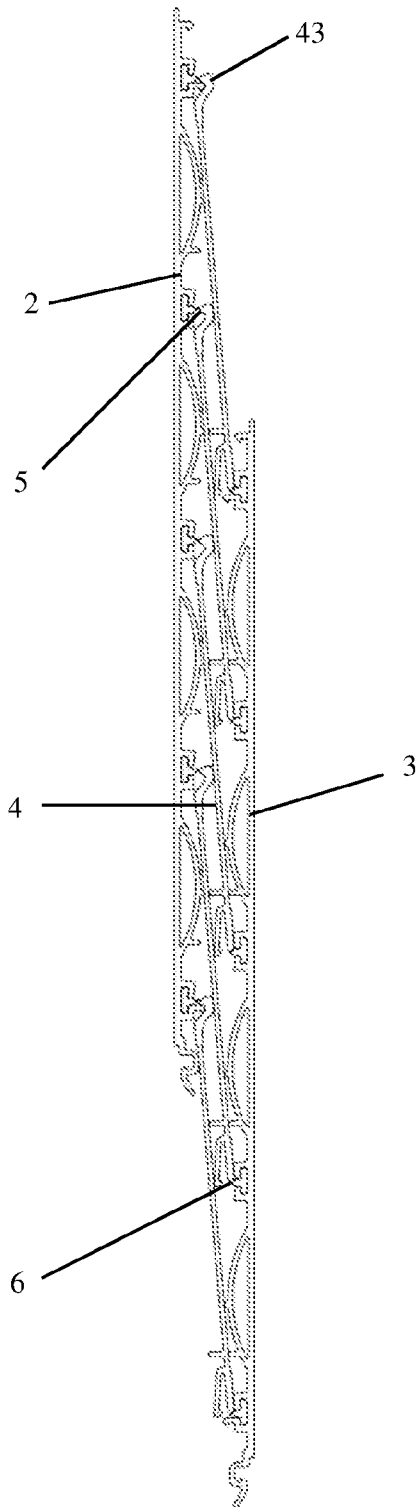


Figure 4

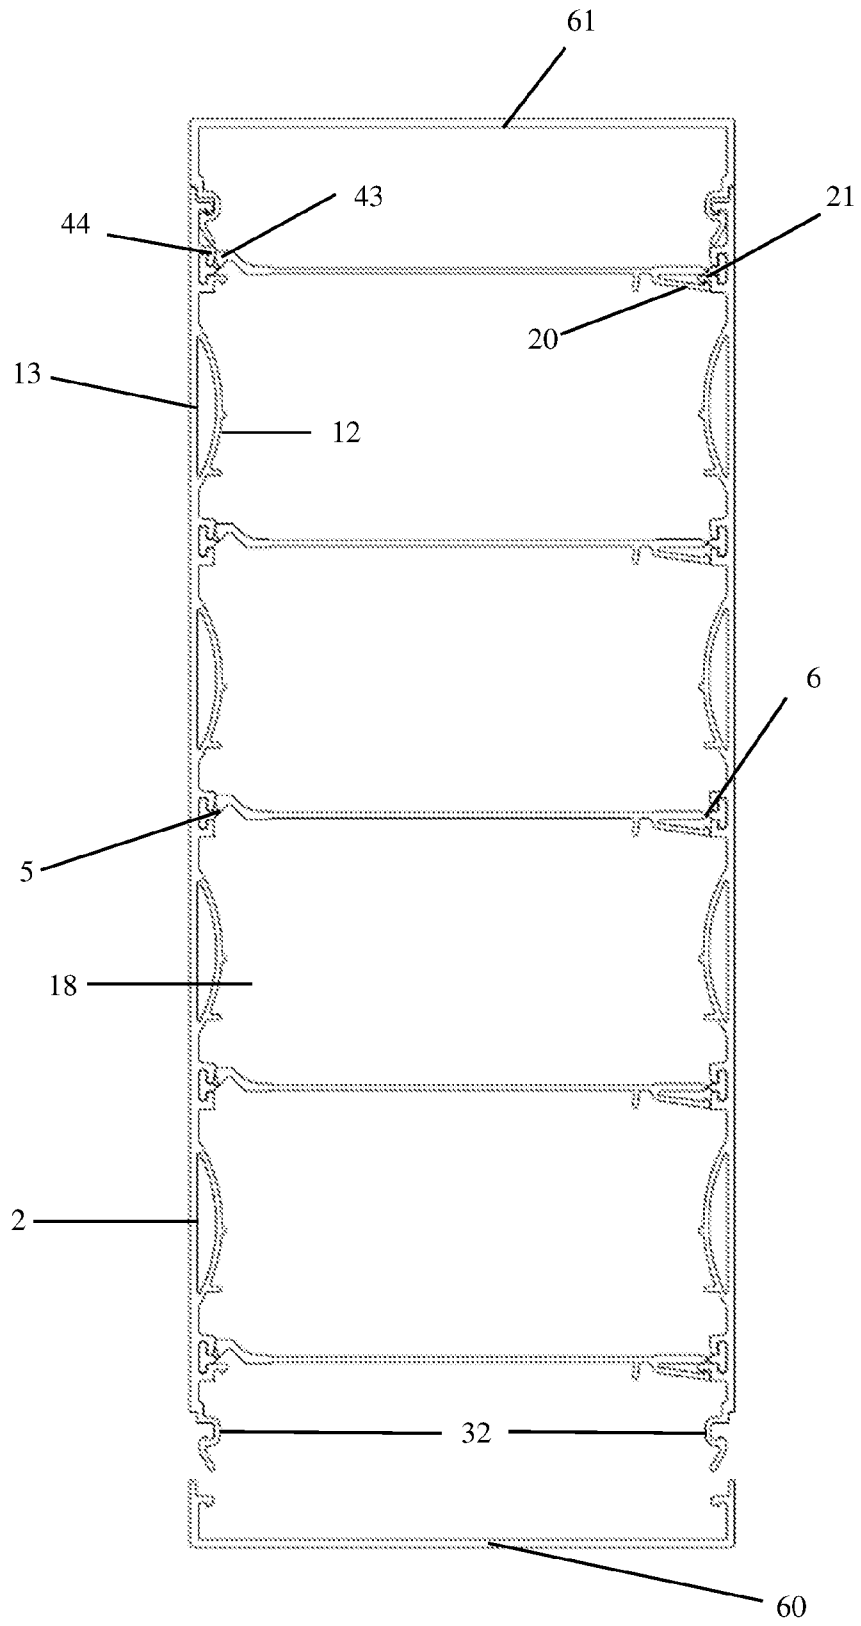


Figure 5

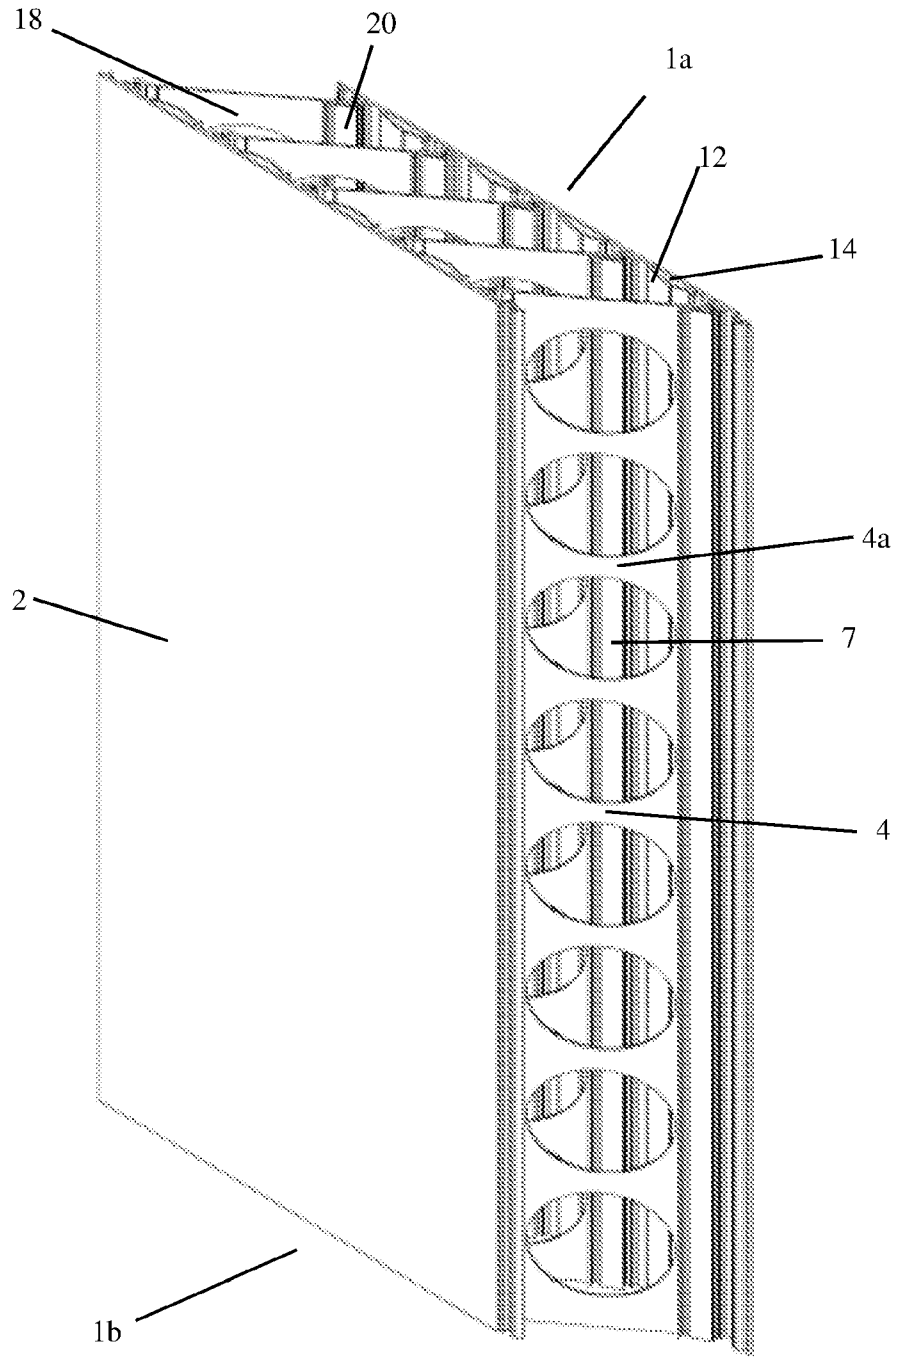


Figure 6

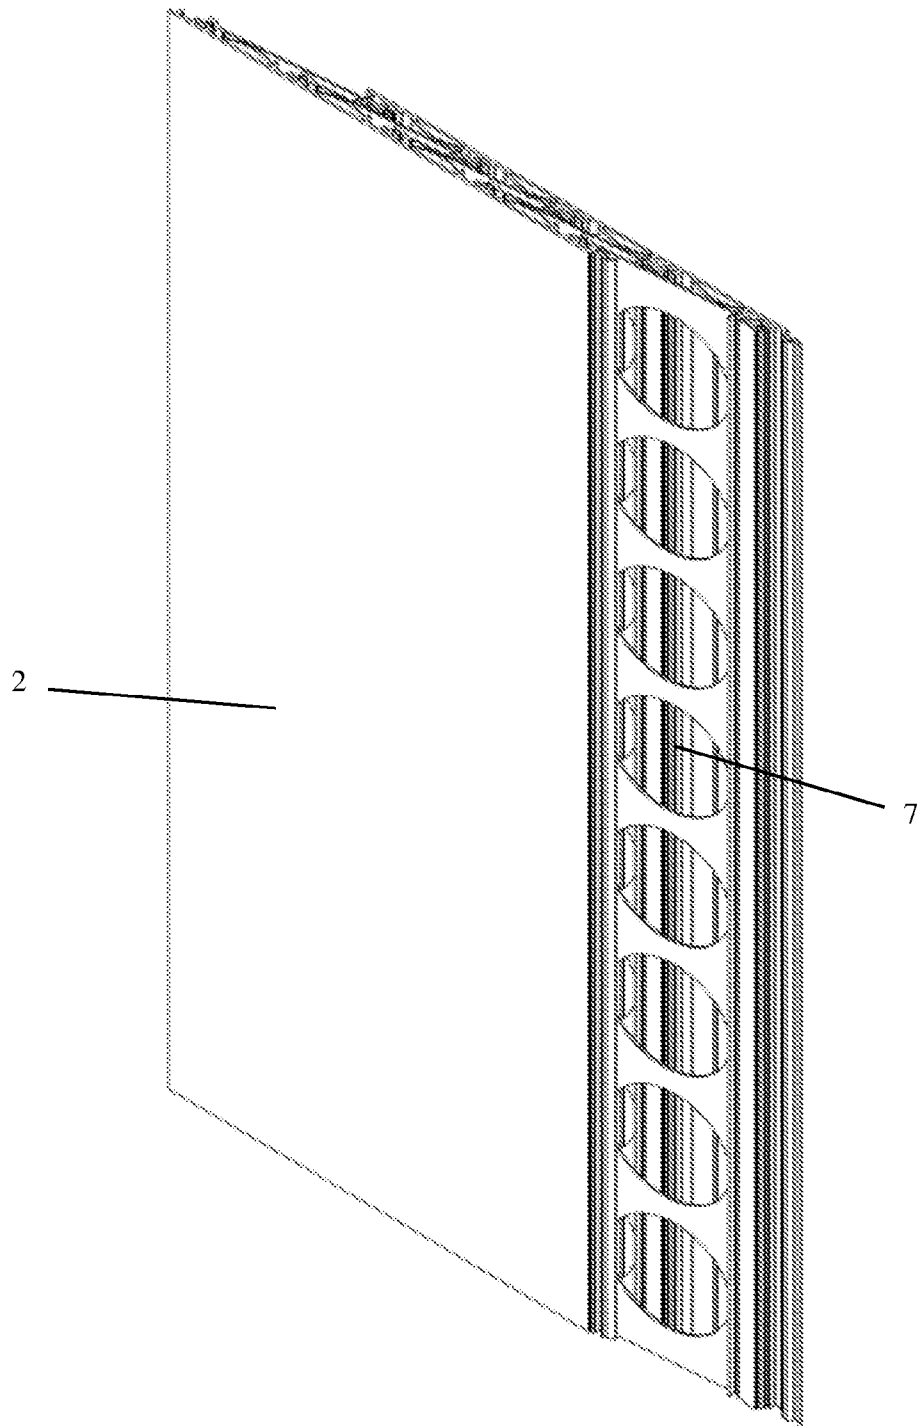


Figure 7

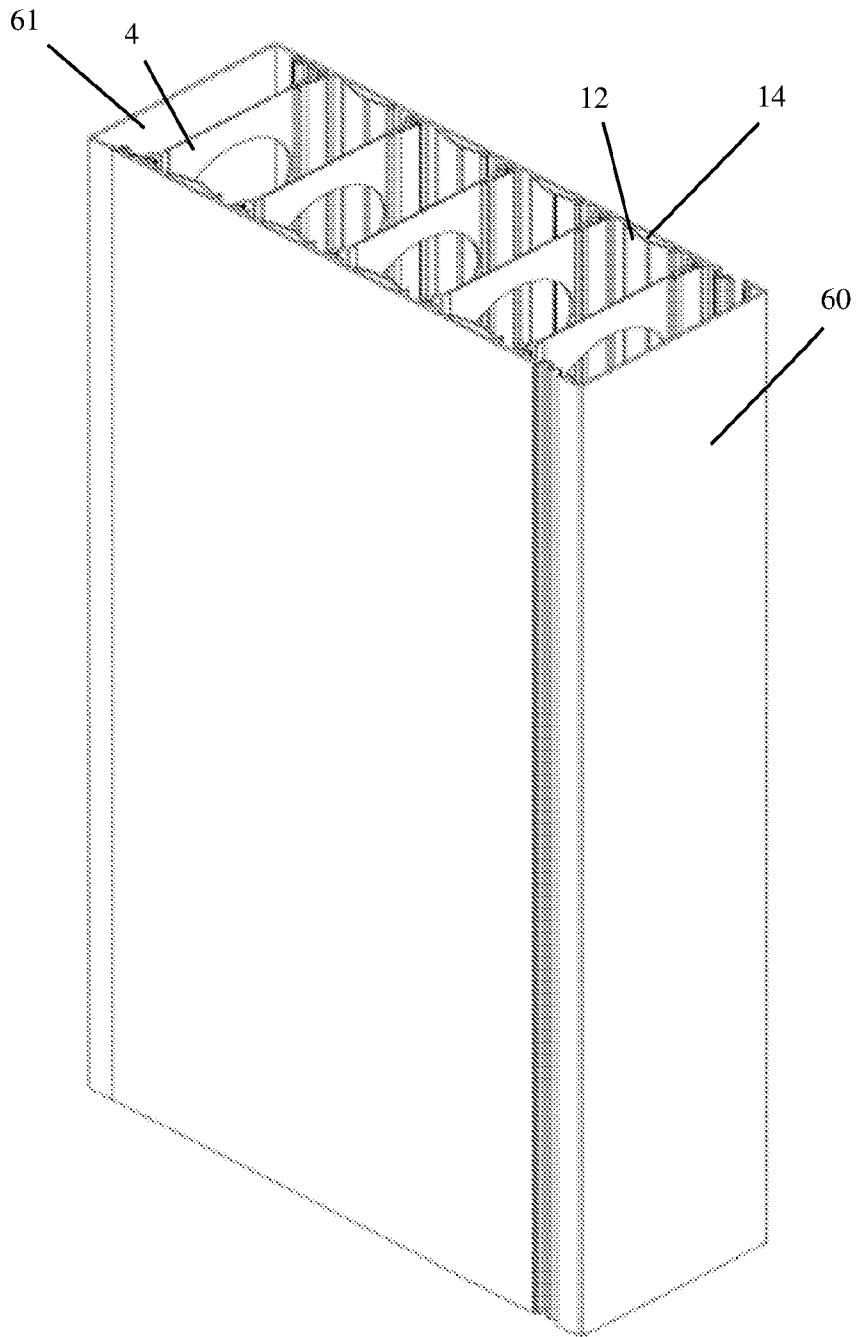


Figure 8

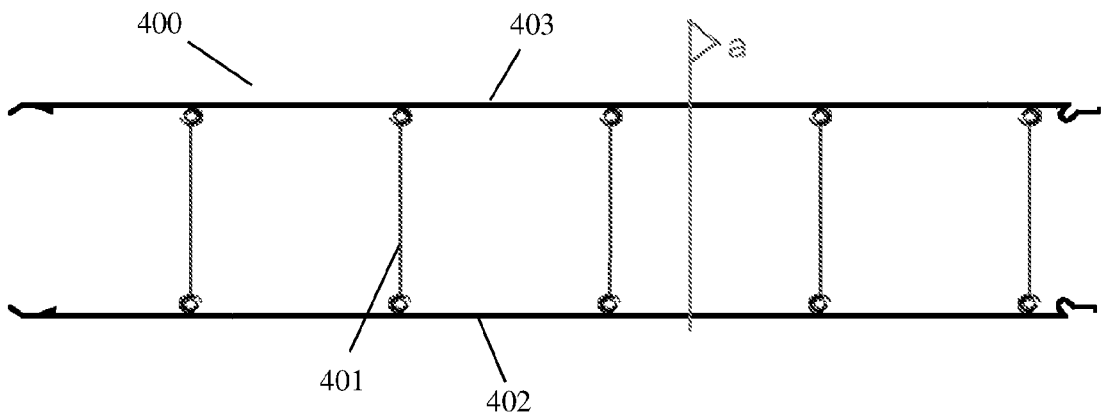


Figure 9

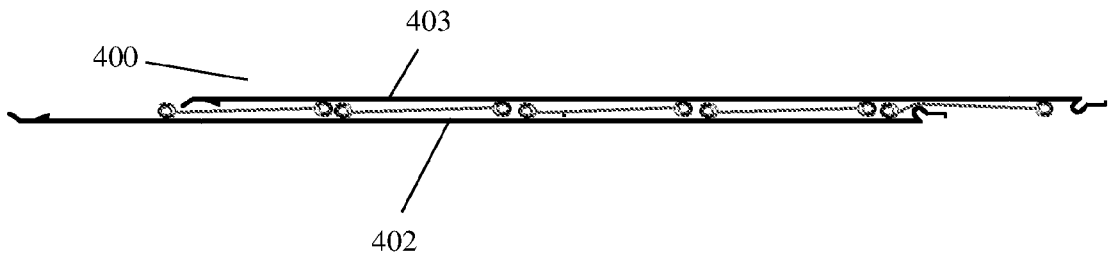


Figure 10

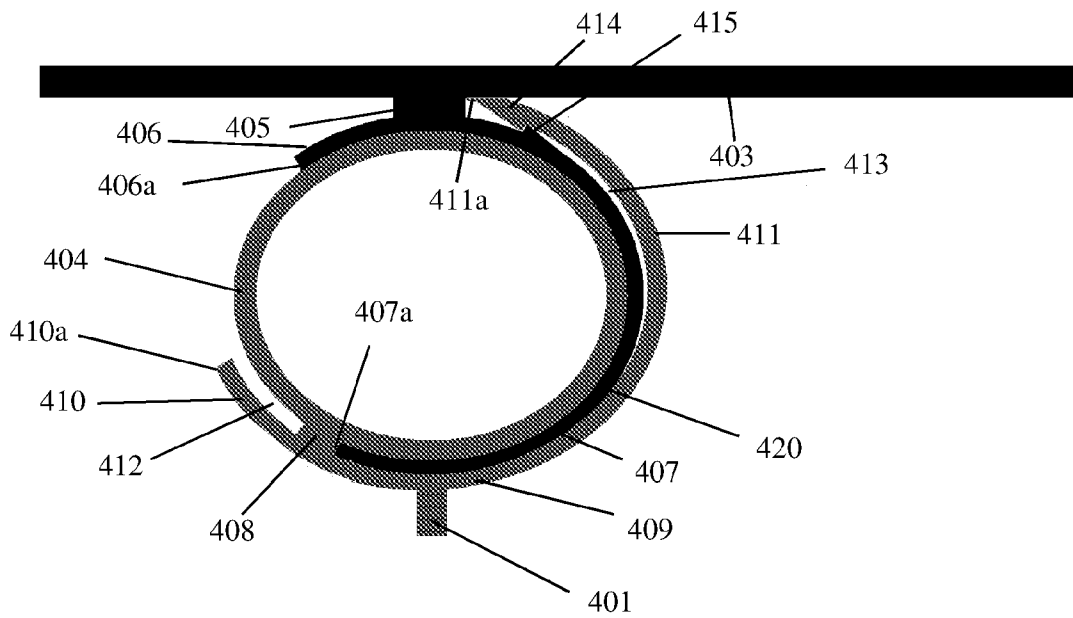


Figure 11

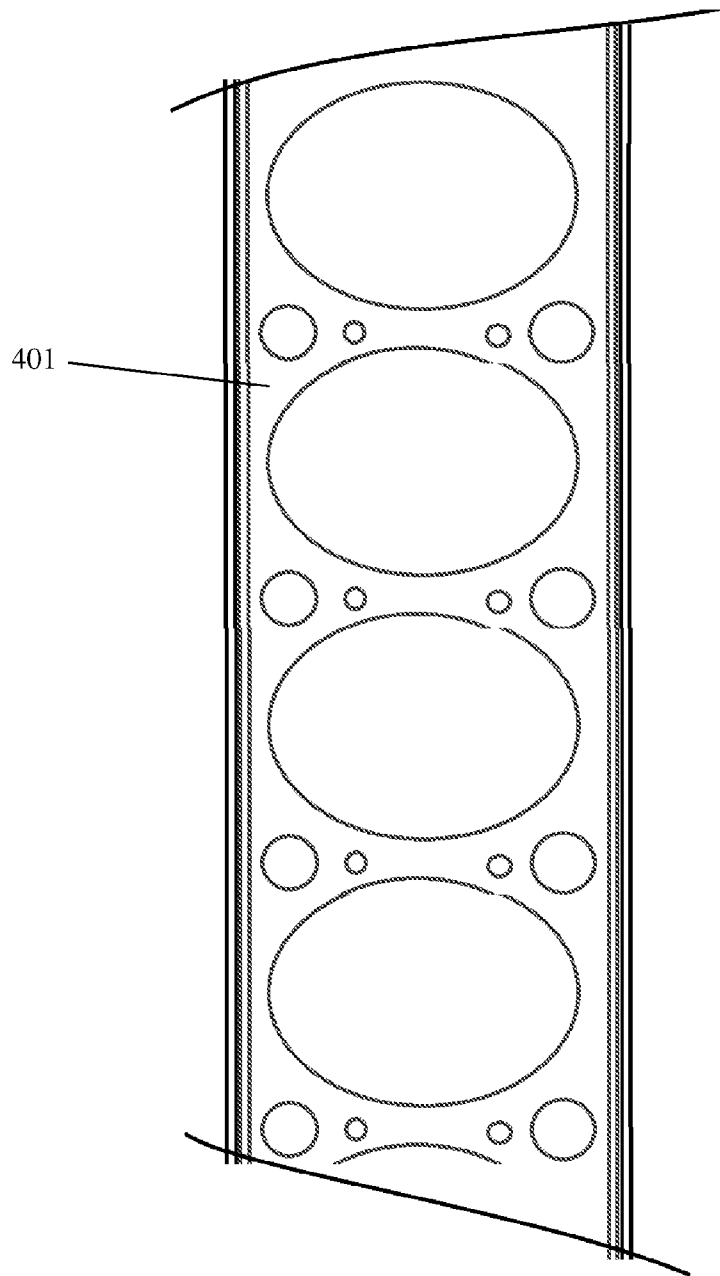


Figure 12

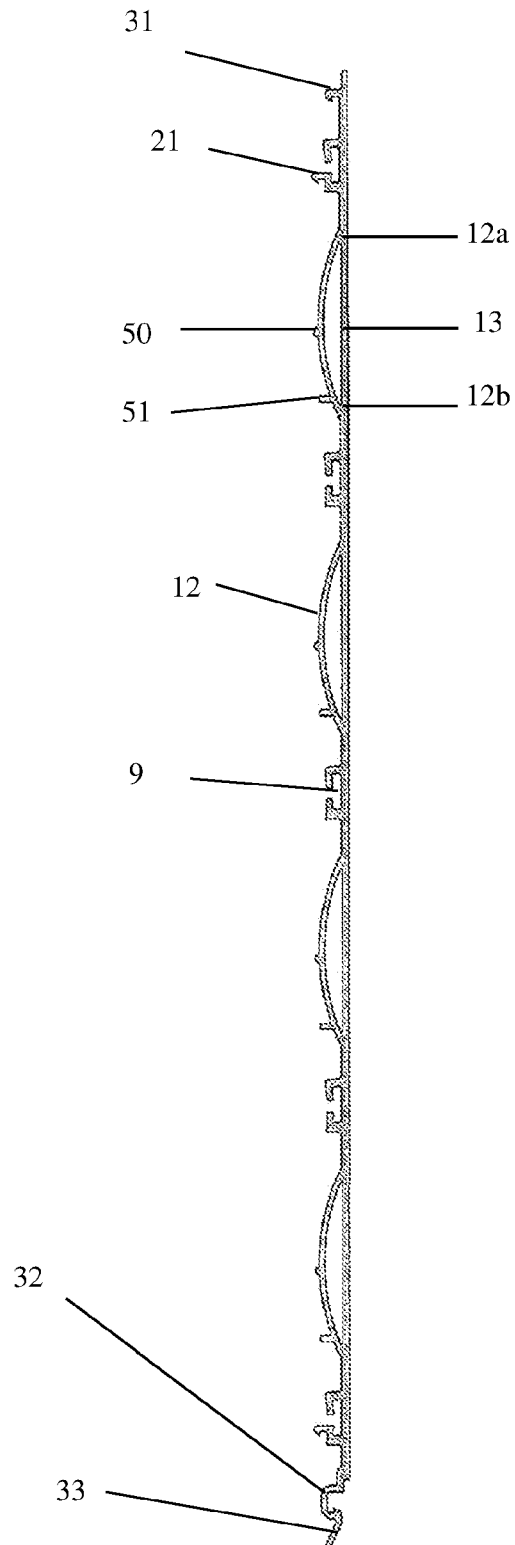
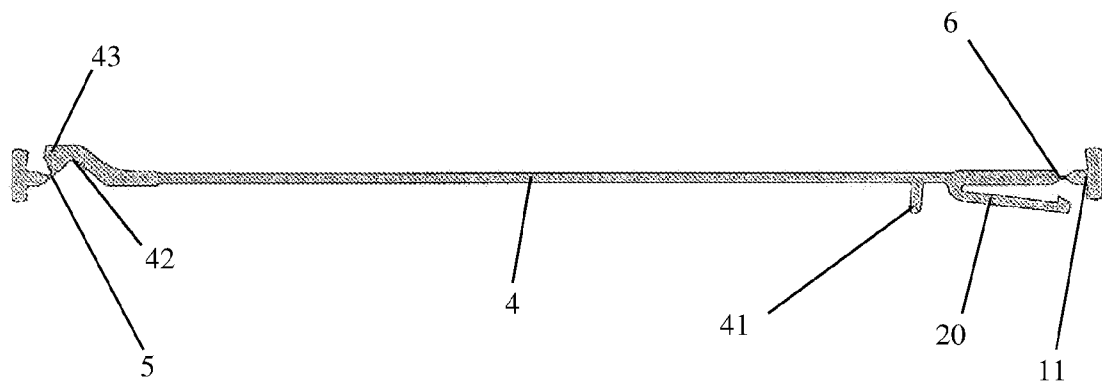


Figure 13



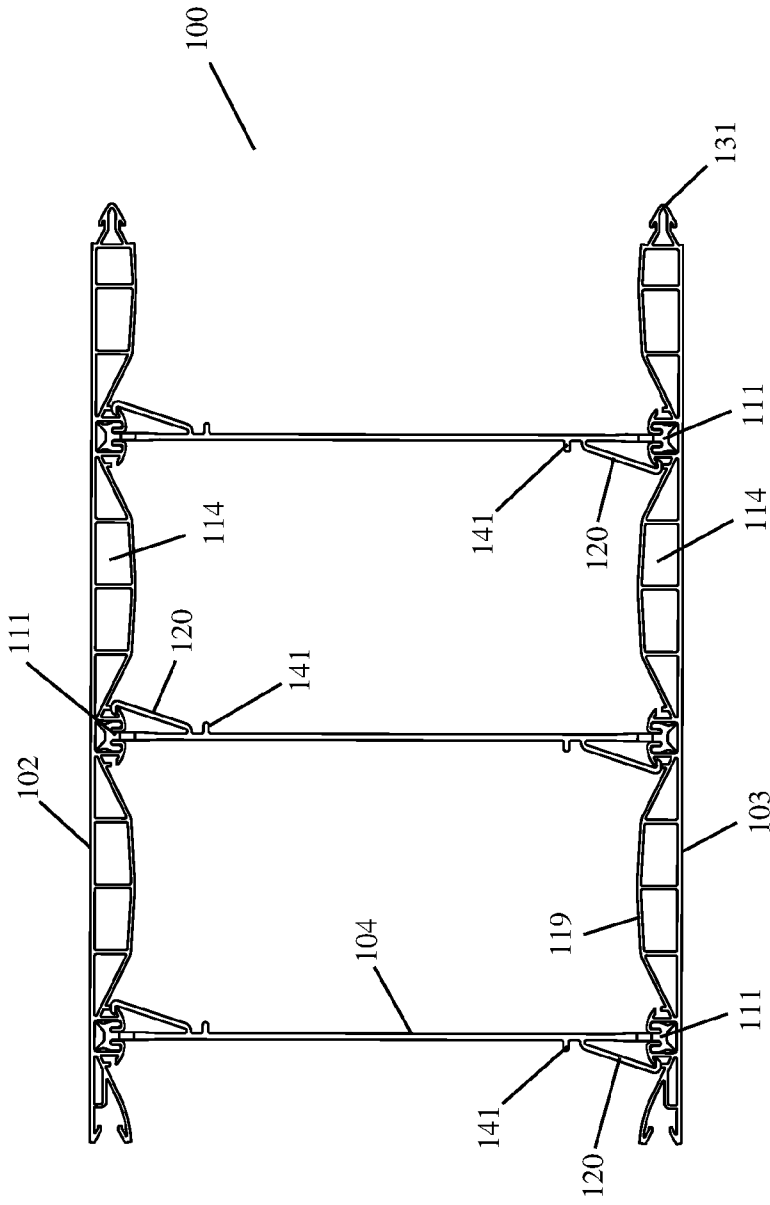


Figure 14

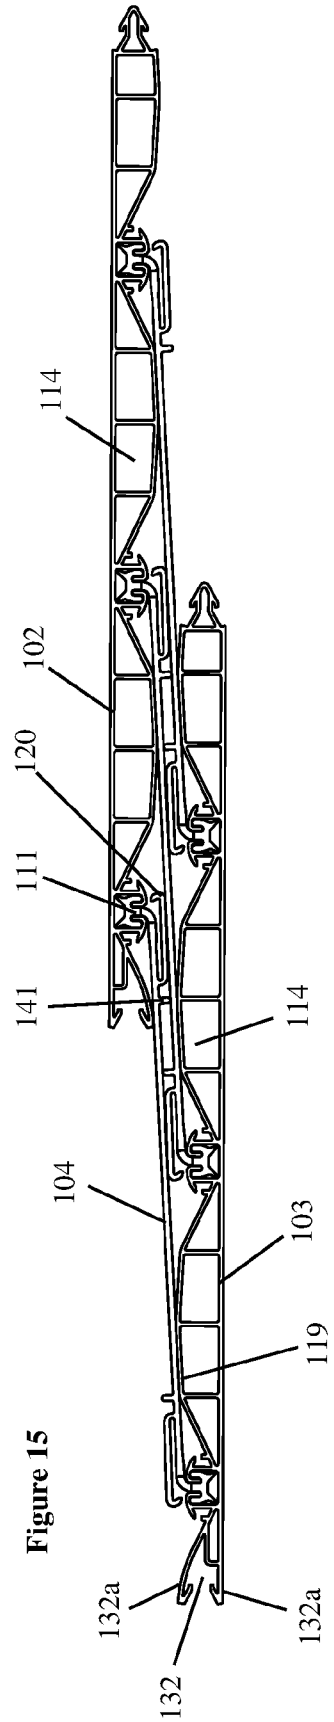


Figure 15

Figure 16

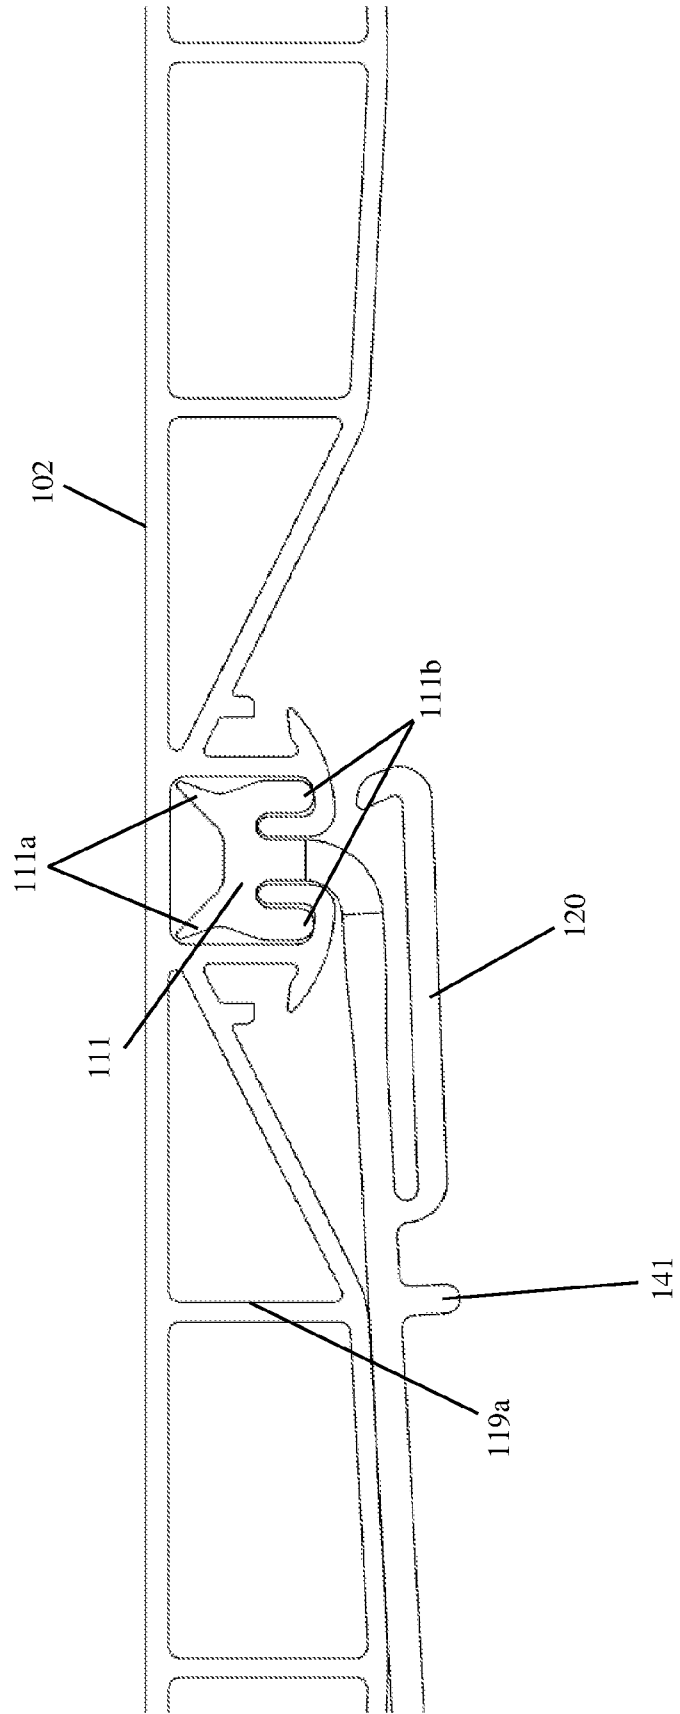


Figure 17

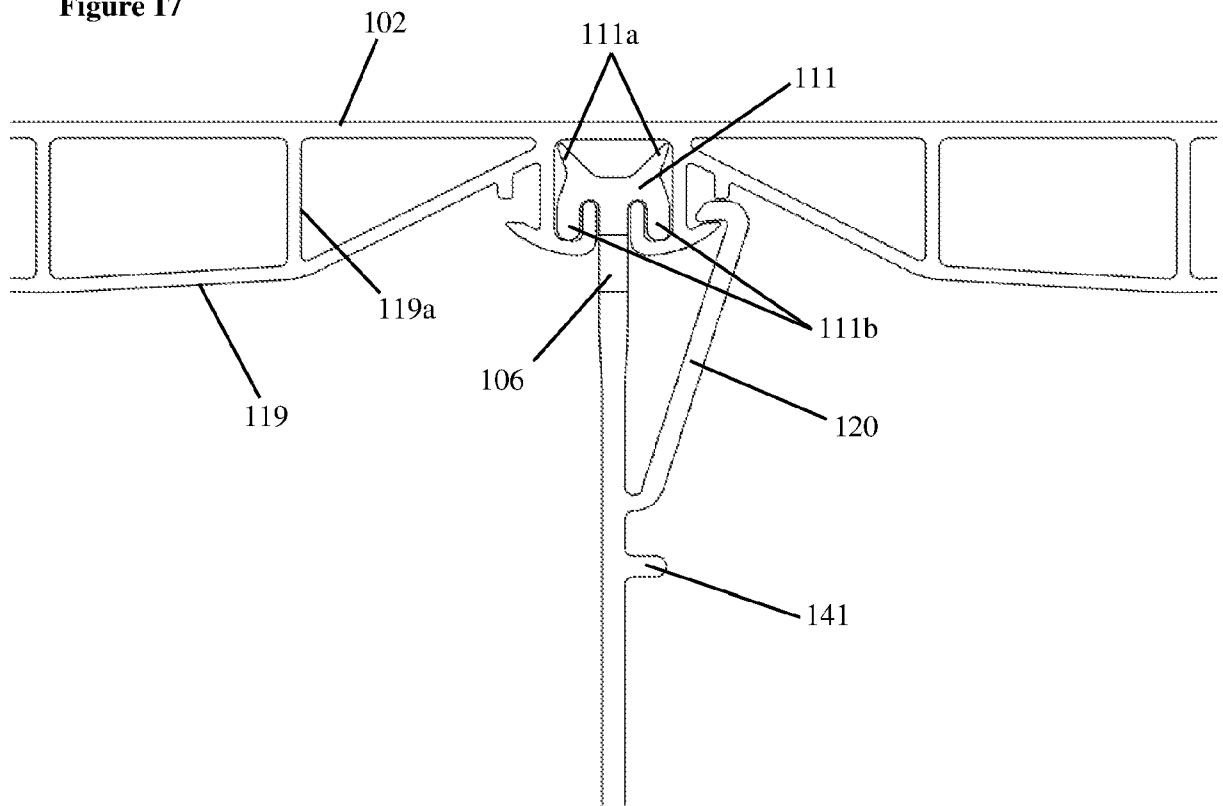


Figure 18

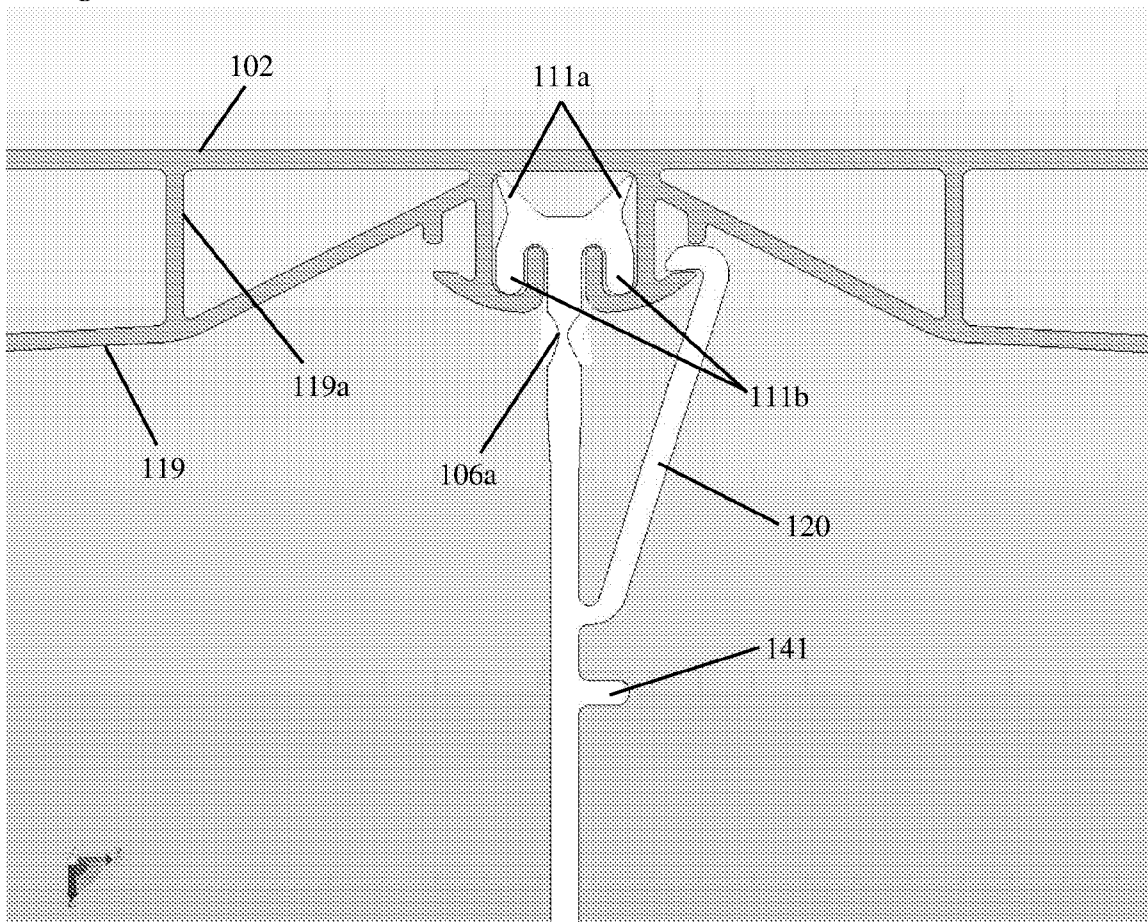


Figure 19

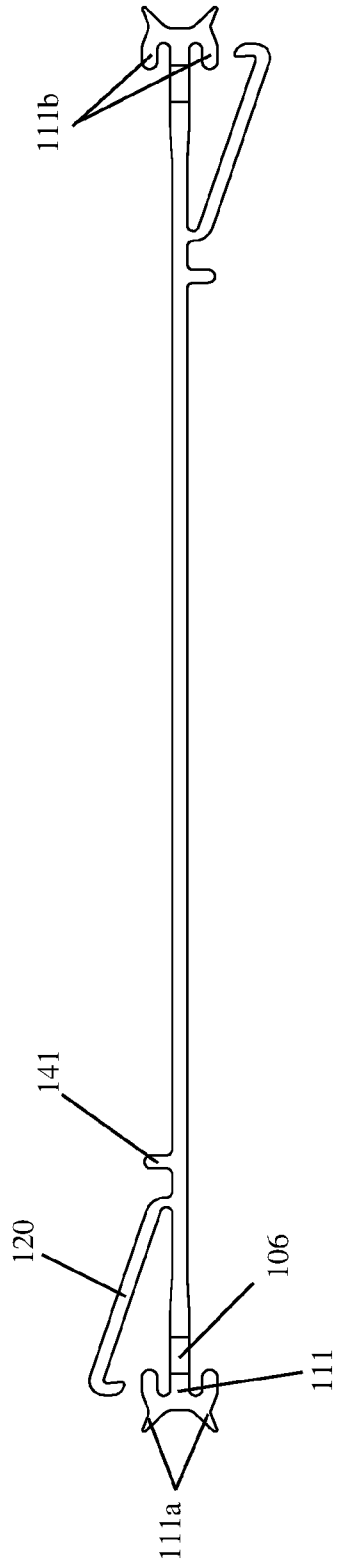


Figure 20

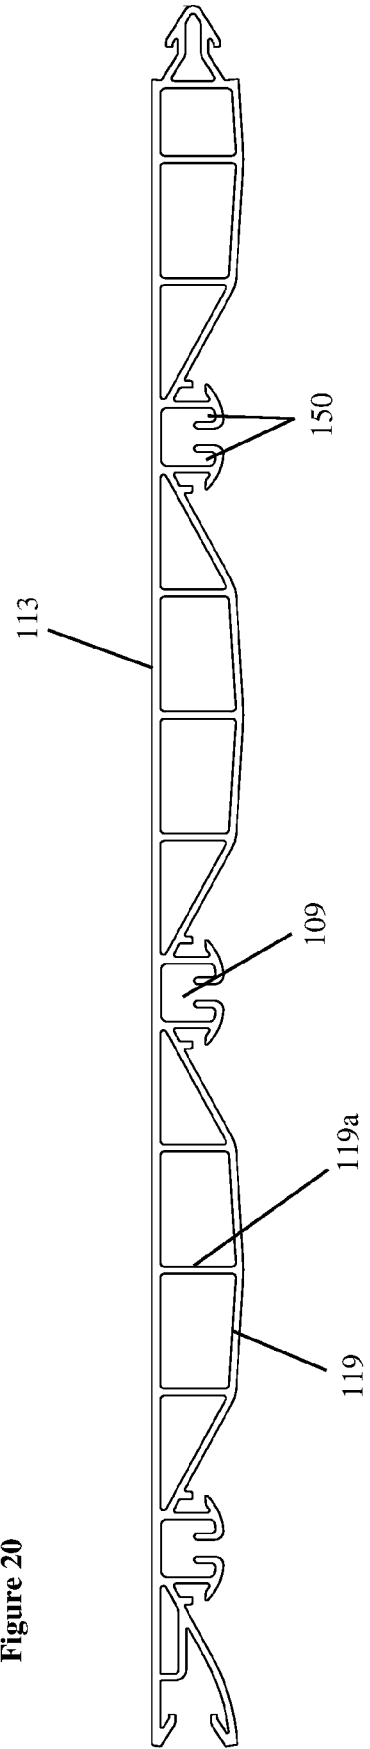


Figure 21

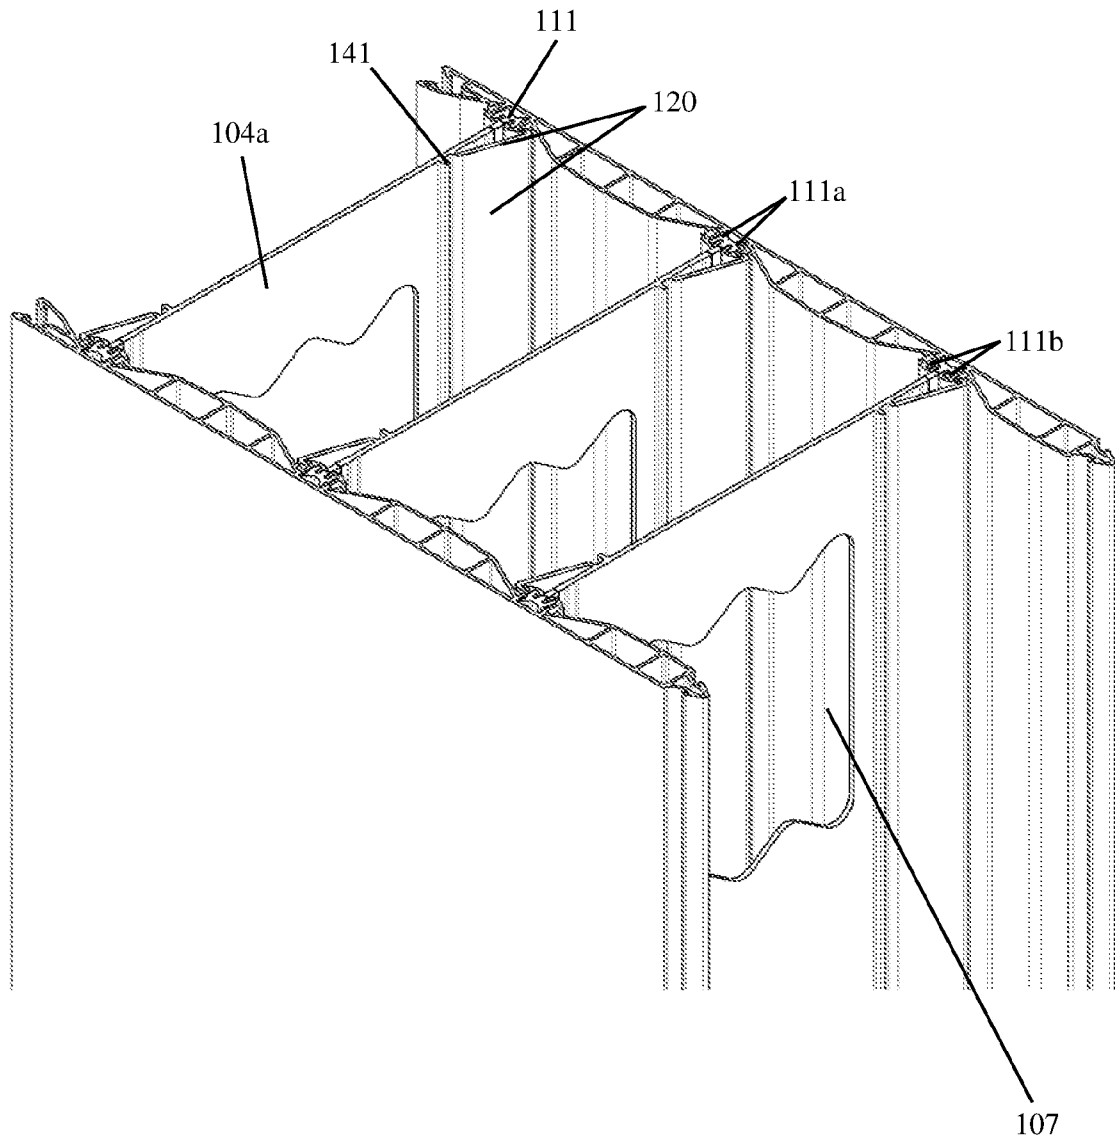


Figure 22

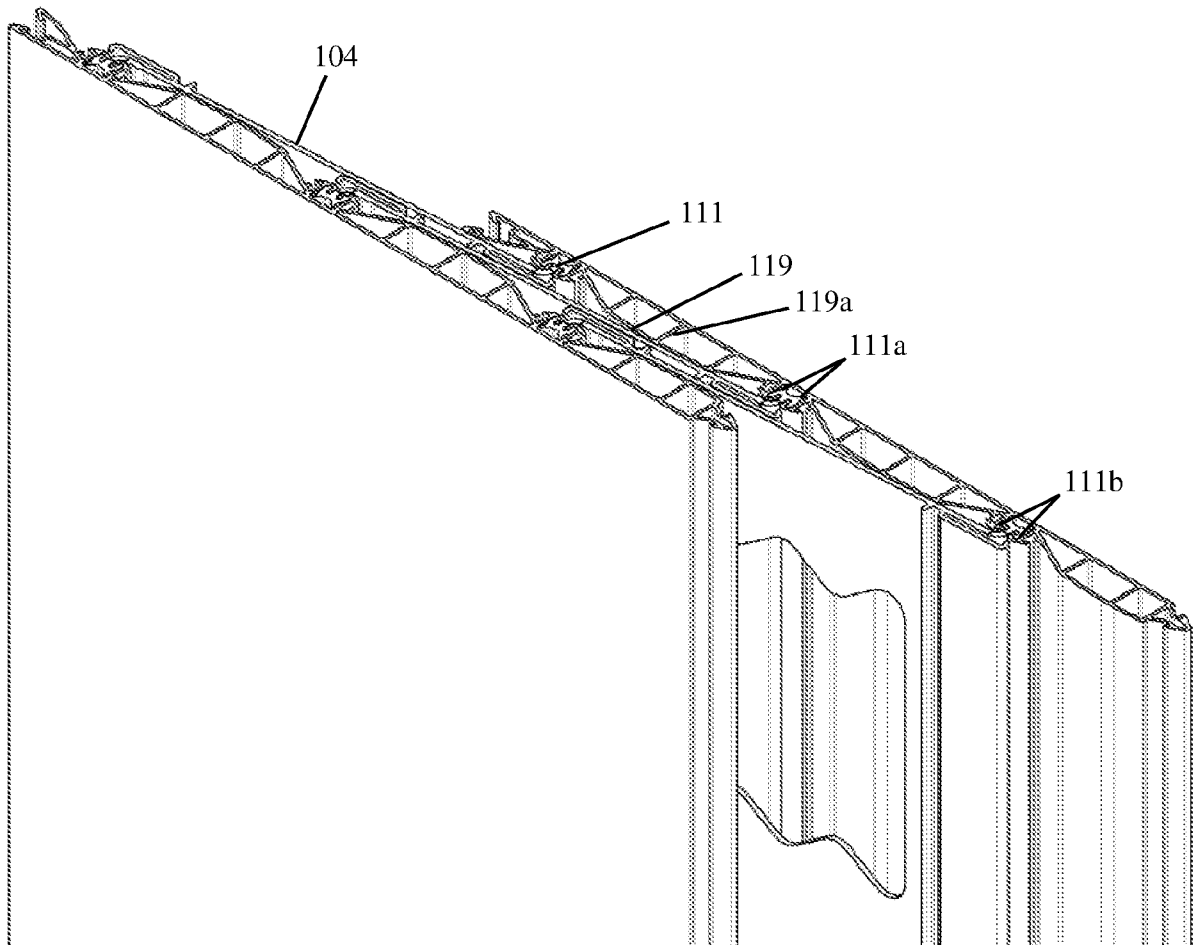


Figure 23

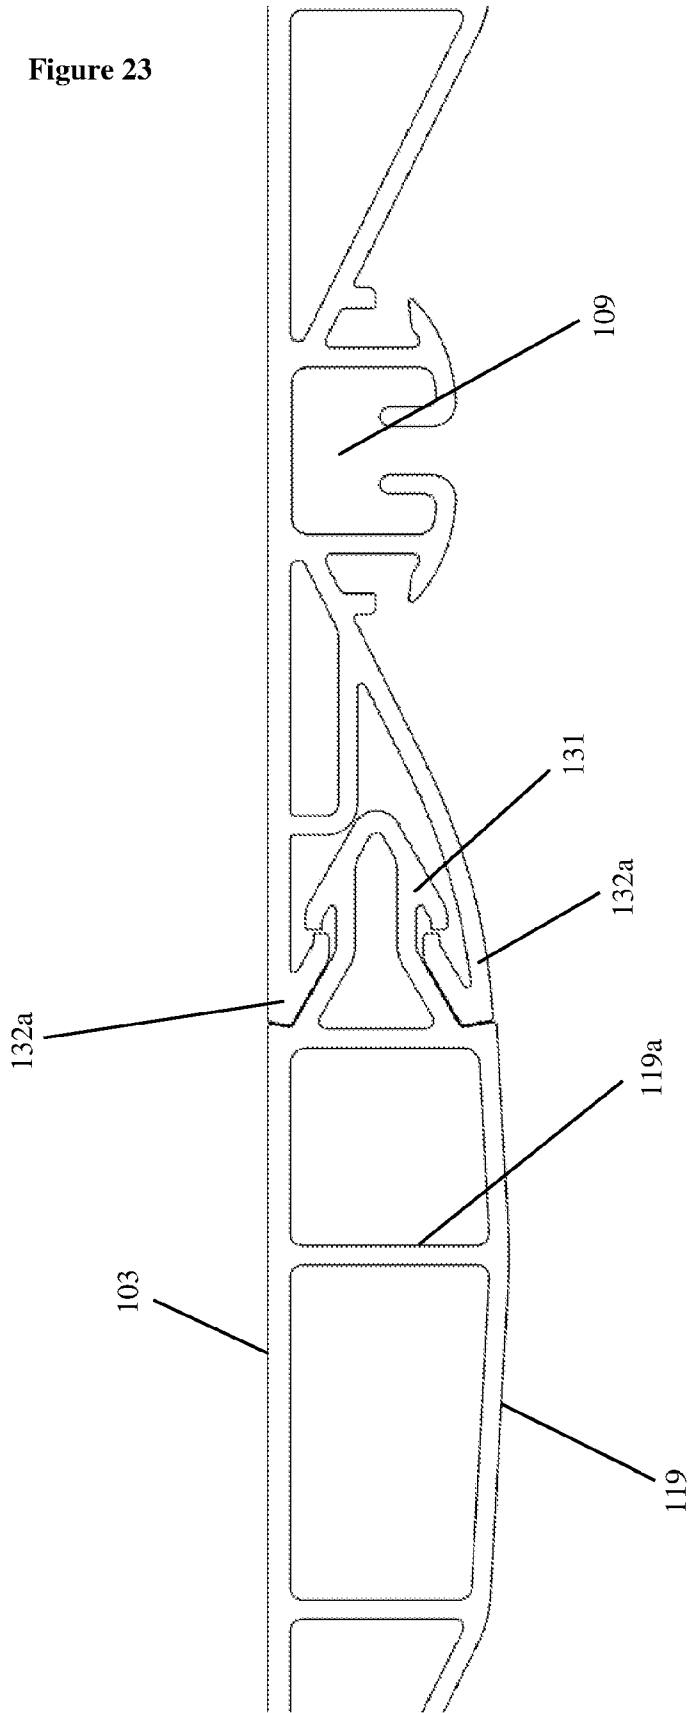


Figure 24


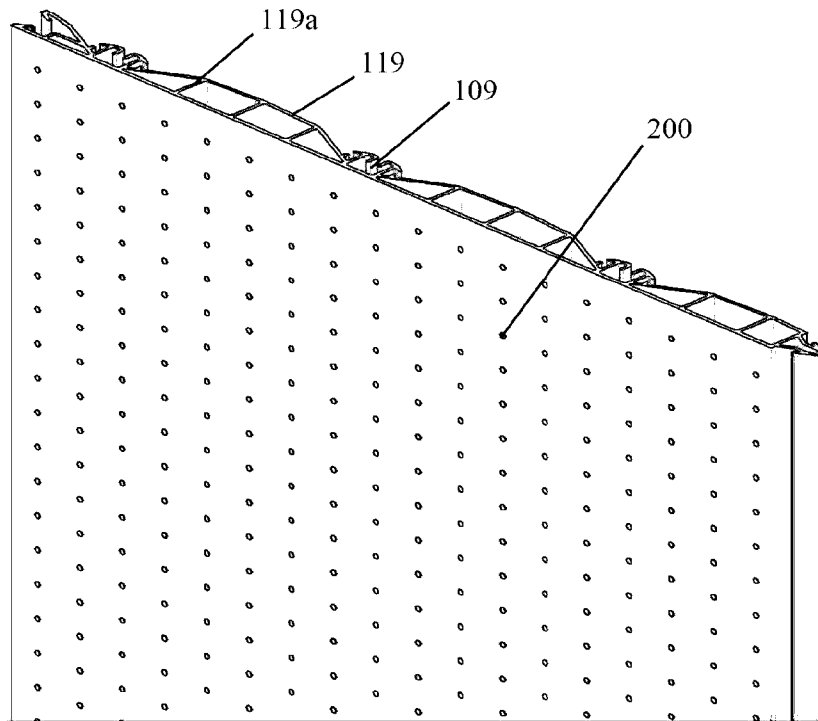


Figure 25

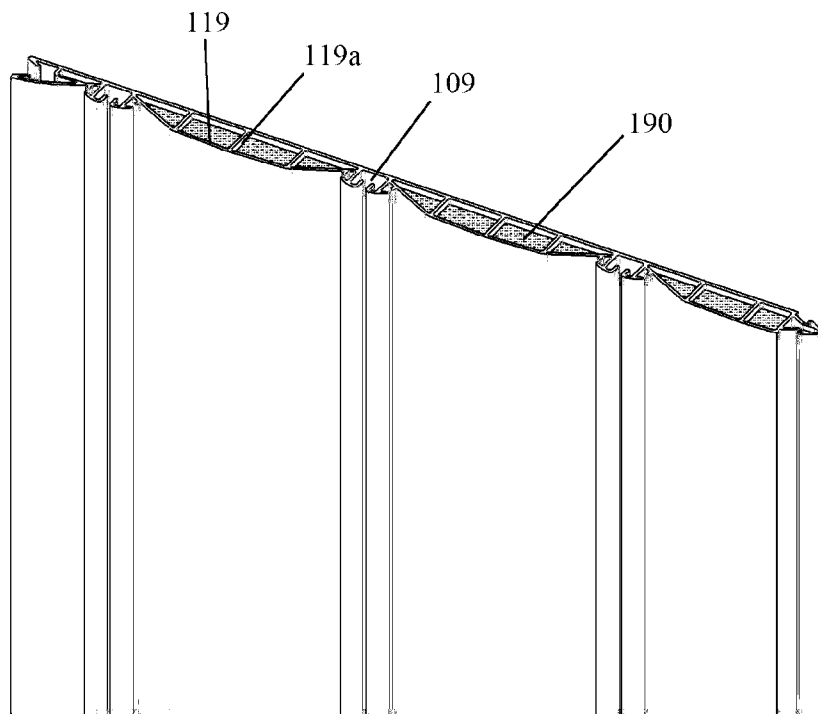

## INTERNATIONAL SEARCH REPORT

International application No.  
**PCT/AU2017/050938**

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> <b>E04B 2/86 (2006.01) E04G 9/05 (2006.01)</b>		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols)		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) Auspat & Espacenet: Inventor & Applicant name searched. PATENW (EPODOC, WPIAP & TXTE) : IPC & CPC: E04B2002/8694, E04B2/86, E04G9/05 with keywords : LIVING, FLEX, HINGE, PIVOT, FOLD, ARTICULAT, COLLAPSE, EXTRUSION, PULTRUSION, COEXTRUSION, CHANNEL, VOID, CAVITY, RIB, GROOVE, SLOT, INSULATION, LAGGING, FOAM and similar terms. Internet Search in Google with keywords: co-extrusion and PVC		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	Documents are listed in the continuation of Box C	
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex		
* "A"	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E"	earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P"	document published prior to the international filing date but later than the priority date claimed	
Date of the actual completion of the international search 4 October 2017	Date of mailing of the international search report 04 October 2017	
<b>Name and mailing address of the ISA/AU</b>  AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA Email address: pct@ipaustralia.gov.au	<b>Authorised officer</b>  Benjamin Norman AUSTRALIAN PATENT OFFICE (ISO 9001 Quality Certified Service) Telephone No. +61262223678	

INTERNATIONAL SEARCH REPORT		International application No.
C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		<b>PCT/AU2017/050938</b>
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3985329 A (LIEDGENS) 12 October 1976 Abstract, Fig. 3, ,5, 7 & 8 Item 2, 12, 15	1-8, 11,12,15,16, 19-22, 24 & 25
X	US 2002/0162294 A1 (BELIVEAU) 07 November 2002 Abstract, Fig.1-3 Item 72	1, 9, 10
X	WO 2007/143820 A1 (ENCON ENVIRONMENTAL CONSTRUCTION SOLUTIONS INC) 21 December 2007 Abstract; Fig. 1-4, 6, 16-21 Items 49, 51; Pg.2 L4-11, Pg. 15 L1-8	1, 13, 14 & 23
X	US 6915613 B2 (WOSTAL et al.) 12 July 2005 Abstract; Fig. 3 & 4 Items 200, 212, 216 & 302	1 & 17
X	WO 1997/028324 A1 (POLYFORM A.G.P. INC) 16 August 2001 Abstract; Fig. 4, 6 & 7; Items 1, 2, 4, 5,7 10, 11; Pg. 1 L9-14	1, 17 & 18
A	COUSINS, K. "Polymers in Building and Construction", Ismithers Rapra Publishing, Shrewsbury, 2002, ISBN 1-8595-7332-0 Pg. 20	4, 5, 22

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/AU2017/050938**

This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

<b>Patent Document/s Cited in Search Report</b>		<b>Patent Family Member/s</b>	
<b>Publication Number</b>	<b>Publication Date</b>	<b>Publication Number</b>	<b>Publication Date</b>
US 3985329 A	12 October 1976	US 3985329 A	12 Oct 1976
		AT A239675 A	15 Dec 1977
		AT 344974 B	25 Aug 1978
		BE 827220 A1	16 Jul 1975
		CA 1063822 A	09 Oct 1979
		DE 2414951 A1	02 Oct 1975
		DE 2414951 B2	08 Mar 1979
		FR 2265944 A1	24 Oct 1975
		FR 2265944 B1	29 Sep 1978
		GB 1497348 A	05 Jan 1978
		IT 1030428 B	30 Mar 1979
		JP S50130224 A	15 Oct 1975
		NL 7503621 A	30 Sep 1975
US 2002/0162294 A1	07 November 2002	US 2002162294 A1	07 Nov 2002
		US 6792729 B2	21 Sep 2004
		AU 2002257439 B2	01 Mar 2007
		BR 0209435 A	03 Aug 2004
		BR 0209435 B1	04 Sep 2012
		CA 2346328 A1	04 Nov 2002
		CA 2358195 A1	04 Nov 2002
		CN 1633537 A	29 Jun 2005
		EP 1387914 A2	11 Feb 2004
		EP 1387914 B1	24 Jun 2015
		JP 2004521210 A	15 Jul 2004
		JP 3974533 B2	12 Sep 2007
		KR 20040016862 A	25 Feb 2004
		KR 100641532 B1	31 Oct 2006
		MX PA03010070 A	08 Jul 2004
		NO 20034908 A	05 Jan 2004
		NO 337275 B1	29 Feb 2016
		NZ 529310 A	25 Feb 2005
		PL 365031 A1	27 Dec 2004
		PL 210431 B1	31 Jan 2012
		WO 02090683 A2	14 Nov 2002
WO 2007/143820 A1	21 December 2007	WO 2007143820 A1	21 Dec 2007

Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.

Form PCT/ISA/210 (Family Annex)(July 2009)

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/AU2017/050938**

This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

<b>Patent Document/s Cited in Search Report</b>		<b>Patent Family Member/s</b>	
<b>Publication Number</b>	<b>Publication Date</b>	<b>Publication Number</b>	<b>Publication Date</b>
		CA 2591664 A1	14 Dec 2007
		US 2007294970 A1	27 Dec 2007
		US 8037652 B2	18 Oct 2011
		US 2012023851 A1	02 Feb 2012
		US 8468761 B2	25 Jun 2013
US 6915613 B2	12 July 2005	US 2004103609 A1	03 Jun 2004
		US 6915613 B2	12 Jul 2005
		CA 2428765 A1	02 Jun 2004
		US 2005108963 A1	26 May 2005
		US 7347029 B2	25 Mar 2008
WO 1997/028324 A1	16 August 2001	WO 9728324 A1	07 Aug 1997
		AU 1458397 A	22 Aug 1997

**End of Annex**