



(86) Date de dépôt PCT/PCT Filing Date: 1999/08/05

(87) Date publication PCT/PCT Publication Date: 2001/02/15

(85) Entrée phase nationale/National Entry: 2002/01/25

(86) N° demande PCT/PCT Application No.: US 1999/017854

(87) N° publication PCT/PCT Publication No.: 2001/010740

(51) Cl.Int.⁷/Int.Cl.⁷ B65D 83/08

(71) Demandeur/Applicant:

THE PROCTER AND GAMBLE COMPANY, US

(72) Inventeurs/Inventors:

HO, MONICA, JP;

CHESHIRE, DIANA JOBSON, JP;


CARTLEDGE, JAMES EDWIN JR., JP;

GOTO, SUMIE, JP

(74) Agent: SIM & MCBURNEY

(54) Titre : CARTON DE DISTRIBUTION POUR PRODUITS EN FEUILLE DE PAPIER

(54) Title: DISPENSING CARTON FOR PAPER SHEET PRODUCTS

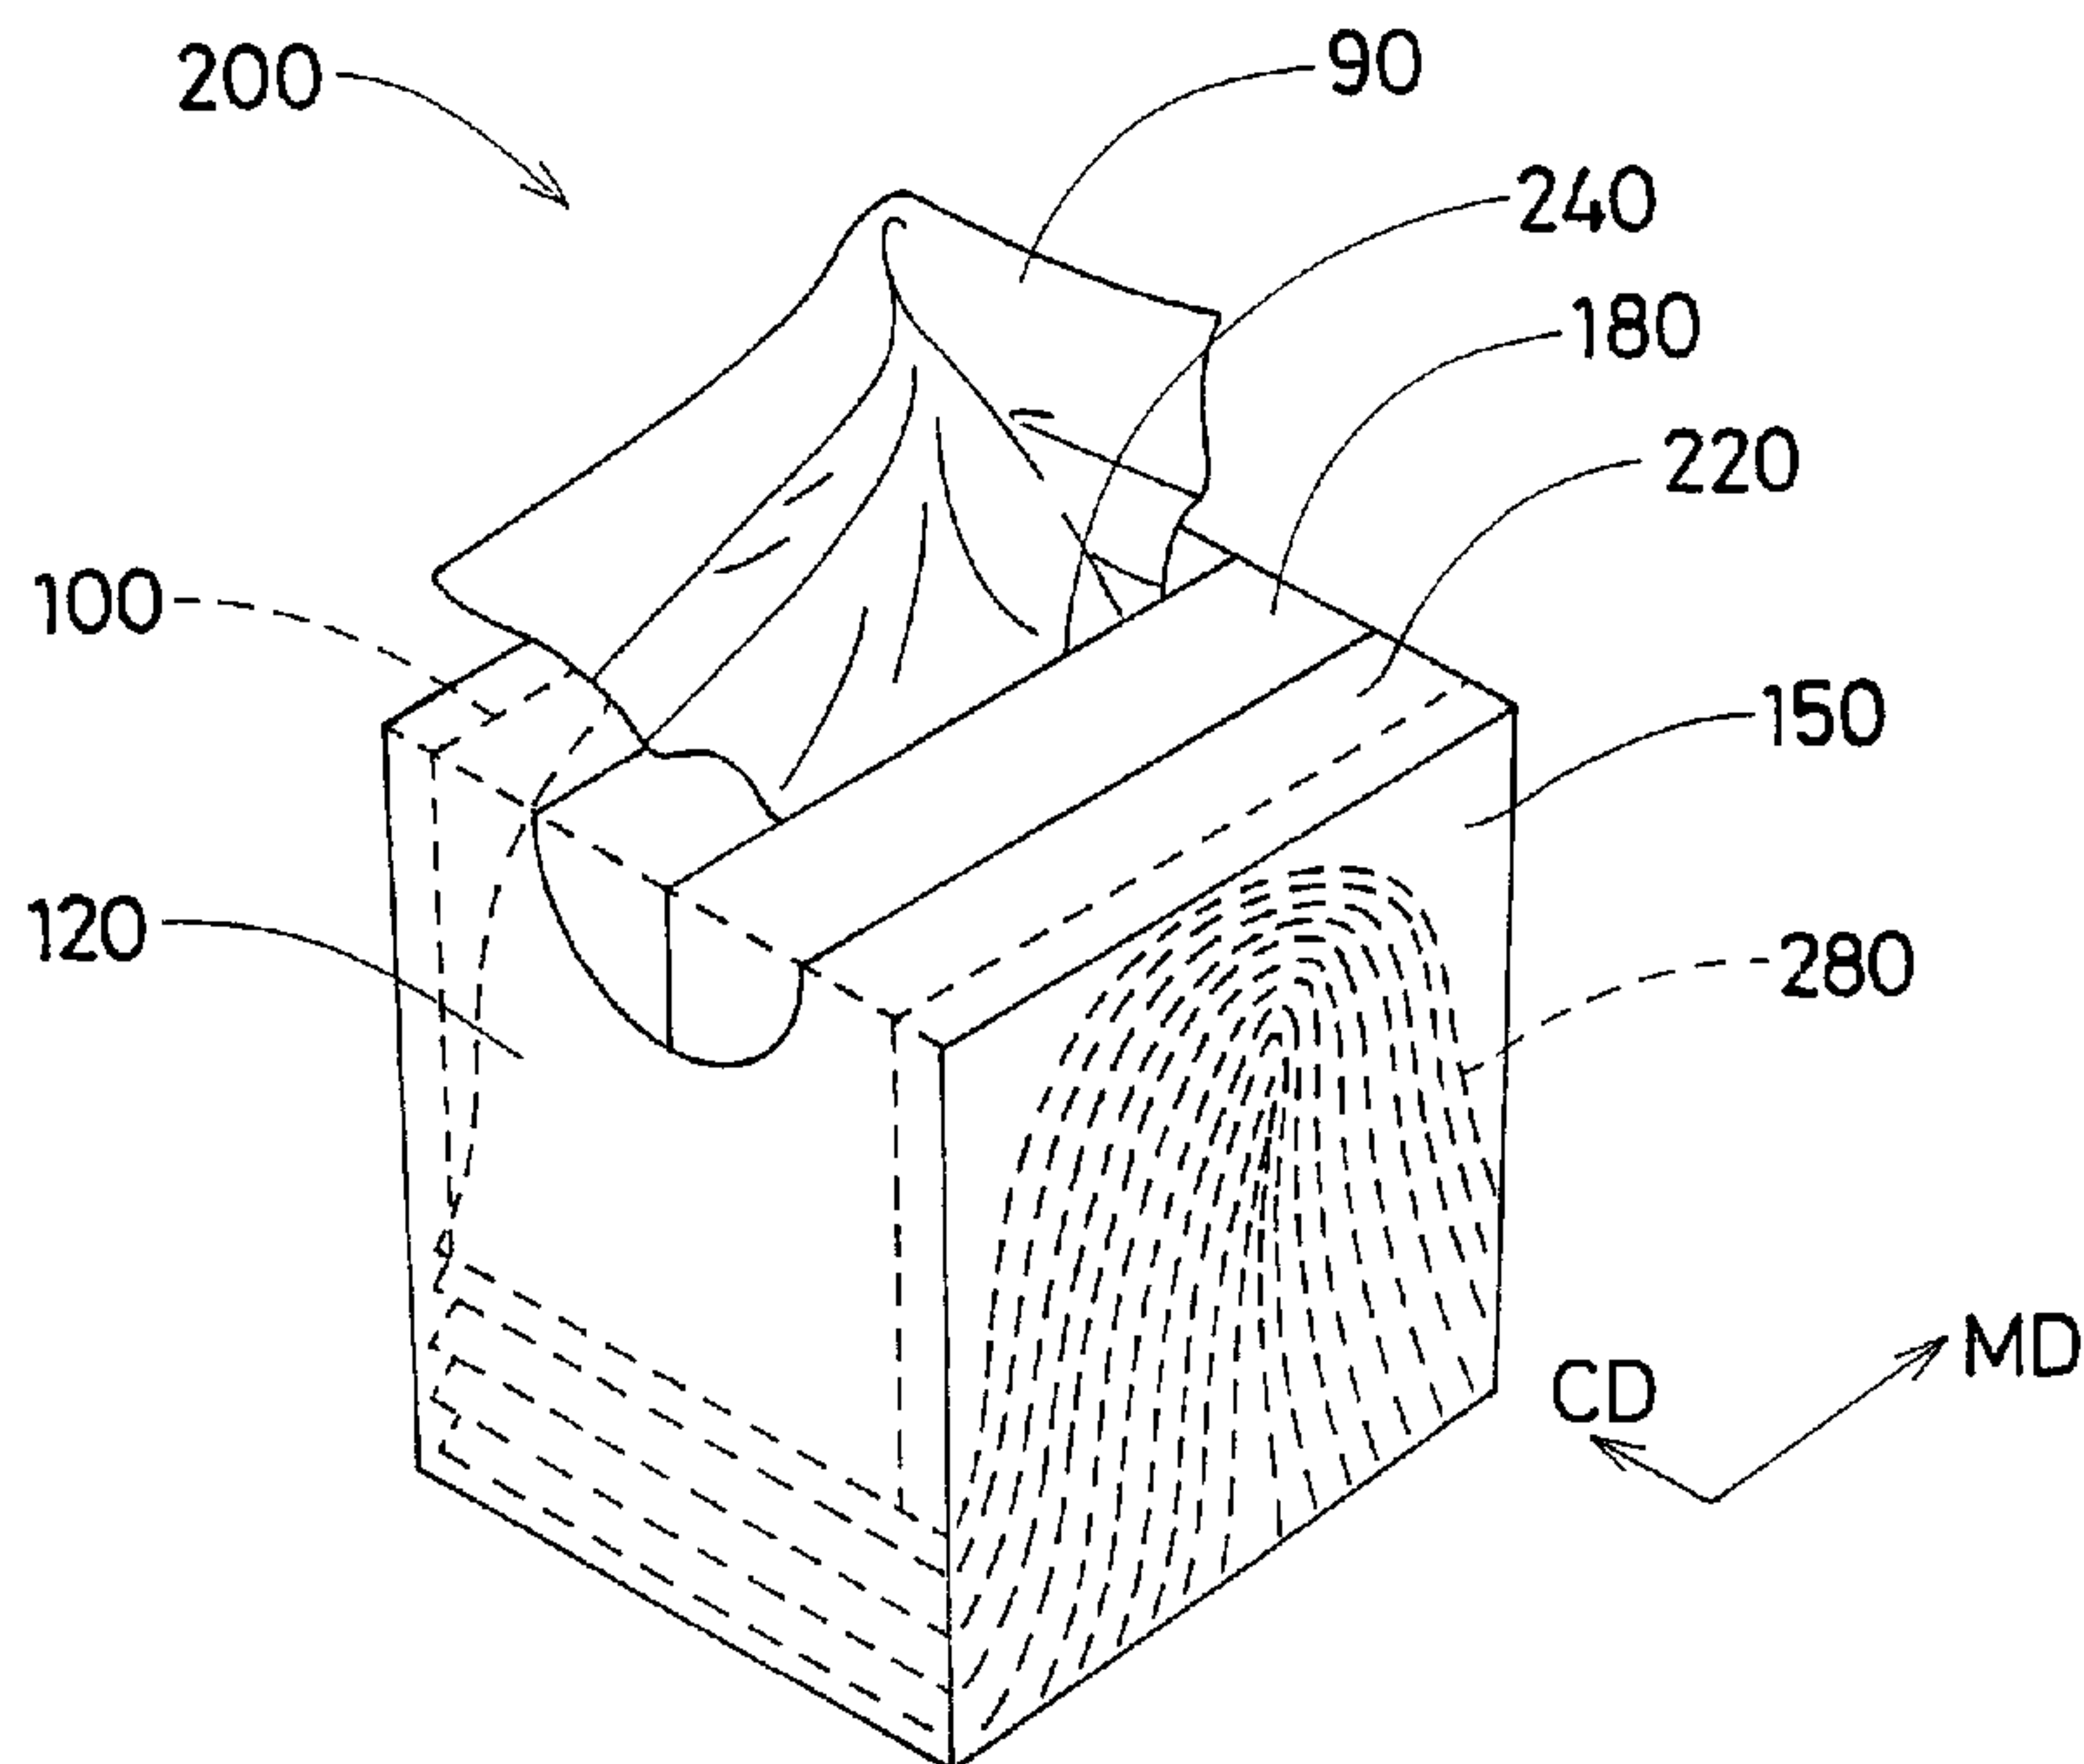

(57) Abrégé/Abstract:

Disclosed is a dispensing carton (200) containing a clip of interfolded sheets of a paper product, comprising: (a) a top wall (100) having a dispensing opening (180) through which the sheets (280) are withdrawn from the carton; (b) two pairs of opposing side walls (120, 140); (c) a bottom wall; (d) a dynamic friction reduction material (20) affixed to at least a portion of the inner surfaces of at least one of the pairs of opposing side walls; wherein the dispensing force required to dispense a sheet from the carton is reduced.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 February 2001 (15.02.2001)


PCT

(10) International Publication Number
WO 01/10740 A1

- (51) International Patent Classification⁷: **B65D 83/08** Higashinada-ku, Kobe 658-0032 (JP). **GOTO, Sumie** [JP/JP]; 17-1-401 Sumiyoshihonomachi 1-chome, Higashinada-ku, Kobe 658-0051 (JP).
- (21) International Application Number: PCT/US99/17854
- (22) International Filing Date: 5 August 1999 (05.08.1999) (74) Agents: **REED, T., David** et al.; The Procter & Gamble Company, 5299 Spring Grove Avenue, Cincinnati, OH 45217-1087 (US).
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **THE PROCTER & GAMBLE COMPANY** [US/US]; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **HO, Monica** [CA/JP]; 1-10-20, Sumiyoshiyamate, Higashinada-ku, Kobe 658-0063 (JP). **CHESHIRE, Diana, Jobson** [US/JP]; #801 The Entante, 5-15 Koyo-cho Naka, Higashinada-ku, Kobe 658-0032 (JP). **CARTLEDGE, James, Edwin, Jr.** [US/JP]; 5-15-1101 Koyo-cho Naka,
- (81) Designated States (*national*): AE, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,

[Continued on next page]

(54) Title: DISPENSING CARTON FOR PAPER SHEET PRODUCTS

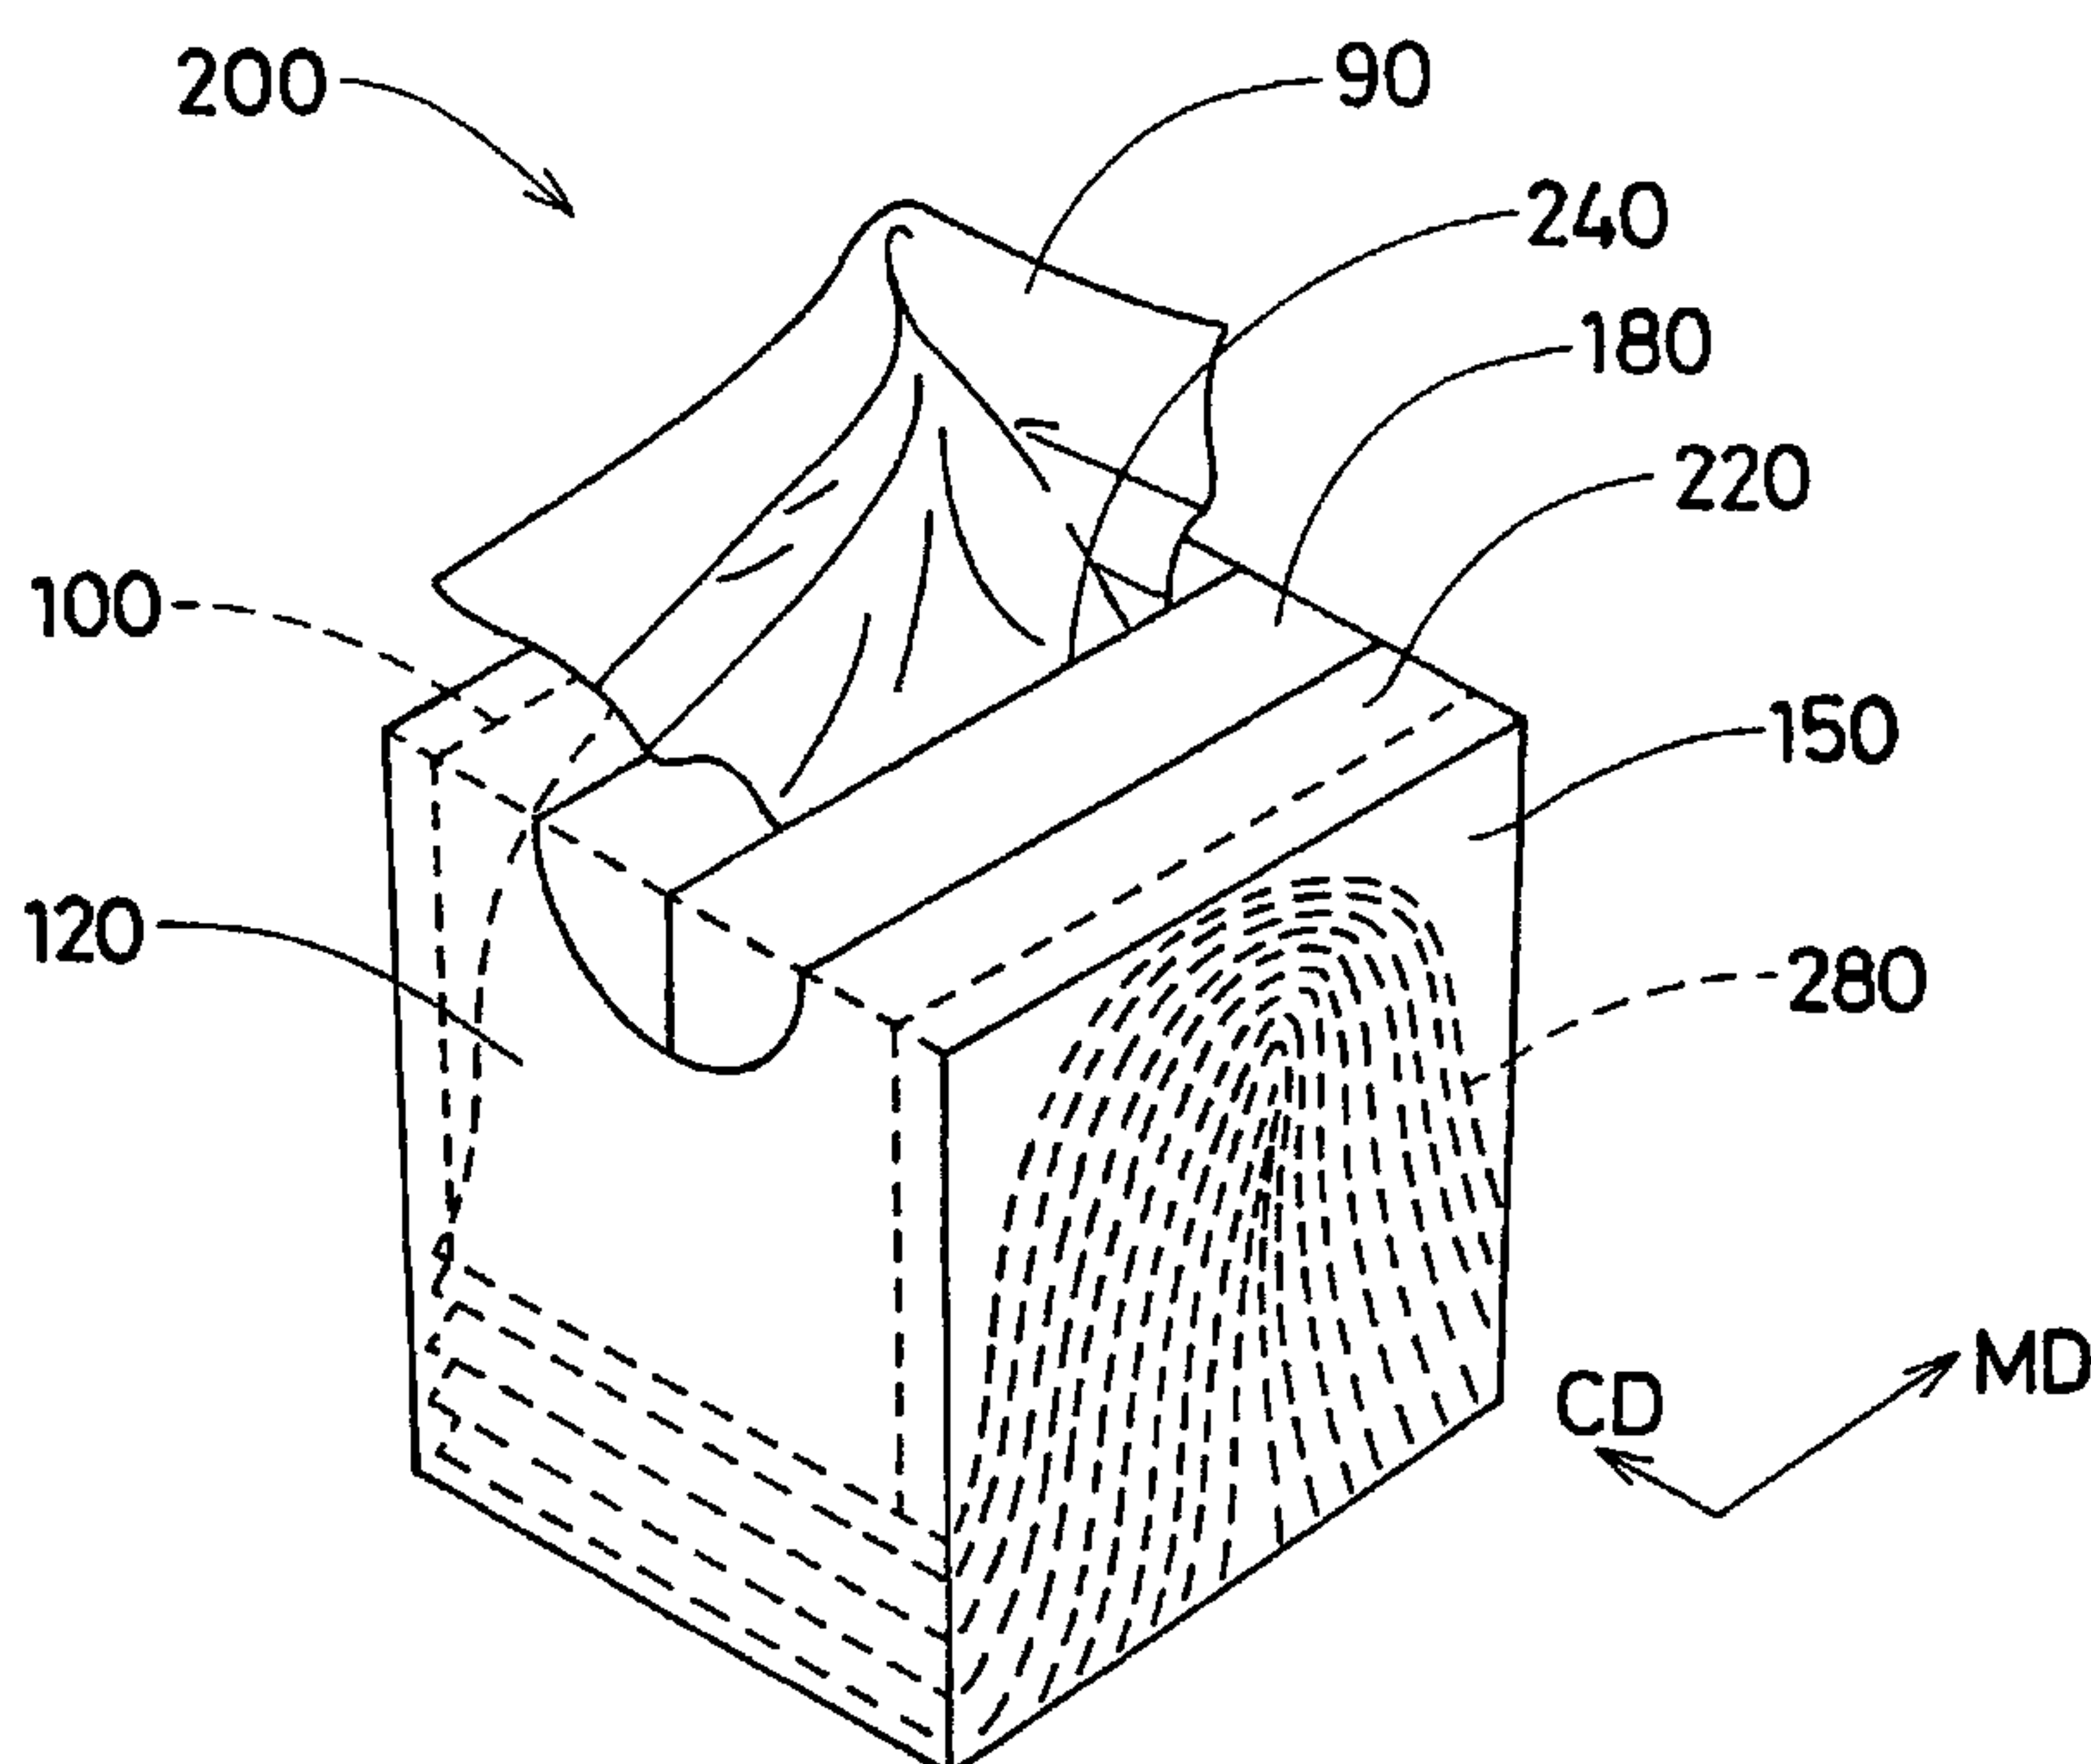

(57) Abstract: Disclosed is a dispensing carton (200) containing a clip of interfolded sheets of a paper product, comprising: (a) a top wall (100) having a dispensing opening (180) through which the sheets (280) are withdrawn from the carton; (b) two pairs of opposing side walls (120, 140); (c) a bottom wall; (d) a dynamic friction reduction material (20) affixed to at least a portion of the inner surfaces of at least one of the pairs of opposing side walls; wherein the dispensing force required to dispense a sheet from the carton is reduced.



WO 01/10740 A1

WO 01/10740 A1



NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *With international search report.*

DISPENSING CARTON FOR PAPER SHEET PRODUCTS

FIELD

The present invention relates to a dispensing carton for paper sheet products. More specifically, the present invention relates to a carton that provides reduced dynamic friction between the carton and the sheets during dispensing, resulting in easier dispensing and less tearing of the paper sheets during dispensing, particularly for the uppermost sheets that are contained in the carton.

BACKGROUND

It is known to dispense creped paper sheet products such as substantially dry facial tissues or substantially dry paper towels for household use from a carton with a dispensing opening formed in the top of the carton. The use of the word "substantially dry" herein is intended to distinguish such sheets from those sheet products that are impregnated with some type of lotion, which are generally referred to as "wet" or "moist" sheet products. Thus, it should be understood that the dry sheets of the present invention may not actually be 100% dry but may be impregnated with a small amount of lotion or liquid. However, the sheets of the present invention do not typically have a wet or moist feeling in the hand of the user.

Such conventional cartons are available in a variety of designs and shapes, but they can generally be classified as either one of two basic styles. One style is the flat carton and the other is the upright carton. In the flat style cartons, the sheets are laid flat in the bottom of the carton and are withdrawn

from the top of the carton or through an opening in the top which partially extends down the front sidewall. The sheets within the carton may interfolded for pop-up dispensing or merely laid on top of each other for reach-in dispensing. In the upright style cartons, the sheets are folded into an inverted u-shaped clip and
5 are interfolded for pop-up dispensing. The sheets are withdrawn through a dispensing opening in the top of the carton, which may contain a poly film having a slit to hold the consecutively popped up tissues in place.

In upright type cartons, "fall-back," which occurs as the clip in the carton gets low and the distance from the uppermost sheet to the opening in the top of
10 the carton gets longer, is typically not a problem. In upright cartons, the inverted u-shaped clip maintains all of the sheets within the clip in close proximity to the top opening all times. However, tearing of the sheets upon removal from the carton is a concern because of the frictional forces and pressures associated with the inverted clip being pressed up against the walls of the carton and the
15 intra-sheet contact. These resistive forces can cause the sheets to tear as they are pulled through the dispensing opening. This is particularly true for the first few sheets dispensed after the carton is opened. The problem is lessened as the sheets within the carton are used up and the compression of the clip is reduced.

It has been suggested that one solution to the problem of sheet tears
20 during dispensing is to reduce the number of paper sheets contained in the clip that is packed into the carton. This reduces the pressure associated with the inverted clip being pressed up against the walls of the carton and the intra-sheet contact; the sheets behave as they would after at least some of the sheets have been used up. This, however, is not a cost-effective solution, especially from the
25 viewpoint of the consumers who purchase the cartons.

Another proposed solution is to modify the dispensing opening such that it has a defined "effective open area" or area available for the tissue sheet to pass through the plastic film that covers the opening. See, US patent no. 5,415,320, "Upright Facial Tissue Carton," to North et al. on May 16, 1995. However, such a
30 carton may require attention to manufacturing tolerance and requires that a plastic film be used to cover the dispensing opening. In addition, this carton does not appear to have any effect on the frictional forces between the side walls of the carton and the facial tissue sheets, but instead offers a different approach to dispensing.

Thus, there remains a desire to provide cost-effective, easy, and tear-free dispensing of a variety of creped paper sheet products from a pop-up dispensing carton, without the need to reduce the number of sheets per clip that can be packaged in the carton. None of the existing art provides all of the advantages and benefits of the present invention.

SUMMARY

The present invention relates to a dispensing carton containing a clip of interfolded sheets of a paper product, comprising: (a) a top wall having a dispensing opening through which the sheets are withdrawn from the carton; (b) two pairs of opposing side walls; (c) a bottom wall; (d) a dynamic friction reduction material affixed to at least a portion of the inner surfaces of at least one of the pairs of opposing side walls; wherein the dispensing force required to dispense a sheet from the carton is reduced.

These and other features, aspects, and advantages of the invention will become evident to those skilled in the art from a reading of the present disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

While the specification concludes with claims particularly pointing out and distinctly claiming the invention, it is believed that the present invention will be better understood from the following description of preferred embodiments taken in conjunction with the accompanying drawings in which:

Fig. 1 is a perspective view of a prior art dispensing carton having a dispensing opening covered with a plastic film having a slit aligned in the machine direction of the tissues contained within the carton;

Fig. 2 is a plan view of a preferred embodiment of a carton blank according to the present invention, showing the surface that forms the inner surface of the carton after the blank has been assembled; and

Fig. 3 is a perspective view of the carton blank shown in Fig. 2 in its assembled state.

DETAILED DESCRIPTION

A perspective view of a commercially available upright facial tissue carton having a top wall 1, a bottom wall (not shown), and four side walls (two of which are shown, numbered side walls 2 and 3), is shown in Fig. 1. The top wall 1

contains an oval carton opening 5 overlaid with a plastic film 6 have a dispensing opening slit 7. Within the carton is an inverted u-shaped clip of interfolded tissues 8 indicated by the phantom lines. The machine direction of the tissues within the clip, as viewed from the top of the carton, is parallel to the direction of the dispensing opening slit 7. During dispensing, the top tissue in the clip is grasped by the user and is withdrawn through the slit. Removal of the top tissue causes the adjacent interfolded tissue, next in line to be dispensed, to be partially pulled through the slit. The partially dispensed tissue 9 is held in a popped-up position by the edges of the slit 7.

Fig. 2 is a plan view of a preferred embodiment of a carton blank 50 according to the present invention. The surface of the blank 50 that will form the inner surfaces of the assembled carton 200 is shown in Fig. 2. The blank 50 is comprised of a top wall panel 10, a bottom wall panel 11, side wall panels 12, 13a, 13b, 14, 15a, and 15b.

When the carton is assembled, it will have two pairs of opposing side walls. One opposing pair of side walls is comprised of panels 12 and 14. The other pair of opposing side walls is comprised of panels 13 and 15. Each of these side walls will actually be comprised of two side wall panels - side wall 13 will be comprised of panels 13a and 13b, and side wall 15 will be comprised of panels 15a and 15b. When the carton is assembled, panel 13b is affixed so that it overlays panel 13a such that panel 13b is a part of the outer surface of the assembled carton, and panel 13a is a part of the inner surface of the assembled carton. The same construction will be used for panels 15a (part of the inner surface of the assembled carton) and 15b (part of the outer surface of the assembled carton).

The various component panels of the carton blank 50 of the present invention may be assembled in any manner known to those of skill in the art, e.g., by using adhesive or sealant located at areas 16a and 16b shown on Fig. 2. In addition, it should be noted that the number and configuration of panels that make up the carton blank 50 of the present invention can vary as is known to those of skill in the art, and need not be limited to the configuration illustrated in Fig. 2.

The carton blank is also provided with a dispensing opening 18. The dispensing opening 18 is located in at least the top wall panel 10 of the carton blank 50 and may further extend into one or both of the side wall panels 12

and/or 14, as shown in Fig. 2. The dispensing opening 18 is preferably of an oval shape for ease of dispensing, but the present invention is not limited to dispensing openings having an oval shape, and it should be noted that any shape is within the scope of the present invention.

5 In addition, the dispensing opening 18 is preferably overlaid with a plastic film 22 having a slit 24. The slitted film 22 can hold a popped-up tissue 90 (see Fig. 3) in place for dispensing and can further provide protection from dust, etc. for the remainder of the contents that would otherwise be exposed to the ambient conditions. The use of such a film 22 has been known in conventional
10 tissue cartons, see, e.g., US 5,414,320. However, such a film 22 does not provide benefits in terms of ease of dispensing or in terms of reducing the number of tears upon dispensing.

According to the present invention, a portion of the inner surface of the blank 50 (and, therefore, of the assembled carton 200) is provided with a
15 dynamic friction reduction material 20a, 20b. This material 20 is affixed to at least a portion of the inner surfaces of two of the four side walls; i.e., to the inner surfaces of at least one pair of opposing side walls. Preferably, these are the two side walls that have the greatest amount of surface to surface contact with the clip of paper sheets placed in the assembled carton. In Fig. 2, these walls
20 are formed from panels 12 and 14.

Fig. 3 shows the blank 50 of Fig. 2 in its assembled state. The carton 200 is comprised of a top wall 100, a bottom wall (not shown), and four side walls (i.e., two pairs of opposing side walls 120 and 140; and 130 and 150), two of the four side walls being shown and numbered as side walls 120 and 150. The top
25 wall 100 contains an oval dispensing opening 180. Within the carton is an inverted u-shaped clip of interfolded paper sheets 280 as indicated by phantom lines. The machine direction of the paper sheets within the clip, as viewed from the top of the carton, is preferably parallel to the direction of the dispensing opening slit 240. The exact geometry of the slit 240 is not important herein, and
30 may be provided as known to those of skill in the art.

It can be appreciated from Fig. 3 that the side wall 120 is one of the two side walls that has the greatest amount of surface to surface contact with the paper sheets forming the clip 280; the side wall 140 that is opposed to the side wall 120 also has surface to surface contact with the paper sheets in the clip, but
35 side wall 140 cannot be seen in Fig. 3. The side wall 150 is one of the two side

walls 130 and 150 (side wall 130 cannot be seen in Fig. 3) that does not have a large amount of surface to surface contact with the paper sheets in the clip 80. Thus, referring to Fig. 2, the side wall panels that have will have the greatest amount of contact with the paper sheets of clip 280 when the carton is assembled are numbered 12 and 14; these are the side walls that should preferably be provided with the dynamic friction reduction material 20.

Referring again to Fig. 2, the material 20 need not cover the entire inner surfaces of the side wall panels 12 and 14. Preferably the material 20a, 20b extends at least from imaginary lines 17a, 17b drawn tangent to the dispensing opening in the cross direction CD, and in the machine direction MD toward the lower edges 19a and 19b of the side wall panels 12 and 14 (i.e., where the side wall panels adjoin the bottom wall 11; in the case of side wall 12, after assembly). The material 20a, b should extend down the side wall to the approximate location of the machine direction edge of the uppermost paper sheet in the clip of sheets that is inserted in the assembled carton. Referring to Figs. 2 and 3, this location is indicated by the imaginary lines "A-A".

In addition, it is not necessary for the material 20 to extend all the way to the cross direction ("CD") edges of the panels 10, 12, and/or 14.

The friction reduction material 20 may also be affixed to the inner surface of the top wall panel 10 of the carton. Thus, for ease of manufacture and for cost-effectiveness, one continuous piece of material may be used to cover the top wall panel 10, the side wall panel 12 and the side wall panel 13. In effect, such a continuous piece would be comprised of sections 20a, 22, and 20b, referring to Fig. 2. In addition, it is not necessary that a unitary, continuous piece be used; one or more smaller sections can be used equally advantageously.

Preferably, the friction reduction material 20 is provided as a thin film. The stiffness/softness and/or the thickness of the film affects dispensability. The film is preferably a teflon, a polypropylene, a polystyrene, or a polyethylene film.

It should be noted that the previously-known plastic films used in connection with a carton opening in the top wall of a pop-up dispensing carton, e.g., as described in US 5,415,320, do not contribute to reduction of dynamic friction during dispensing. These films only serve to protect the popped-up tissue from fallback, and to provide overall protection from contamination or soiling of the contents via the dispensing opening. Therefore, as noted above, it

is not necessary to provide the friction reduction material on the inner surface of the top wall herein in order to obtain the dispensing benefit according to the preferred embodiments of the present invention. However, by providing the friction reduction material 20 in combination with a plastic film 22 such as
5 described in US 5,415,320, both benefits can be obtained. As further noted above, it may be advantageous in terms of cost and ease of manufacture to provide one continuous sheet of material 20, 22 that actually serves both purposes.

For example, in one preferred embodiment of the present invention
10 suitable for dispensing v-folded paper towel substrates having per sheet dimensions of approximately 22.5 cm (9 inches) x 26.25 cm (10.5 inches), the assembled carton dimensions are approximately 12 cm in width, 16 cm in height, and 11.2 cm in length. The dimensions of the friction reduction material that are used on the side wall panels, and also on the top wall panel, are approximately
15 11 cm by 37.2 cm (one continuous section of the friction reduction material). The carton material is a 50 μ m recycled paperboard, and the friction reduction material is a 50 μ m low density polyethylene film. In this embodiment, the friction reduction material also serves to cover the dispensing opening of the carton for preventing contamination and fallback.

20 In another preferred embodiment of the present invention, the walls themselves may be made from a material that provides reduced dynamic friction as the sheets are removed. In this embodiment, there is no need to affix an additional friction reduction material 20a or 20b to the side walls.

25 EXAMPLES

In order to illustrate the dispensing benefits of the preferred embodiments of the present invention, a number of different paper substrates were measured for dynamic coefficient of friction and dispensing force, comparing cartons constructed according to the present invention, i.e., those provided with the
30 dynamic friction reduction material, to conventional cartons, i.e., those without the dynamic friction reduction material.

A. Dynamic Coefficient of Friction

Dynamic coefficient of friction was measured according to the JIS standard test method VCM with a 40 gram load. According to this method, a probe is dragged across a test sample at a certain speed, and dynamic coefficient of friction is measured. The following results are an average for five samples.

Material of Carton Inner Wall	Average Dynamic Coefficient of Friction (n=5)
Cardboard	0.43
Cardboard with Friction Reduction Material *1 Affixed	0.22

*1: 50 μ m low density polyethylene film

Paper Substrate	Average Dynamic Coefficient of Friction Using a Cardboard Probe (n=5)	Average Dynamic Coefficient of Friction Using a Friction Reduction Material Probe (n=5)
BOUNTY Through Air-dried Paper Towel Substrate *1	0.59	0.44
BOUNTY Conventional Paper Towel Substrate *2	0.52	0.37
PUFFS PLUS Facial Tissue Substrate *3	0.41	0.31
PUFFS Regular Facial Tissue Substrate *3	0.44	0.33

*1, *2: The BOUNTY paper towel substrates are creped, dry paper towel substrates available from the Procter & Gamble Co. of Cincinnati, Ohio, USA.

*3: The PUFFS substrate is a creped, dry or lotioned facial tissue, available from the Procter & Gamble Co. of Cincinnati, Ohio, USA.

B. Dispensing Force

The force required to remove a paper sheet from a dispensing carton provided with a friction reduction material according to the present invention, and from a conventional carton, is measured as follows. Herein this force is referred to as the "dispensing force."

Dispensing force is measured according to the (modified) JIS standard test method JIS B7721, General Pulling Test. The Conditioning Room is temperature and humidity controlled within the following limits: (1) relative humidity $\pm 2\%$; and (2) temperature $22.78^{\circ}\text{C} \pm 1.1^{\circ}\text{C}$ ($73^{\circ}\text{F} \pm 2^{\circ}\text{F}$). The force
5 tester is a Sintech Frame Instron #5564 with 100 Newton load cell, plexiglass sample holder, and jaw with two flat faces.

The plexiglass sample holder is installed in the lower position of the Instron. The jaw is installed with the two flat faces in the upper position, and the air supply is connected. The upper jaw orientation should allow the jaw to close
10 from side to side. This allows increased visual alignment when positioning the paper sheets.

Following the installation of the necessary test equipment, the instrument should be calibrated. The "Simple Tensile Test" is an appropriate method with variations based on the data that is needed. For example, a setting for the
15 in/min crosshead speed that is appropriate herein is 98. This more closely represents consumer removal patterns than the slower settings. In addition the gauge length should be determined by the height of the carton being tested.

Samples should be conditioned about 2 hours prior to testing. Cartons should be opened either by removing any poly overwrap or by removing the tear
20 panel.

The placement orientation in the plexiglass holder should be consistent, for example, by placing the carton in the holder with the opening centered under the jaw. (It may also be helpful if the code date on the carton is always oriented to the same side.)

Prior to carton placement in the holder, the tissue fold should be loosened or pulled up just enough so that the jaw can grasp it. Care should be used not to bias the test by loosening the tissue too much. The jaw should be lowered and the tissue positioned in the jaw. The first pull may be somewhat difficult due to the jaw placement and the tightness of the tissue in the carton. Once the tissue
25 has been secured in the jaw and the carton placement is centered, the test is started. After the initial pull, positioning the tissue in the jaw will become easier.

All substrates are v-folded and interleaved. The clip is folded in half to form a U before inserted into the carton. Paper towel substrates are approximately 22.5 cm (9 inches) x 26.25 cm (10.5 inches); PUFFS substrates
35 are approximately 22 cm (8.8 inches) x 20.5 cm (8.2 inches).

The cartons are sized to fit the substrate size appropriately.

Table 1: BOUNTY Through Air-Dried Paper Towel Substrate (packed 42 sheets to a carton)

Sheet Being Dispensed	1 st of 42	2 nd of 42	3 rd of 42	4 th of 42	5 th of 42
Dispensing Force (g)					
With Friction Reduction Material	865	786	822	687	591
Without Friction Reduction Material	1598	1410	1367	1273	1104
Percent Reduction in Dispensing Force	45.9%	44.3%	39.9%	46%	46.5%

5

Table 2: BOUNTY Conventional Paper Towel Substrate (packed 40 sheets to a carton)

Sheet Being Dispensed	1 st of 40	2 nd of 40	3 rd of 40	4 th of 40	5 th of 40
Dispensing Force (g)					
With Friction Reduction Material	621	547	587	501	569
Without Friction Reduction Material	1357	989	1027	732	798
Percent Reduction in Dispensing Force	54.2%	44.7%	42.8%	31.6%	28.7%

Table 3: PUFFS PLUS Facial Tissue Substrate (packed 74 sheets to a carton)

Sheet Being Dispensed	1 st of 74	2 nd of 74	3 rd of 74	4 th of 74	5 th of 74
Dispensing Force (g)					
With Friction Reduction Material	288	275	245	187	157
Without Friction Reduction Material	312	297	288	267	223
Percent Reduction in Dispensing Force	7.7%	7.4%	14.9%	30%	29.6%

Table 4: PUFFS Regular Facial Tissue Substrate (packed 105 sheets to a carton)

Sheet Being Dispensed	1 st of 105	2 nd of 105	3 rd of 105	4 th of 105	5 th of 105
Dispensing Force (g)					
With Friction Reduction Material	156	142	123	112	102
Without Friction Reduction Material	256	257	251	223	232
Percent Reduction in Dispensing Force	39.1%	44.7%	51%	49.8%	54.7%

5 No tears are seen during dispensing. It can be therefore be seen that the average coefficient of dynamic friction for the carton inner wall is reduced by the addition of the dynamic friction reduction material, e.g. from 0.43 to 0.22 (by about 50%), and the dispensing force is at least reduced to less than the tear strength of a sheet contained in the carton, e.g., dispensing force is decreased up to over 50%.

10 Thus, the embodiments disclosed herein provide the advantages of ease of dispensing and less sheet tearing during dispensing without having to reduce the number of sheets that are packed into a carton. The preferred embodiments herein are also cost effective and easy to manufacture.

15 All cited references are incorporated herein by reference in their entireties. Citation of any reference is not an admission regarding any determination as to its availability as prior art to the claimed invention.

Herein, "comprising" means that other steps and other components which do not affect the end result can be added. This term encompasses the terms "consisting of" and "consisting essentially of."

5 It is understood that the examples and embodiments described herein are for illustrative purposes only and that various modifications or changes in light thereof will be suggested to one of skill in the art without departing from the scope of the present invention.

WHAT IS CLAIMED IS:

1. A dispensing carton containing a clip of interfolded sheets of a paper product, comprising:

(a) a top wall having a dispensing opening through which the sheets are withdrawn from the carton;

5 (b) two pairs of opposing side walls;

(c) a bottom wall;

(d) a dynamic friction reduction material affixed to at least a portion of the inner surfaces of at least one of the pairs of opposing side walls;

10 wherein the dispensing force required to dispense a sheet from the carton is reduced.

2. The carton of Claim 1 wherein the dispensing opening is covered with a plastic film having a slit through which the sheets are dispensed.

3. The carton of Claim 2 wherein the dispensing opening further extends into the side walls that are provided with the friction reduction material.

4. The carton of Claim 1 wherein the friction reduction material is selected from the group consisting of teflons, polystyrenes, polypropylenes, and polyethylenes.

5. The carton of Claim 1 wherein the friction reduction material extends down the side walls in the direction of the bottom wall to the approximate location of the machine direction edge of the uppermost paper sheet in the clip of sheets that is inserted in the carton.

5

6. The carton of Claim 1 wherein the clip is comprised of interleaved sheets of paper towels.

7. The carton of Claim 1 wherein the clip is comprised of interleaved sheets of facial tissues.

8. The carton of Claim 1 wherein the dispensing force is at least reduced to less than the tear strength of a sheet contained in the carton.

9. The carton of Claim 8 wherein the dispensing force is decreased up to over 50%.

10. The carton of Claim 1 where the average coefficient of dynamic friction for the carton inner wall is reduced by about 50%.


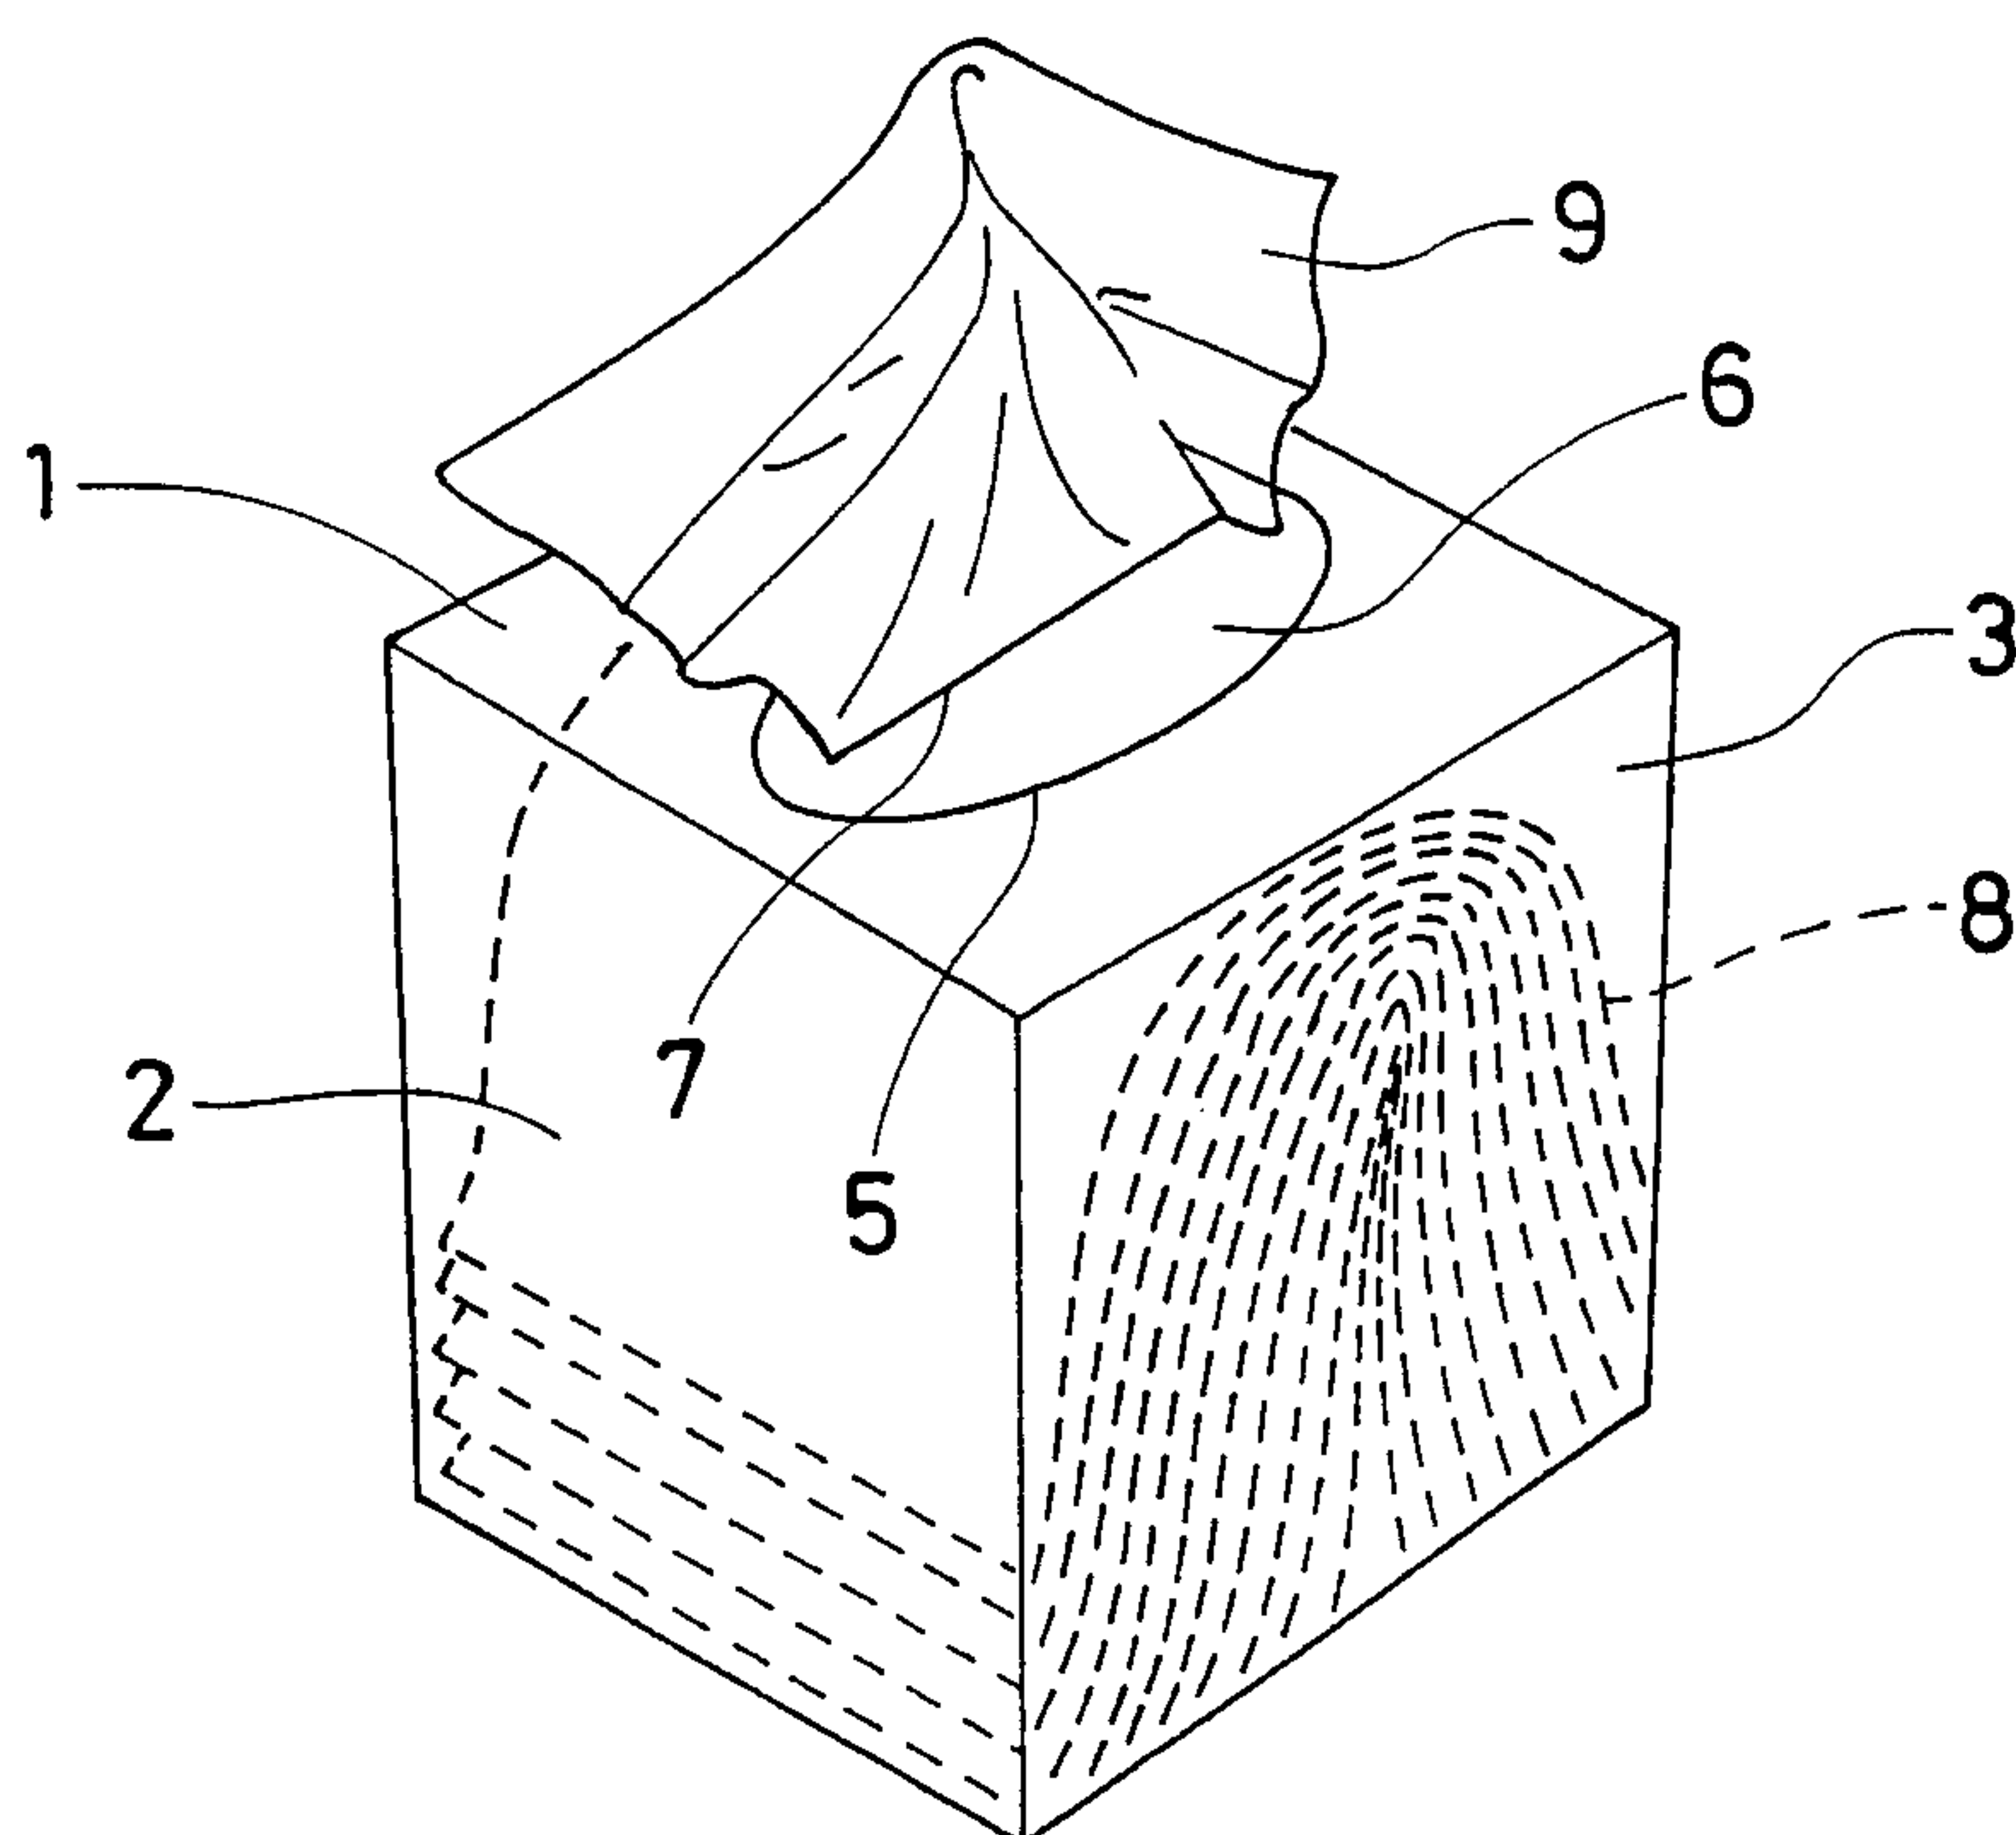


FIG. 1
(PRIOR ART)

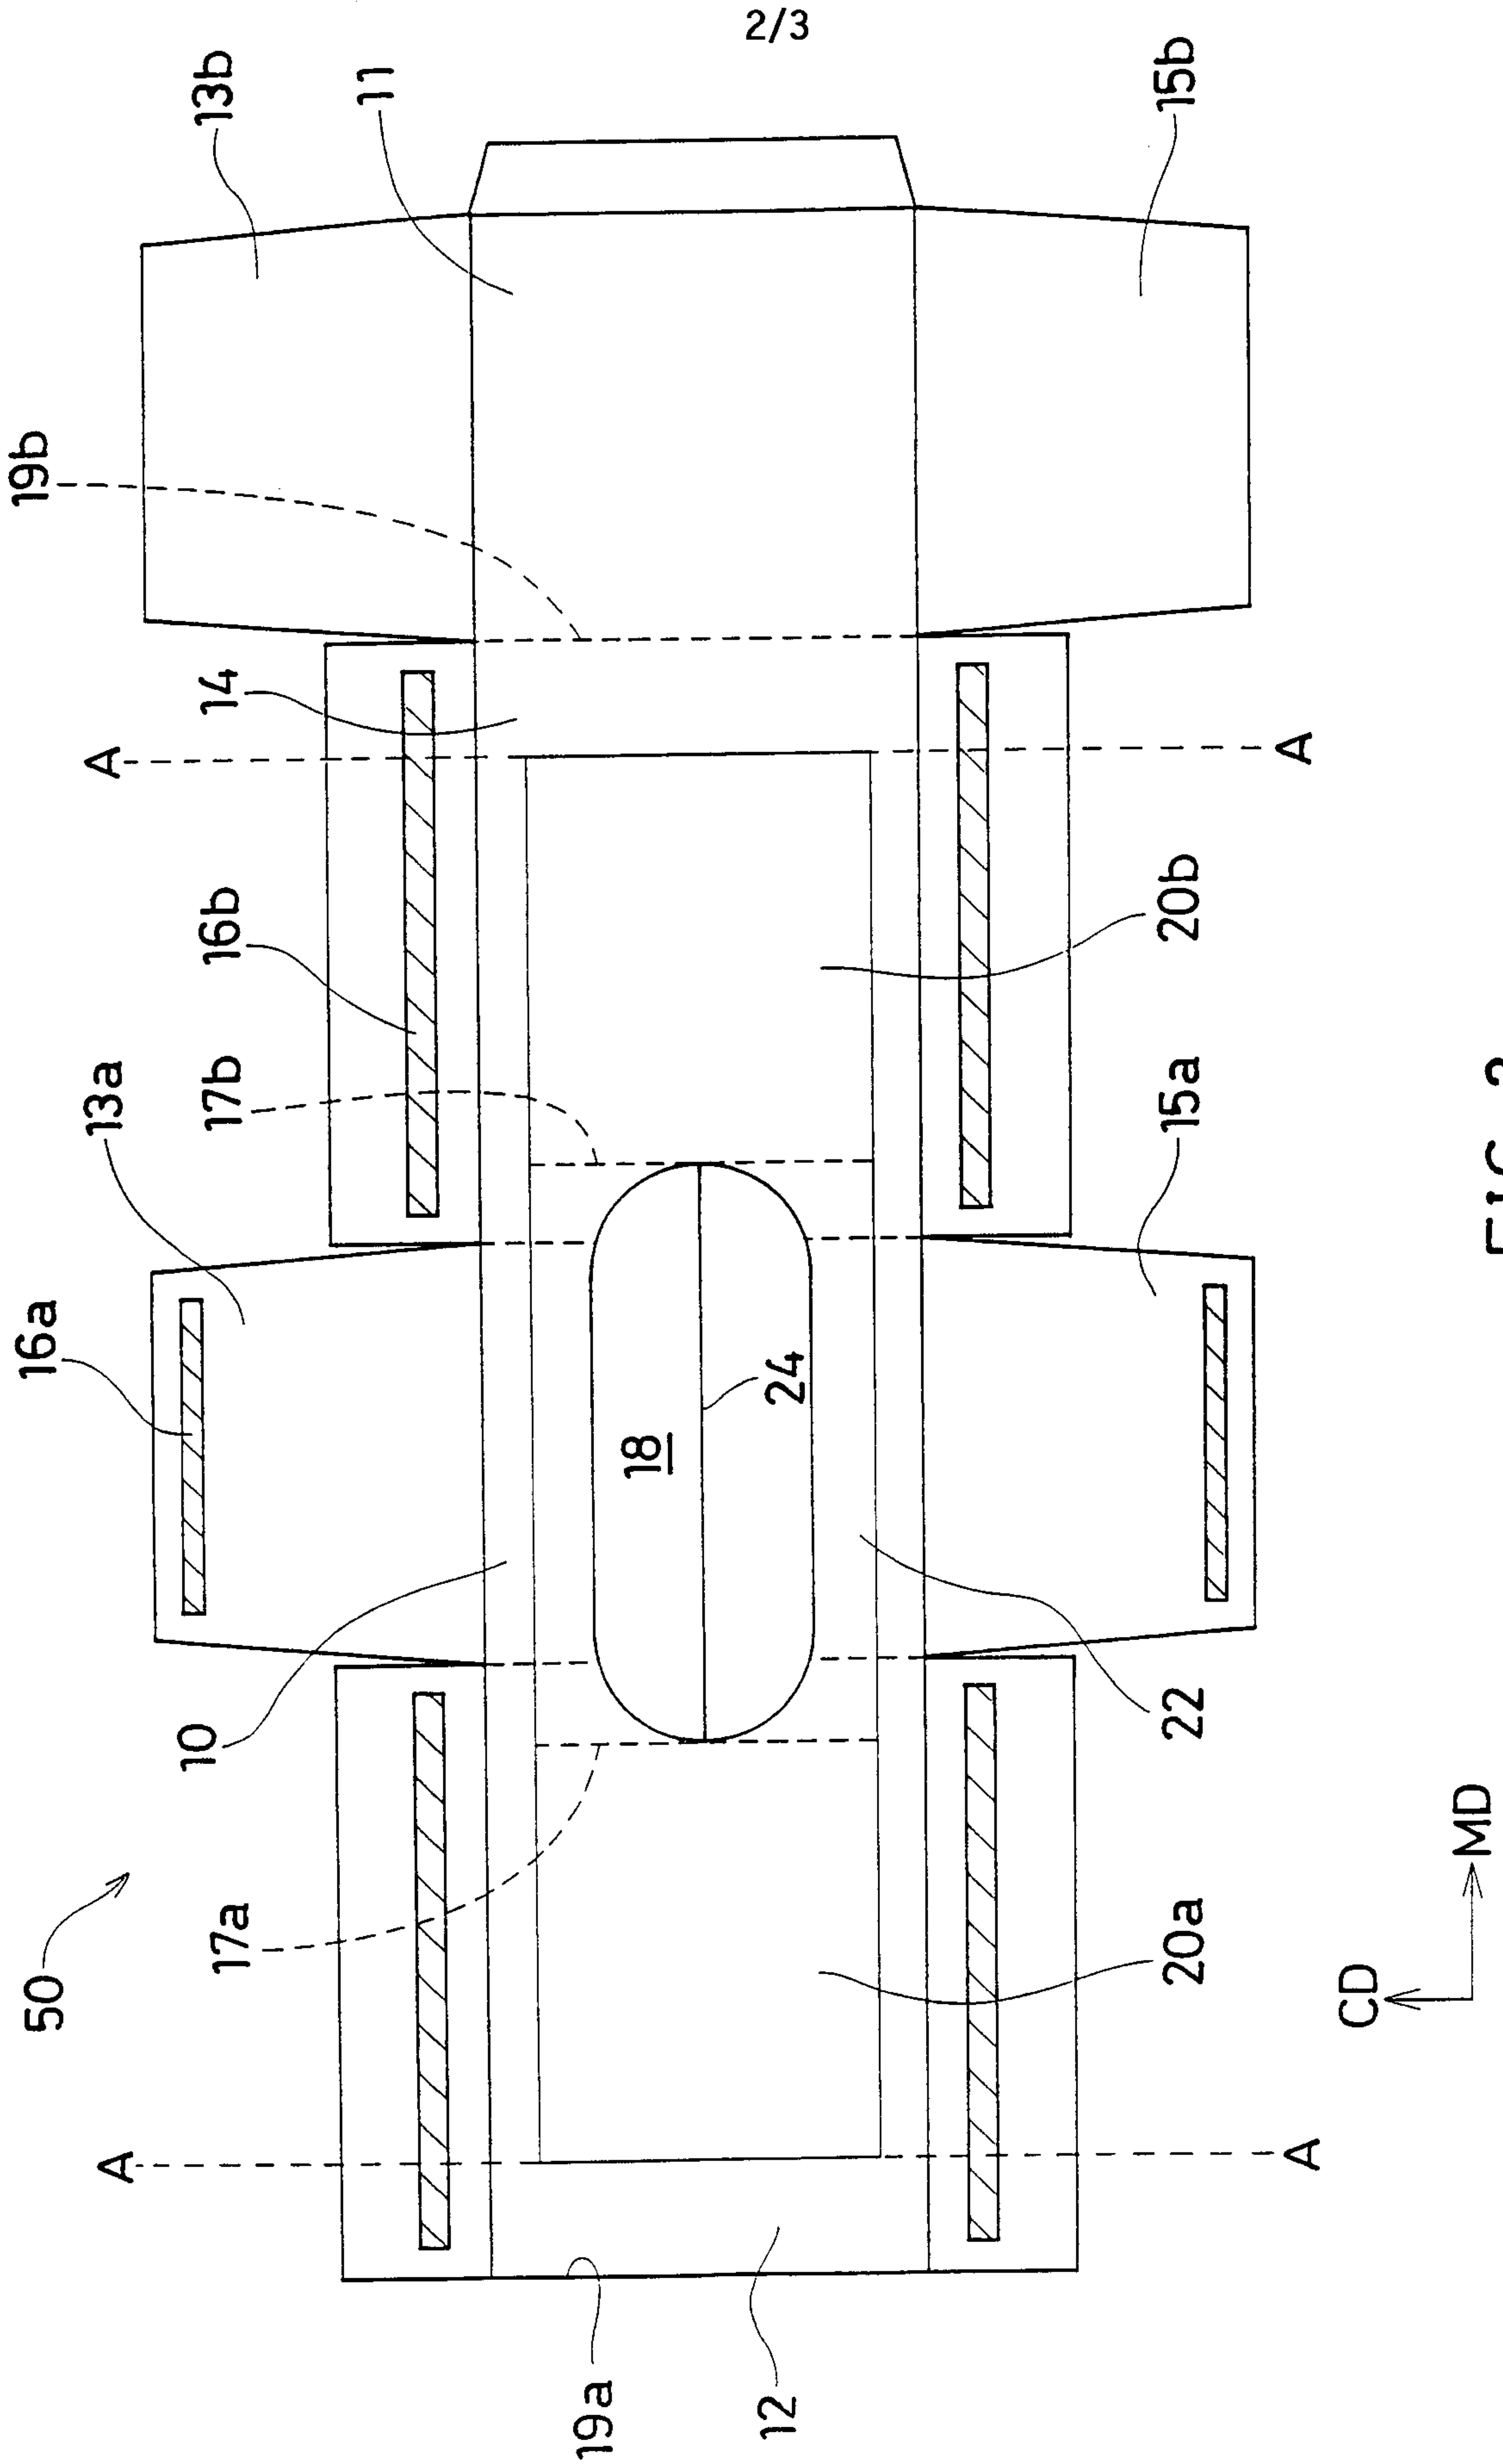

3/3

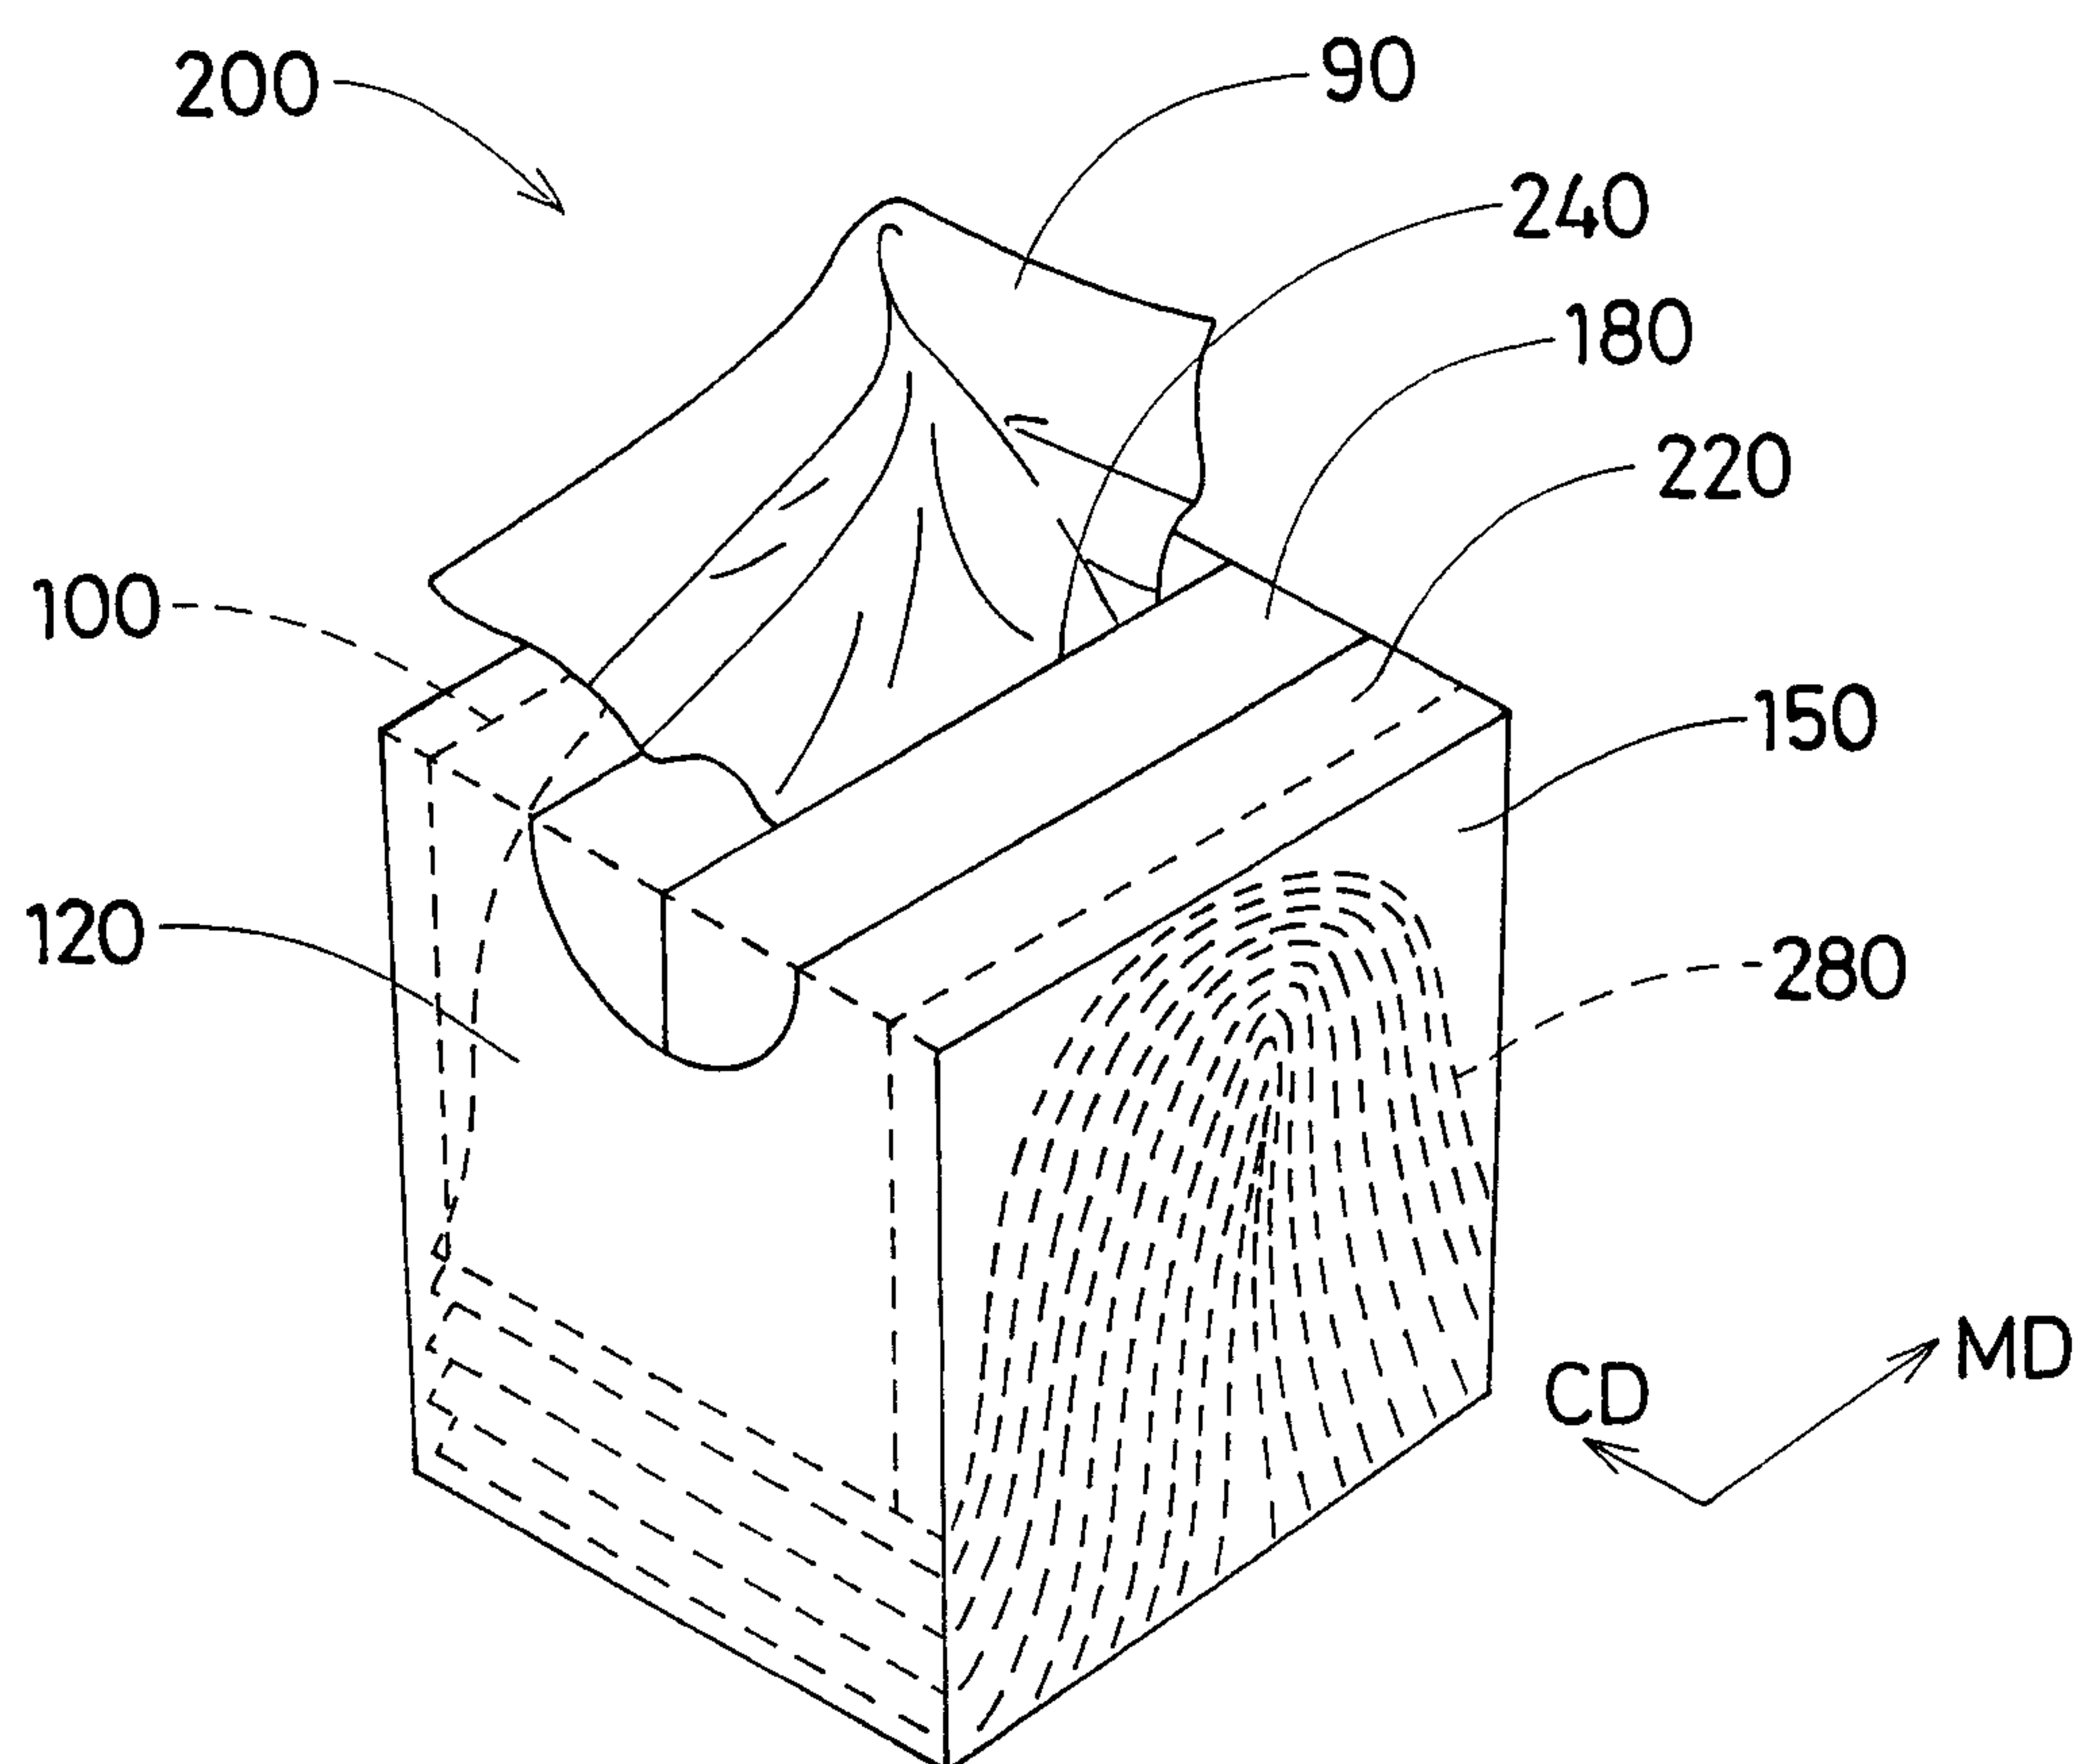


FIG. 3

