



(22) Date de dépôt/Filing Date: 2000/02/03

(41) Mise à la disp. pub./Open to Public Insp.: 2000/08/10

(45) Date de délivrance/Issue Date: 2015/08/18

(62) Demande originale/Original Application: 2 396 094

(30) Priorités/Priorities: 1999/02/03 (US60/118,668);
1999/05/28 (US09/322,852); 1999/05/28 (US09/322,457);
1999/05/28 (US09/322,455); 1999/05/28 (US09/322,965);
1999/05/28 (US09/322,962); 1999/05/28 (US09/322,643);
1999/05/28 (US09/322,459); 1999/05/28 (US09/322,207);
1999/05/28 (US09/322,964)

(51) Cl.Int./Int.Cl. *G06F 9/44* (2006.01),
G06F 3/0481 (2013.01)


(72) Inventeurs/Inventors:
HASHA, RICHARD, US;
PYLE, HARRY S., US

(73) Propriétaire/Owner:
GATES, WILLIAM H., III, US

(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : PROCEDE ET SYSTEME PERMETTANT DE GENERER UNE INTERFACE UTILISATEUR POUR DES UNITES REPARTIES

(54) Title: METHOD AND SYSTEM FOR GENERATING A USER INTERFACE FOR DISTRIBUTED DEVICES

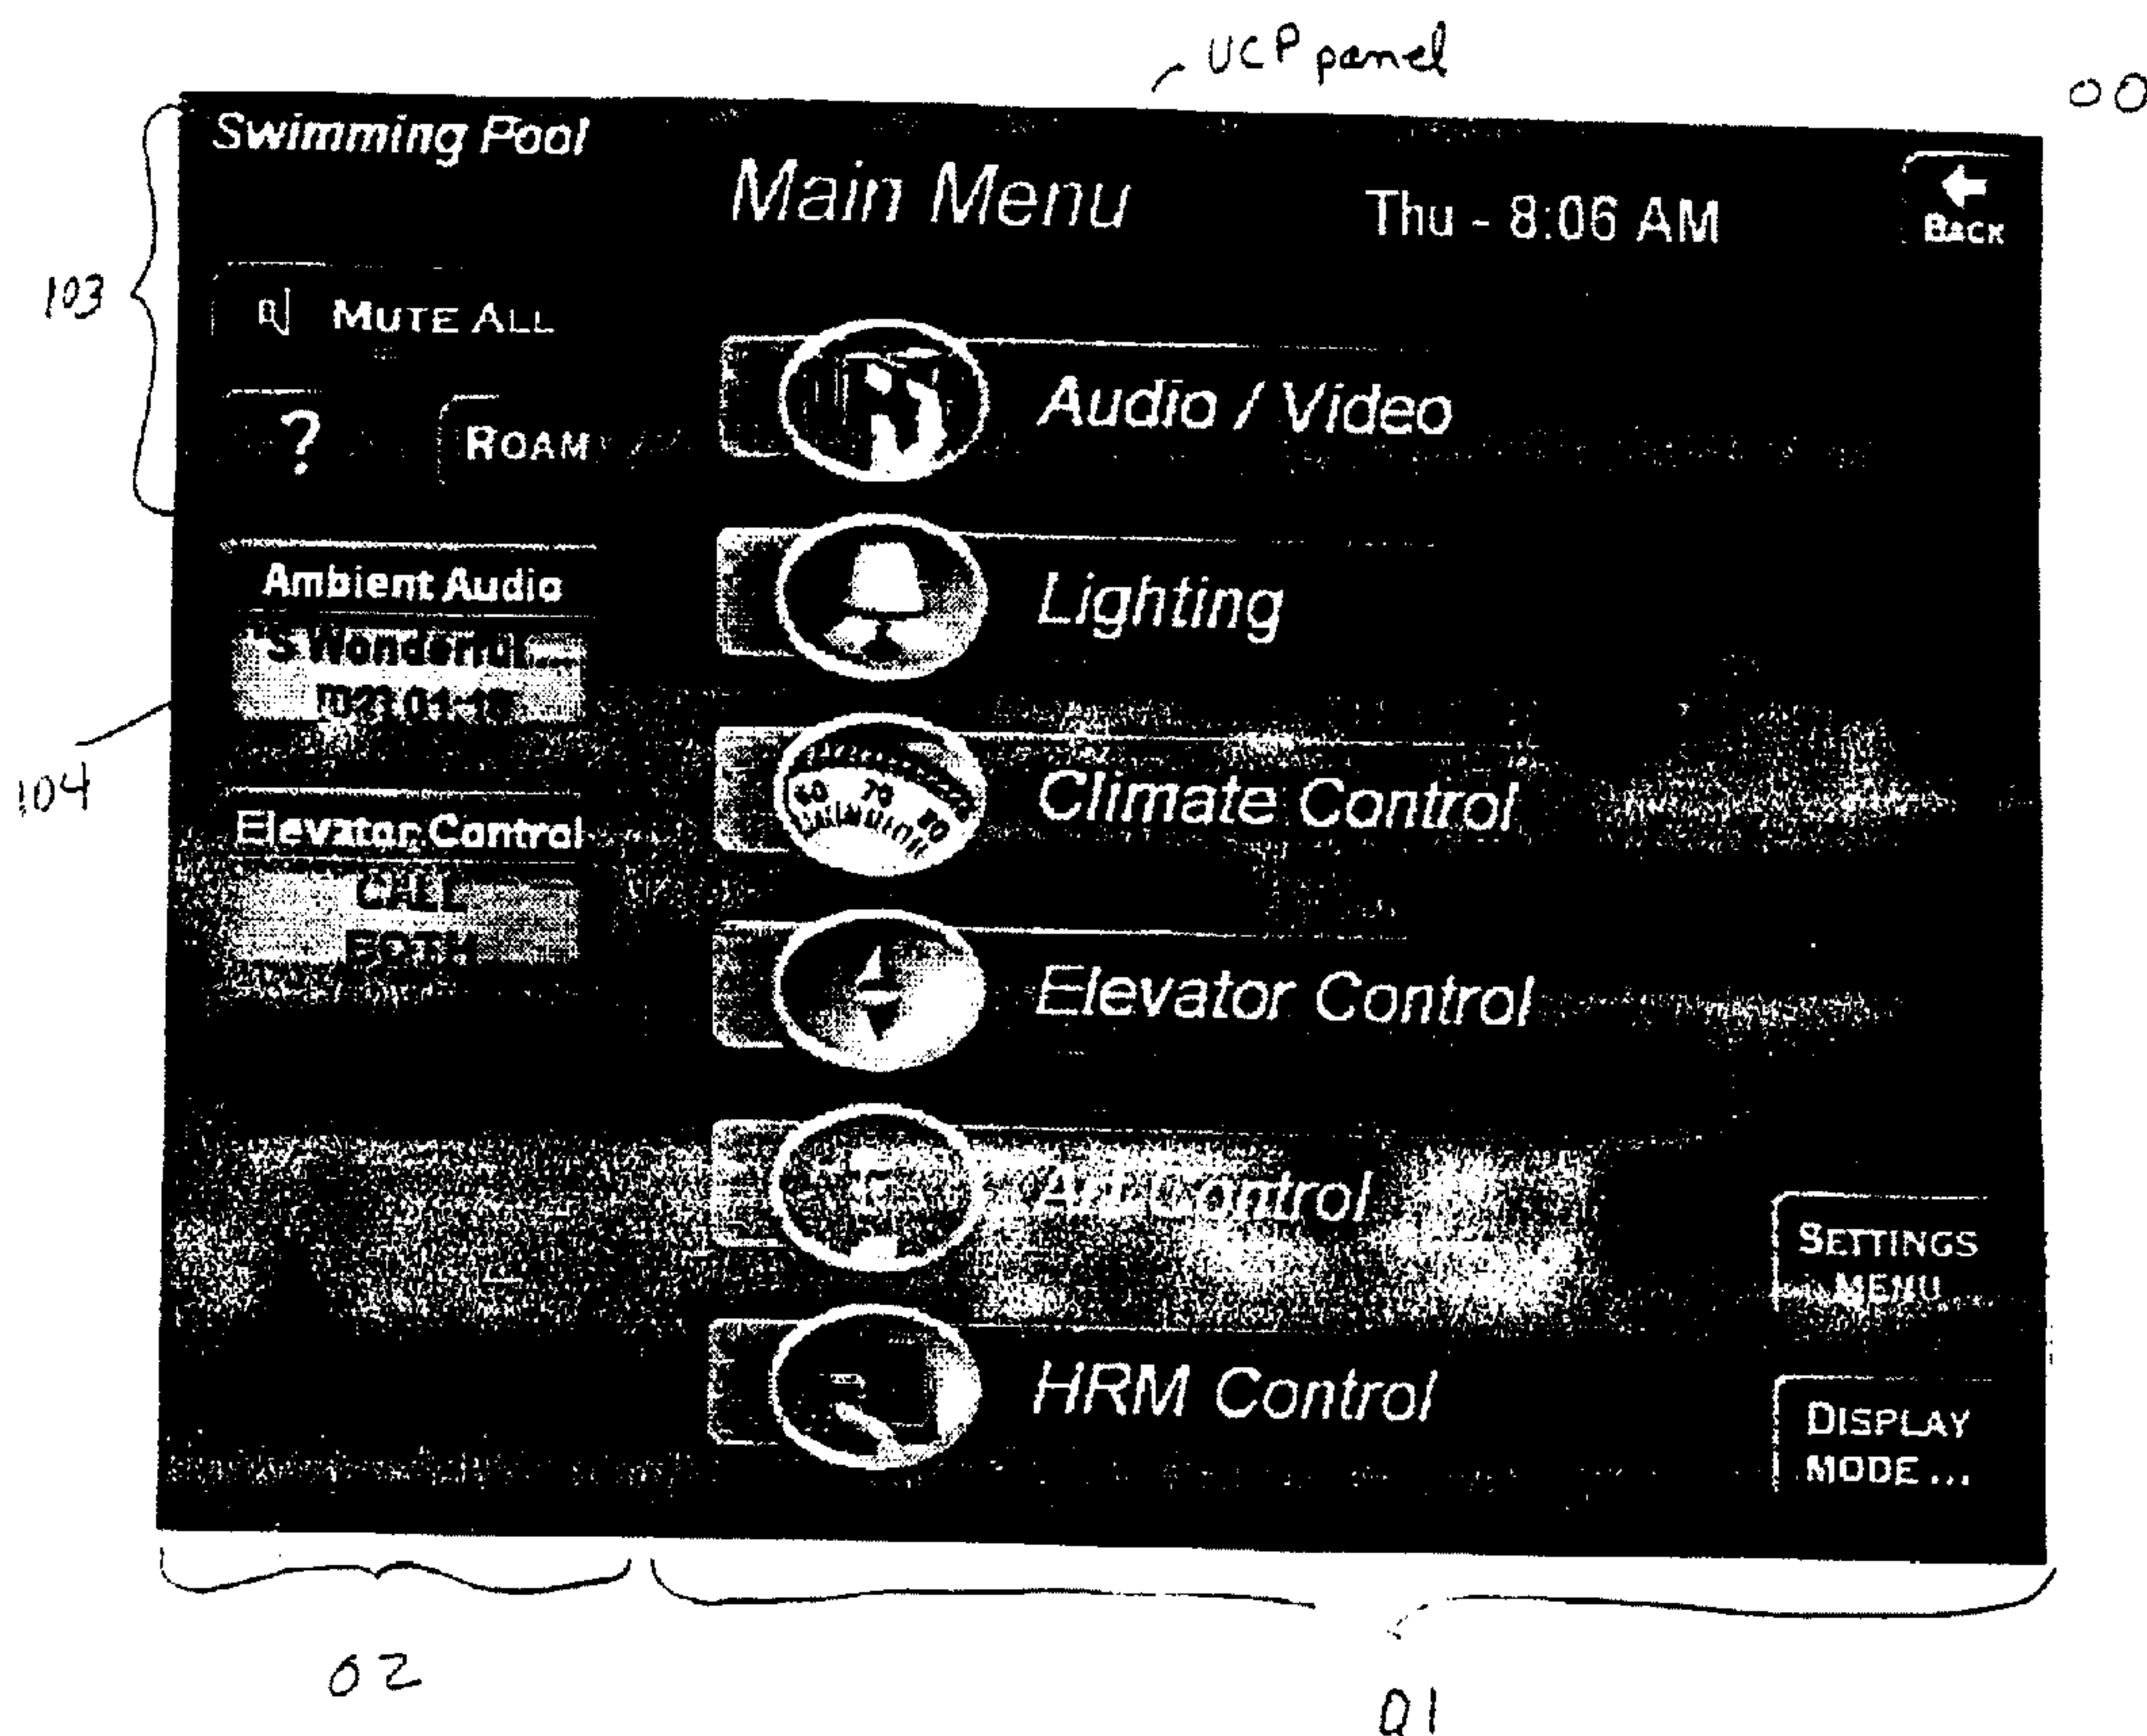

(57) Abrégé/Abstract:

A method and system for generating a user interface for controlling software components through a user control point device. The user interface system provides multiple software components that each can provide a user interface component. Each user

(57) **Abrégé(suite)/Abstract(continued):**

interface component provides a user interface for the corresponding software component. A user control point component requests each software component to provide its user interface component. The user control point component then displays an indication of each software component. In response to the selection of a software component, the user control point component requests the user interface component for that software component to display its user interface through the control point device. When a user interacts with that user interface, the user interface component notifies the corresponding software component of the interaction.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 August 2000 (10.08.2000)


PCT

(10) International Publication Number
WO 00/46657 A3

- (51) International Patent Classification⁷: G06F 9/44 (72) Inventors; and
(21) International Application Number: PCT/US00/03098 (75) Inventors/Applicants (for US only): HASHA, Richard [US/US]; #106, 210 Boylston Avenue East, Seattle, WA 98102 (US). PYLE, Harry, S. [US/US]; 12721 S.E. 25th Place, Bellevue, WA 98005 (US).
(22) International Filing Date: 3 February 2000 (03.02.2000)
(25) Filing Language: English (74) Agents: BIERMAN, Ellen, M. et al.; Seed Intellectual Property Law Group PLLC, Suite 6300, 701 Fifth Avenue, Seattle, WA 98104-7092 (US).
(26) Publication Language: English
(30) Priority Data:
60/118,668 3 February 1999 (03.02.1999) US (81) Designated States (national): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
09/322,852 28 May 1999 (28.05.1999) US
09/322,964 28 May 1999 (28.05.1999) US
09/322,207 28 May 1999 (28.05.1999) US
09/322,459 28 May 1999 (28.05.1999) US
09/322,643 28 May 1999 (28.05.1999) US
09/322,965 28 May 1999 (28.05.1999) US
09/322,962 28 May 1999 (28.05.1999) US
09/322,455 28 May 1999 (28.05.1999) US (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
09/322,457 28 May 1999 (28.05.1999) US
(71) Applicant (for all designated States except US): GATES, William, H., III [US/US]; P.O. Box 514, Medina, WA 98039 (US).

[Continued on next page]

(54) Title: METHOD AND SYSTEM FOR GENERATING A USER INTERFACE FOR DISTRIBUTED DEVICES

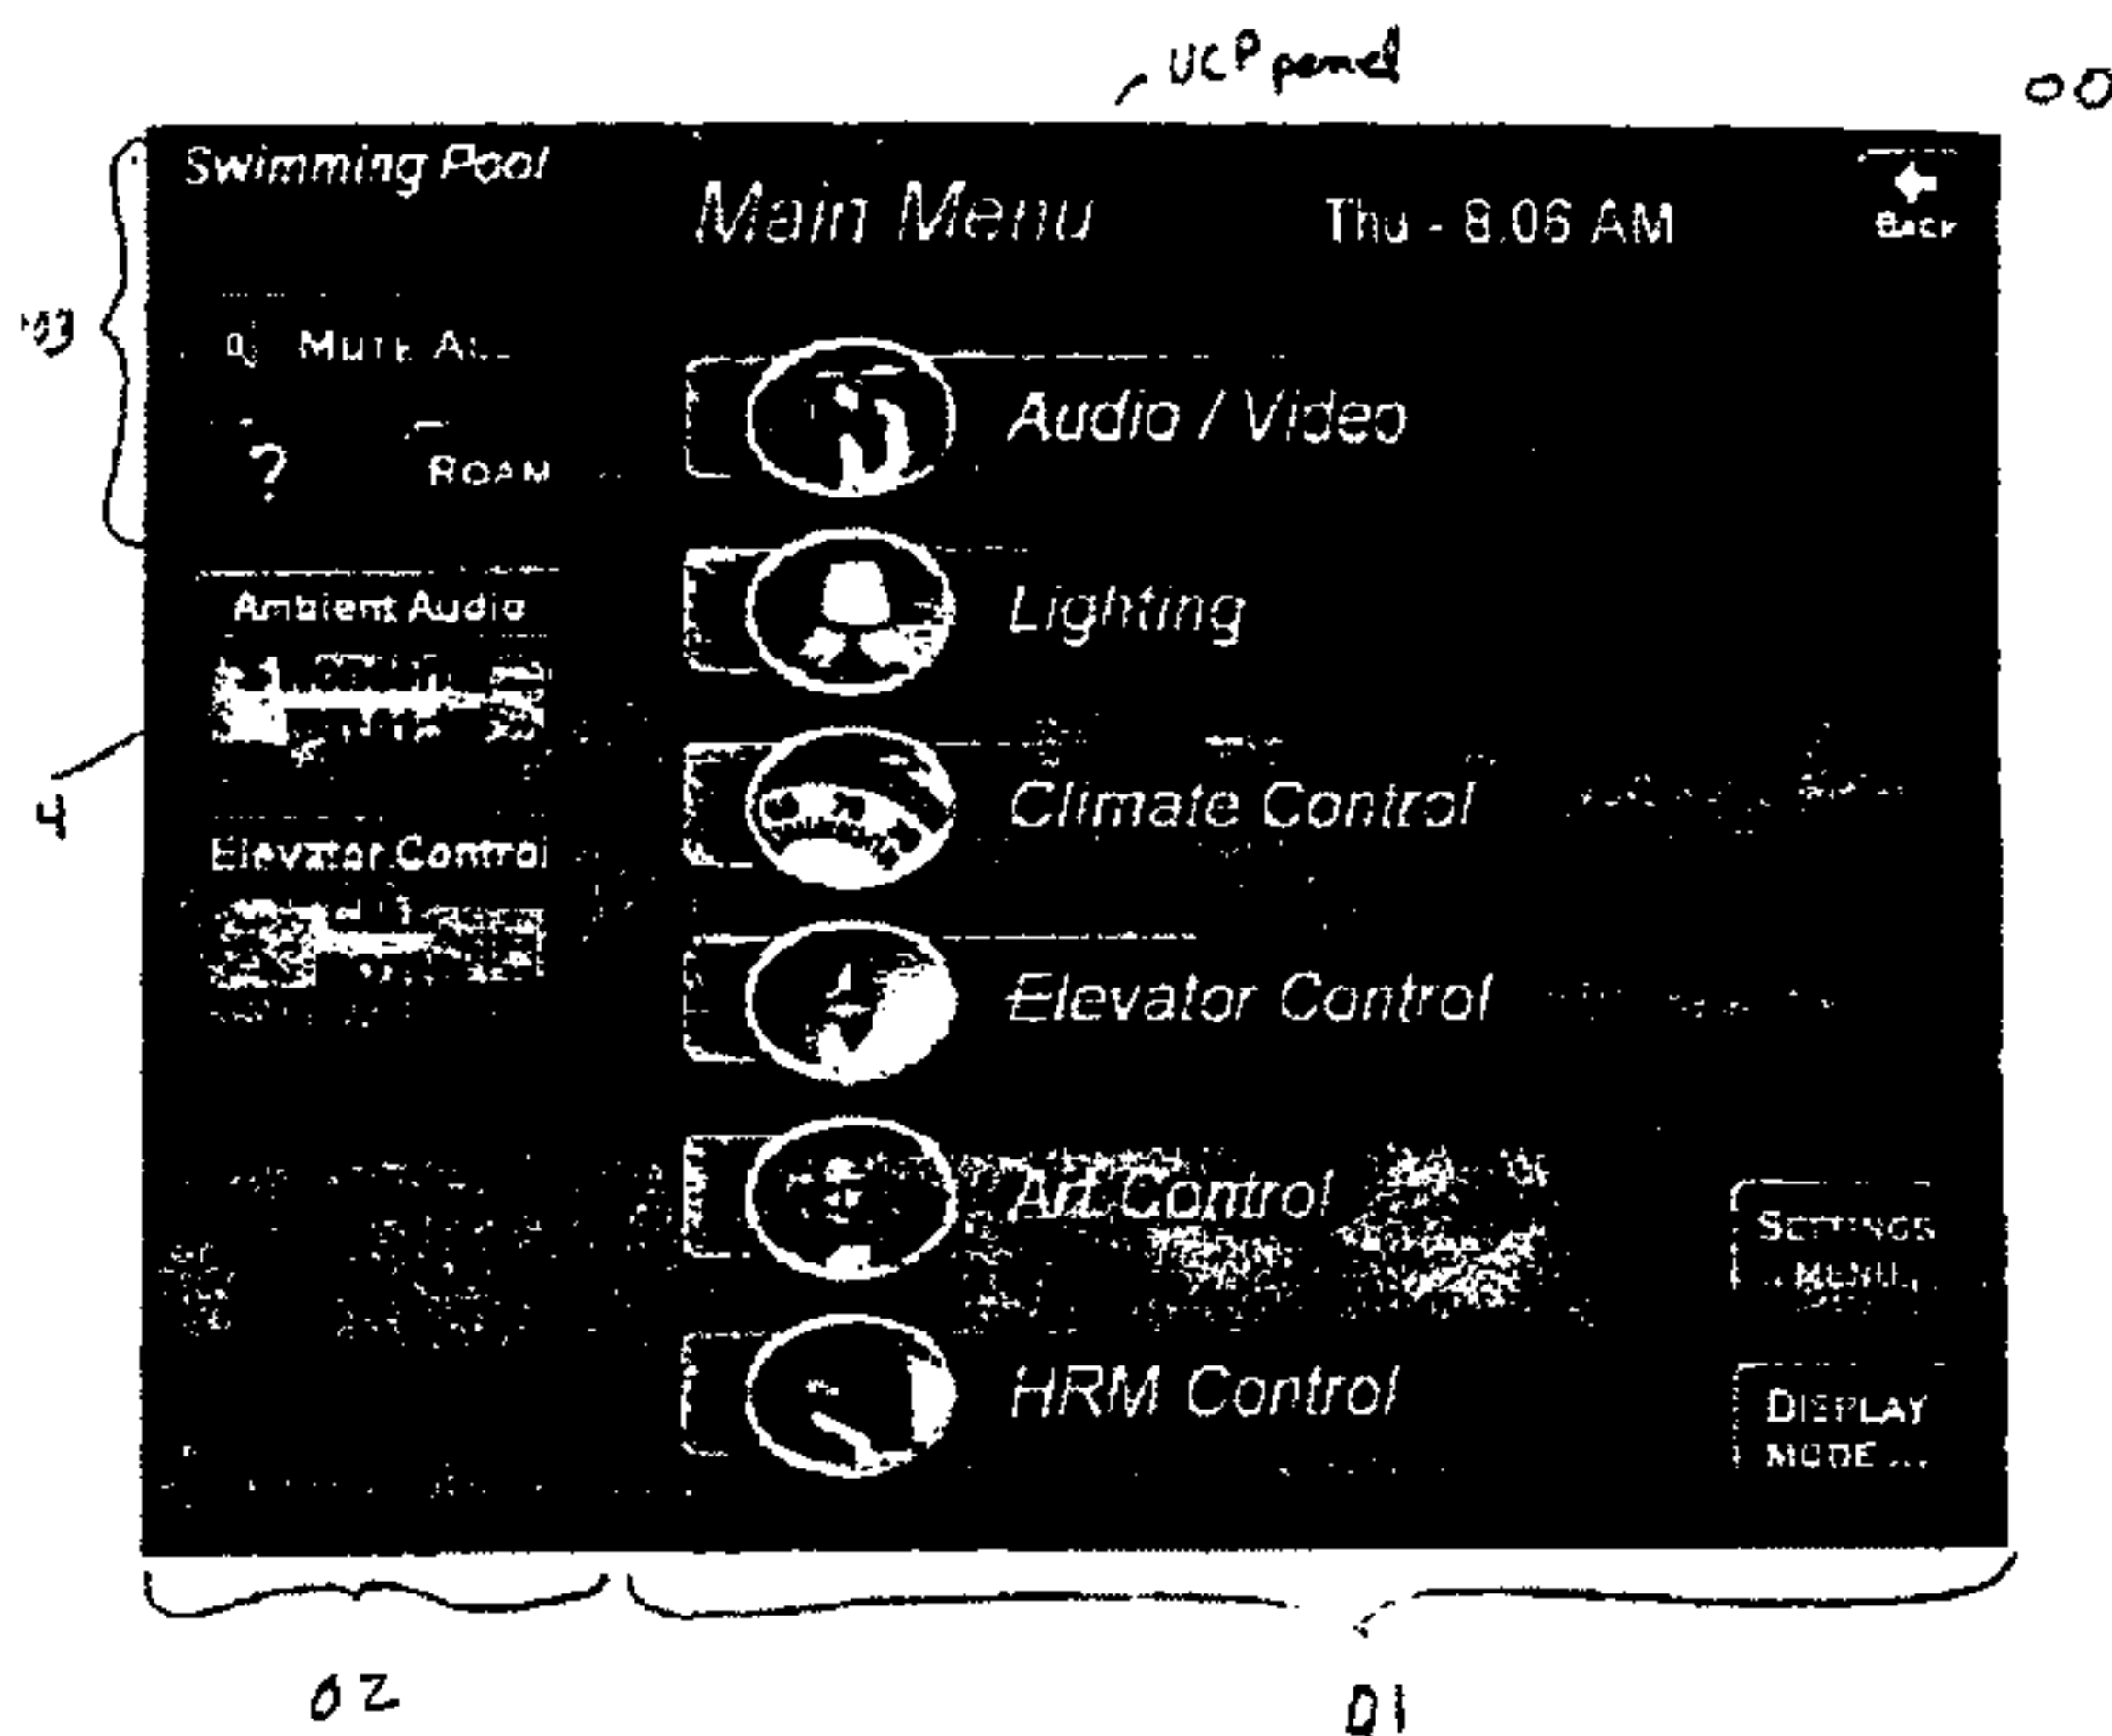

(57) Abstract: A method and system for generating a user interface for controlling software components through a user control point device. The user interface system provides multiple software components that each can provide a user interface component. Each user interface component provides a user interface for the corresponding software component. A user control point component requests each software component to provide its user interface component. The user control point component then displays an indication of each software component. In response to the selection of a software component, the user control point component requests the user interface component for that software component to display its user interface through the control point device. When a user interacts with that user interface, the user interface component notifies the corresponding software component of the interaction.

WO 00/46657 A3

WO 00/46657 A3



Published:

— *With international search report.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:

28 December 2000

WO 00/46657

PCT/US00/03098

METHOD AND SYSTEM FOR GENERATING A USER INTERFACE FOR DISTRIBUTED DEVICES

TECHNICAL FIELD

The present invention relates generally to a computer system for generating
5 user interfaces and, more particularly, to a system that generates a user interface for
controlling distributed devices.

BACKGROUND

A large environment, such as a large building, a factory, or a large house, may
have hundreds and thousands of devices that control various systems within the
10 environment. These systems may include lighting systems, heating systems, elevators, and
various electronic systems (*e.g.*, monitors, cameras, and CD players). In such large
environments, the controlling of the devices can be cumbersome. Each device may provide
a control panel through which the device can be controlled. For example, a CD player may
have a control panel on it for controlling the device to eject the CDs, to pause the CD, and
15 so on. These devices may also provide an electronic interface through which the device can
be controlled by a computer. A computer that is connected to the electronic interface may
provide a user interface through which a user can control the device. These devices may be
connected to a communications channel, such as a serial link, so that a central computer can
control the devices. The connections to the communications channel may be direct when
20 the device has an embedded interface to the communications channel or may be indirect by
being connected to a computer system that is then connected to the communications
channel. To control the devices from a central location, a user interface for each device
needs to be developed for the computer at the central location. The development of the user
interfaces for controlling these devices from a remote location can be expensive and time-
25 consuming. Moreover, whenever new devices are added to the environment, new user
interfaces also need to be developed so that the new devices can be controlled remotely.

In certain environments, such as a large house, it may be desirable to remotely
control the devices from various locations rather than at a central location. In addition, it
may be desirable to allow control of only certain devices from each location so that the user

interface can be customized to the devices that can be controlled. For example, within a media room it may be desirable to control all the devices within that room and to control certain devices (*e.g.*, lights) in adjacent rooms. The use of the same user interface, which is intended for controlling all the devices in an environment from a central location, would be
5 cumbersome if used at multiple locations where it is only desired to control certain devices. For example, it would be cumbersome to have a user interface for controlling all devices within a large building, when only one type of device (*e.g.*, a light switch) should logically be controlled from that location.

SUMMARY

10 A method and system for generating a user interface for controlling software components through a user control point device is provided. The user interface system provides multiple software components that each can provide a user interface component. Each user interface component provides a user interface for the corresponding software component. A user control point component requests each software component to provide
15 its user interface component. The user control point component then displays an indication of each software component. In response to the selection of a software component, the user control point component requests the user interface component for that software component to display its user interface through the control point device. When a user interacts with that user interface, the user interface component notifies the corresponding software component
20 of the interaction. The user control point component may have an associated space (*e.g.*, room within a house). The user control point component may identify each software component associated with that space and provide a user interface for the software components through their user interface components. In addition, a software component may provide a user interface component to more than one user control point component. In
25 this way, multiple users can be controlling the software component simultaneously through different user control point devices. In one embodiment, the user interface component that is provided by a software component is customized to a combination of the user control point device and the particular software component that is requesting the user interface component.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates the main display of the user control point device.

Figure 2 illustrates a display of the user control point device after the
5 audio/video button has been selected.

Figure 3 illustrates a display of the user control point device after the music
album selector button has been selected.

Figure 4 illustrates a display of a user control point device after a user has
selected a particular music album.

10 Figure 5 illustrates a display of a user control point device after a particular
album has been selected to play in the ambient audio component.

Figure 6 illustrates a display of a user control point device when a user has
selected to roam to another space.

Figure 7 is a block diagram illustrating the architecture of computer systems
15 and the associated components in one embodiment.

Figure 8 is a block diagram of modules of the user interface system in one
embodiment.

Figure 9 is a block diagram illustrating certain modules of the user interface
system.

20 Figure 10 is a block diagram illustrating more detailed modules of the user
interface system.

Figure 11 is a flow diagram of a user control point activated function.

Figure 12 is a flow diagram illustrating processing performed when the user control point receives an indication that its corresponding space object is up.

Figure 13 is a flow diagram illustrating processing performed when the resource user control object for the space object is activated.

5 Figure 14 is a flow diagram illustrating processing performed when a resource user control object for a space object receives an indication that a spatial service object is up.

Figure 15 is a flow diagram illustrating processing performed when a resource user control object for spatial service object is activated.

10 Figure 16 is a flow diagram illustrating processing performed when menu item is added to the main menu.

Figure 17 is a flow diagram illustrating processing when an event is received at the main menu.

15 Figure 18 is a flow diagram illustrating processing when a button object receives an event.

Figure 19 is a flow diagram illustrating processing when a panel for an ambient audio spatial service receives a user interface event.

DETAILED DESCRIPTION

20 A method and system for generating a user interface for controlling components through a user control point device, such as a touch panel display, is provided. The term “component” refers to any hardware or software entity that can be controlled. A hardware component may be a device such as a CD player, and a software component may be a computer routine, object, thread, process, and so on. A software component may serve to control a hardware component. For example, a software component may serve as a

programmatic interface to a CD player. In one embodiment, the user interface system identifies the software components that can be controlled through a user control point (“UCP”) device. For example, if a UCP device is located within a certain room in a house, then the user interface system may allow the UCP device to only control those software
5 components that, in turn, control those hardware components related to that room or adjacent rooms. The user interface system provides a UCP component, which is also a software component, for each UCP device. The UCP component controls the overall user interface of the UCP device and may identify the software components that are accessible from the UCP device. Each software component may have one or more corresponding user
10 interface components, which are also software components, or may have no user interface component. A user interface component provides a user interface for a UCP device and controls the corresponding software component. A software component may receive commands from its user interface component and perform the commands itself or forward those commands to a hardware component that it may control. Each software component
15 may provide a user interface component when requested by a UCP component or other software component. The UCP component can use the user interface components to generate a user interface for the software components that it controls. These user interface components can be tailored to the specific software component and the UCP device.

The user interface system may allow a single software component to be
20 controlled simultaneously from multiple UCP devices. For example, the volume of background music, or ambient audio, that is played throughout an environment may be controllable by each UCP device within that environment. The user interface system allows the user interface at several UCP devices to reflect the current state of the corresponding software component, which may in turn reflect the state of a hardware component. For
25 example, when a certain volume level for the ambient audio is selected at one UCP device, the user interfaces of the other UCP devices are updated to reflect the current volume level. The user interface system uses a property notification mechanism to ensure that each user interface component is aware of the current state of its corresponding software component.

The user interface system also allows user interfaces to be defined for subcomponents of a software component. For example, a software component corresponding to an entertainment center may have subcomponents corresponding to a television, CD player, and sound system within the entertainment center. Each subcomponent may provide a corresponding user interface component, which can be aggregated into the user interface for the software component corresponding to the entertainment center. Thus, the user interfaces provided at a UCP device and the corresponding user interface components are effectively nested. Also, since user interface components and UCP components are both software components, they may themselves provide user interface components where appropriate.

Figures 1-6 illustrate sample user interfaces of a touch panel UCP device. Figure 1 illustrates the main display of the user control point ("UCP") device. The display indicates that the UCP device is currently configured to control components associated with the swimming pool area within a house. The areas within an environment are referred to as spaces. For example, the swimming pool area and the living room within a house are each considered a space. The display 100 includes a main portion 101, a bulletin portion 102, and a title portion 103. The main portion of the display contains a menu item implemented as a button for various components associated with the current space. In this example, the components relate to audio/video, lighting, climate control, elevator control, art control, and high-resolution monitor control, which each has a corresponding button on the main portion. When a user selects one of the buttons, the user interface for the corresponding software component is provided by a user interface component for that software component. The bulletin portion contains various status buttons that can be selected to directly interact with a certain component or subcomponent. In this example, the ambient audio bulletin button 104 indicates that a certain song is currently being played as ambient audio. When a user selects the ambient audio bulletin button, the user interface for controlling ambient audio as provided by the user interface component for the corresponding software component is displayed. The title portion indicates that the UCP device is displaying information for the swimming pool space and that the main portion contains the main menu for the UCP. The

title portion also contains a roam button that allows a user to specify that this UCP device is to display the user interface for controlling another space.

Figure 2 illustrates a display of the UCP device after the audio/video button has been selected. The main portion has been changed to reflect options relating to
5 controlling audio/video. The user interface for controlling audio/video is provided by the user interface component for the audio/video software component. The main portion contains various program selector buttons for controlling various programs. An audio/video program may be a movie, a television channel, a music album, and so on. The main portion also contains various control center buttons for controlling various control center
10 components within the current space. A control center software component may correspond to an entertainment center, an ambient audio hardware component, or other hardware component within the space.

Figure 3 illustrates a display of the UCP device after the music album selector button has been selected. The main portion has been changed to reflect the list of available
15 music albums. The user interface component for the audio/visual software component controls the display of this user interface. The various controls of the main portion allow the user to select an available album and to direct the music to a hardware component, such as the ambient audio component.

Figure 4 illustrates a display of a UCP device after a user has selected a
20 particular music album. In this example, the user interface displays a list of options available for that album in a pop-up window. If the user selects to play the album now, then the album output is directed to the ambient audio hardware component.

Figure 5 illustrates a display of a UCP device after the ambient audio has been selected. The ambient audio can be selected either from the main portion of Figure 2, from
25 the bulletin portion of any of the figures, or from the Play Now button of Figure 4. The main portion contains a user interface for controlling the ambient audio. In this example, the main portion indicates that a certain music album is currently being directed to the

ambient audio hardware component. The displayed user interface allows the user to adjust the characteristics of the ambient audio such as increasing the volume, pausing, selecting another track, and so on.

Figure 6 illustrates a display of a UCP device when a user has selected to
5 roam. The user selected the roam button of the bulletin portion to display this user interface. In response, a pop-up window is displayed that lists the various spaces that can be controlled from this UCP device. If the user selects the garden room, then the UCP component will identify the components associated with the garden room and display the appropriate user interface.

10 Figure 7 is a block diagram illustrating an architecture of computer systems and associated hardware components in one embodiment. The computer systems 701, 703, 705 are interconnected via a communications channel 708. Each computer system may be connected to one or more hardware component, such as a CD library 702, a UCP device 704, and entertainment centers 706-707. These computer systems may be stand-alone
15 computers with interfaces to the component or may be computer systems that are integrated within the component. The communications between these computer systems may be based on technology described in the U.S. Patent Application "Method and System for Tracking Software Components." A "tracking reference" is a reference that identifies a software component and can be used to request that the availability of a software component be
20 tracked. A software component that requests that another software component be tracked may be notified when the tracked software component becomes available and unavailable. When a software component becomes available, a "behavioral reference" can be retrieved and used to access the behavior of the software component so long as the software component stays available. For example, a tracking reference may be the name of a
25 software component, and a behavioral reference may be a pointer to a software component. The computer systems may include a central processing unit, memory, and input/output devices. The software components of the user interface system may be implemented as computer programs that execute on these computer systems. The computer programs and associated data structures may be stored on computer-readable medium, such as memory,

disk, and CD-ROM, or transmitted through a computer-readable transmission medium, such as the Internet.

Figure 8 is a block diagram of software components of the user interface system in one embodiment. In this embodiment, the software components correspond to objects in the object-oriented sense and are sometimes referred to as “resources”. The software components of the user interface system include a UCP object 801, space objects 802 and 806, and spatial service objects 803-805. The UCP object includes a space resource user control (“RUC”) object 807 and spatial service RUC objects 808-810. The UCP object points to the space object that includes a list of the spatial services (*e.g.*, software components) within the space that can be currently controlled by the user. In this example, the UCP object is associated with the swimming pool space and may display a user interface similar to that as shown in Figures 1-6. A spatial service is a behavior associated with a space. The behavior may be the controlling of a hardware component (*e.g.*, CD player) or may be an aggregation of other spatial services (*e.g.*, audio/visual software component). A software component as described above provides a spatial service. In this example, the audio/video, lighting, and high-resolution monitor control spatial services are nested within the swimming pool space.

The user interface system instantiates a UCP object for each UCP device. The UCP object may identify its corresponding space from configuration information and establishes a tracking reference to the space object for the corresponding space. The identity of the corresponding space can be obtained from any number of places including, but not limited to, a registry system whose information can be either manually entered or automatically established from user preferences. Each space object and spatial services object can provide a RUC object (that is, a type of user interface component) for controlling a user interface associated with the particular space or spatial service object.

In one embodiment, the space and spatial service objects provide the identifier of their corresponding RUC objects when requested or may provide the actual RUC objects themselves. In another embodiment, the identifier of a corresponding RUC object may be

obtained from an external source such as configuration information for the space or spatial service object. The RUC objects may be customized to the particular UCP device and the particular user interface component in which they are nested. The combination of the UCP device type (*e.g.*, touch panel display) and embedding object type (*e.g.*, space) defines an environment in which the RUC object is to operate. Thus, when a space or spatial service object is requested to provide the identifier of their RUC object, it is passed the operating environment. Also, if the RUC identification is obtained from configuration information, it may be based on the operating environment. For example, the RUC object may be different depending on whether the UCP device is a touch panel device or a television remote control-type device.

Each RUC object is provided with a tracking reference to its corresponding space or spatial service object. The RUC object for a spatial service object registers to receive notifications of changes in state from its corresponding spatial service object. The RUC objects send commands to their spatial service objects to perform a behavior as requested by a user through the user interface.

Figure 9 is a block diagram illustrating the nesting of software components in the user interface system. In this example, the embedding object 901 is associated with a resource object 902. After the embedding object is instantiated, it requests 903 the resource object to provide the identifier of a RUC object that is appropriate for the type of UCP device and the type of embedding object of the RUC object. The identifier is returned 904 by the resource object. Once the embedding object receives the RUC object identifier, it instantiates a RUC port 905. The RUC port provides a mechanism through which a RUC object can interact with its embedding object. The embedding object then instantiates the RUC object 906. The RUC object is provided with a pointer to the RUC port of its embedding object along with a pointer to the resource object. The RUC object can then interact with its embedding object via the RUC port to display its user interface.

As the user interacts with the user interface, input events are sent to the RUC object. The RUC object can then notify the resource object to perform a certain command

to effect the desired behavior. For example, if the resource object corresponds to a video player, then the command may be to fast forward. The RUC object can also request the resource object to notify it of changes in the state of the object. For example, if a user presses the stop button on the video player itself, then a stop notification is sent to the RUC object from the resource object. The RUC object can then adjust its user interface to reflect the change in state of the resource object.

Since each RUC object has a tracking reference to its corresponding space or spatial service object, the RUC object can be notified when these objects become unavailable. The RUC object can then decide to either display the fact that its corresponding resource is not available and wait for notification that it is available, or the RUC object can destroy itself, causing it to disappear from its embedding object.

Figure 10 is a block diagram illustrating more detailed software components of the user interface system. These components include a UCP object 1001, a space object 1002, and spatial service objects 1003. When a UCP object is instantiated, it may identify the space with which it is associated from configuration information and retrieves a tracking reference to the space object corresponding to that space. When the UCP object is notified that the space object is available, it then requests the space object to provide the identifier of a RUC object for that space. When the UCP object receives the identifier, it instantiates a RUC object for that space. The RUC object is passed a pointer to a RUC port of the UCP object and a pointer to the space object. The space RUC object requests the space object to identify the spatial services that it provides. The space RUC object then retrieves a tracking reference to the spatial service objects. As the space RUC object is notified that each referenced spatial service object is available, it then retrieves a behavioral reference to the spatial service object and requests the spatial service object to provide the identifier of its RUC. The space RUC object then instantiates the RUC objects for the spatial service objects. These spatial service RUC objects are passed a pointer to the space RUC port of the space RUC object and a pointer to their corresponding spatial service objects. The spatial service object RUC objects interact with the space RUC object, via the space RUC port, to display their user interface. When the RUC objects receive events, they pass the

event as a command to the corresponding spatial service objects to perform the behavior corresponding to the event. For example, if the RUC object for a video player receives an event indicating that the user wants to fast forward, then it sends a fast forward command to the spatial service object for the video player. The spatial service object RUC objects also
5 receive notifications of change in state from the spatial service objects.

Figures 11-19 are flow diagrams illustrating the processing of the components of the user interface system in one embodiment. These flow diagrams illustrate the processing performed by the various functions of the objects of the user interface system.

Figure 11 is a flow diagram of a UCP activated function. This function is
10 invoked when the UCP object is instantiated. The UCP object may be instantiated as part of the initialization of a system for controlling devices. In step 1101, the function retrieves the configuration information for the UCP object. The configuration information includes the identification of the primary space for this UCP object and of the spaces to which it can roam. In step 1102, the function retrieves the name of the primary space. In step 1103, the
15 function gets a tracking reference to the space object corresponding to the primary space. In step 1104, the function creates a background window for the UCP device. This may be a window within the Microsoft Windows™ operating system that has functions for processing window events. This window is registered with the UCP environment, which uses it as the parent window for all subsequent windows within the user interface, and the function then
20 returns. The UCP environment provides the facility for creating all other windows within the UCP, tracking user activity, caching bitmap images used within the user interface, and identifying the current user of the user control point.

Figure 12 is a flow diagram illustrating processing performed when the UCP object receives an indication that its corresponding space object is up. The tracking of
25 object references is more fully described in the "Method and System for Tracking References to Objects." In step 1201, the function retrieves a pointer to the space object. In step 1202, the function invokes a function of the space object to retrieve the identifier of the RUC object for the space object. The function passes the environment parameter, which

indicates the type of UCP device and the type of RUC object container, here being that of a UCP, to the invoked function. In step 1203, the function creates a RUC port for the UCP object. In step 1204, the function creates a RUC object for the space based on the returned identifier. In step 1205, the function invokes a function to activate the RUC object for the
5 space object passing a pointer to the UCP RUC port and a pointer to the space object. The function then returns.

Figure 13 is a flow diagram illustrating processing performed when the RUC object for the space object is activated. This function is passed a pointer to a RUC port for the UCP object and a pointer to the space object. In step 1301, the function retrieves the list
10 of spatial services from the space object. In steps 1302-1304, the function loops selecting each spatial service and retrieving a tracking reference to each spatial service object. In step 1302, the function retrieves the next spatial service in the list. In step 1303, if all the spatial services have already been selected, then the function continues at step 1305, else the function continues at step 1304. In step 1304, the function gets a tracking reference to the
15 selected spatial service object and loops to step 1302 to select the next spatial service. In step 1305, the function registers a main menu panel. A panel is an object that may correspond to a window within the Microsoft Windows operating system and that has functions for processing window events. These windows are created using the UCP environment facility described for Figure 11. In step 1306, the function stacks the main
20 menu panel so that it is displayed and then the function returns. The RUC object for the space object maintains a list of all panels that have been registered with it by associated spatial service object RUC objects. It also maintains of stack of panels that have been displayed. The top panel in the stack corresponds to the panel currently being displayed. The "stacking" of a panel pushes it into the stack, and the "hiding" of a panel pops it from
25 the stack. The maintenance of the stack by each RUC object for the space object facilitates the implementation of a technique to back up to a previously displayed window.

Figure 14 is a flow diagram illustrating processing performed when a RUC object for a space object receives an indication that a spatial service object is up. In step 1401, the function gets a pointer to the spatial service object that has been reported as being

up. In step 1402, the function retrieves the identifier of the RUC object for the spatial service object. The function passes the environment parameter, which indicates the type of UCP device and the type of RUC object container, here being that of a space, to the invoked function. In step 1403, if a RUC port for the space object has already been created, then the
5 function continues at step 1405, else the function continues at step 1404. In step 1404, the function creates a RUC port for the space object. In step 1405, the function creates a RUC object based on the returned identifier. In step 1406, the function activates the RUC object passing a pointer to the RUC port of the space object and a pointer to the spatial service object and then returns.

10 Figure 15 is a flow diagram illustrating processing performed when a RUC object for a spatial service object is activated. In step 1501, the function registers its panel. In step 1502, the function creates a button object that describes a menu item that is to be displayed on the main menu for the space object. The button object includes information describing the menu item and an indication of the panel that is to be stacked or other
15 operation to be performed when the menu item is selected. In step 1503, the function adds the menu item to the main menu by invoking a function of the RUC port for the space, passing the button object as a parameter. In step 1504, the function registers with the spatial service object to receive notifications of changes in its state. The function then returns.

Figure 16 is a flow diagram illustrating processing performed when a menu
20 item is added to the main menu. This function is provided as part of the RUC port for the space object. In step 1601, the function creates a button control for the menu item. In step 1602, the function adds the created button control to the window. In step 1603, the function stores a mapping of the created button control to the passed pointer so that when the button control is selected, that event can be passed in the corresponding button object. The
25 function then returns.

Figure 17 is a flow diagram illustrating processing when an event is received at the main menu. In step 1701, if the event corresponds to the selecting of a button control, then the function continues at step 1702, else the function continues its normal processing.

In step 1702, the function identifies the button object corresponding to the button control that was selected. In step 1703, the function passes an indication of that event to the button object.

Figure 18 is a flow diagram illustrating processing when a button object
5 receives an event. In step 1801, the function stacks (and therefore displays) the panel associated with that button object and then returns.

Figure 19 is a flow diagram illustrating processing when a panel for an ambient audio spatial service receives a user interface event. The function decodes the event and sends the appropriate command to the spatial service object.

10 Although specific embodiments of, and examples of, the present invention are described herein for illustrative purposes, it is not intended that the invention be limited to these embodiments. Equivalent methods, structures, processes, steps, and other modifications within the spirit of the invention are within the scope of the invention. For example, a UCP device includes any devices through which information can be provided to
15 a user and received from the user. A UCP device may be a combination of a display device and keyboard (or mouse), speech synthesizer and voice recognizer, a device that resembles a television remote controller, any other user input/output device, any user input device, or any user output device. Multiple UCP devices can interface with a single spatial component to allow parallel control of the spatial services. Also, the techniques of the present invention
20 can be employed in environments that may or may not be spatially organized. Also, a UCP object may receive events relating to the corresponding space. For example, a lighting system may generate an "lights out" event when all lights within a space are turned off. When the UCP object receives such an event for its space, the UCP can take appropriate action, such as turning off the display light so that the space is entirely dark. A user
25 interface system may be implemented using the techniques and facilities described in U.S. Patent Application entitled "Method and System for Tracking Software Components." Accordingly, invention is not limited to these specific embodiments, but instead the scope of the invention specified by the following claims.

What is claimed is:

1. A method in a computer system for specifying a user interface, the method comprising:
 - providing an indication of a user control point device through which the user interface is to be provided; and
 - providing an indication of a software component through which the user interface is provided;
 - wherein different user interfaces are provided based on the combination of the provided indications.
2. The method of claim 1 wherein the software component contains at least one subcomponent, and identifying a user interface component for each subcomponent of a software component.
3. The method of claim 2 wherein more than one type of user interface component is provided.
4. The method of claim 1 wherein each user control point device has multiple spaces that each indicate the software components that the user control point device controls and wherein a current space is selected for the user control point device.
5. The method of claim 1 wherein the user interface that is provided is based on type of user control point and on a type of embedding component.
6. The method of claim 1 identifying a space whose software components are controlled by the user control point device.
7. A system in a computer system for specifying a user interface, the method comprising:
 - a memory having stored thereon computer instructions that, upon execution on a computing device, at least cause the system to:
 - provide an indication of a user control point device through which the user interface is to be provided; and
 - provide an indication of a software component through which the user interface is provided;
 - wherein different user interfaces are provided based on the combination of the provided indications.
8. The system of claim 7 wherein the software component contains at least one subcomponent, and identifying a user interface component for each subcomponent of a software component.

9. The system of claim 7 wherein more than one type of user interface component is provided.
10. The system of claim 7 wherein each user control point device has multiple spaces that each indicate the software components that the user control point device controls and wherein a current space is selected for the user control point device.
11. The system of claim 7 wherein the user interface that is provided is based on type of user control point and on type of embedding component.
12. The system of claim 7 identifying a space whose software components are controlled by the user control point device.


WO 00/46657

1 / 19

PCT/US00/03098

UCP panel

00

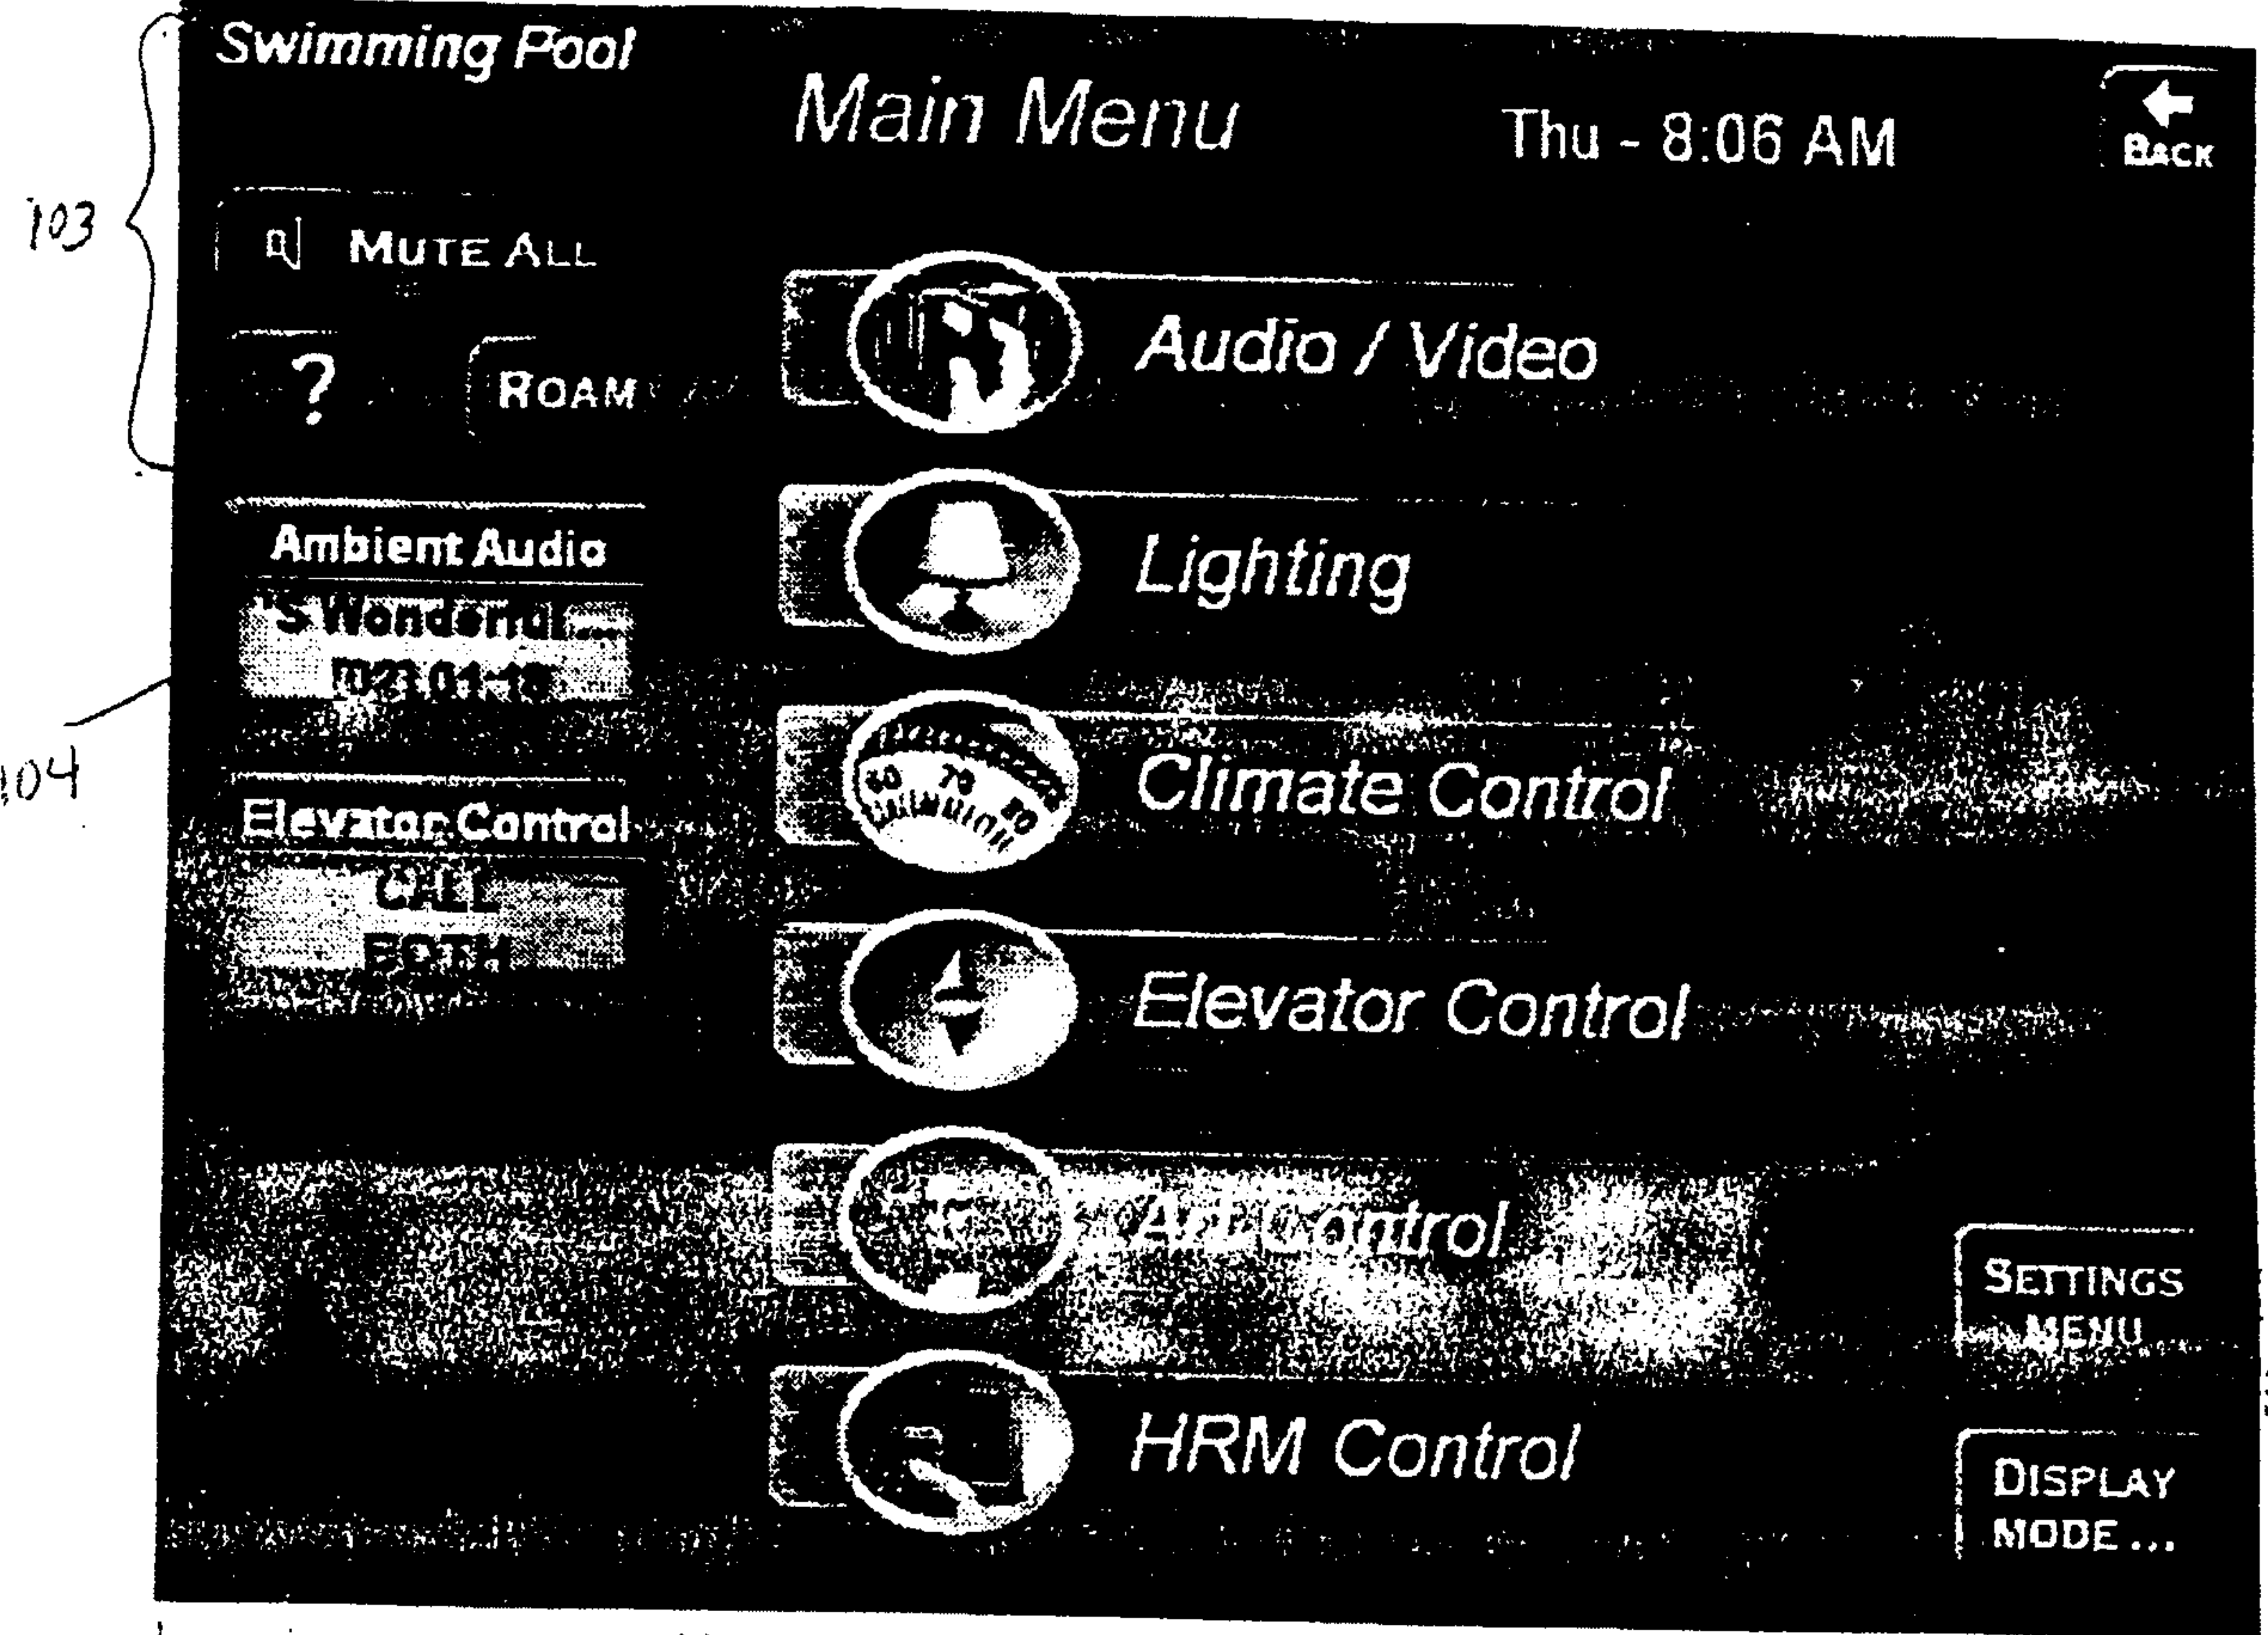

02


01

\$1

WO 00/46657

2 / 19

PCT/US00/03098

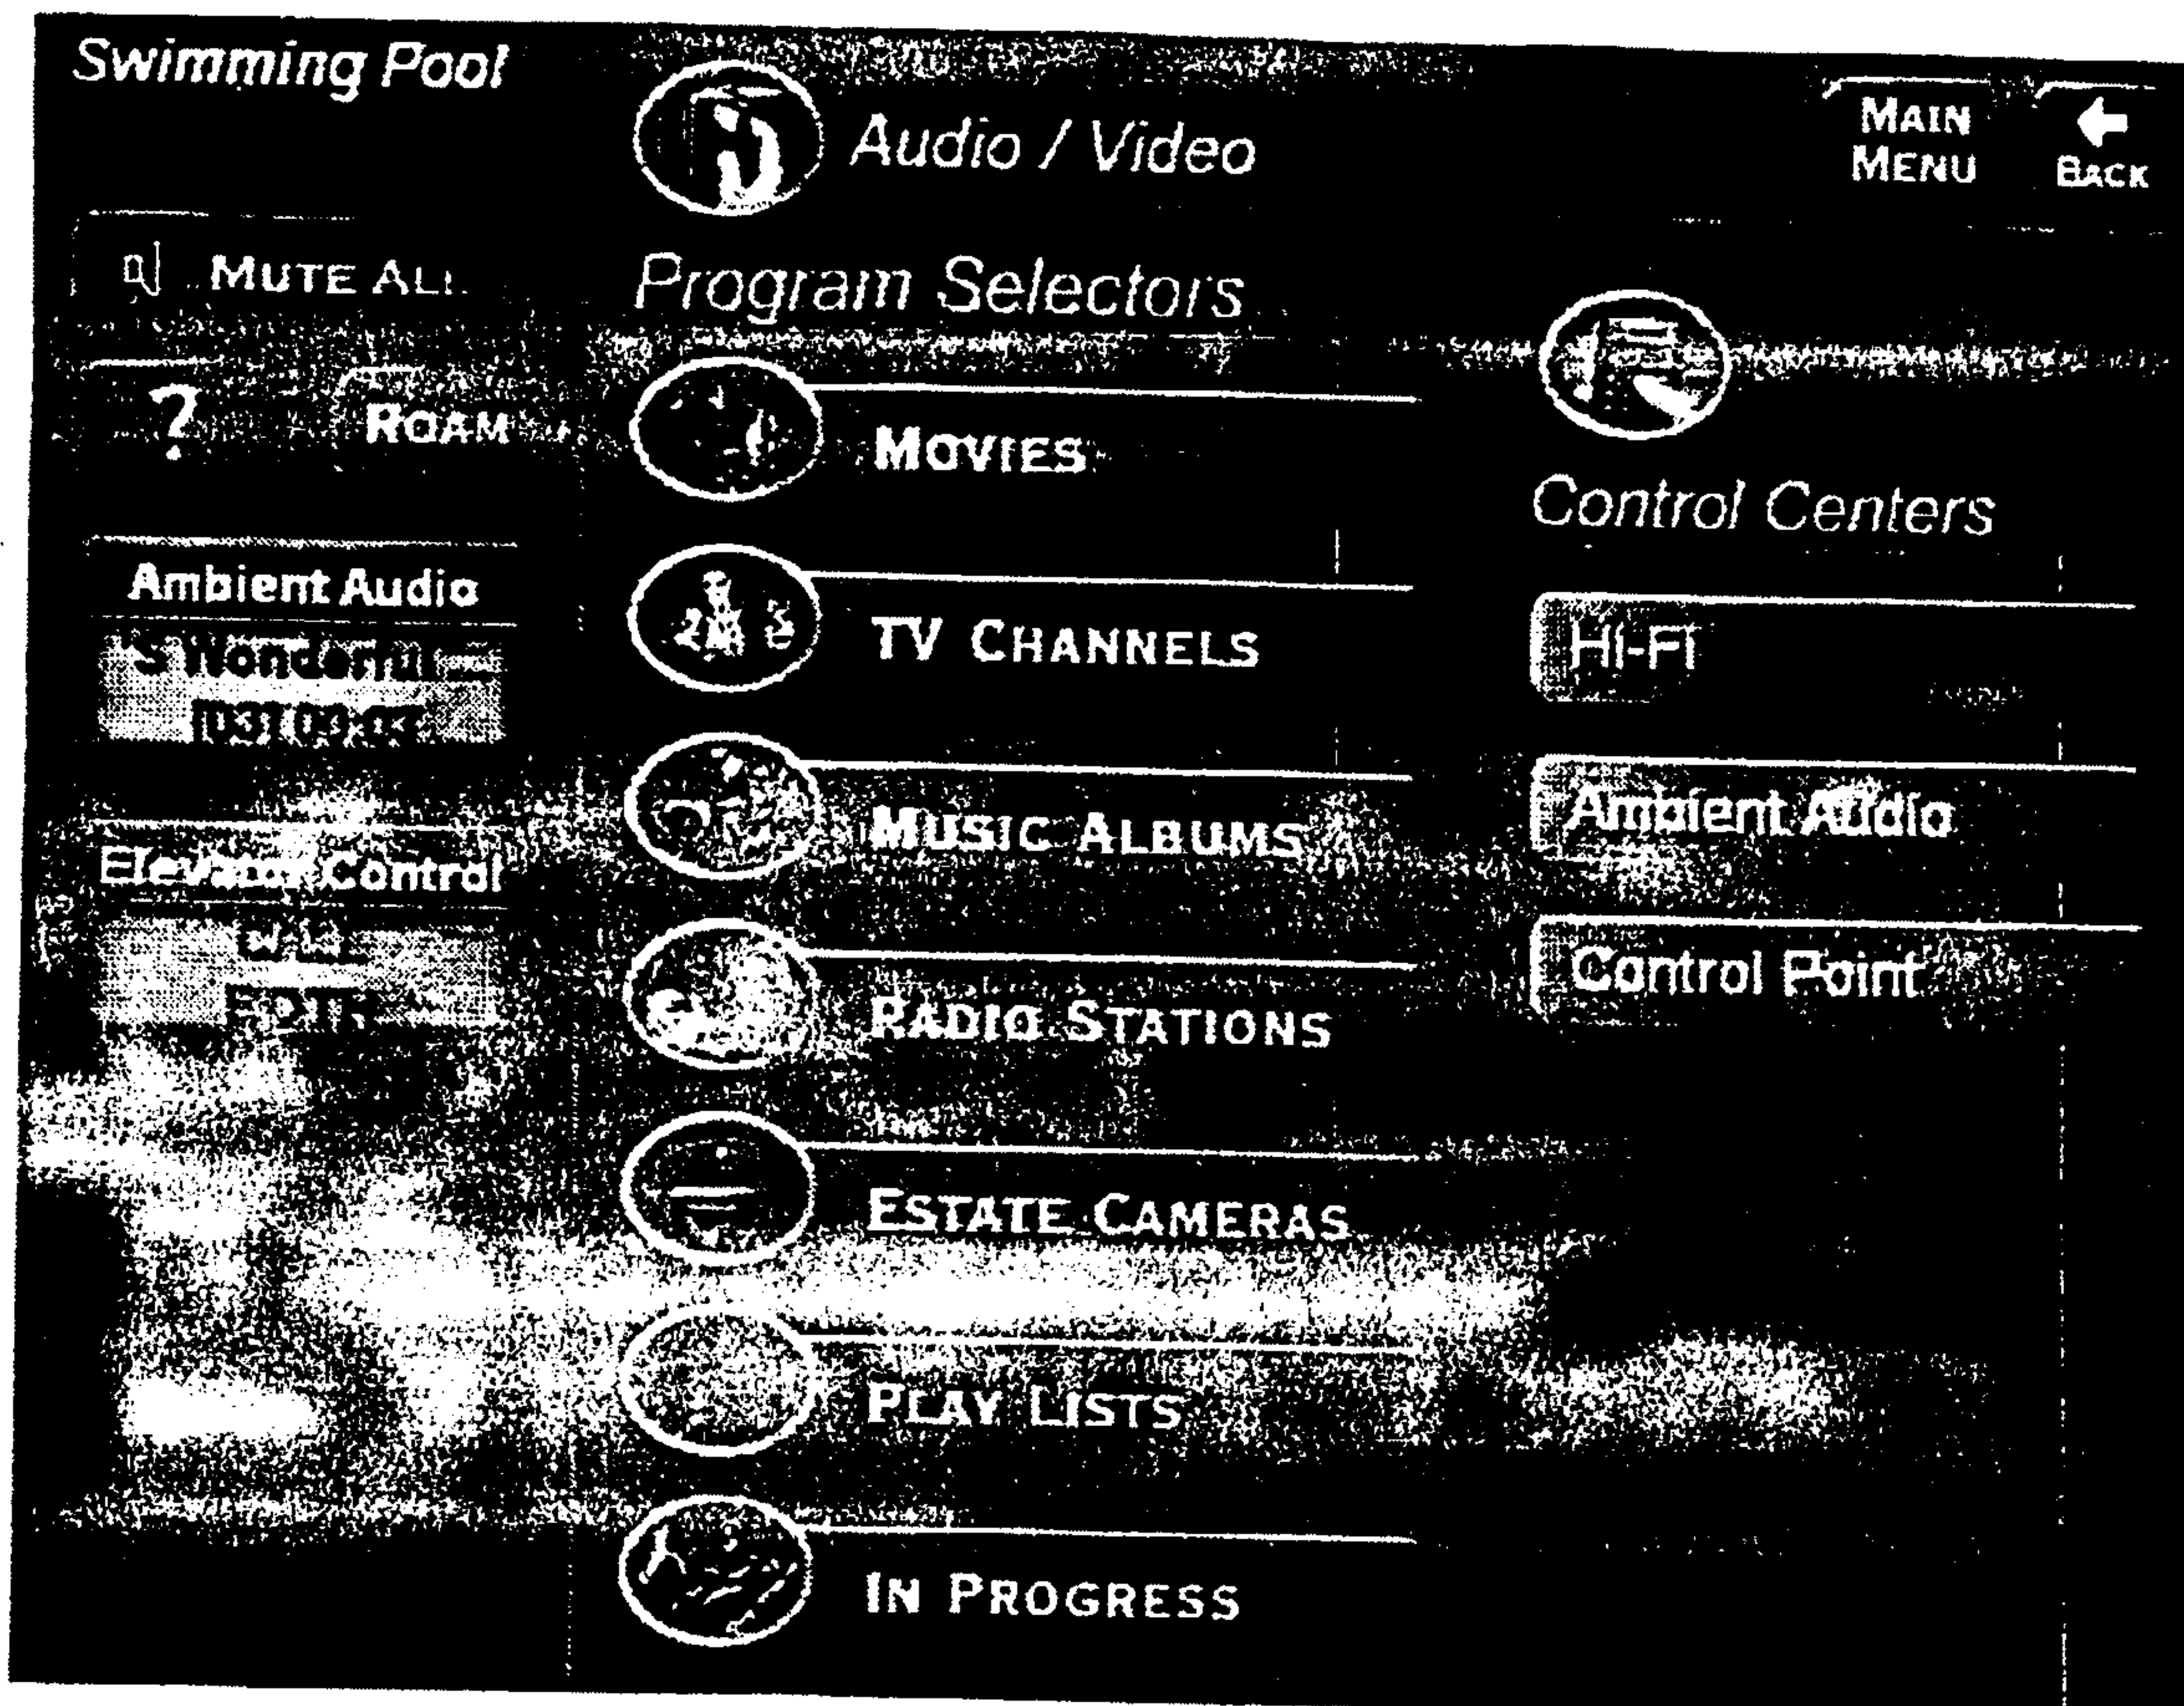


\$ 2

WO 00/46657

3 / 19

PCT/US00/03098

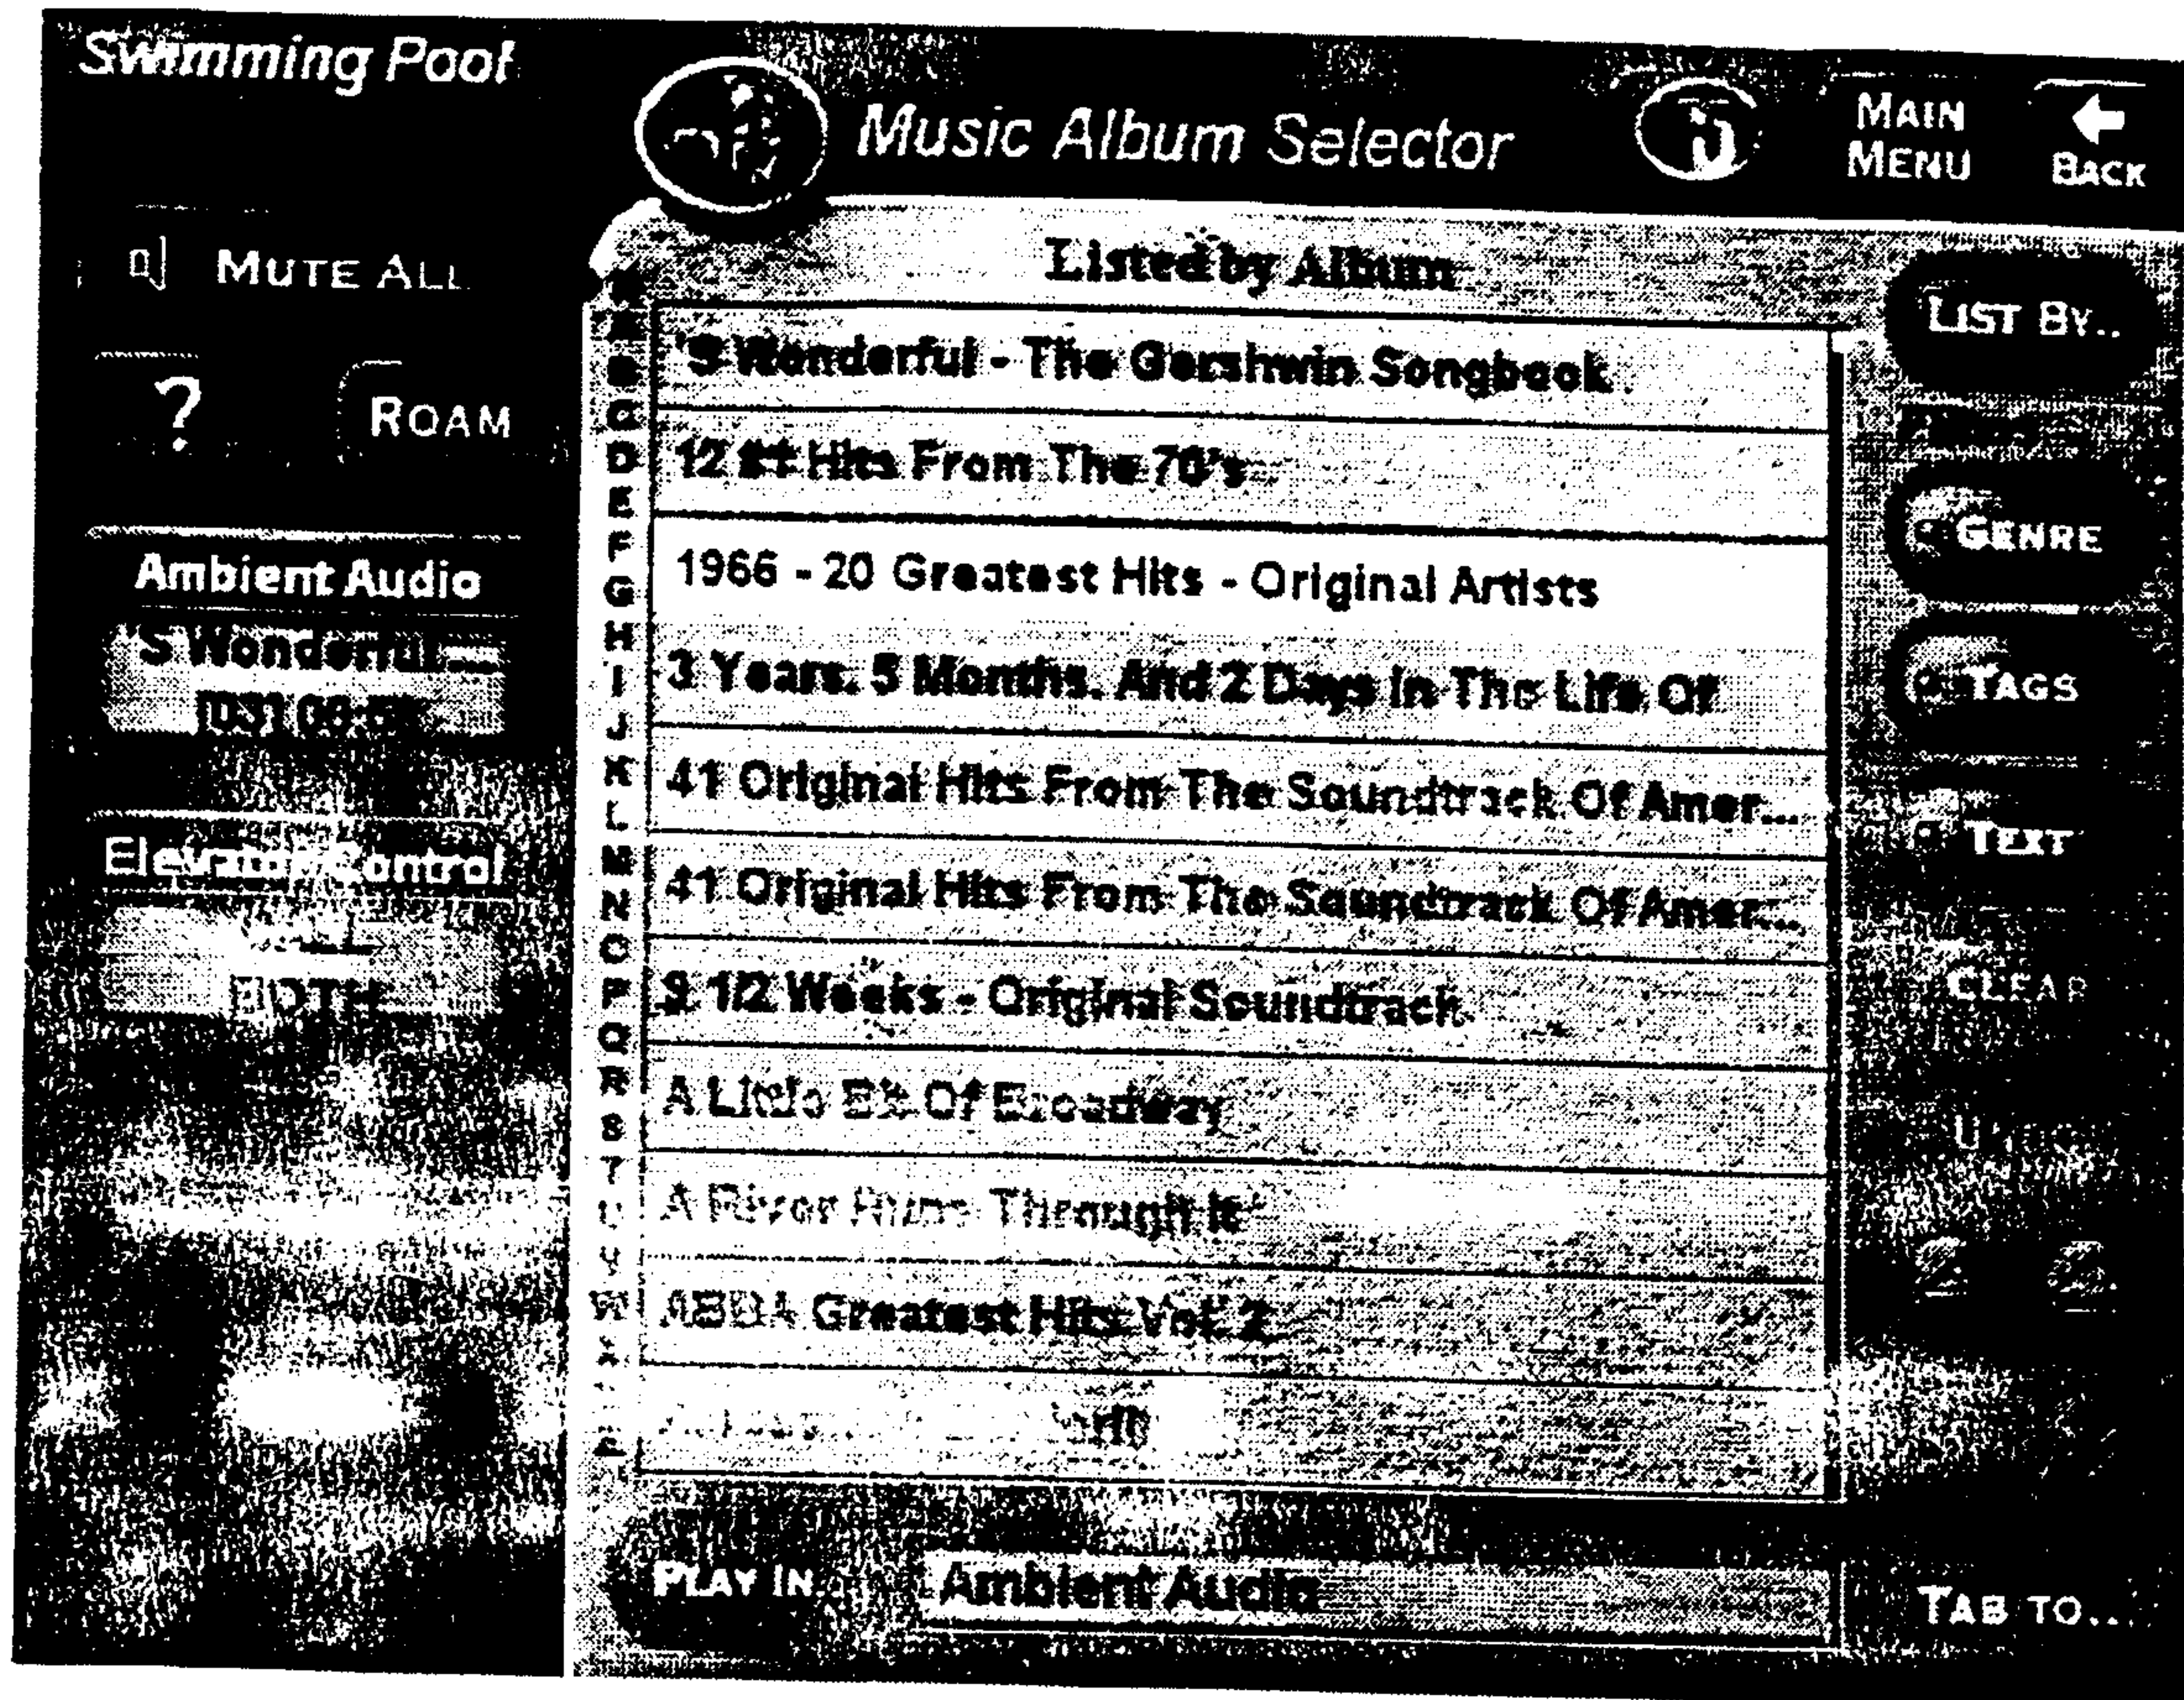


\$ 3

WO 00/46657

4 / 19

PCT/US00/03098

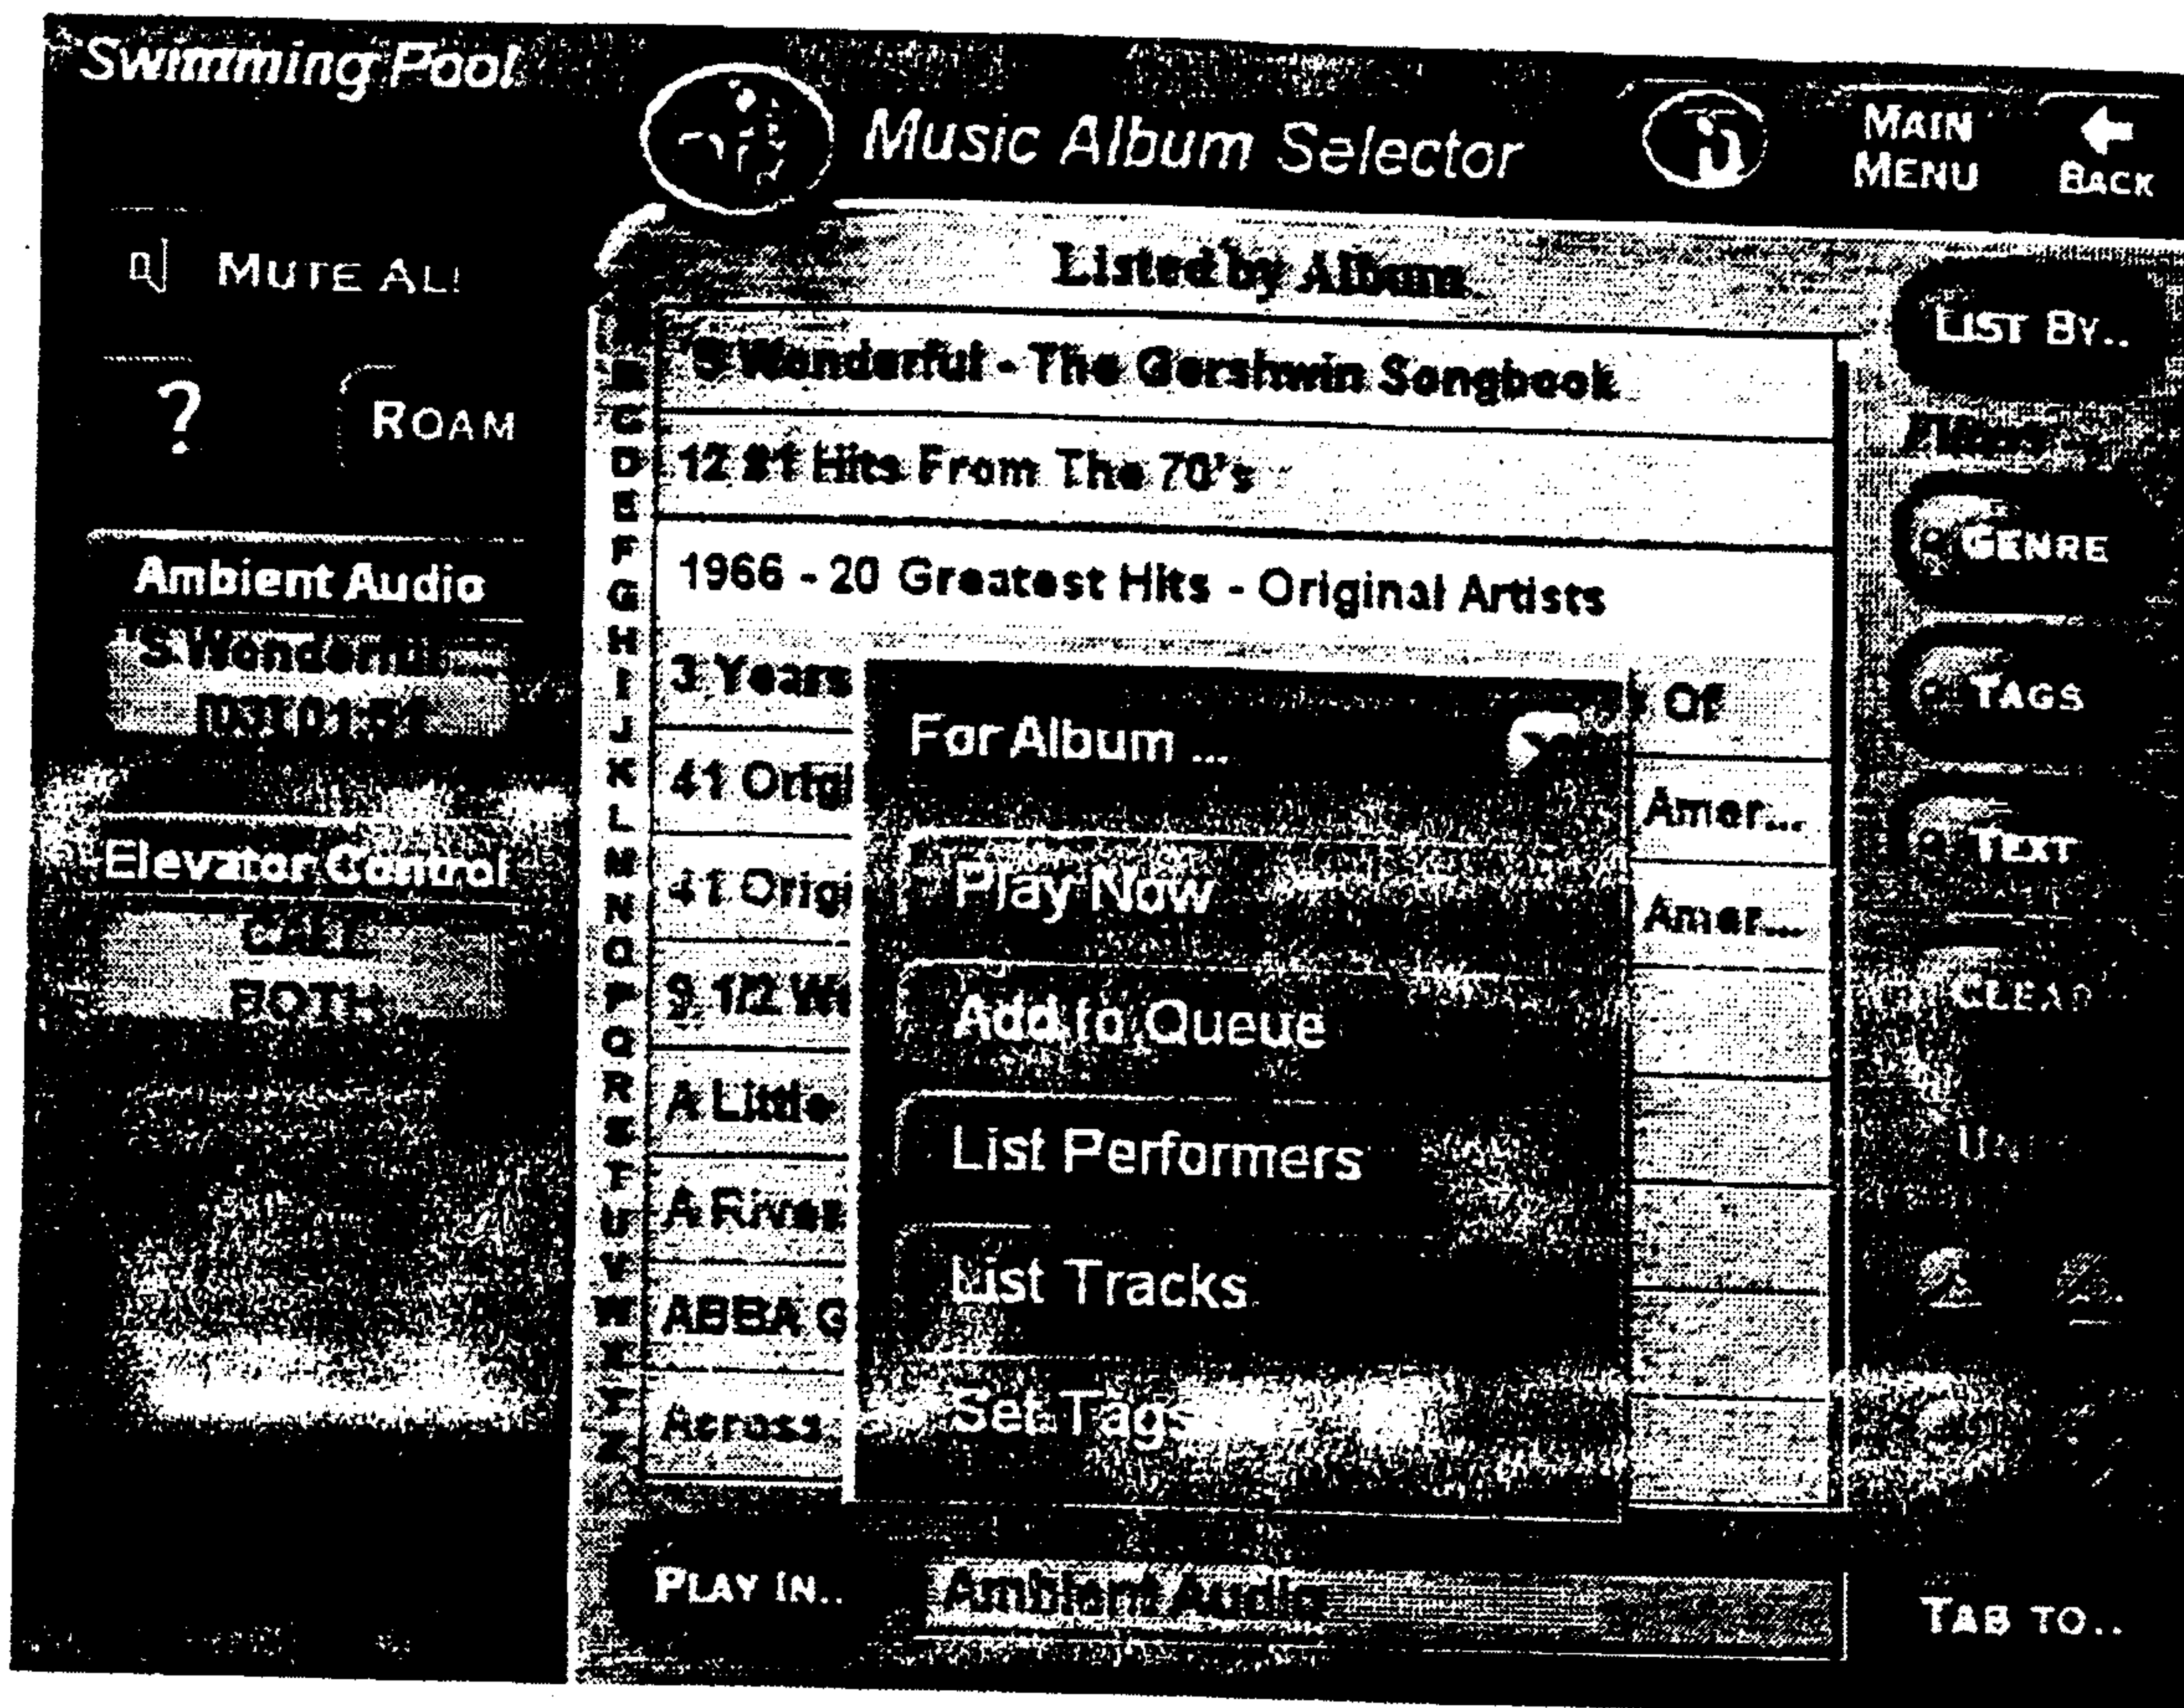


\$ 4

WO 00/46657

5 / 19

PCT/US00/03098

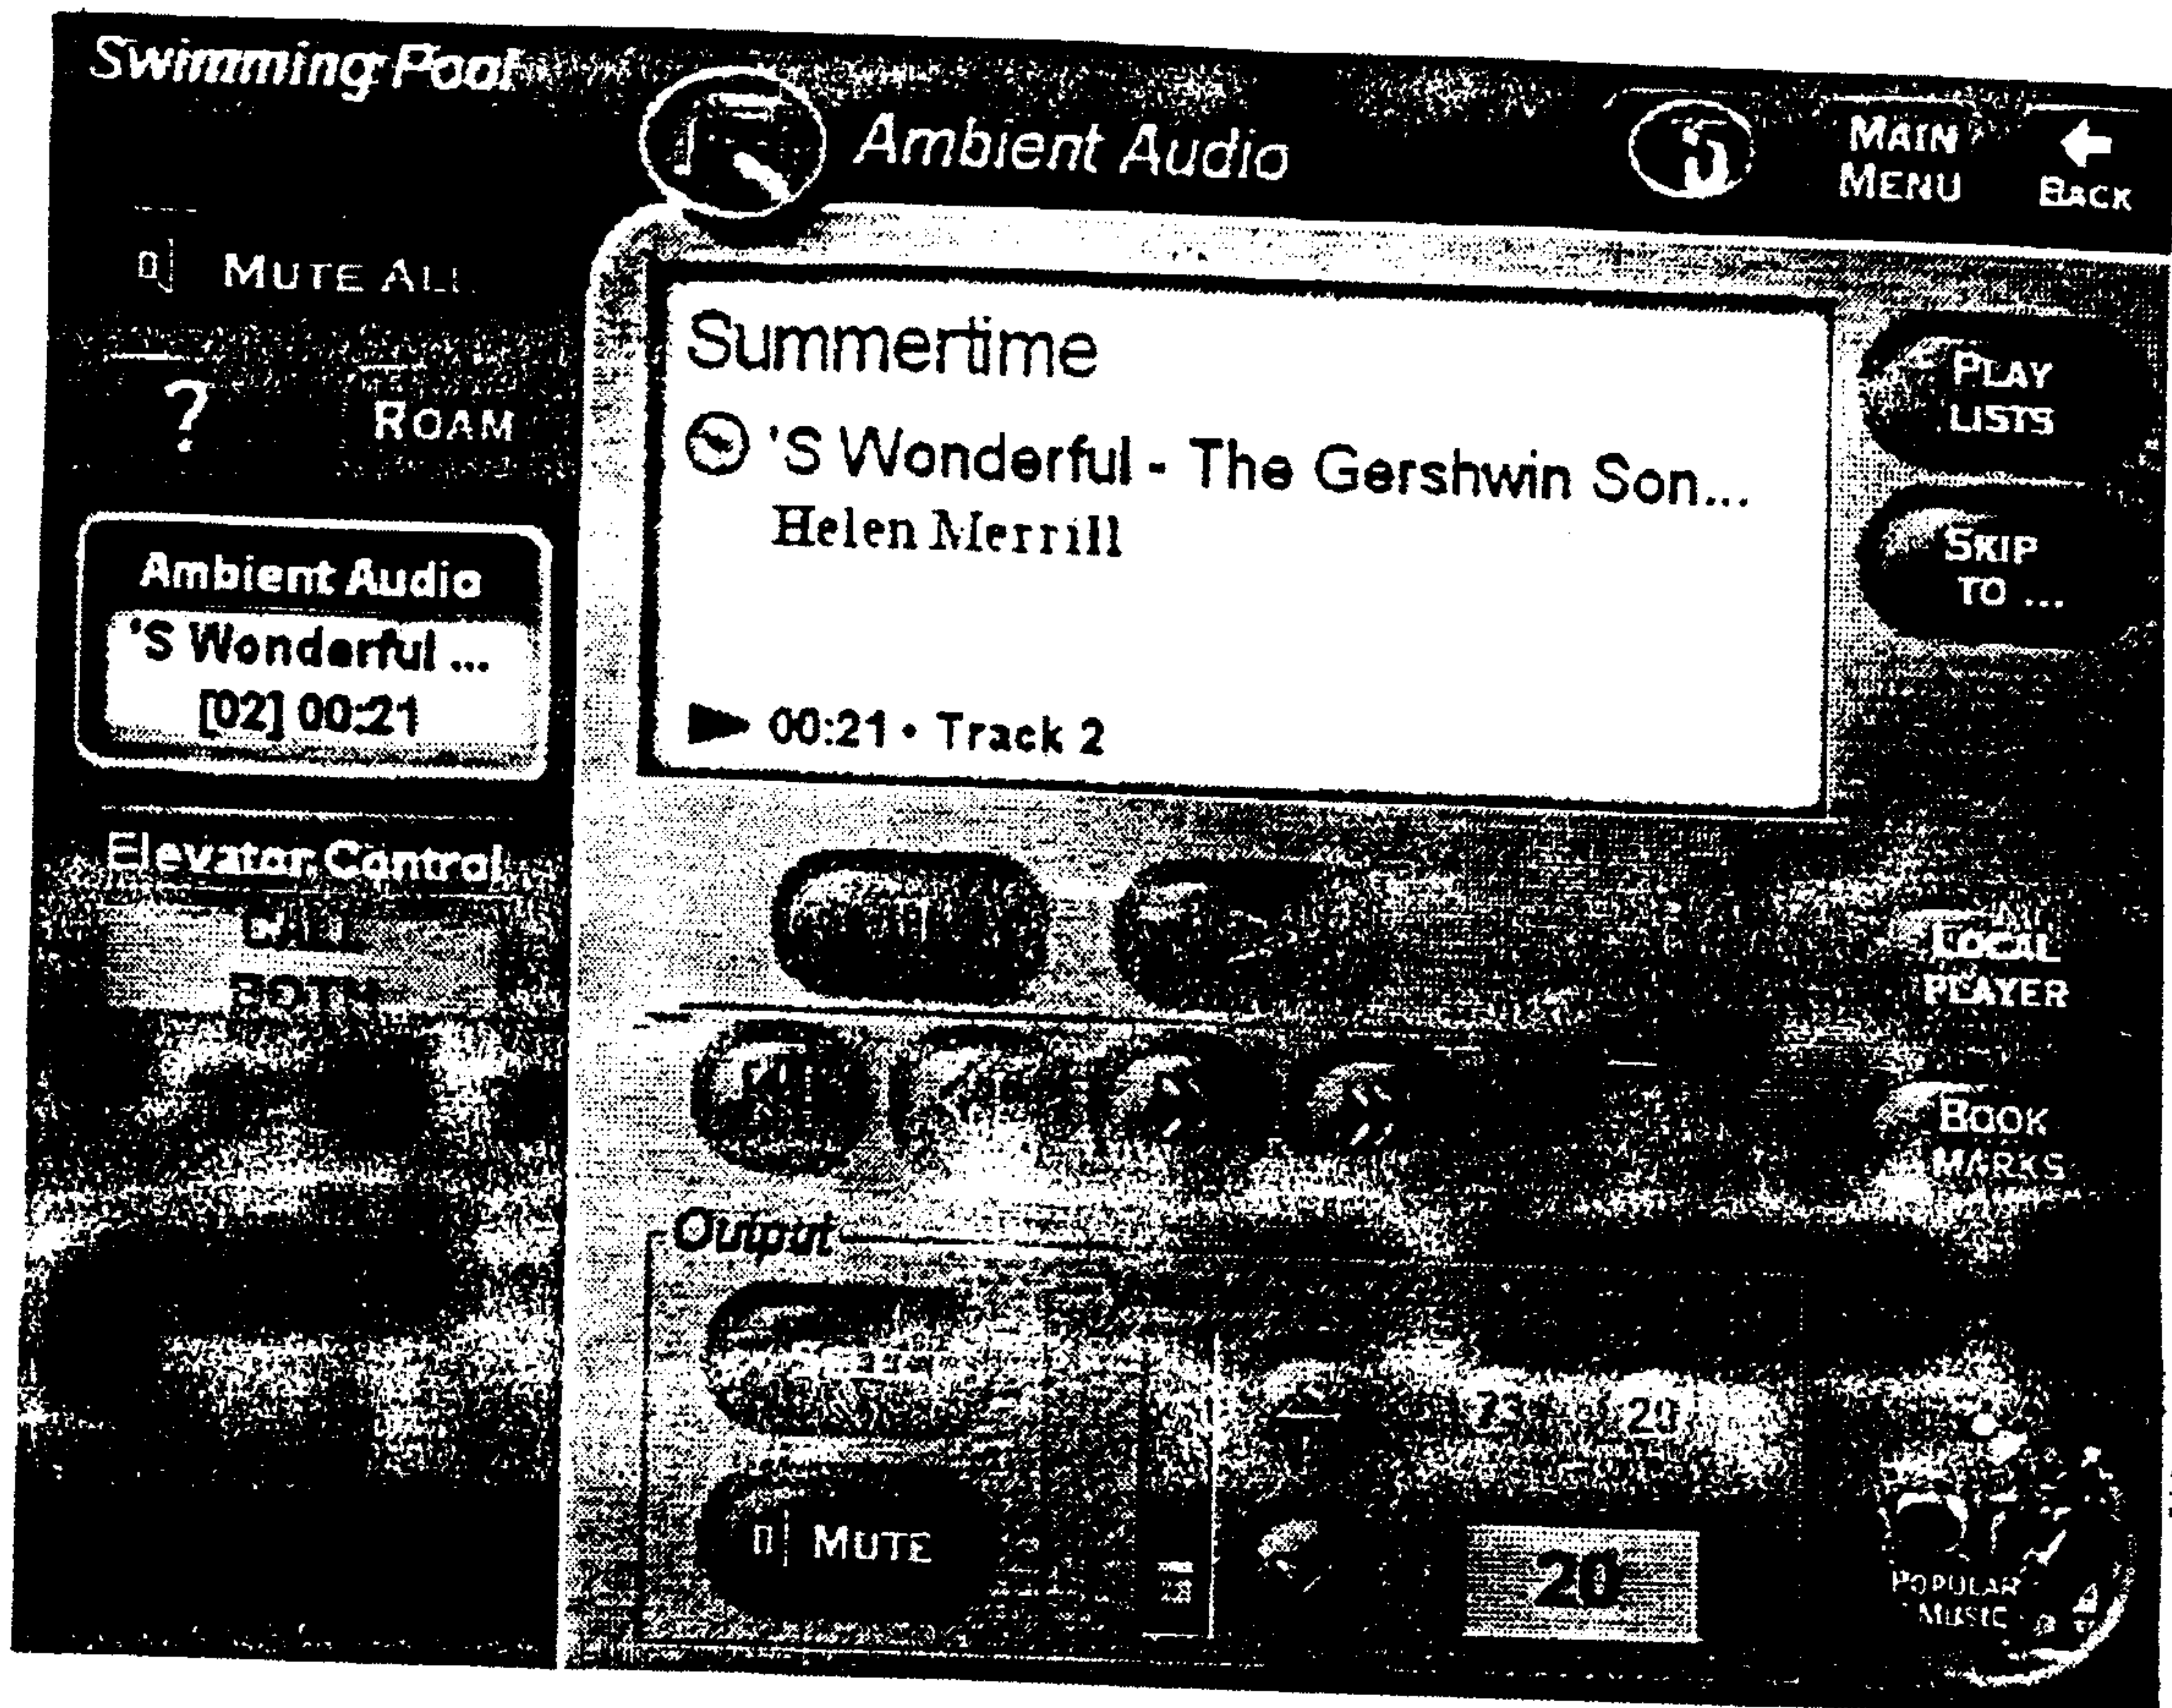


\$ 5

WO 00/46657

6 / 19

PCT/US00/03098

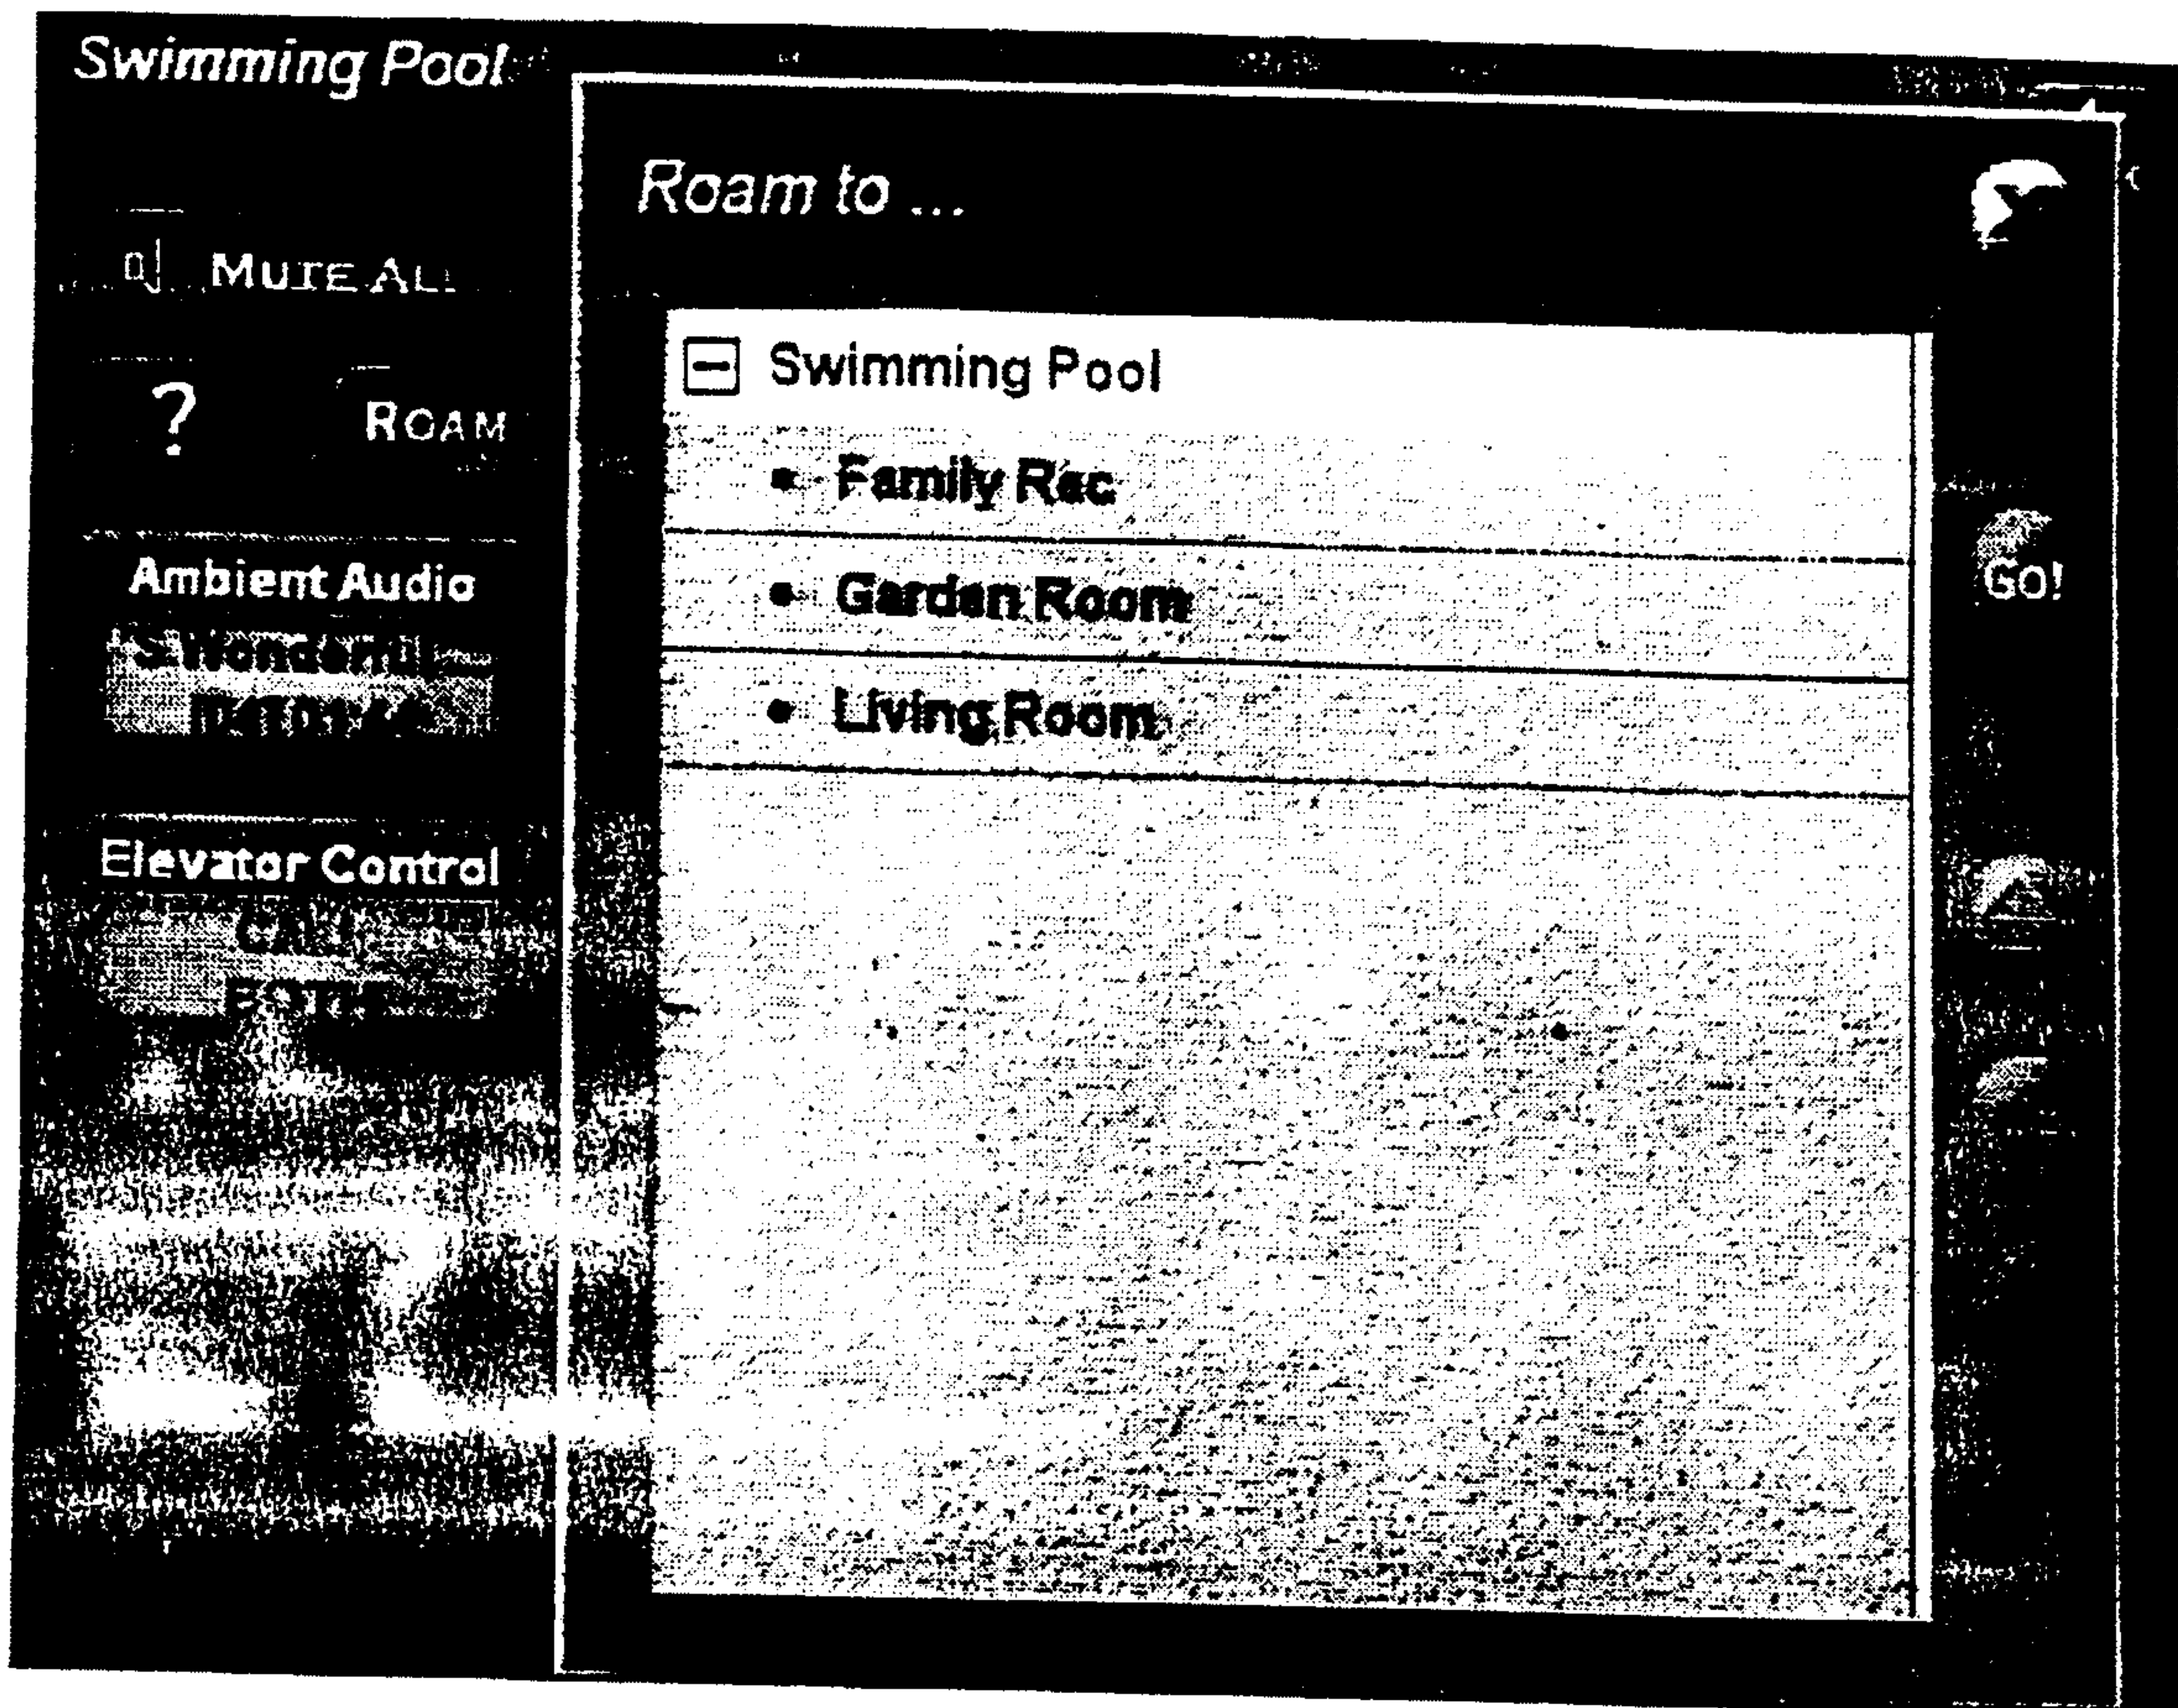


\$6

WO 00/46657

7 / 19


PCT/US00/03098

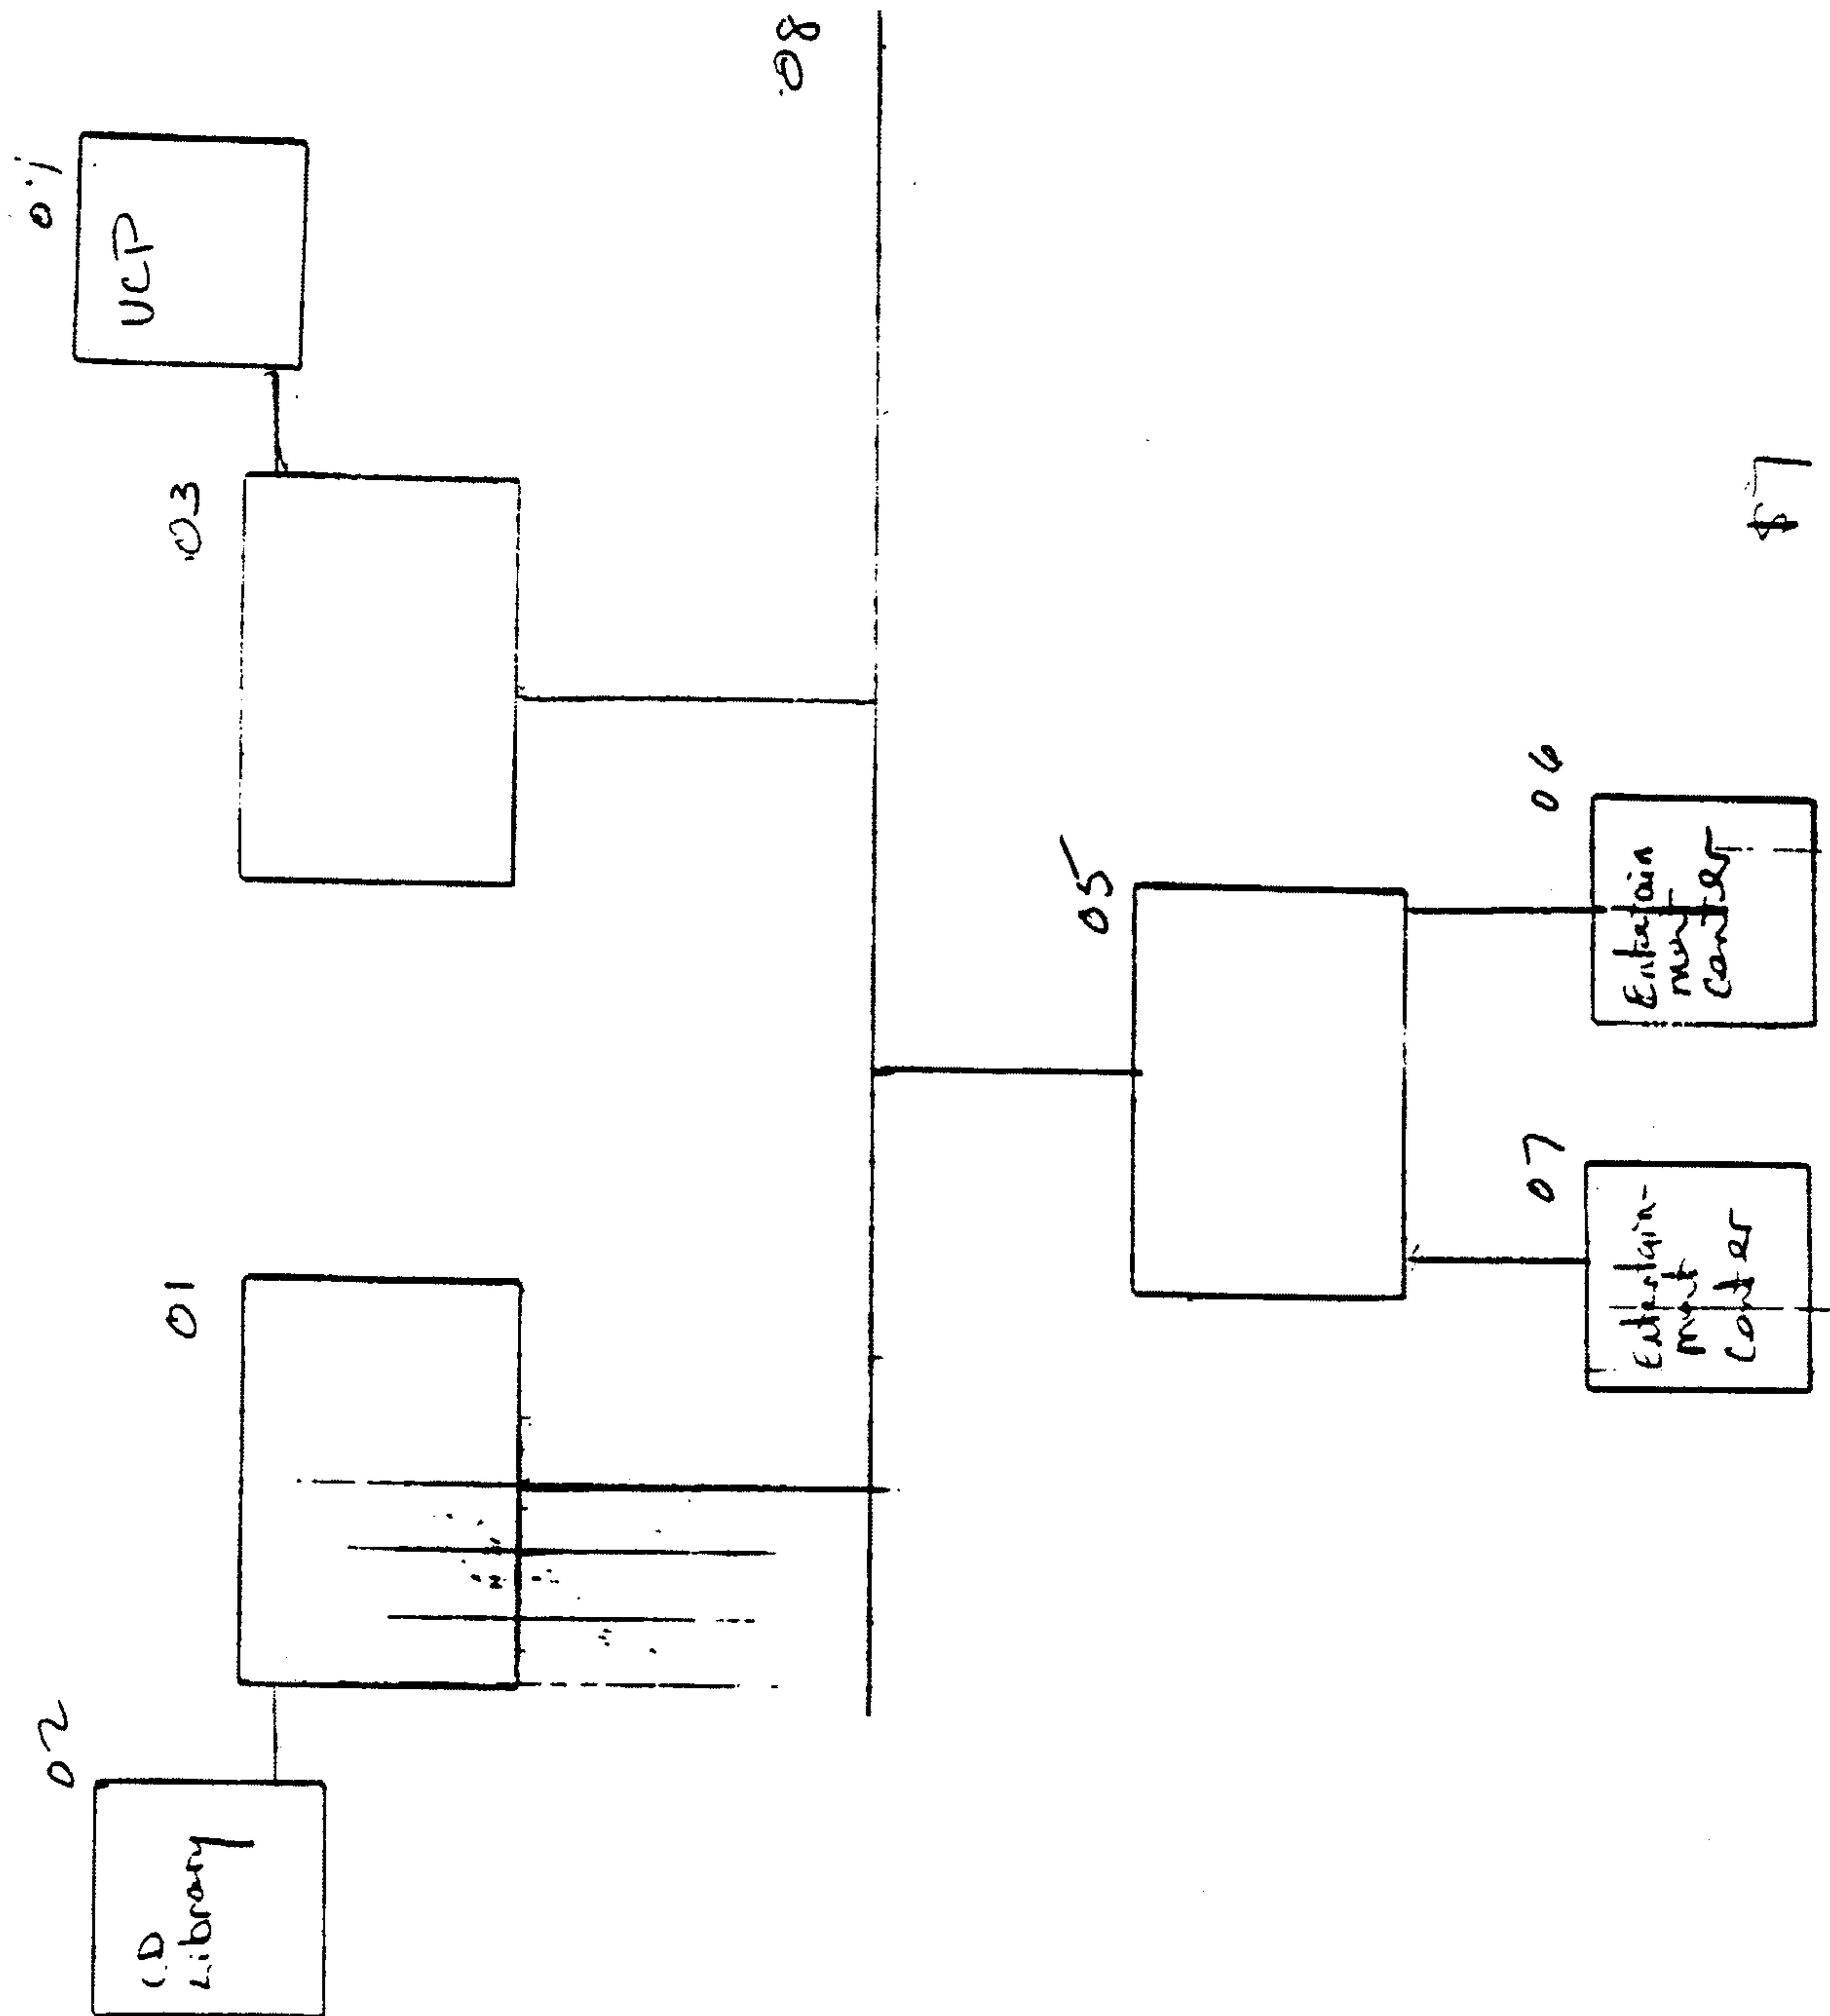


WO 00/46657

8 / 19

PCT/US00/03098

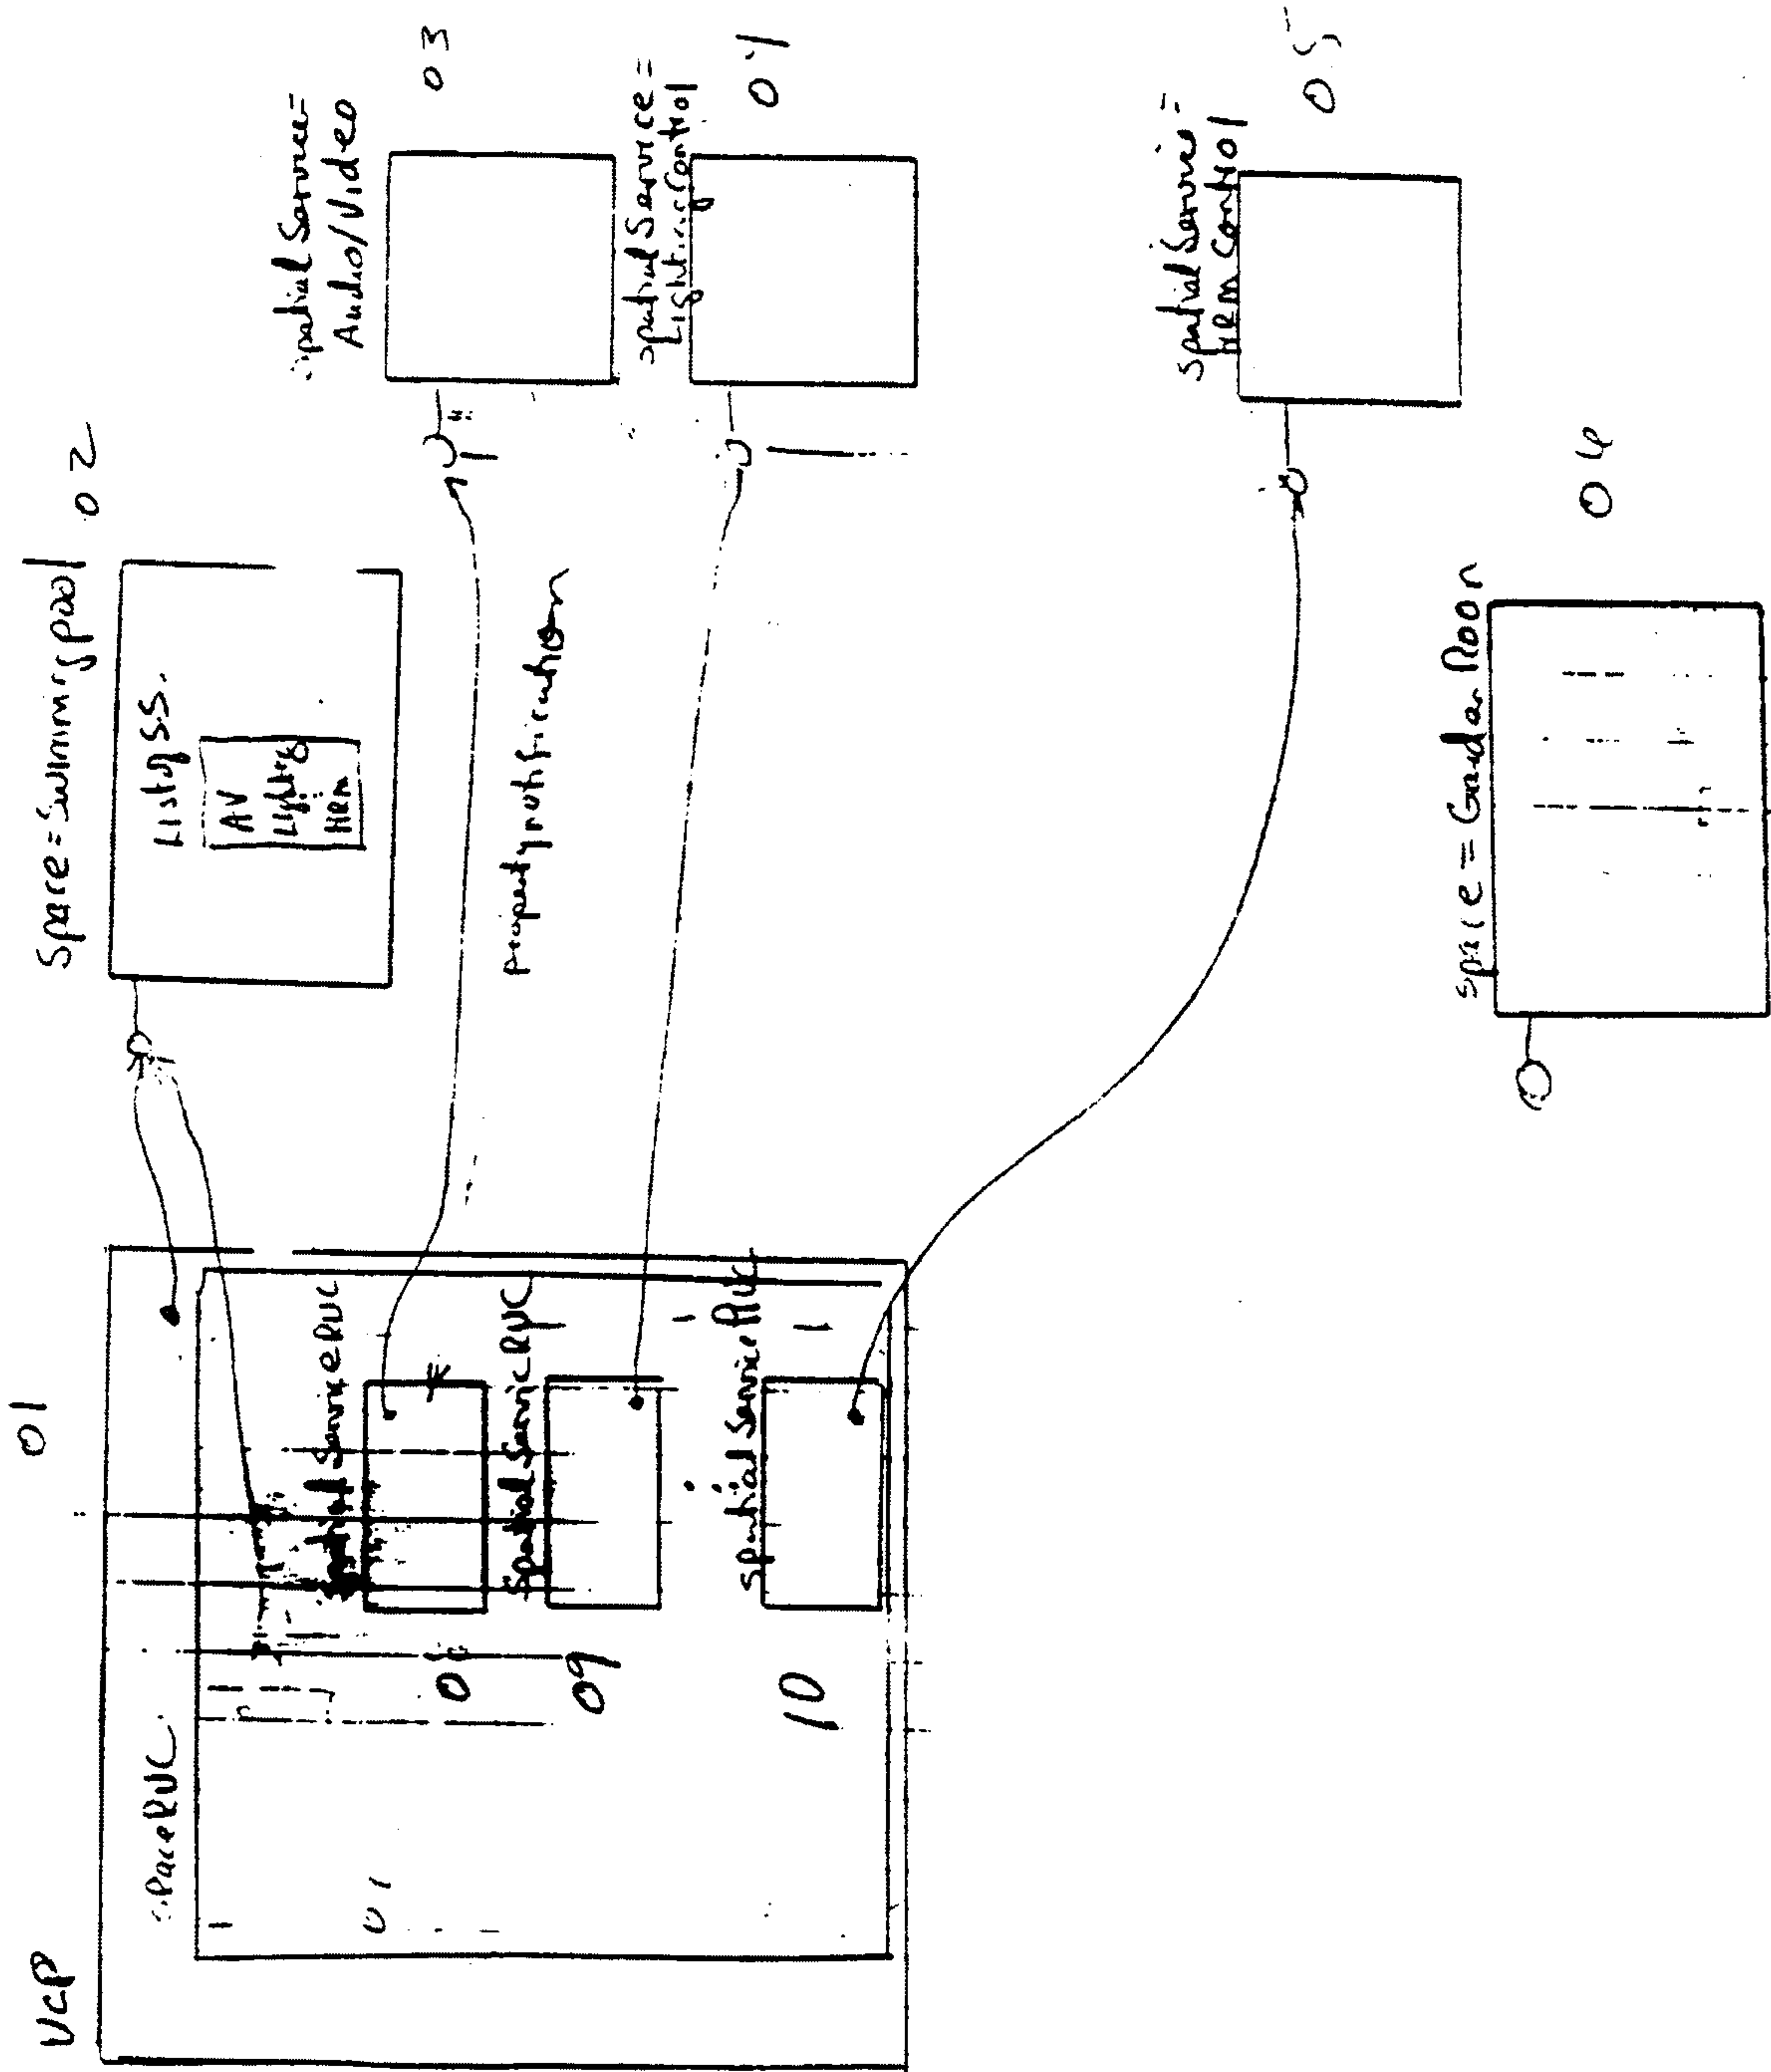

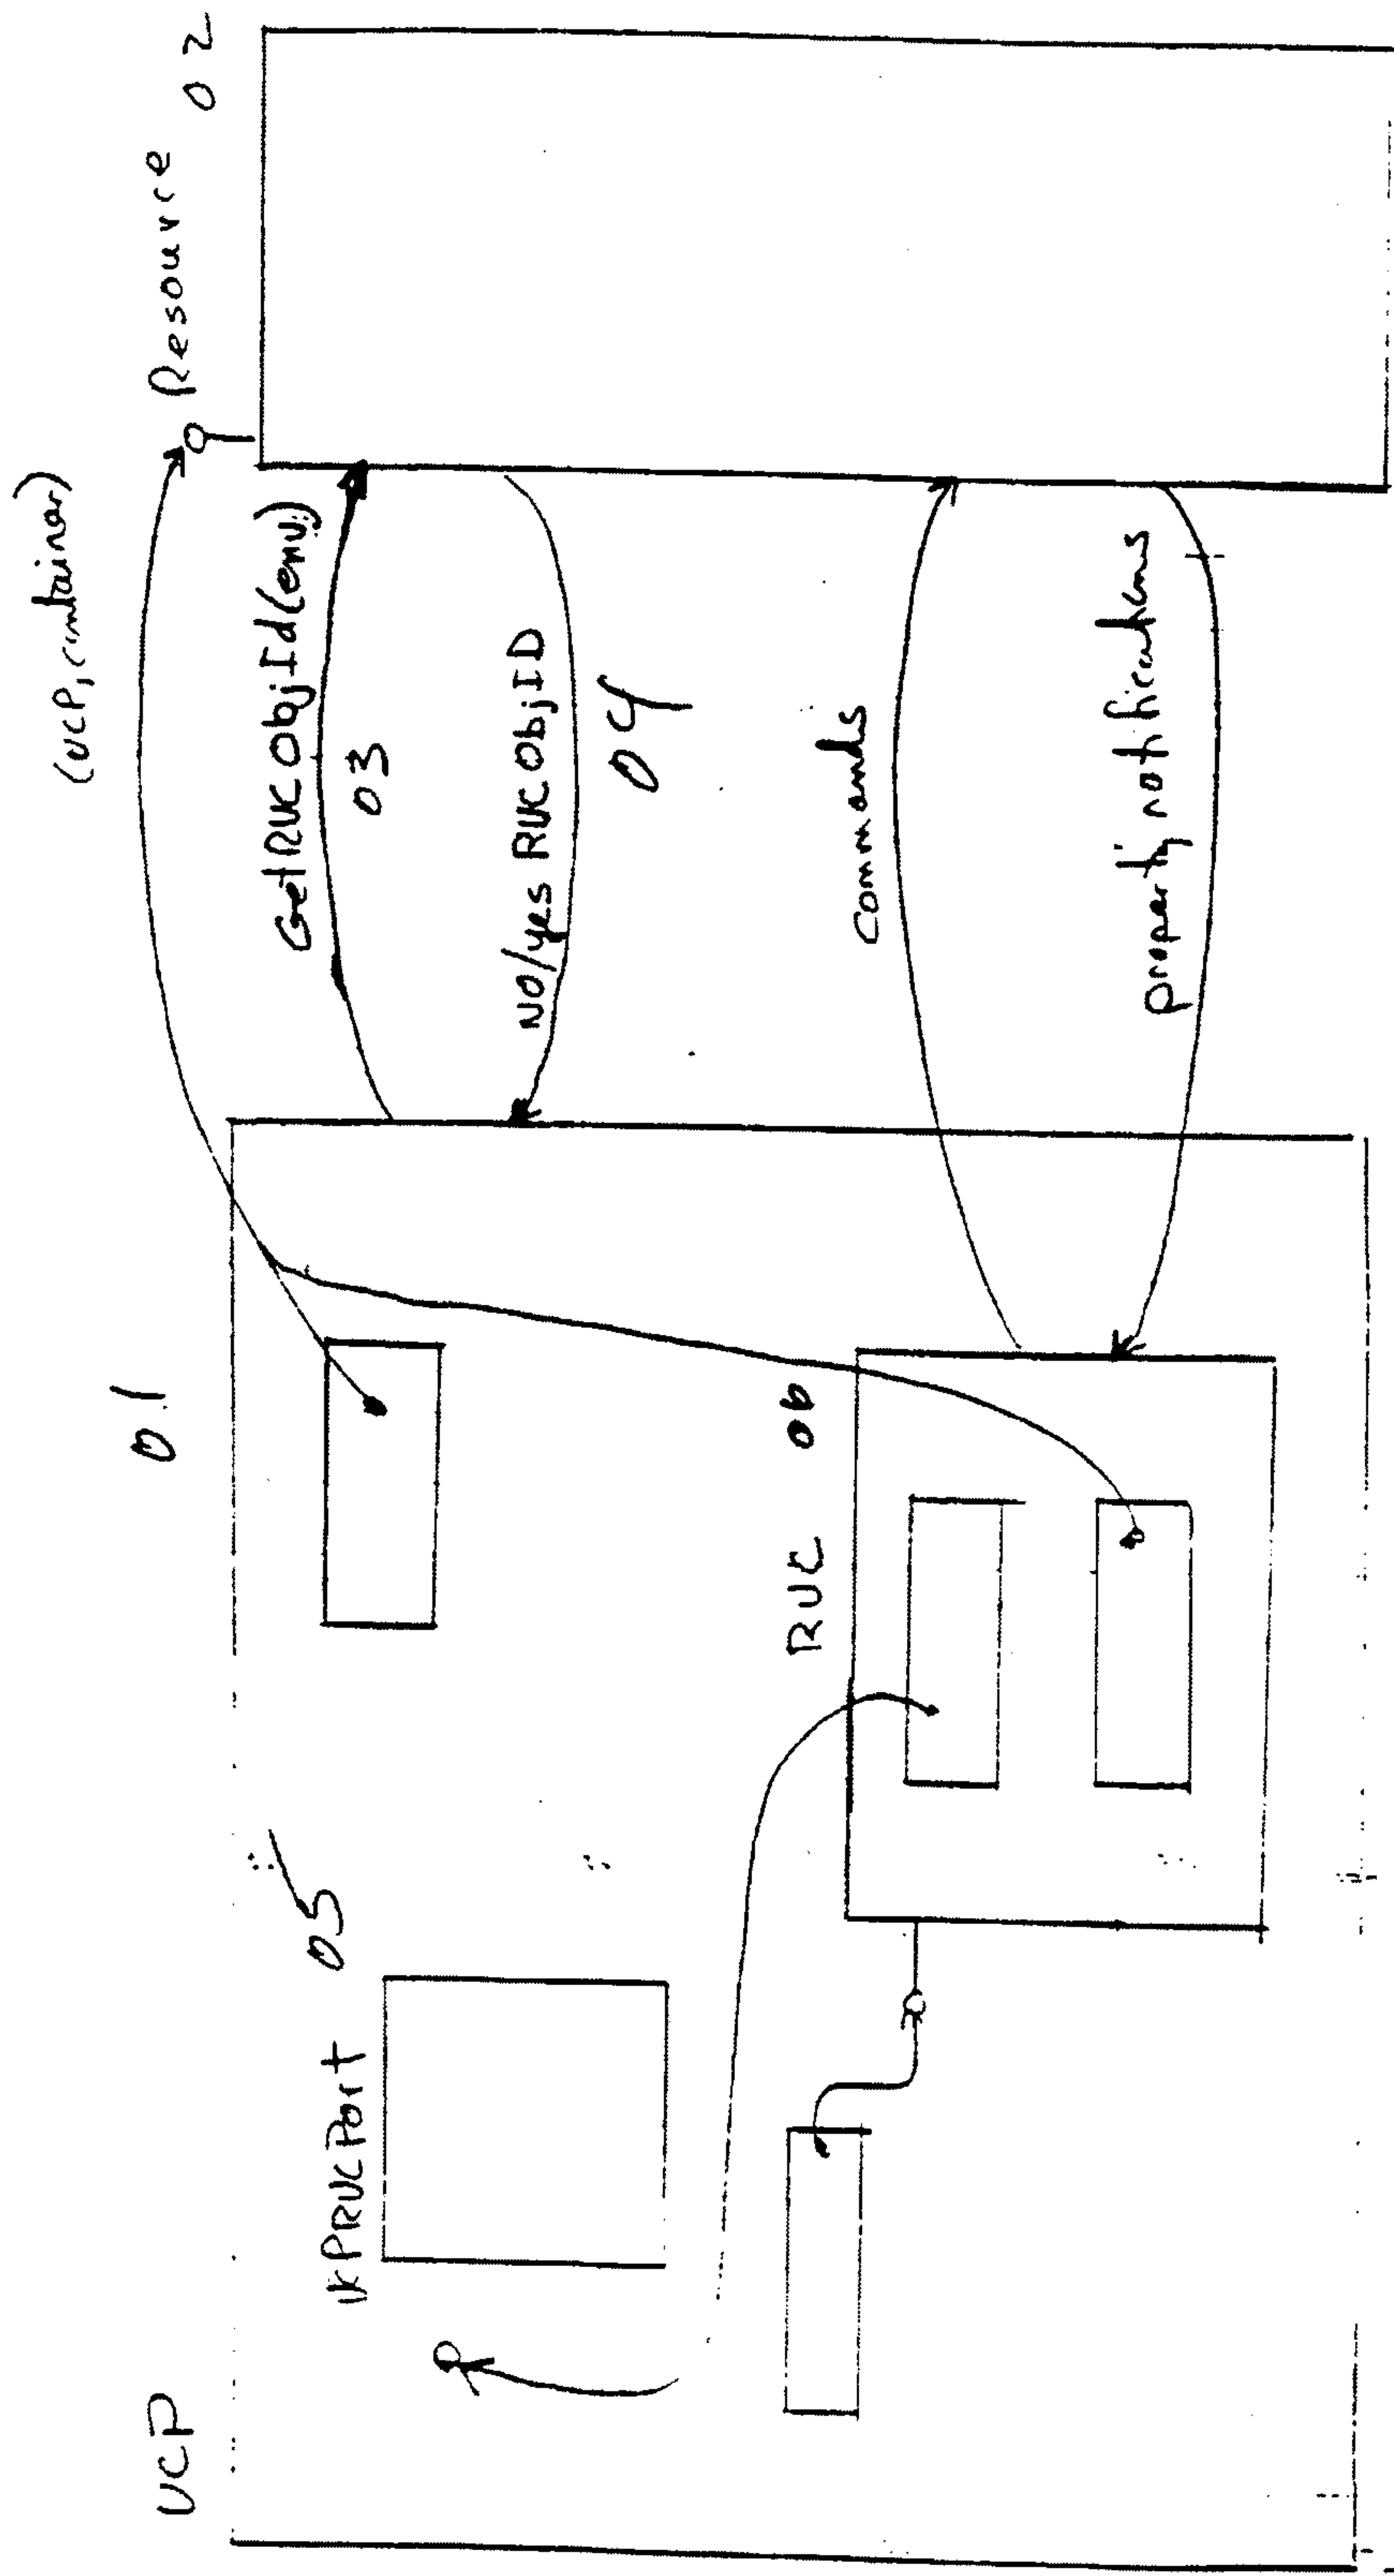

69


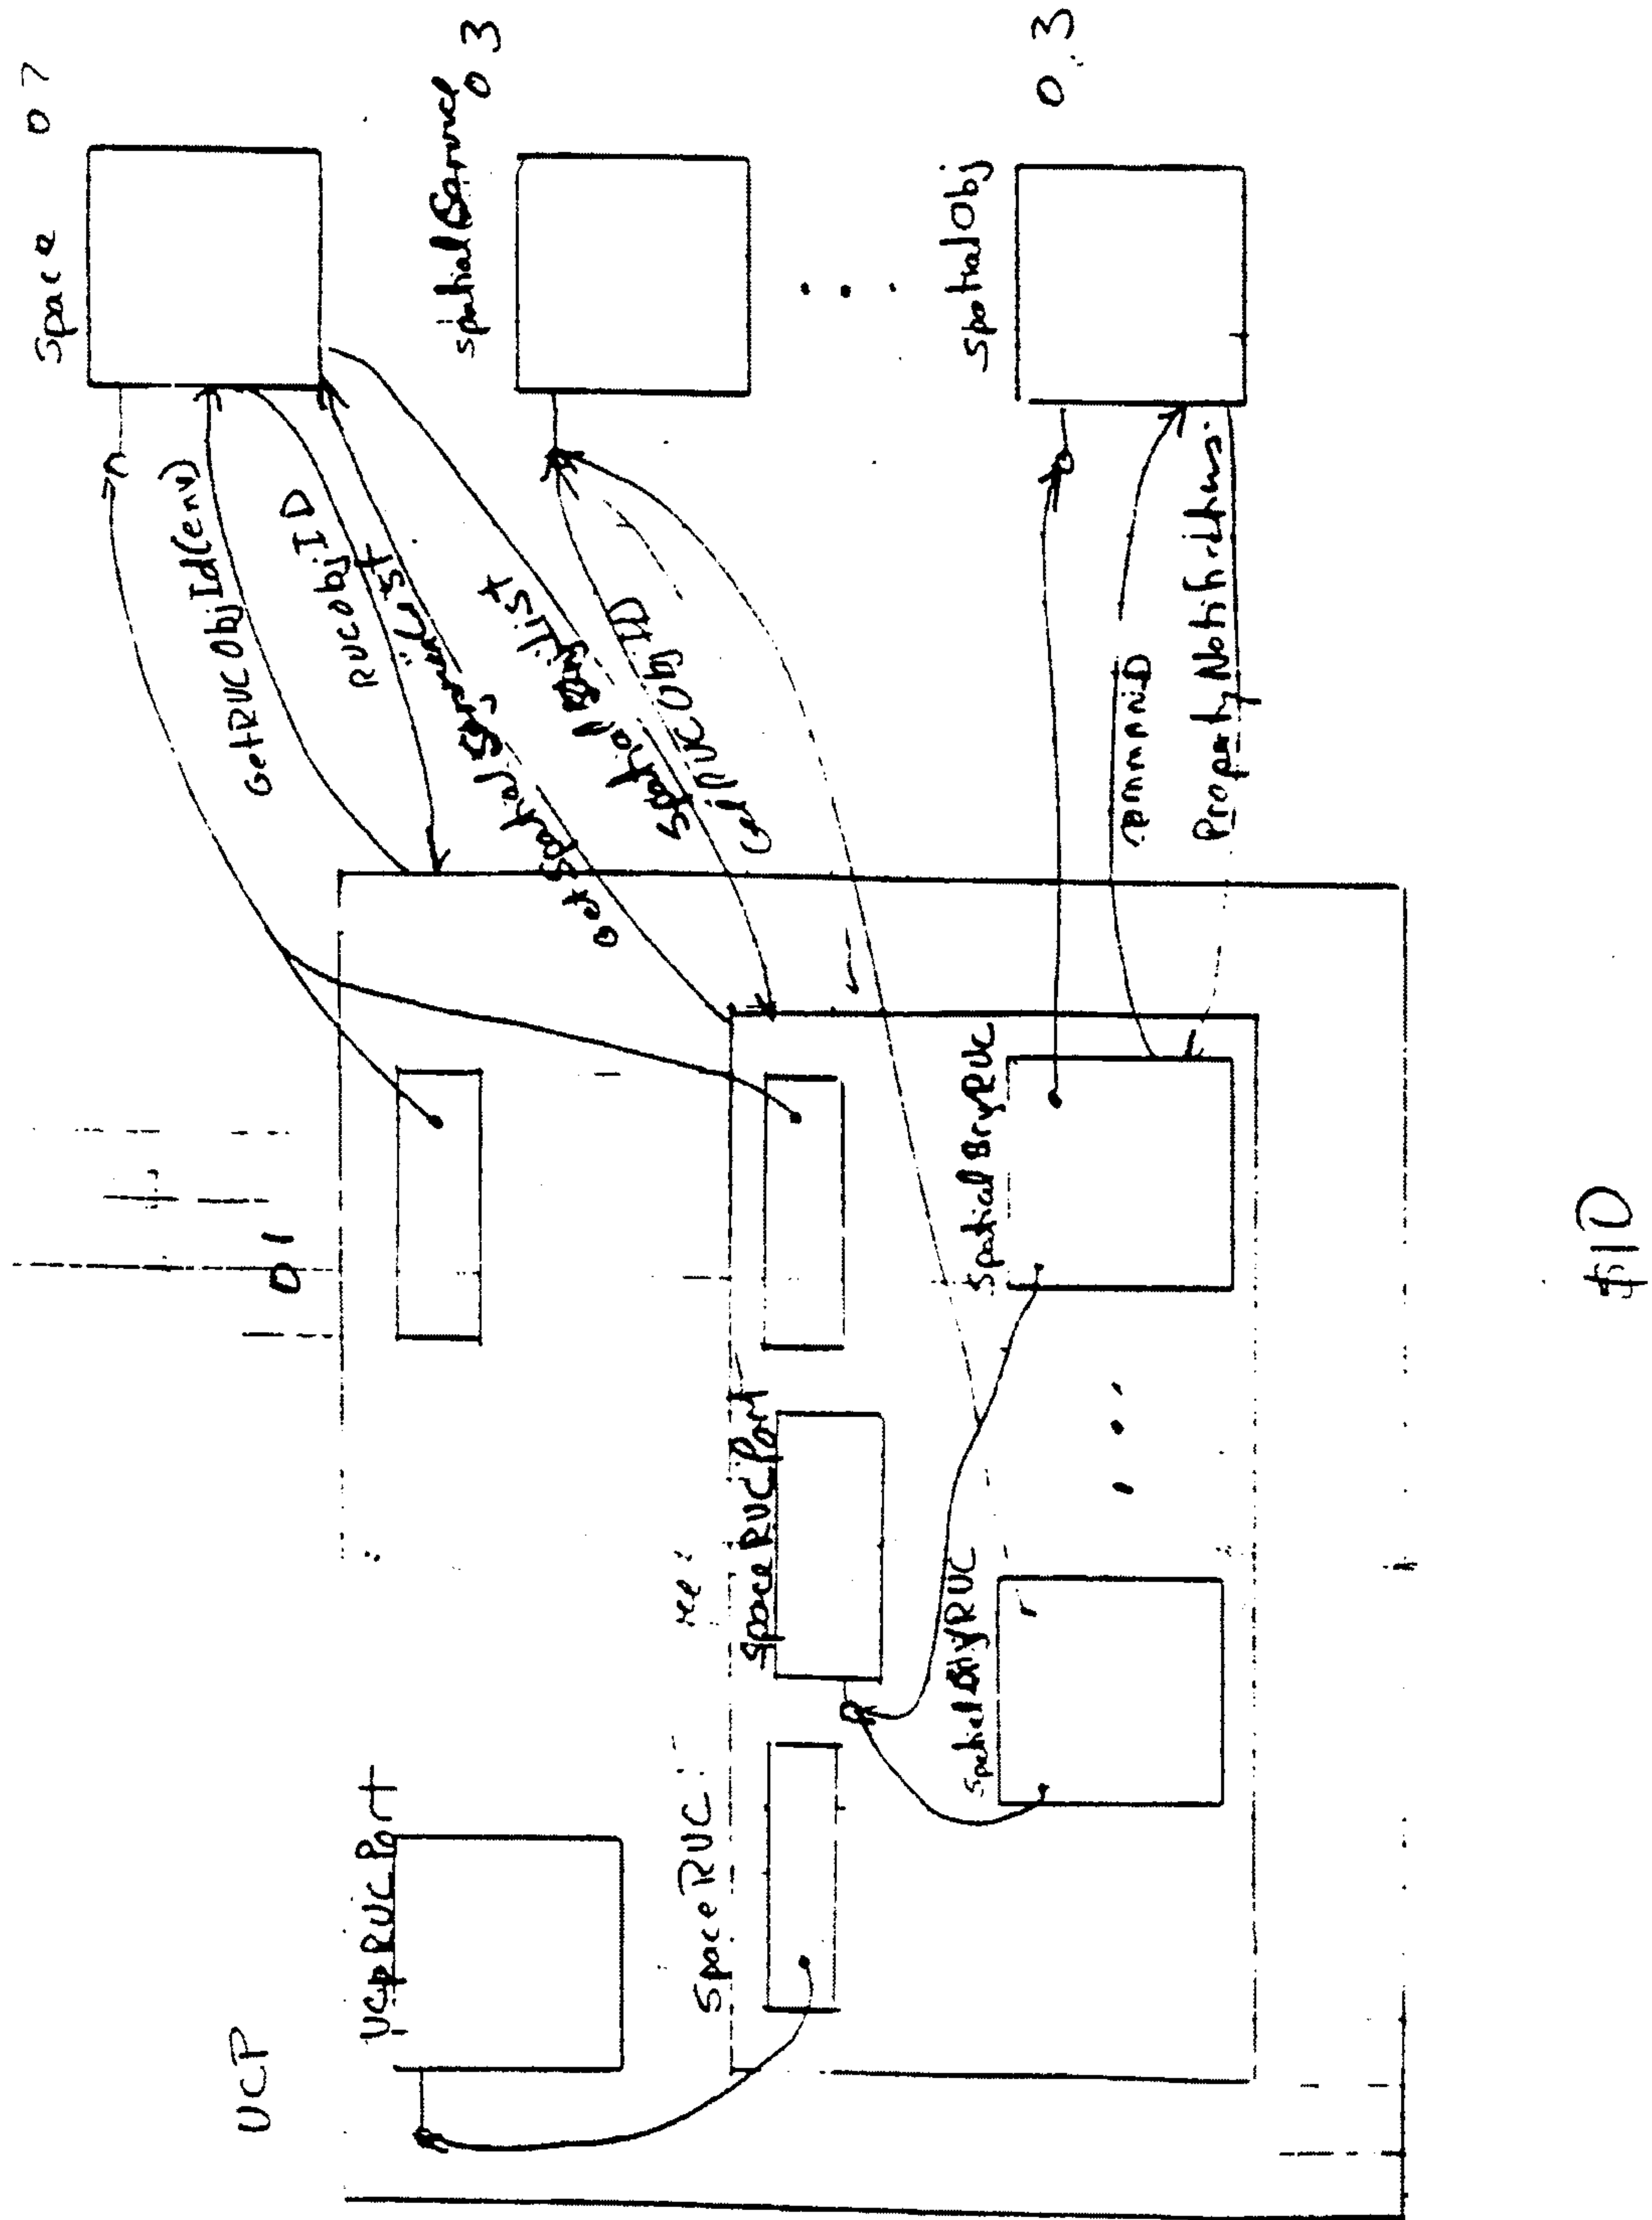


FIG 10

WO 00/46657

11 / 19

PCT/US00/03098

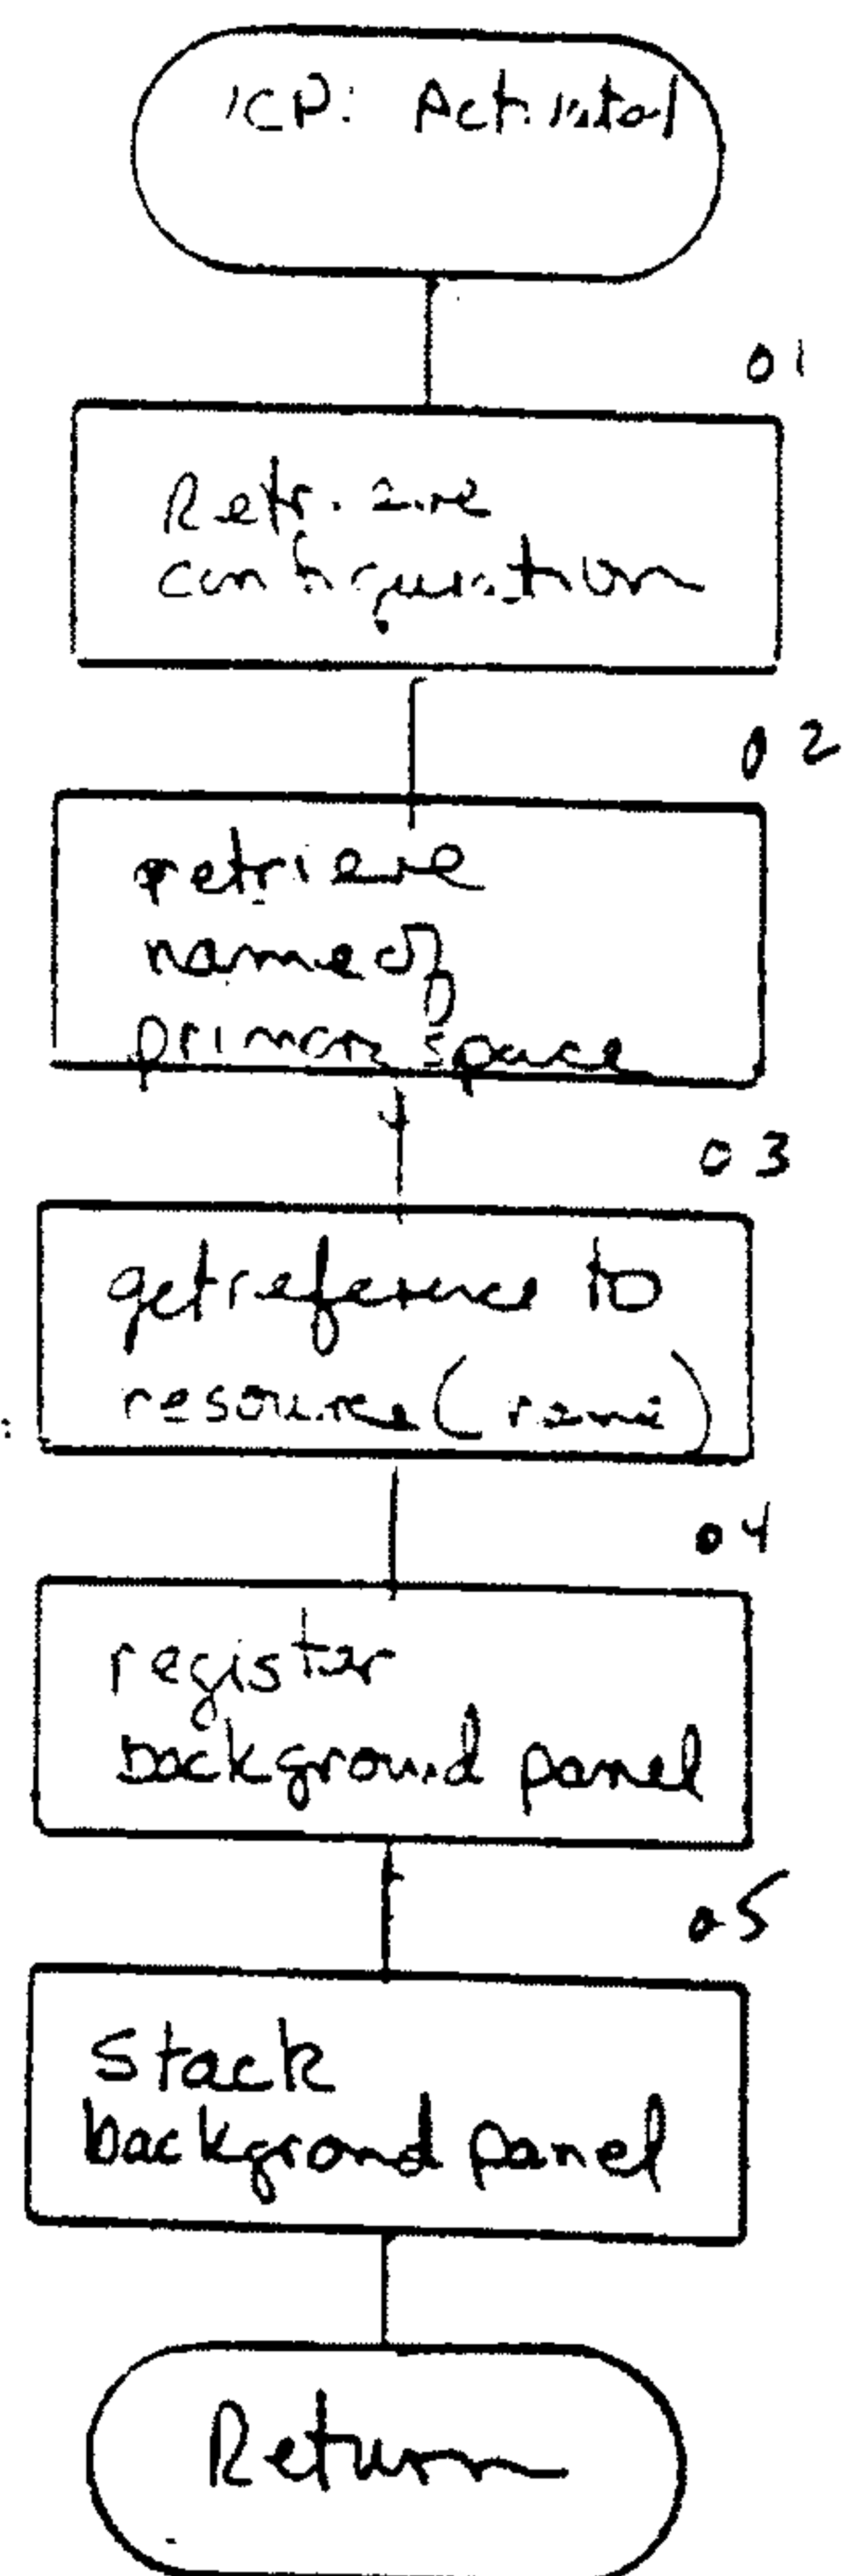


711


WO 00/46657


12 / 19


PCT/US00/03098

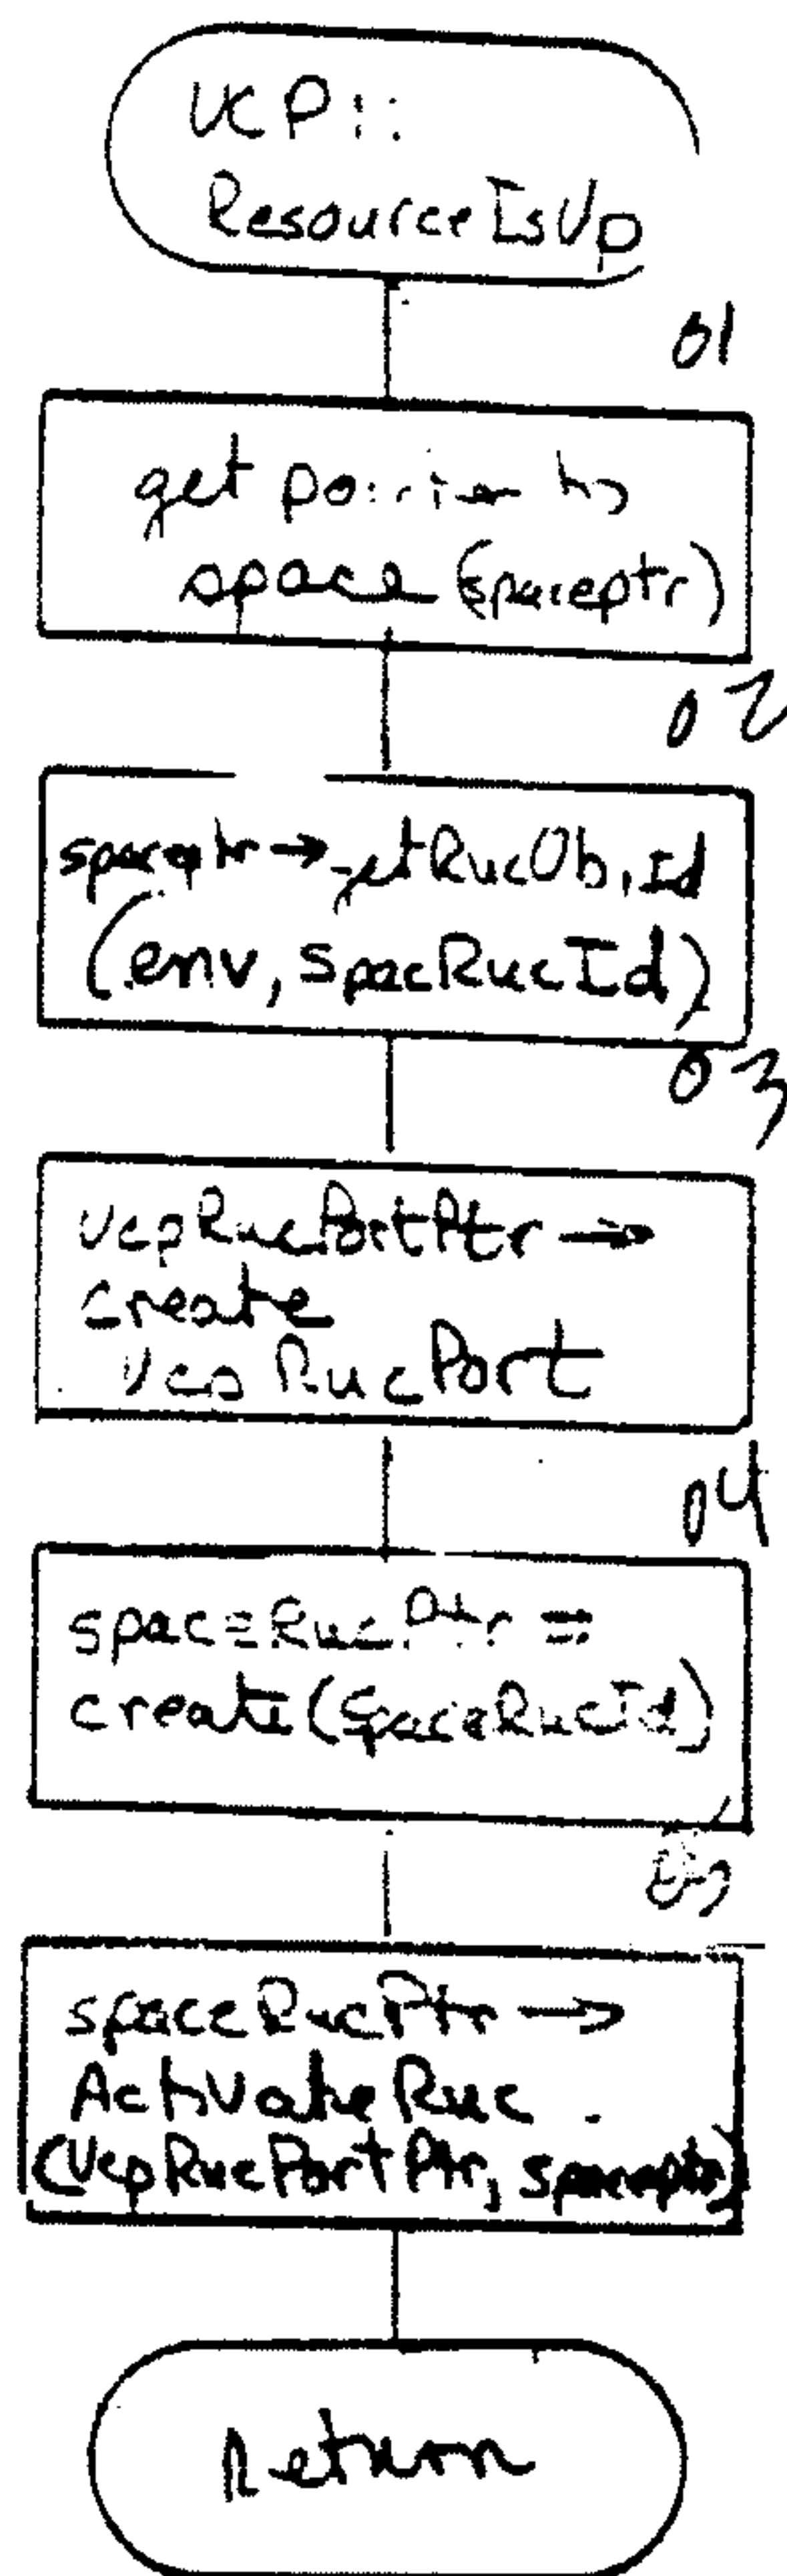

\$12

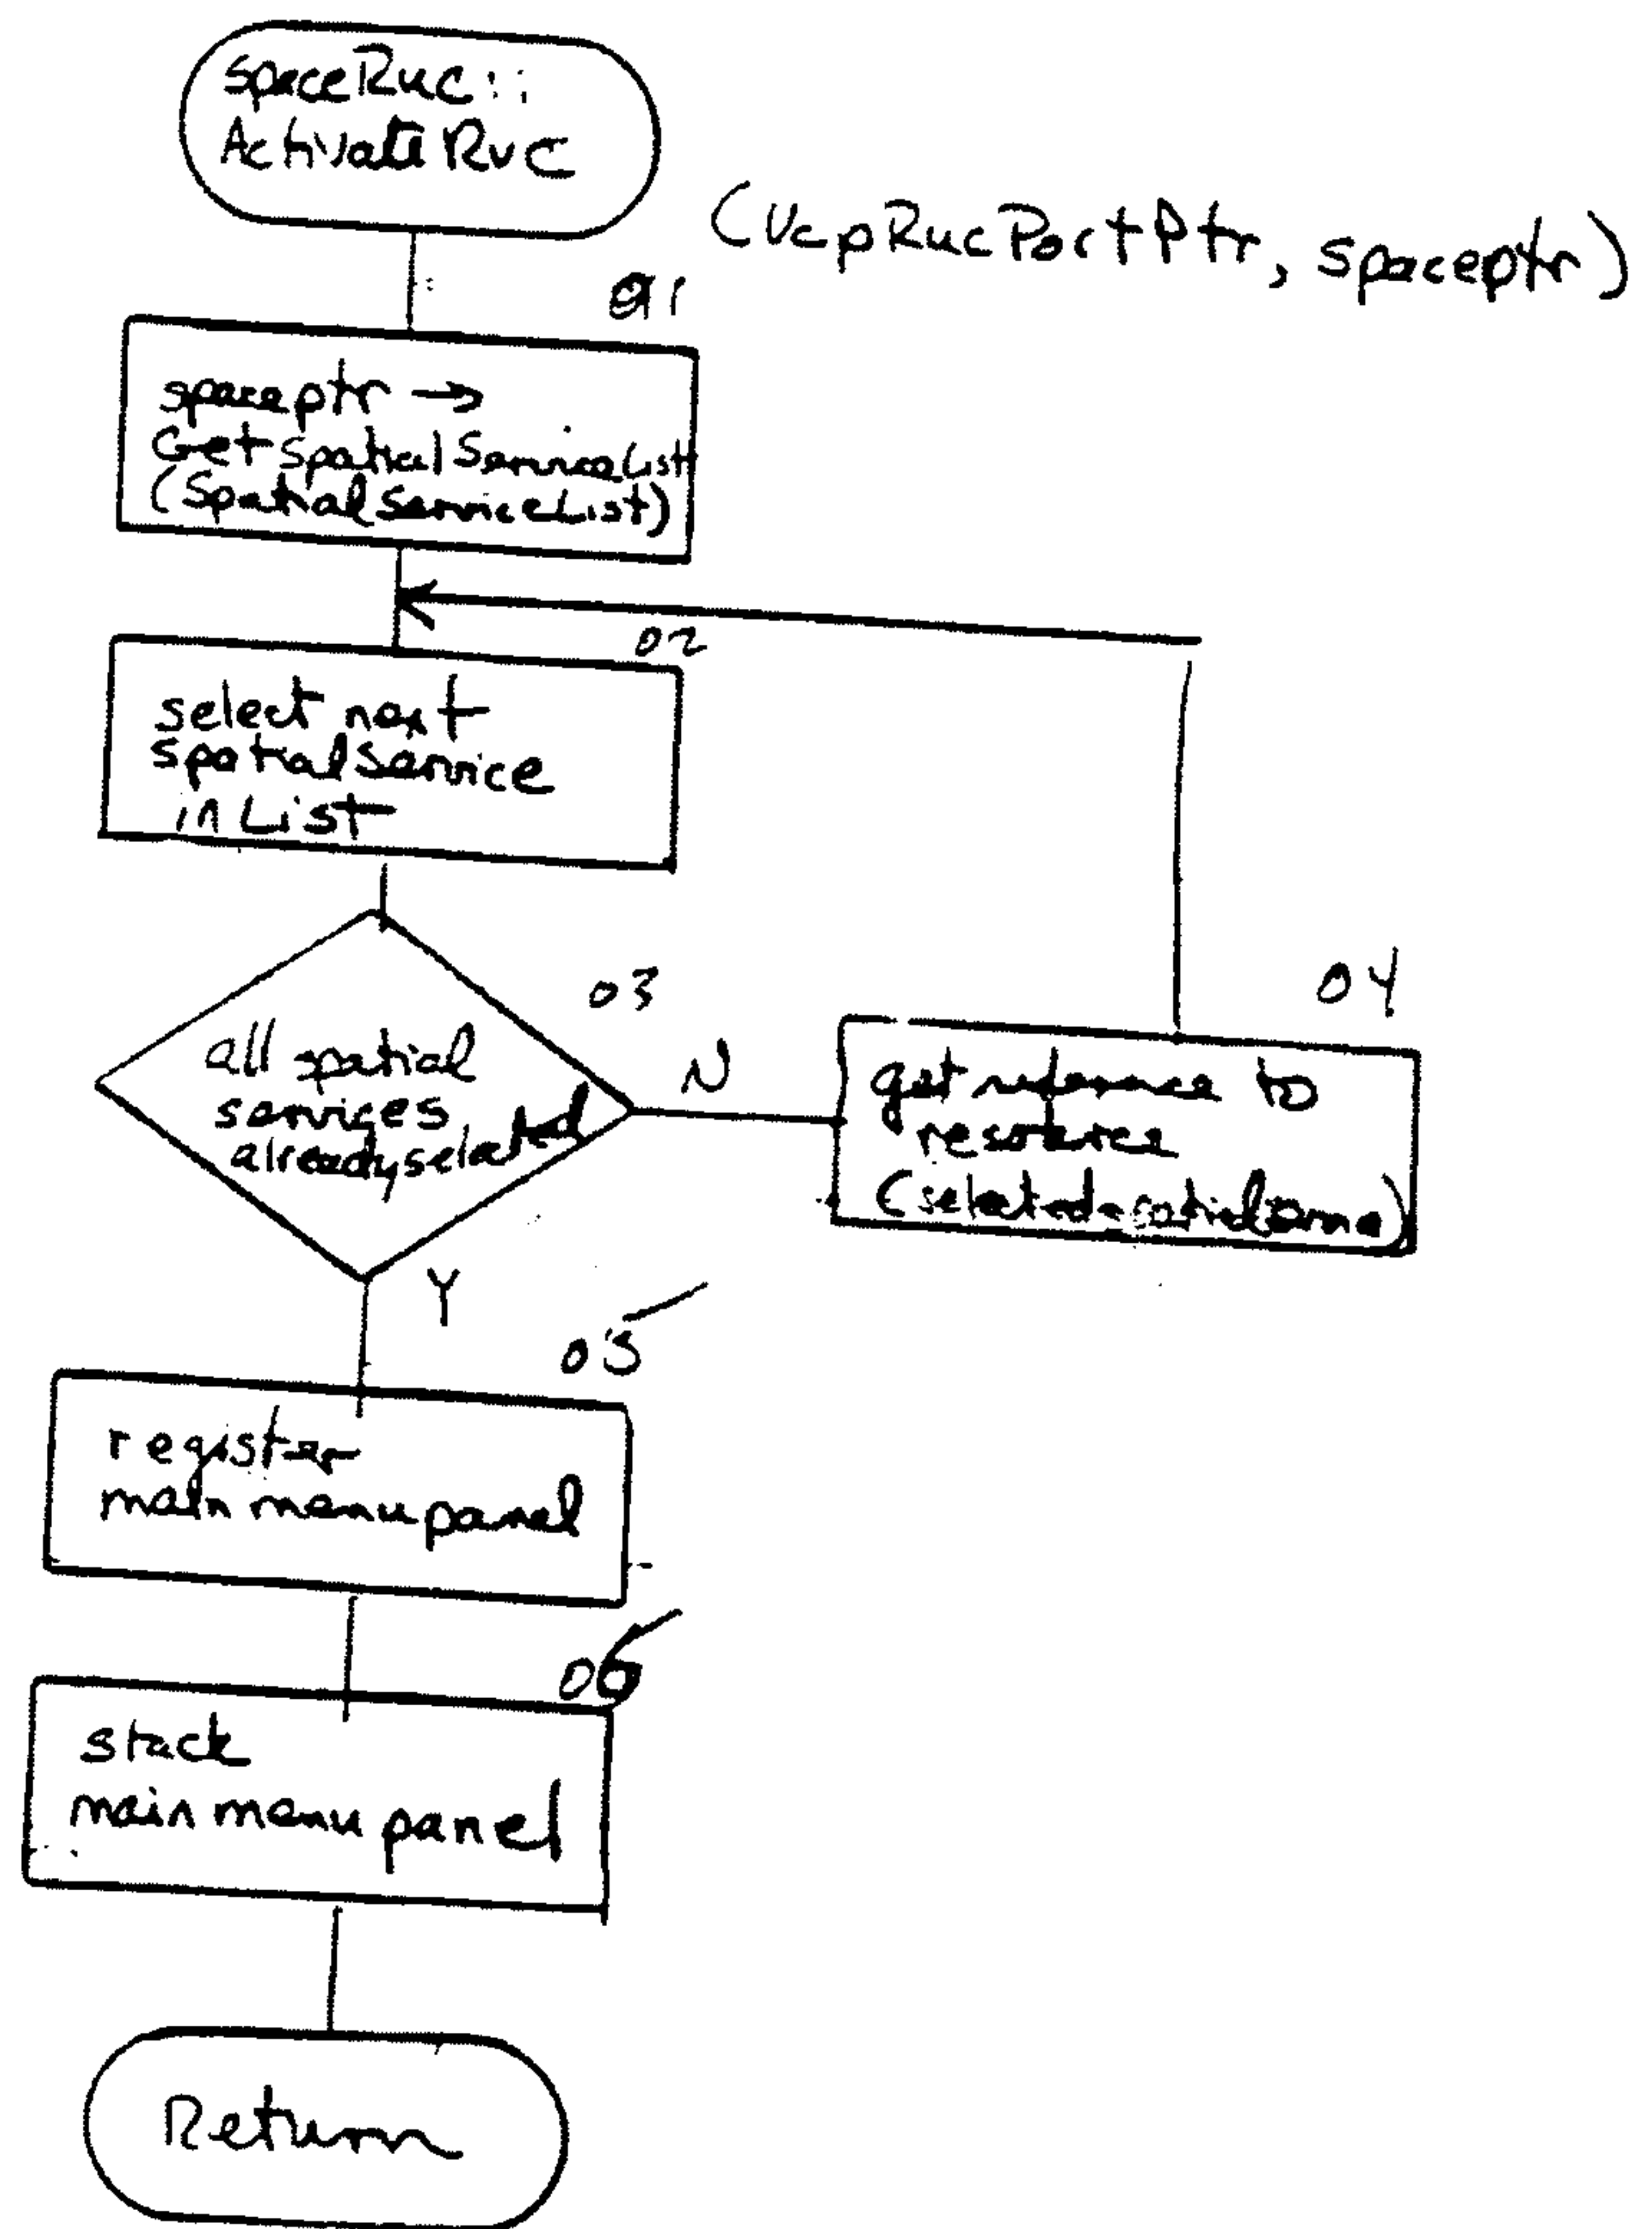

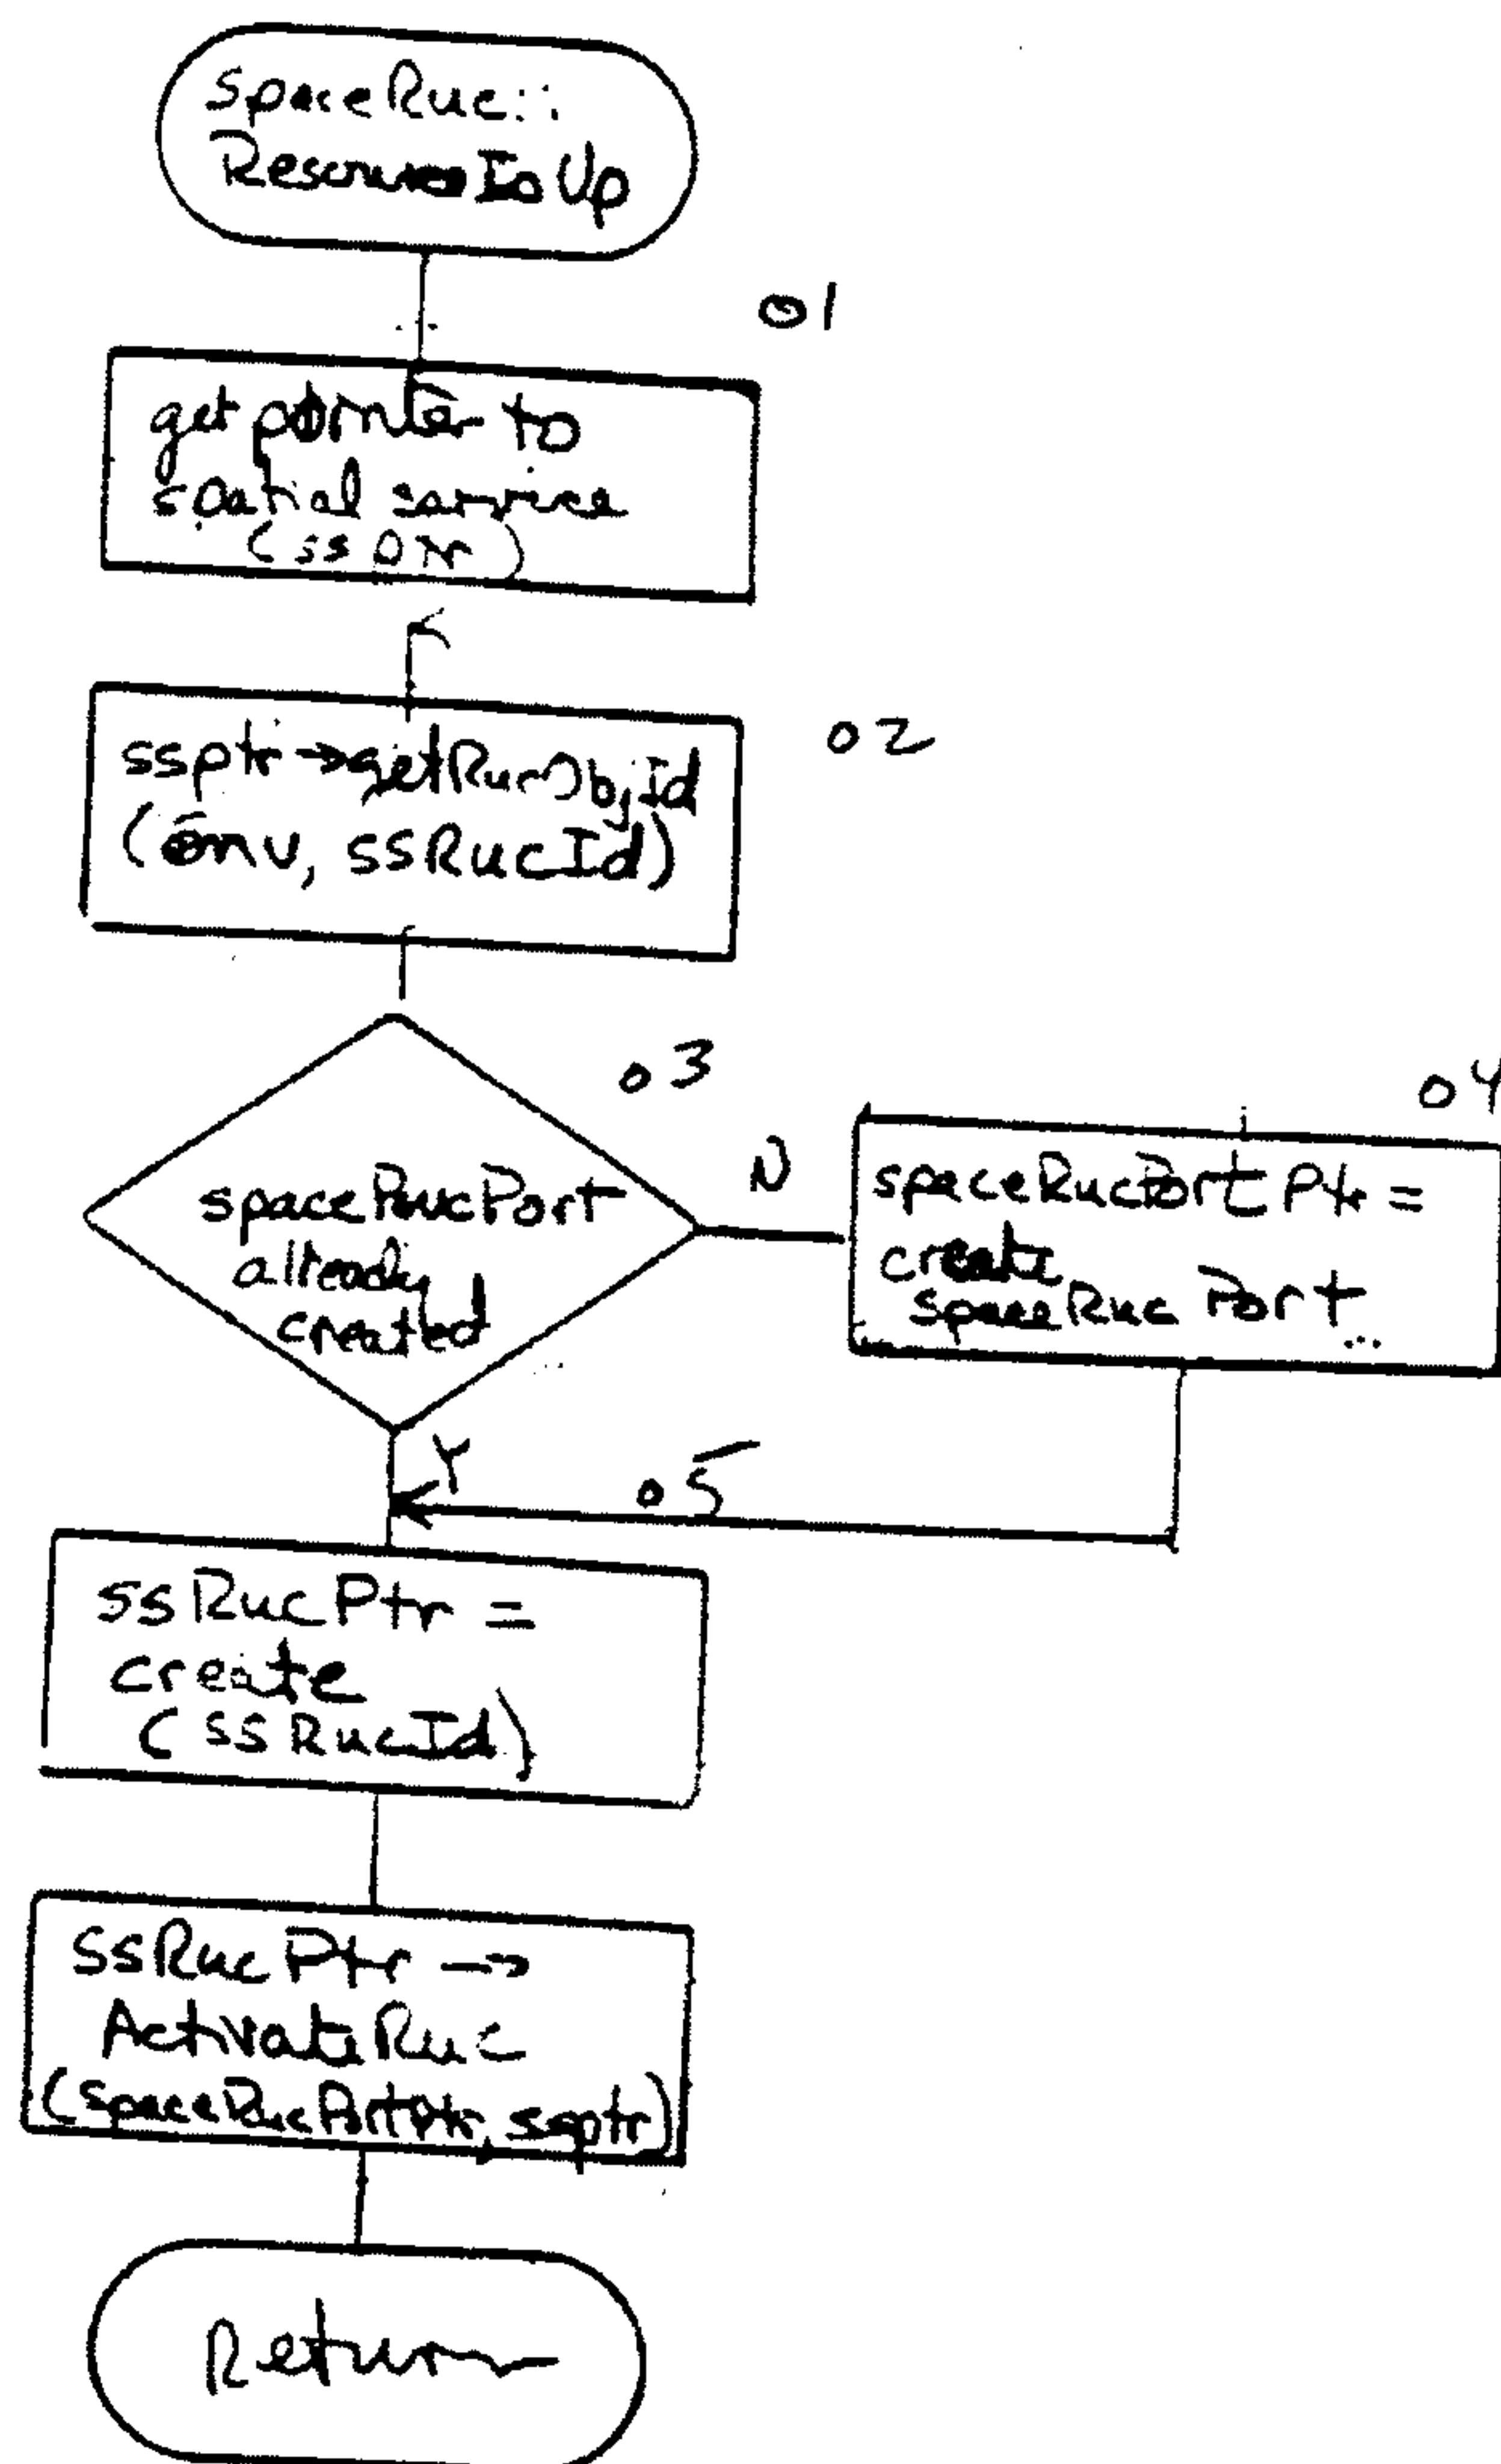

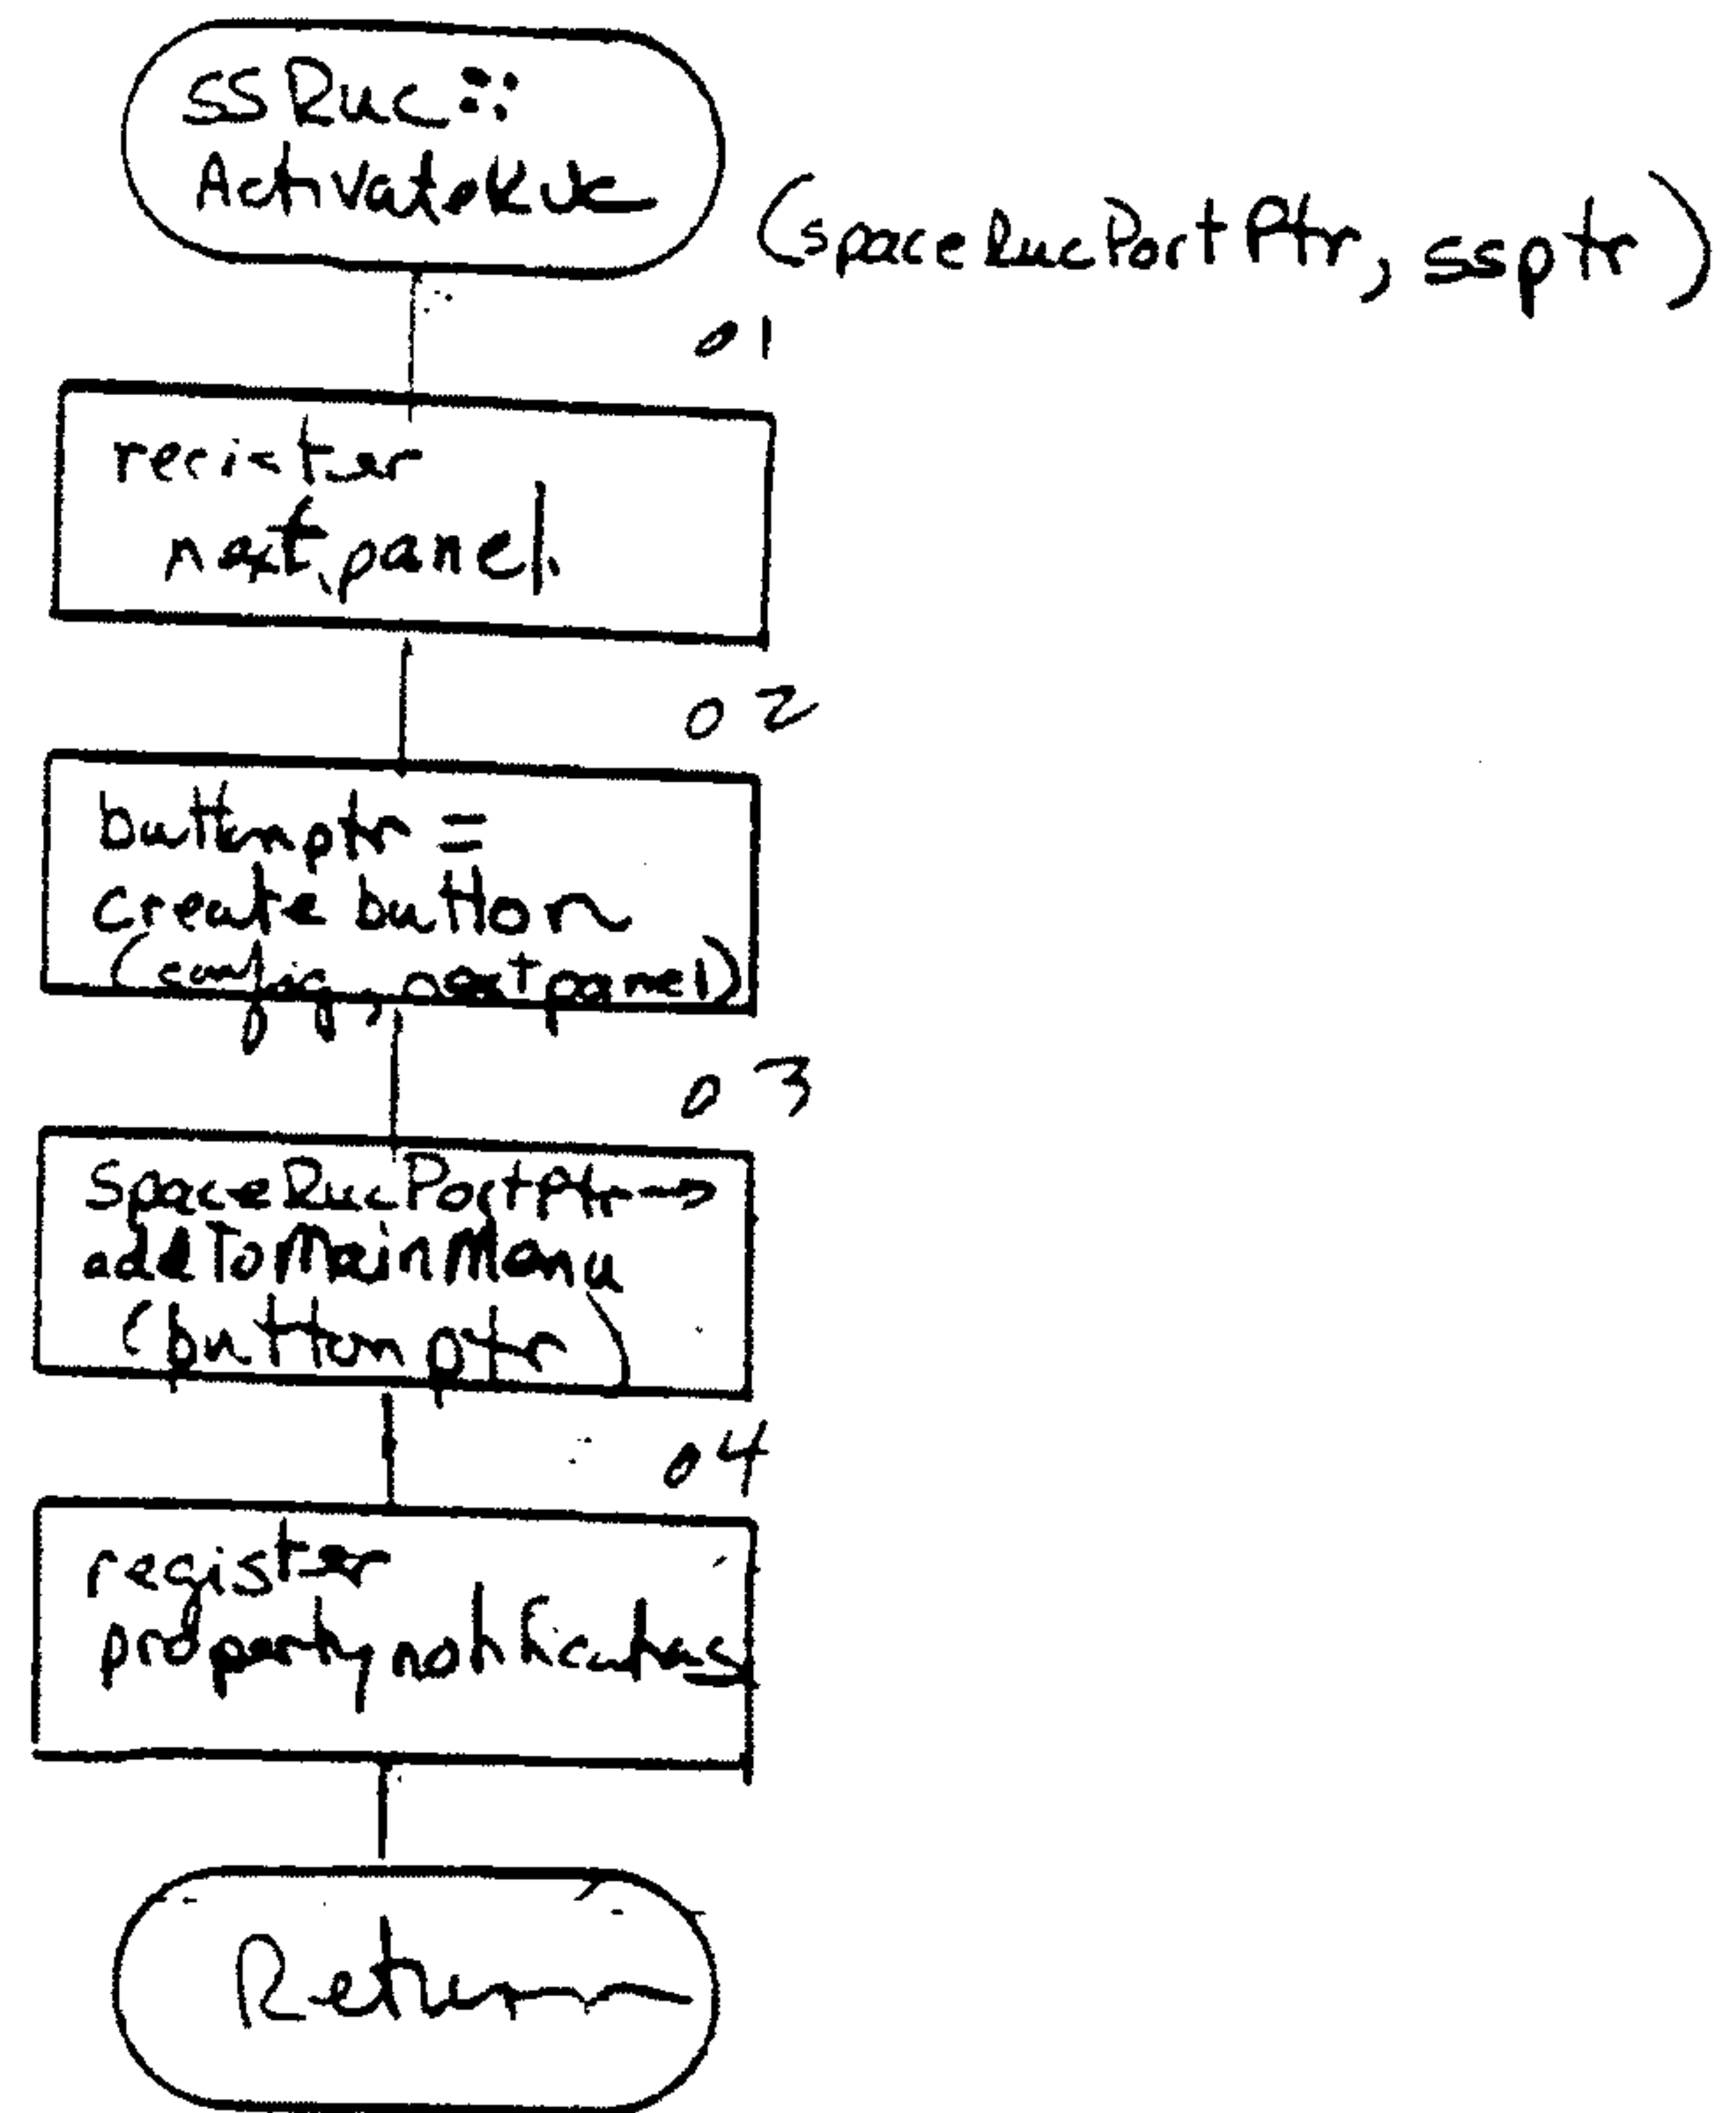


\$15


WO 00/46657

16 / 19

PCT/US00/03098

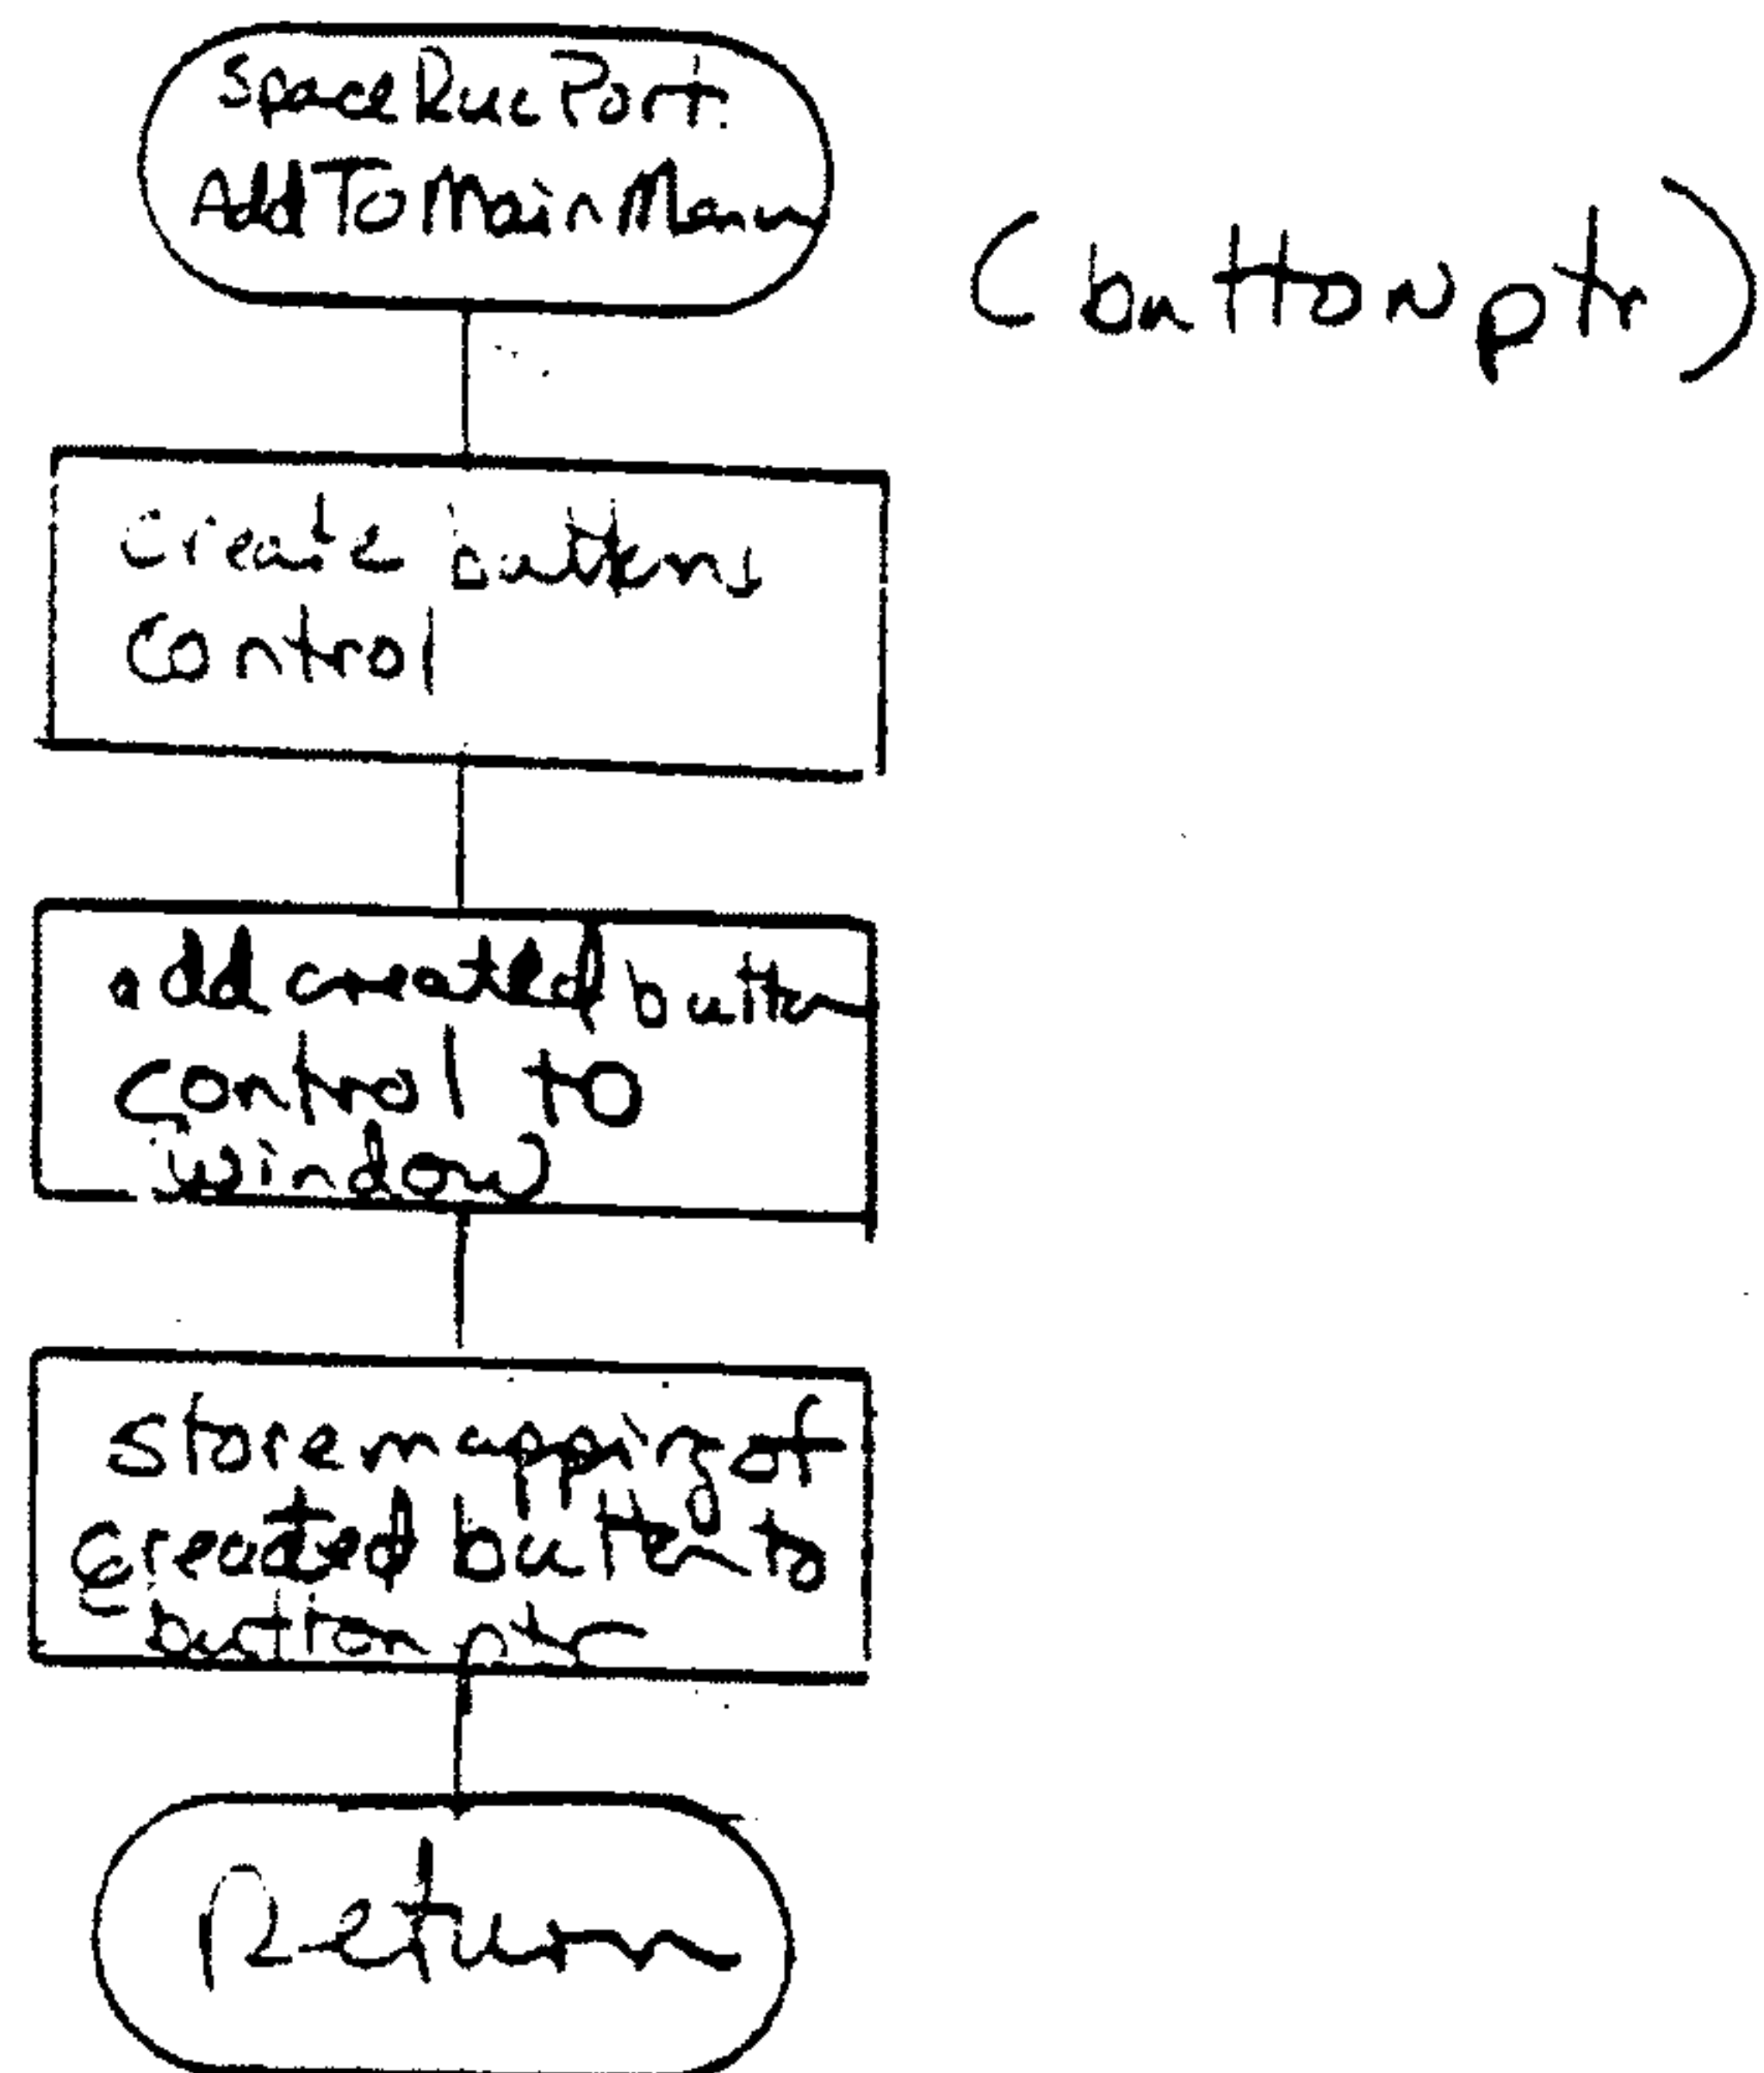

\$16

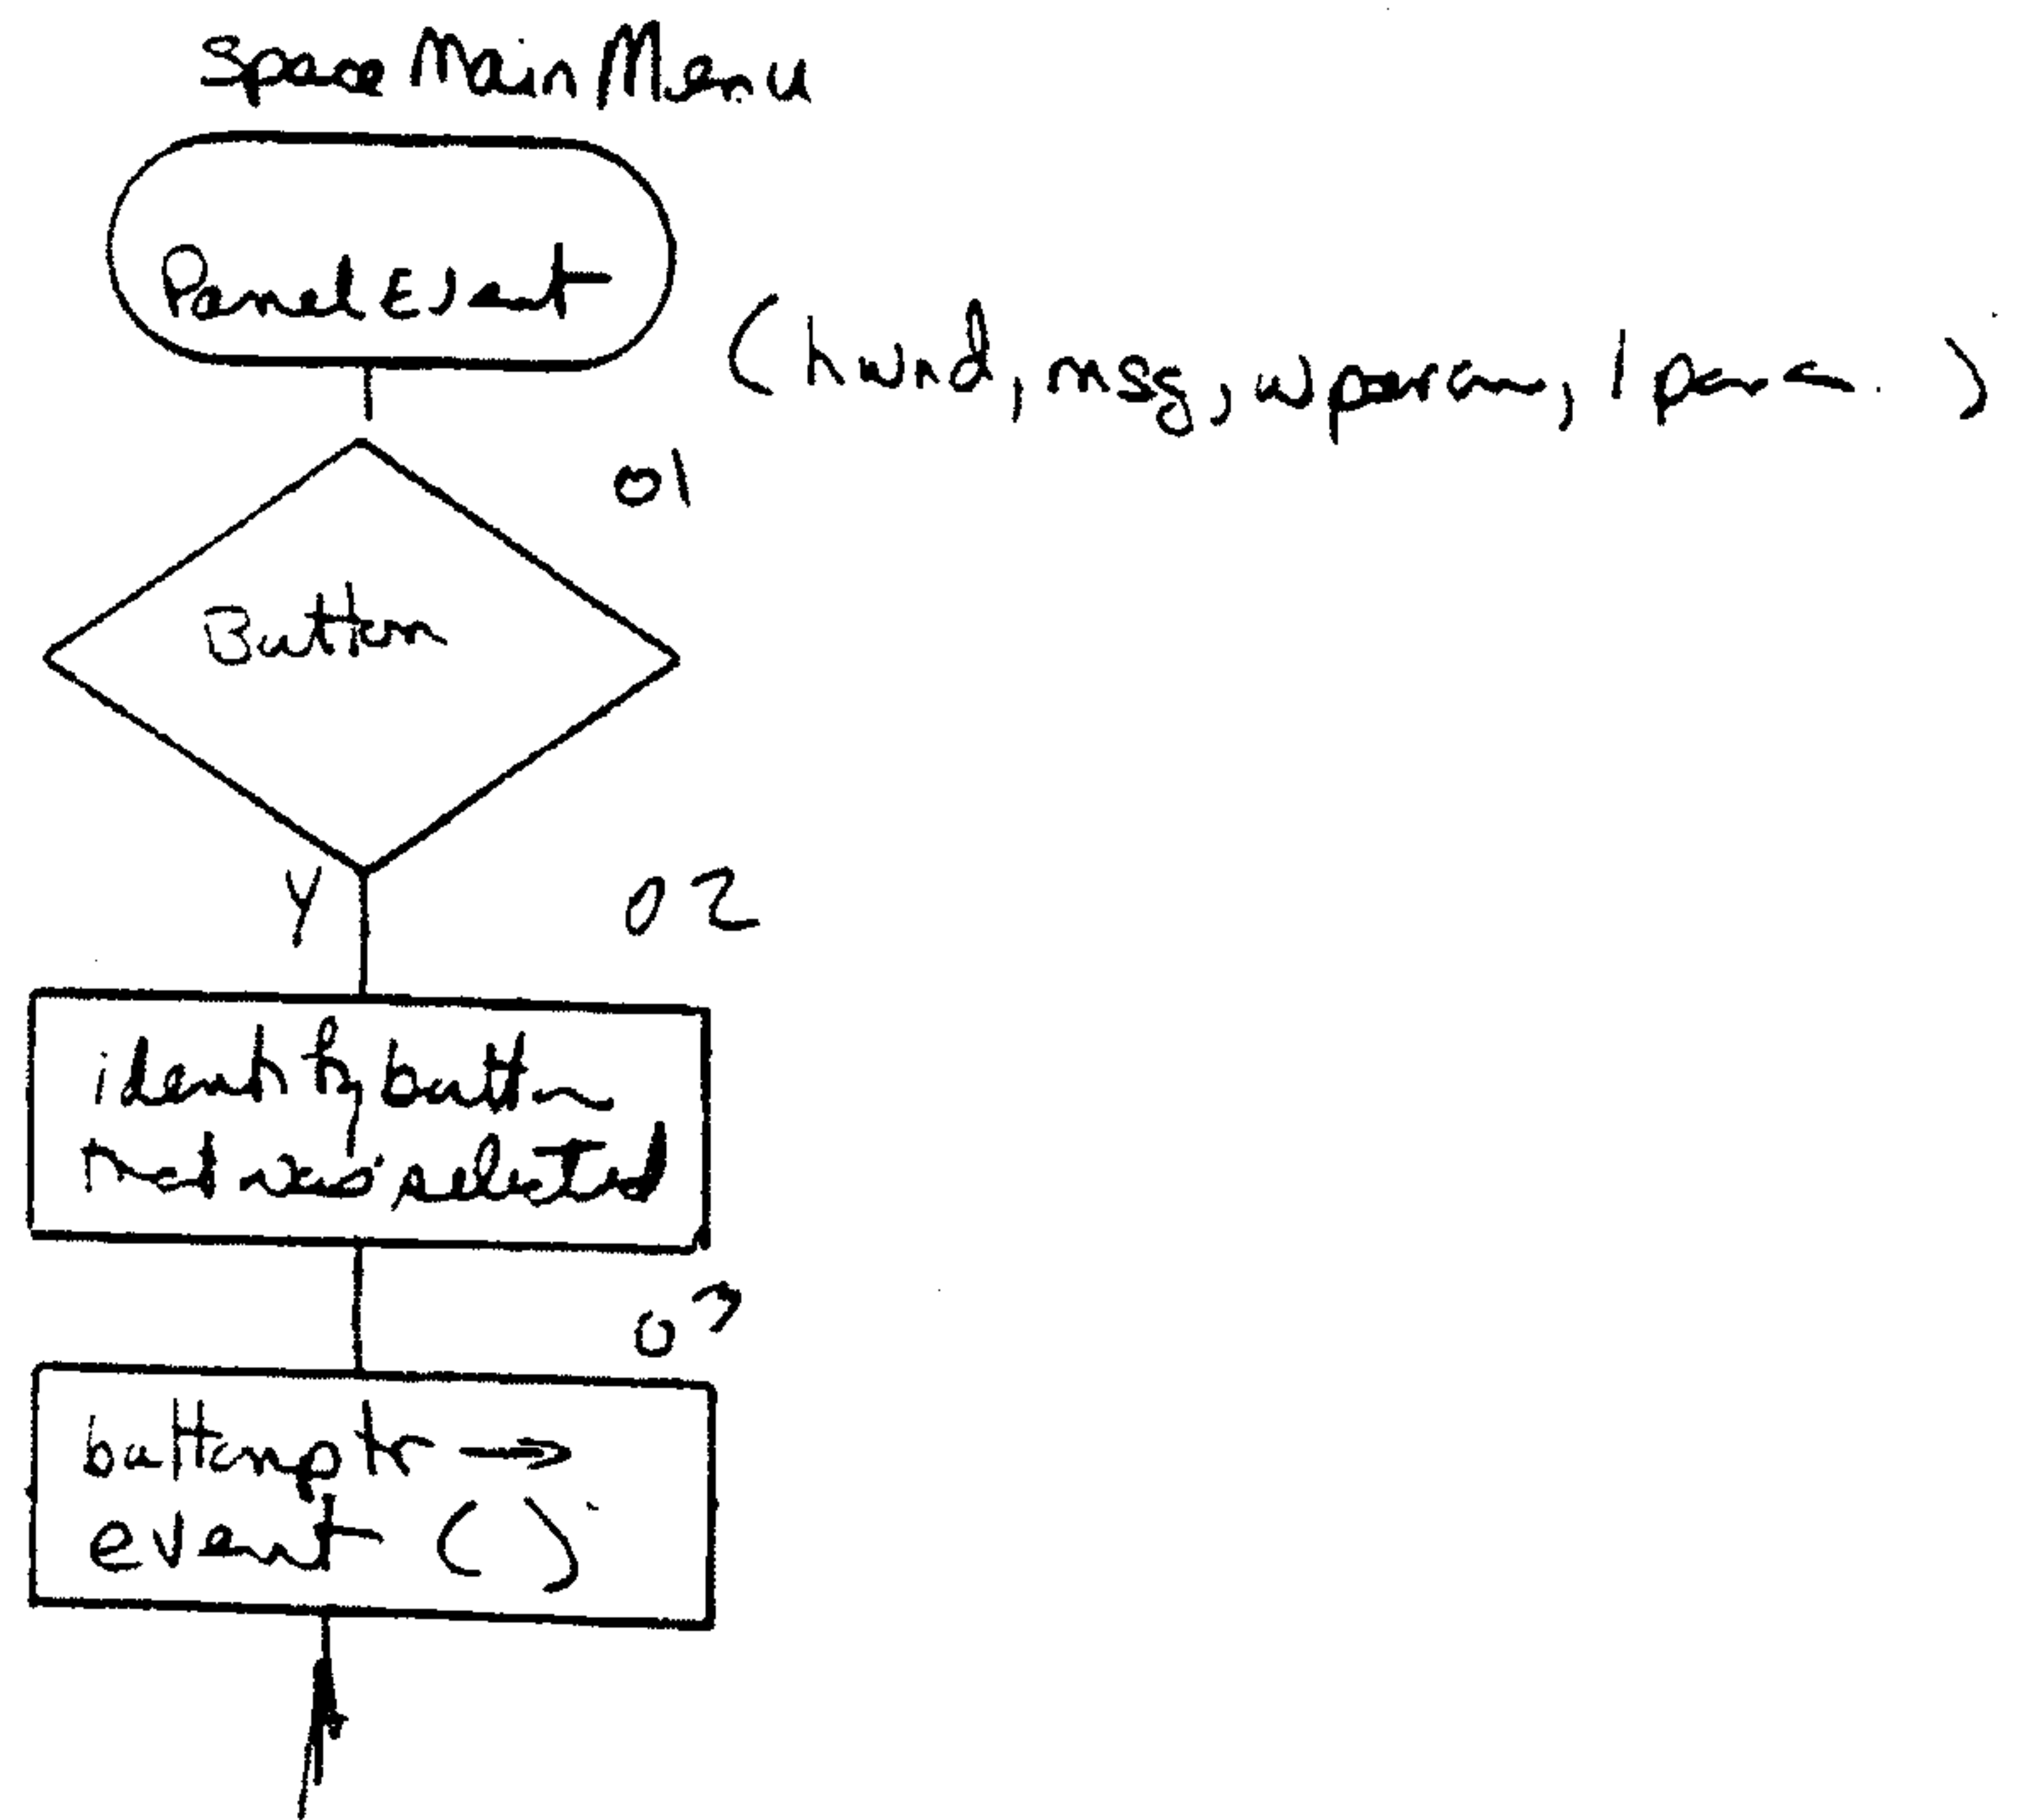


\$17


WO 00/46657

18 / 19

PCT/US00/03098

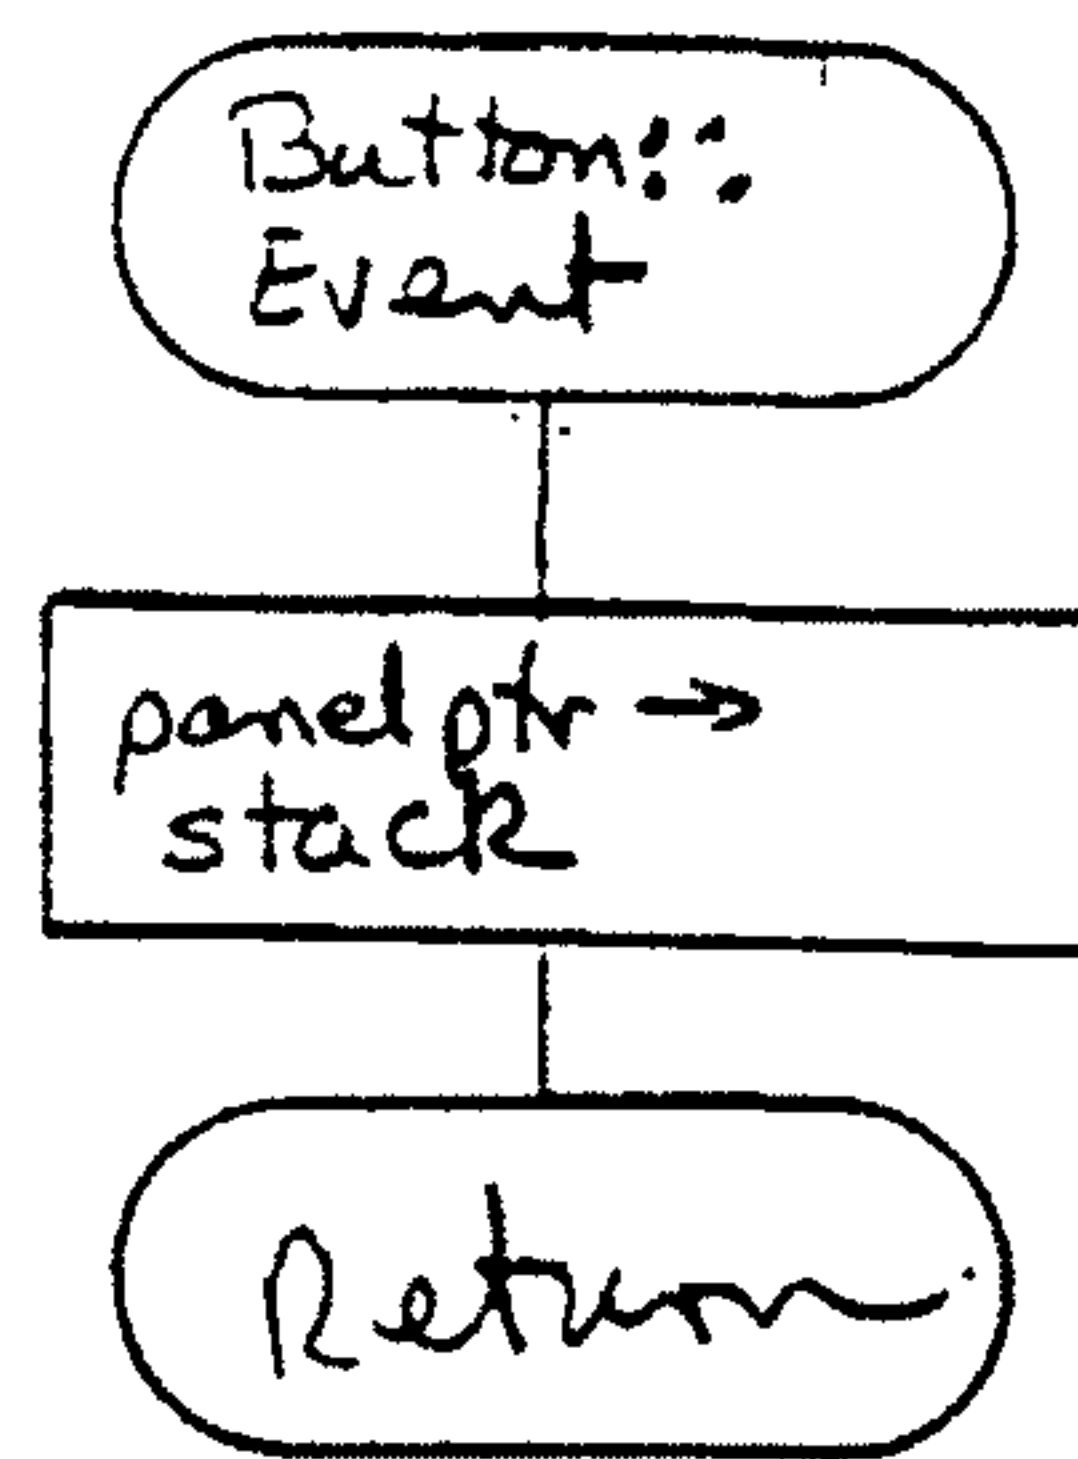

\$ 18

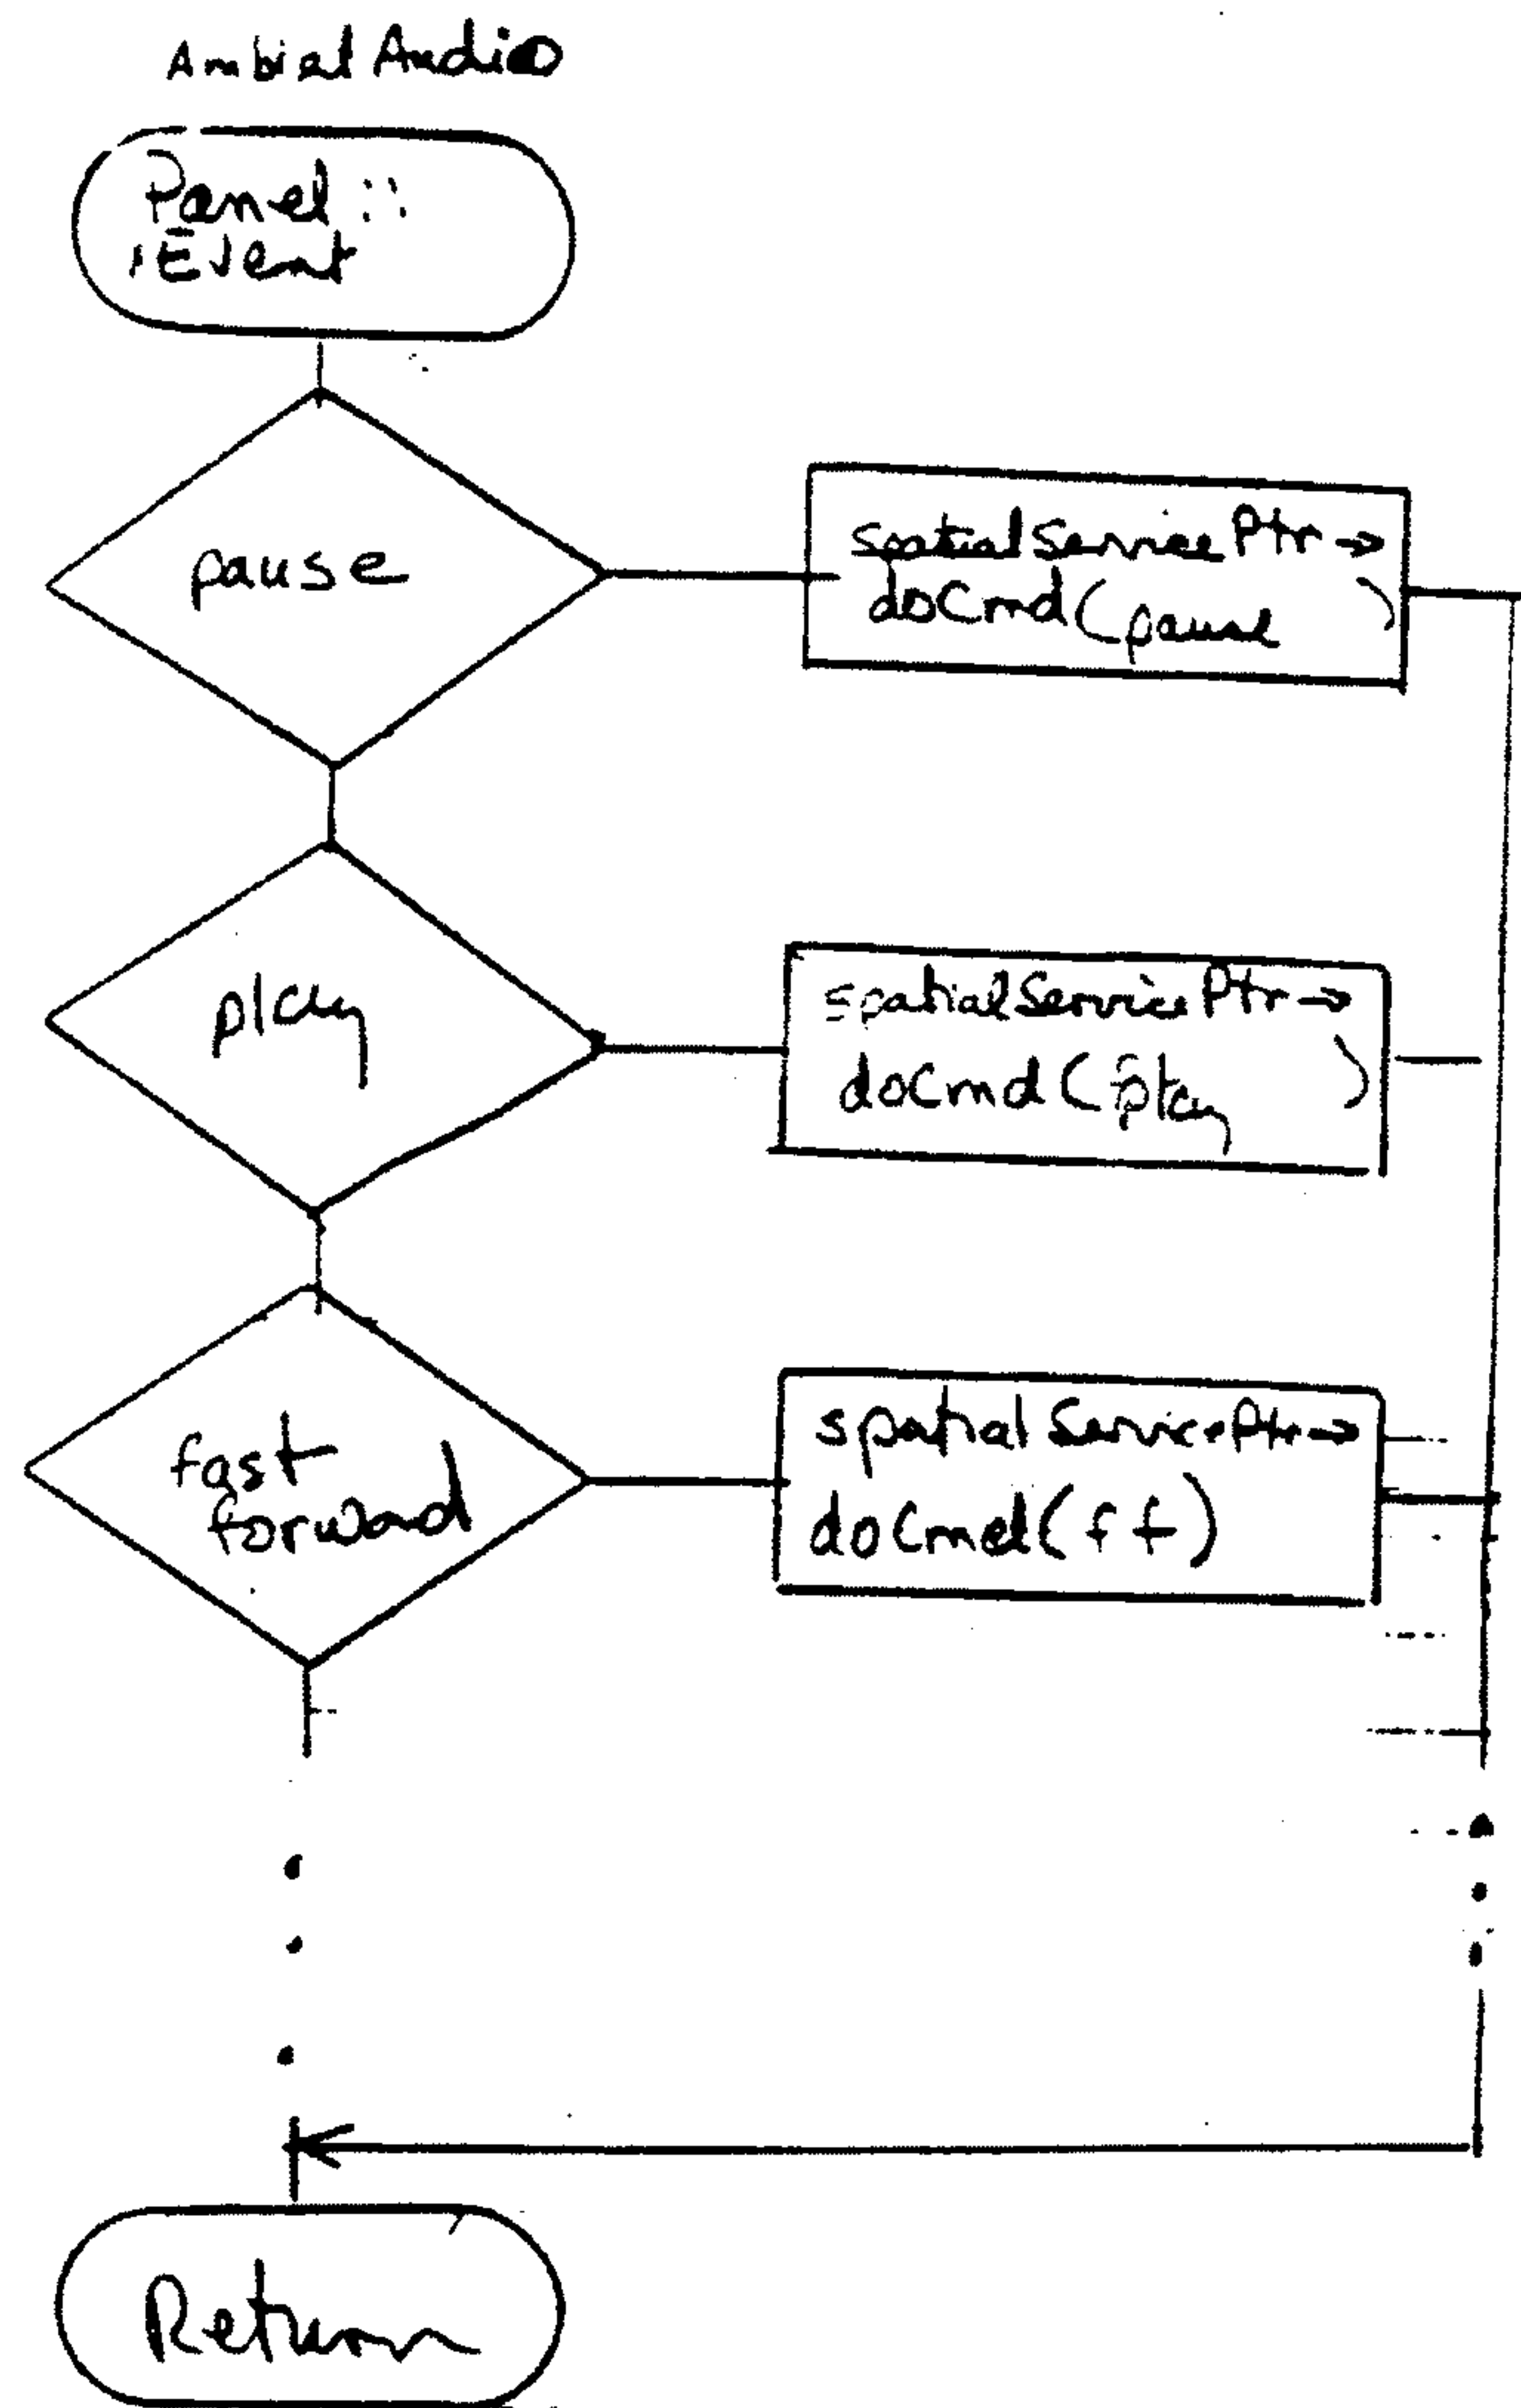

UCP panel

00

Swimming Pool

Main Menu

Thu - 8:06 AM

←
BACK

103 { MUTE ALL

?

ROAM



Audio / Video



Lighting



Climate Control



Elevator Control



Air Control



HRM Control

Ambient Audio

S. Wonderful

1023 04-18

Elevator Control

CALL

BOTH

SETTINGS
MENU

DISPLAY
MODE ...

02

Q1