

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 July 2009 (02.07.2009)

PCT

(10) International Publication Number
WO 2009/080872 A1

(51) International Patent Classification:
D21F 3/00 (2006.01) *D21G 1/00* (2006.01)
D21F 3/02 (2006.01)

(74) Agent: KESPAT OY; P.O.Box 601, FI-40101 Jyväskylä (FI).

(21) International Application Number:
PCT/FI2008/050724

(22) International Filing Date:
10 December 2008 (10.12.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
07150199.3 20 December 2007 (20.12.2007) EP

(71) Applicants (for all designated States except US): STORA ENSO OYJ [FI/FI]; Kanavaranta 1, FI-00160 Helsinki (FI). METSO PAPER, INC. [FI/FI]; Fabianinkatu 9 A, FI-00130 Helsinki (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): KYLLIÄINEN, Pekka [FI/FI]; Joukahaisenkuja 6, FI-55100 Imatra (FI). RÄISÄNEN, Kari [FI/FI]; Alasallaantie 250, FI-40500 Jyväskylä (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

(54) Title: ARRANGEMENT IN CONNECTION WITH THE PRESS SECTION OF A WEB-FORMING MACHINE AND BOARD OR PAPER PRODUCED IN SUCH ARRANGEMENT

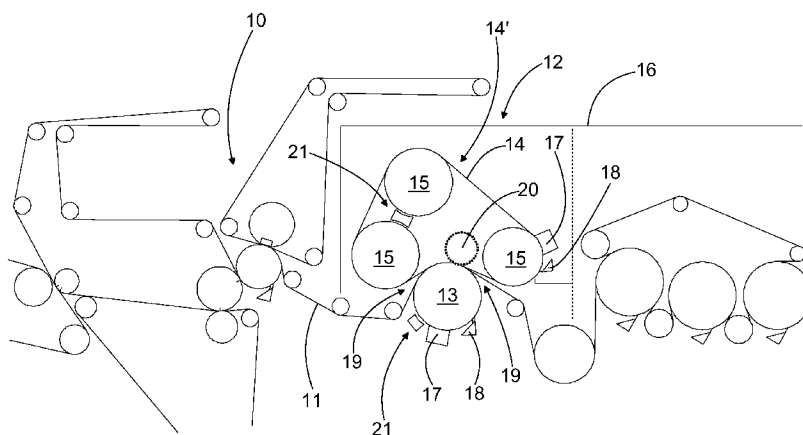


Fig. 1

(57) Abstract: The invention relates to an arrangement in connection with the press section of a web-forming machine. The arrangement includes at least one press nip (10) for dewatering the web (11) manufactured on a web-forming machine. The arrangement also includes a smoothing press (12) including a soothing roll (13) arranged after the press nip (10). The smoothing press (12) includes smooth heat carrying means (14') arranged as a loop around at least two guide rolls (15). The soothing roll (13) is arranged into contact with the means (14') between two guide rolls (15). The soothing roll (13) and/or at least one of the guide rolls (15) is a steam heated drying cylinder or a steam heated roll modified thereof. The invention also relates to a board or paper produced in such arrangement.

WO 2009/080872 A1

ARRANGEMENT IN CONNECTION WITH THE PRESS SECTION OF A WEB-FORMING MACHINE AND BOARD OR PAPER PRODUCED IN SUCH ARRANGEMENT

The present invention relates to an arrangement in connection
5 with the press section of a web-forming machine, which arrangement includes

- at least one press nip for dewatering the web manufactured on a web-forming machine, and
- a smoothing press including a smoothing roll arranged after
10 the press nip.

The present invention also relates to a board or paper produced in such arrangement.

In the press section of a web-forming machine lots of water is
15 rapidly removed from the web. The press section has usually one or two press nips and press felts are also used. The press nip is often formed of two rolls arranged to be loaded against each other.

20 The quick removing of water causes surface densification of the same side of the web where the water is removed. Simultaneously, an oil absorption reduction appears and the print quality degrades. To avoid these problems a smoothing press is arranged after the press section. Traditionally the smoothing
25 press includes two rolls forming a nip. The web is thus pressed in the nip without any press felt. Due to this fact water is not removed from the web in the smoothing press. However, both surfaces of the wet web get smoother which improves drying of the web in the drying section.

30

One target in the web-forming is to maintain both sides of the web as symmetrical as possible. However, this has occasionally required very complicated structures in the press sections and smoothing presses. Also, when heating the paper or board some

problems have occurred. In the conventional short heated smoothing nip the water may turn to steam with a sudden heat or press impulse. This leads to delamination of the web. Furthermore the brightness and opacity of the web may decrease and the web can stick to the surfaces, for example to the surface of the roll.

The invention is intended to create a new type of arrangement in connection with the press section of a web-forming machine by means of which arrangement the quality of the surfaces of the web can be improved together with better drying properties. The characteristic features of this invention are stated in the accompanying Claims. The arrangement according to the invention is a new kind of combination of a press nip and a smoothing press. In the smoothing press according to the invention the web is heated efficiently without any risk of delamination. Simultaneously, both surfaces of the web get smooth which intensifies drying of the web. Other properties and advantages of the arrangement are discussed later. The paper or board produced in the arrangement according to the invention has surprisingly improved properties, above all, the initial smoothness of the paper or board product is improved resulting in improved stiffness and more efficient drying of the paper or board. Dry content of 60% or more enables smoothing with lower nip loads and without the need of moisturising. However, the smoothing press can be applied for paper or board products independent of the of content with appropriate moisturising and even just before reeling.

In the following, the invention is described in detail with reference to the accompanying drawings showing two embodiments of the invention, in which

Figure 1 shows a schematic drawing of a side view of the arrangement according to the invention,

Figure 2 shows a schematic drawing of a side view of the embodiment of the arrangement according to the invention.

5 Figure 1 shows an arrangement according to the invention in connection with the press section of a web-forming machine. The arrangement includes at least one press nip 10 for dewatering the web 11 manufactured on a web-forming machine. In Figure 1 there is actually three press nips. The arrangement also in-
10 cludes a smoothing press 12 including a smoothing roll 13. The smoothing press 12 is arranged after the press nip 10. When arriving to the smoothing press, the web has a dry content of 60 % or more. According to the invention the smoothing press 12 also includes smooth heat carrying means 14', such as a belt
15 14. The belt is preferably made of metal. The metal belt is smooth and has no void volume for water removal. The belt 14 is arranged as a loop around at least two guide rolls 15. The smoothing roll 13 is then arranged into contact with the belt 14 between two guide rolls 15. Thus, a non-water removing long
20 nip area is formed with the metal belt. During the processing of the web, the web is guided between the belt and the smoothing roll. Then both surfaces of the web will be smoothened in this long wrap metal belt smoothing nip. In addition, the smoothing roll 13 and/or at least one of the guide rolls 15 is
25 arranged to be heated by steam. Thus, the web is also heated in an efficient way. In practice the rolls are internally heated, for example, with steam.

According to the invention, the press nip 10 is a roll nip or
30 a long nip press. A long nip and low specific pressure in the press nip is very beneficial to the final bulk and bending stiffness of the paper or board. Preferably, the long nip press is a shoe press. With the shoe press high amount of water can be removed from the web. This increases both bulk and dry
35 content of the paper or board but it can make the surfaces of

the web porous. However, the web is then smoothened in the smoothing press according to the invention. This results in a paper or board with improved bulk or in a paper or board with improved surface properties with standard bulk. Simultaneously, drying efficiency can be improved since the contact between the web and the drying rolls is improved. This results in, for example, reduced drying shrinkage in the cross direction of the paper or board. The belt and the smoothing roll have very smooth surfaces which is important in view of smoothing. Due to the long nip area in the smoothing press heat has time to penetrate through the web and thus also to increasing the temperature of the middle layer of the web.

Heating of a web influences the smoothness of the web. The smoothing press according to the invention has a more efficient heating equipment compared to prior art. First, the smoothing roll 13 can be a steam cylinder or a steam heated roll modified thereof. Secondly, at least one of the guide rolls 15 can be a steam cylinder or steam heated roll modified thereof. A combination of the first two embodiments is also possible. Also all guide rolls 15 can be steam cylinders or steam heated rolls modified thereof. Steam is very efficient source of heat and the structure of a steam cylinder is simple. The required temperatures can be achieved with a steam system of 1 - 10 bar. Temperatures of smoothing press are around 20 - 300 °C, preferably 50 - 170 °C. If needed, there can be also some auxiliary heating means 21 for the rolls 13, 15. The auxiliary heating means can include, for example infrared, resistive, inductive or gas-burner heater. There can be also a combination of the above mentioned heaters and the belt can also be heated. Some special arrangements can also be equipped with above mentioned auxiliary heating means without any steam heated solutions. In practise the diameter of the smoothing roll 13 and/or the guide roll 15 is 1000 - 2500 mm, preferably 1300 - 2000 mm. Thus, the

nip area becomes long and the rolls are stiff. In spite of large rolls the actual size of the smoothing press stays quite small. Preferably the smoothing press 12 also has an own hood 16. In this way it is possible to independently control the smoothing press and runaway heat flows can be avoided. Also excess or extra moisture can be handled with removal of moist air. The hood can also be common with the hood of the drying section.

10 In Figure 1 there is an open draw from the press nip 10 to the smoothing press 12. The tail threading is handled for example by ropes arranged to the side of the press section. However, vacuum belt conveyors and air blowings can be used.

15 The belt can be made of metal, for example of steel. The thickness of the metal belt is about 1 mm. In order to achieve a stable run of the belt quite high tensions are needed. According to the invention, the tension of the belt 14 is 0,3 - 15 kN/m, preferably 5 - 10 kN/m. The position and alignment of one
20 or more guide rolls can be adjusted. Thus, the smoothing press can be controlled for every situation.

The web may dust during smoothing. Also fibres, fines, chemical deposit or stickies can stick to the surface of the rolls or
25 belt. According to one preferred embodiment of the invention, there are cleaning equipments 17 which include high-pressure water cleaners preferably in connection with both the smoothing roll 13 and the belt 14. The cleaners are used continuously and bigger particles are removed with doctors 18. For better cleaning
30 results the temperature of the cleaning medium can be risen close to 100 °C which also reduces the cooling effect of the cleaners.

The smoothing effect of the smoothing press is achieved by long wrap metal belt nip area together with smooth surfaces of the belt 14 and the smoothing roll 13, and heating. The length of the nip is 500 - 2500 mm, preferably 1000 - 2000 mm. There is
5 no need to press the web which would decrease the bulk. Thus, the smoothing press 12 has a linear load which is 1 - 150 kN/m, preferably 5 - 100 kN/m. This nip pressure can be adjusted for example by moving one guide roll. If additional pressing is needed the smoothing roll 13 can be equipped with a counter
10 roll 20 which is arranged inside the belt 14 arranged as a loop. By loading the counter roll against the smoothing roll, the nip pressure is locally increased. The counter roll is preferably a crowned or tube a roll.

15 The smoothing roll 13 is arranged into contact with the belt 14 between two guide rolls 15. The rolls are situated in such a way that the smoothing roll 13 and the belt 14 form two gaps 19 which open downwards. The gaps are under the loop which keeps the smoothing press clean if threading tail breaks. Also, if
20 something else than the web enters into the closing gap, it will come out and fall underneath the smoothing press by way of gravity.

The second embodiment of the present invention shown in Figure
25 2 includes a dryer 22 arranged between the press section and the smoothing press 12. The dryer 22 is for increasing the temperature of the web and decreasing the water content therein. Thus the smoothing process becomes more effective. Here the dryer 22 includes four steam cylinders and one drying
30 wire. This web-preheating arrangement according to Figure 2 also enables less or no heating in the actual smoothing press.

In Figure 1 and Figure 2 the web is guided from the smoothing press to the drying section. Due to the smoothing press accord-
35 ing to the invention the first drying cylinder can be warmer

than previously. The above mentioned arrangement is advantageous when forming board and especially board with one or more plies. In known web-forming machines, the drying of the different plies of the board will occur at different times, i.e. the middle ply will have a different drying time than the top plies. Also, the shrinking forces of different plies are different in the top and middle of the web. In other words, when the top ply shrinks, the middle ply is still wet and can not resist shrinkage. This causes defects of the surface properties of the board and especially in the edge areas of the board where the board can dry freely. With the smoothing press the temperature of the web can be raised. Thus, the effect of z-directional shrinkage difference can be minimized. Simultaneously, higher initial cylinder temperatures can be used in the drying section. This improves the drying capacity of the drying section as a whole. Also the improved smoothness of the web will increase the friction between drying cylinders and drying fabrics. This will improve the surface properties of the board especially in the edge areas.

20

The arrangement according to the invention is compact and it has many advantageous features. Due to the long wrap metal smoothing nip, the web has higher dry content than in the ordinary smoothing press. Also, the surfaces of both sides of the web are very similar. The components of this arrangement are simple so the founding costs are low. Also, there are only minor press felt markings on the web after leaving the smoothing press. The web has very good smoothness and bulk both after the press section and also for the end product. As mentioned earlier, this leads to improved contact between drying cylinders and drying fabrics. Also the drying shrinkage is reduced and the temperature transmission from drying cylinders to the web is improved. When the drying efficiency gets higher the production capacity can be improved or higher bulk can be achieved after the press section. When the smoothness is im-

35

proved in the metal belt smoothing press there is less need for calendaring after the drying section. This leads to improved bending stiffness because the caliper of the web is improved. Also, the reduced z-directional temperature gradient leads to
5 reduced drying roughening which improves the cross direction uniformity of the web.

The press section has few press nips. The structure of the press section is thus simple which improves the runnability of
10 the press section and reduces the investment costs. This gives a short payback period for the smoothing press arrangement according to the invention. Also, the space needed for the press section is reduced. The metal belt smoothing press has also effect on the strength properties of the end product. In
15 practise, a minimum web stretch on the press section keeps the md/cd strength property ratio down. This kind of ratio is desirable for packaging board end uses. Also, both sides of the board have improved similarity. The smoothing press also changes the surface properties of the web. Also, it is possible to
20 adjust the temperatures of the sides of the paper or board in the smoothing press. Hence, it is easy to change the sidedness of the paper or board. When the web is already preheated in the smoothing press, higher initial cylinder temperature can be used in the drying section without fibre picking and dusting or
25 linting problems.

The press section is intended for dewatering and/or processing paper of board webs. The board can have one or more plies. Liquid packaging board and cup stock board are preferable end
30 products. In spite of the end use, the board has no warpages or curlings and it has a good stiffness. According to the invention, the heating means or heat carrying means or cleaning equipments includes one or more suitable device for heating, heat carrying or cleaning, respectively.

The boards are divided into a number of different types, depending on their intended end use. Each application makes different demands on the properties of the board and each board type therefore implies certain characteristics, such as strength properties, internal bonding (Scott Bond (J/m²), bending resistance index (Nm⁶/kg³), taint/odour (hexanal value (ppb)); brightness (ISO) (%) and edge penetration. The different board applications of this invention are therefore characterized by means of parameters, which correspond to their intended end use. The following methods and standards apply both to the definitions of the appended claims.

The edge penetration is a measure of hydrophobicity and sizability and is measured by an edge penetration test EWT (Edge Wick Test) according to the following method: board samples are conditioned at 23 °C, 50% RH for 10 minutes. The samples are then cut to a specific size and the thickness of the samples is measured. The samples are then covered on both sides with a waterproof tape, the edges of the samples are thus uncovered, and the weight of the samples is measured. The size of the samples is for example 25 x 75 mm. Thereafter, the samples are put into a test solution (bath) for a certain period of time: lactic acid (concentration 1%, 1 hour), hydrogen peroxide (concentration 35%, 70 °C, 10 minutes), cream coffee (1 l tap water, 9,5 g instant coffee, 17,5 g dry cream, 80 °C, 10 minutes). The weight of the samples is measured after the samples have been in the bath. The wick index is then calculated by the formula:

30 where
$$E = \frac{W_2 - W_1}{t \cdot l}$$

E = Wick index [kg/m²]

W_1 = weight before bath [mg]

W_2 = weight after bath [mg]

t = thickness (μm)

l = total length of the edges of the samples [m]

Hexanal is measured within one week from production of the board according a gas chromatography method, in which a sample is heated in a headspace (Perkin Elmer HS 40XL) to a temperature of 90 °C for 40 minutes, and the gas formed is conducted to the gas chromatograph (AutoSystem XL with a FID), where the components of the sample are separated. The amount of hexanal is measured in ppb ($\mu\text{g/kg}$).

Bending resistance is measured according to SCAN-P 29:95 (L&W 15 degrees). Bending resistance index (F) is calculated: $F = 10^6 \cdot F_b / w^3$ (Nm^6/kg^3), where w grammage (g/m^2) and F_b is bending resistance (mN). The bending resistance index refers to the geometrical bending resistance index, which is calculated $F_{\text{geom}} = (F_{\text{md}} \cdot F_{\text{cd}})^{0.5}$, where F_{md} is the bending resistance index in the machine direction and F_{cd} is the bending resistance index cross the machine direction.

20

The following properties are measured according to the standards indicated:

Scott Bond: TAPPI UM-403,

Roughness Bendtsen; SCAN-P 84,

25 Brightness (ISO): ISO 2470,

CD stretch to break: SCAN-P 67.

The value of roughness is measured before the board is pre-calendered or calendered. The roughness can either be measured on the web by open the calender and then measure the roughness or a sample can be cut out of the web and the roughness can then be measured on the sample. The other parameters, such as Scott Bond, bending resistance, hexanal and EWT are measured on the finished board.

35

In one preferred embodiment of the invention the board has an initial roughness Bendtsen value below 1000 ml/min, a Scott Bond of 120 - 350 J/m², a bending resistance index of 8 - 25 Nm⁶/kg³, a hexanal value below 600 ppb when measured within one week from the board manufacture and an EWT (lactic acid) value below 2 kg/m² and/or an EWT (hydrogen peroxide) value below 2 kg/m². The board of this embodiment has high cleanliness, high strength and good hydrogen peroxide and/or lactic acid penetration values, all which is important for packages containing liquid. It fulfils the demands for use as a liquid packaging board, and is thus suitable for the manufacture of packages for holding liquids, such as milk or juice cartons.

In another embodiment of the invention, the board has an initial roughness Bendtsen value below 1000 ml/min, a bending resistance index of at least 5 Nm⁶/kg³, a Scott Bond value of at least 160 J/m², a CD (cross direction) stretch to break of at least 2.5%, preferably 3.5%, a hexanal value below 600 ppb when measured within one week from the board manufacture, preferably below 400 ppb, and an EWT (cream coffee) value below 1.8 kg²/m². This board grade has high formation, high cleanliness as well as a good CD stretch value, which fulfils the demands of cup stock board, and is thus suitable for use in the manufacture of cups for holding liquids, such as coffee or other beverages.

25

In a further embodiment of the invention, the board has an initial roughness Bendtsen value below 1000 ml/min, a Scott Bond value of at least 130 J/m², a hexanal value below 1000 ppb when measured within one week from the board manufacture and a brightness (ISO-UV; measured with 420 nm filter) of at least 82% for the uncoated board. The board of this embodiment has good strength and optical properties and fulfils the demands of a graphical paperboard, and is thus suitable for use as a graphical board and for packages holding for example pharmaceuticals or cosmetics.

35

In yet another embodiment of the invention, the board has an initial roughness Bendtsen value below 1000 ml/min, a bending resistance index of at least $5 \text{ Nm}^6/\text{kg}^3$, a Scott Bond value of at least 130 J/m^2 , a CD stretch to break of at least 2.5%, preferably 3.5 % and a hexanal value below 600 ppb when measured within one week from the board manufacture, preferably below 400 ppb. The board of this embodiment has high cleanliness in combination with good strength and CD stretch, and fulfils the demands of food service board, which makes it suitable for use as food service board and in the manufacture of packages for foodstuff, especially packages in which the foodstuff comes into direct contact with the board.

CLAIMS

1. Arrangement in connection with the press section of a web-forming machine, which arrangement includes
- 5 - at least one press nip (10) for dewatering the web (11) manufactured on a web-forming machine, and
- a smoothing press (12) including a smoothing roll (13) arranged after the press nip (10),
- characterized in that the smoothing press (12) includes smooth
- 10 heat carrying means (14') arranged as a loop around at least two guide rolls (15), and the smoothing roll (13) is arranged into contact with the means (14') between two guide rolls (15), and the smoothing roll (13) and/or at least one of the guide rolls (15) is a steam heated drying cylinder or a steam heated
- 15 roll modified thereof.
2. Arrangement according to Claim 1, characterized in that the smoothing press (12) is arranged in the direction of motion of the web (11) when the dry content of the web (11) is 60 % or
- 20 more.
3. Arrangement according to Claim 1 or 2, characterized in that the smooth heat carrying means (14') consist of a belt (14) made of metal.
- 25
4. Arrangement according to any of Claims 1 - 3, characterized in that the smoothing roll (13) and/or at least one of the guide rolls (15) is arranged to be heated by steam, infrared, resistive, inductive or gas-burning heating means.
- 30
5. Arrangement according to any of Claims 1 - 4, characterized in that all guide rolls (15) are steam cylinders or steam heated rolls modified thereof.
- 35 6. Arrangement according to any of Claims 1 - 5, characterized in that the diameter of the smoothing roll (13) and/or the guide roll (15) is 1000 - 2500 mm, preferably 1300 - 2000 mm.

7. Arrangement according to any of Claims 1 - 6, characterized in that the smoothing press (12) has an own hood (16).

5 8. Arrangement according to any of Claims 3 - 7, characterized in that the tension of the belt (14) is 0,3 - 15 kN/m, preferably 5 - 10 kN/m.

9. Arrangement according to any of Claims 3 - 8, characterized
10 ized in that in connection with both smoothing roll (13) and belt (14) there are cleaning equipments (17) which include high-pressure water cleaners.

10. Arrangement according to any of Claims 1 - 9, characterized
15 ized in that the smoothing press (12) has a linear load which is 1 - 150 kN/m, preferably 5 - 100 kN/m.

11. Arrangement according to any of Claims 3 - 10, characterized
20 terized in that the smoothing roll (13) has a counter roll (20) which is arranged inside the belt (14) arranged as a loop.

12. Arrangement according to any of Claims 3 - 11, characterized
terized in that the smoothing roll (13) and the belt (14) form two gaps (19) which open downwards.

25

13. Arrangement according to any of Claims 1 - 12, characterized
terized in that in connection with the smoothing press (12) there are auxiliary heating means (21) for heating the web (11) and/or the smooth heat carrying means (14').

30

14. Arrangement according to any of Claims 1 - 13, characterized
terized in that the arrangement is intended for dewatering and/or processing board webs, especially liquid packaging board or cup board.

35

15. Board or paper produced in the arrangement according to any of claims 1 - 14, for use as a liquid packaging board,

having an initial roughness before pre-calendering or calendering Bendtsen value below 1000 ml/min, a Scott Bond of 120 - 350 J/m², a bending resistance index of 8 - 25 Nm⁶/kg³, a hexanal value below 600 ppb when measured within one week from the board manufacture and an EWT (lactic acid) value below 2 kg/m² and/or an EWT (hydrogen peroxide) value below 2 kg²/m².

16. Board or paper produced in the arrangement according to any of claims 1 - 14, for use in the manufacture of cups for holding liquids, said board having an initial roughness before pre-calendering or calendering Bendtsen value below 1000 ml/min, a bending resistance index of at least 5 Nm⁶/kg³, a Scott Bond value of at least 160 J/m², a CD stretch to break of at least 2,5%, preferably at least 3,5%, a hexanal value below 600 ppb when measured within one week from the board manufacture, preferably below 400 ppb, and a EWT (cream coffee) value below 1.8 kg²/m².

17. Board or paper produced in the arrangement according to any of claims 1 - 14, for use as a graphical board wherein said board having an initial roughness before pre-calendering or calendering Bendtsen value below 1000 ml/min, a Scott Bond value of at least 130 J/m², a hexanal value below 1000 ppb when measured within one week from the board manufacture and a brightness (ISO-UV; measured with 420 nm filter) of at least 82% for the uncoated board.

18. Board or paper produced in the arrangement according to any of claims 1 - 14, for use as food service board, said board having an initial roughness before pre-calendering or calendering Bendtsen value below 1000 ml/min, a bending resistance index of at least 5 Nm⁶/kg³, a Scott Bond value of at least 130 J/m², a CD stretch to break of at least 2,5%, preferably at least 3,5% and a hexanal value below 600 ppb when measured within one week from the board manufacture, preferably below 400 ppb.

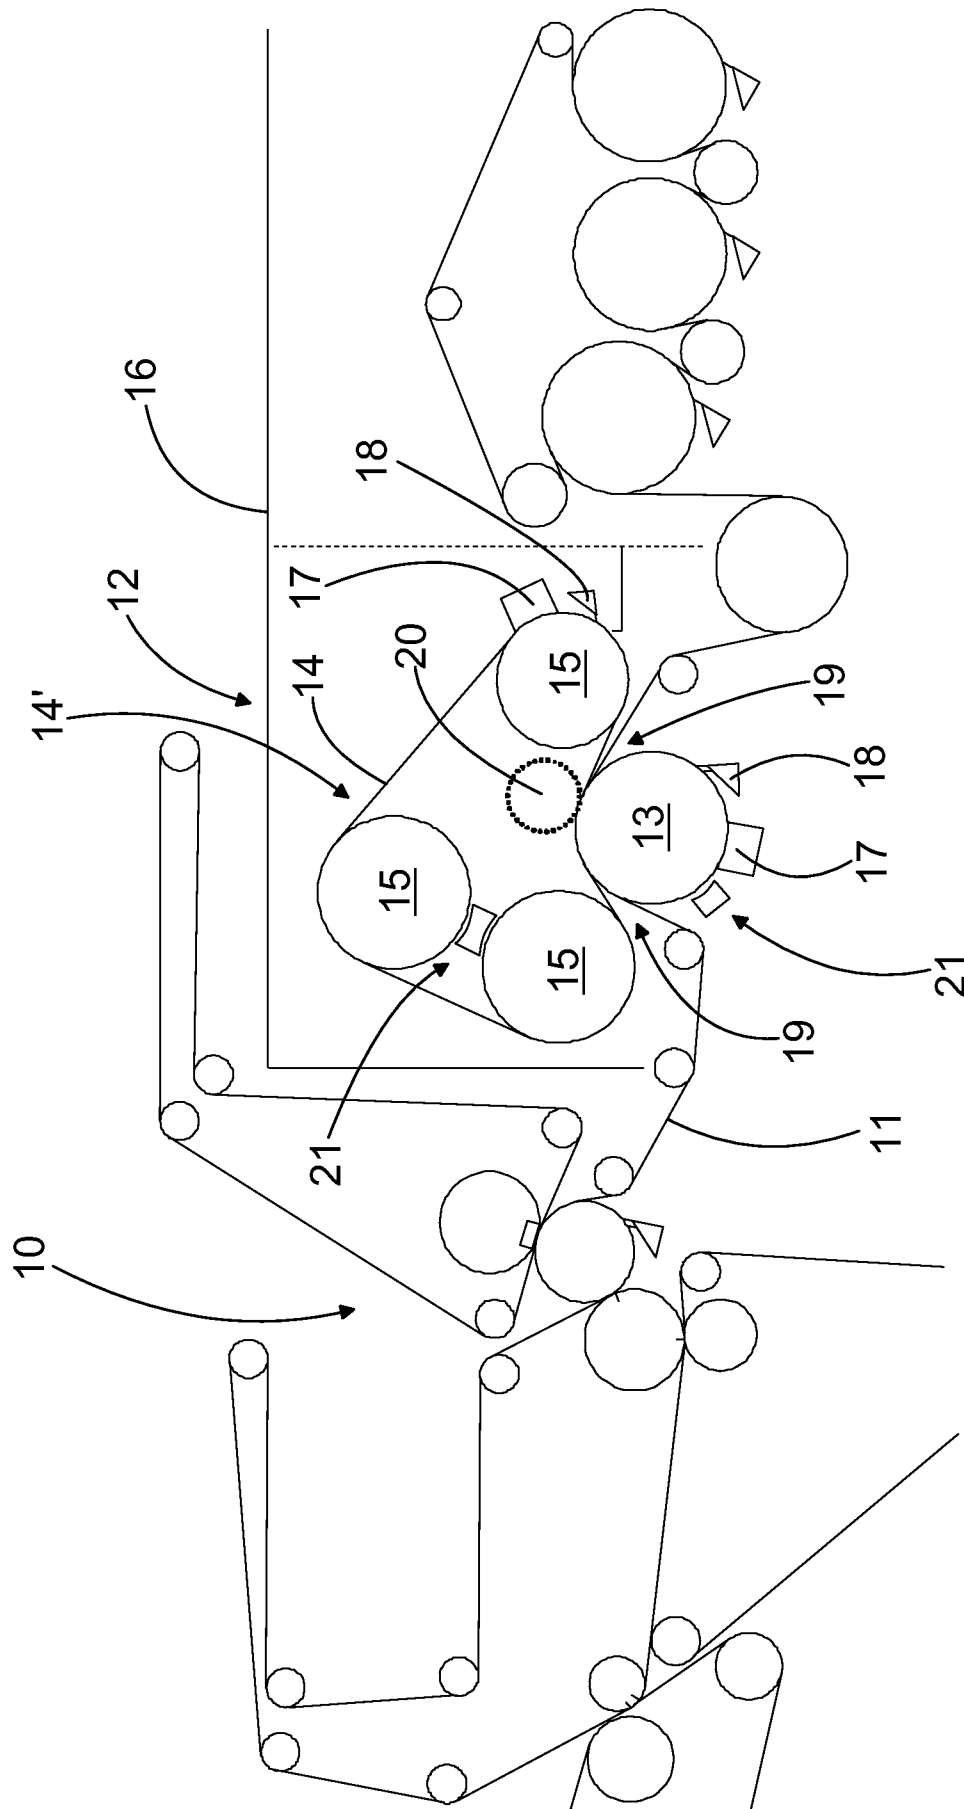


Fig. 1

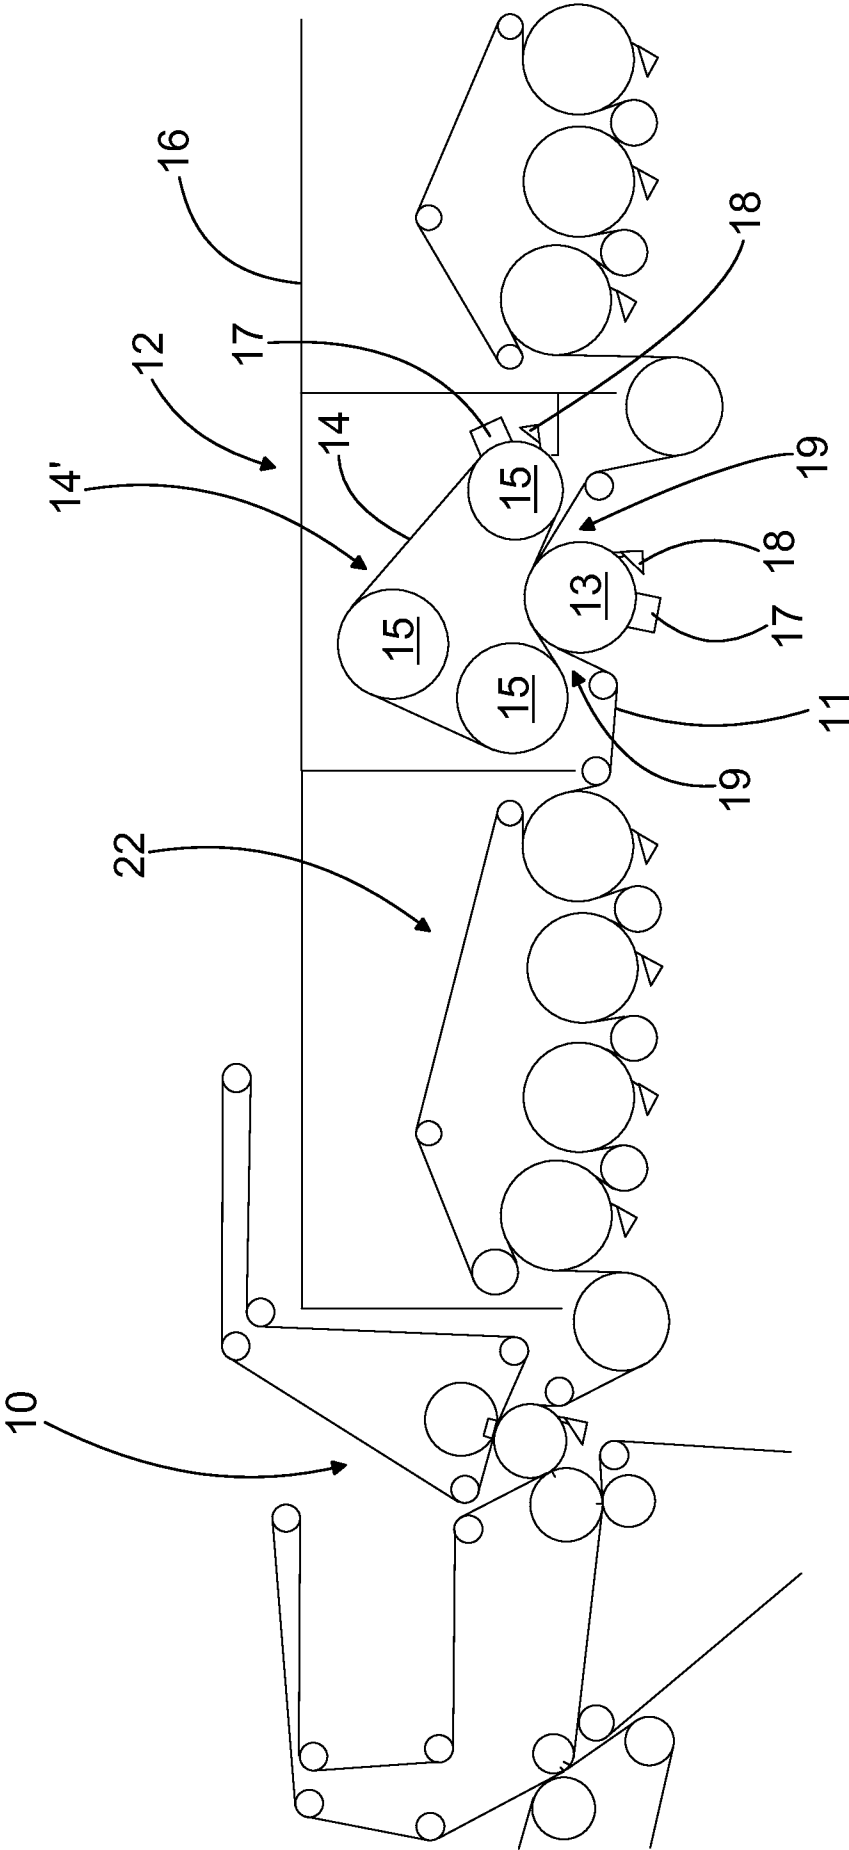


Fig. 2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2008/050724

A. CLASSIFICATION OF SUBJECT MATTER

See extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: D21F, D21G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

FI, SE, NO, DK

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI, COMPDX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3354035 A (GOTTWALD BRUCE C et al.) 21 November 1967 (21.11.1967), figures 1, 2, 5, and 6; column 1, lines 51-75; column 3, lines 10-14; column 3, line 68 – column 4, line 22; column 8, lines 4-9, 14-16, 35-51; column 9, lines 40-44; column 9, lines 60-64; column 10, lines 59-69	1-10, 12-18
Y	EP 0828028 A2 (VOITH SULZER PAPIERMASCH GMBH) 11 March 1998 (11.03.1998), abstract, figure 1	1, 15-18
Y	WO 2006129871 A2 (ICHIKAWA CO LTD et al.) 07 December 2006 (07.12.2006), abstract, figure 1	1, 11, 15-18
Y	EP 1314819 A2 (VOITH PAPER PATENT GMBH) 28 May 2003 (28.05.2003), figure; column 3, lines 43-51	1, 11, 15-18
P, X	WO 2008000885 A1 (METSO PAPER INC et al.) 03 January 2008 (03.01.2008)	1, 15-18

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

13 February 2009 (13.02.2009)

Date of mailing of the international search report

26 March 2009 (26.03.2009)

Name and mailing address of the ISA/FI
National Board of Patents and Registration of Finland
P.O. Box 1160, FI-00101 HELSINKI, Finland

Facsimile No. +358 9 6939 5328

Authorized officer

Tuomo Pynnönen

Telephone No. +358 9 6939 500

INTERNATIONAL SEARCH REPORT

International application No.
PCT/FI2008/050724

CLASSIFICATION OF SUBJECT MATTER

Int.Cl.

D21F 3/00 (2006.01)

D21F 3/02 (2006.01)

D21G 1/00 (2006.01)

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/FI2008/050724

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
US 3354035 A	21/11/1967	None	
EP 0828028 A2	11/03/1998	CA 2215077 A1 DE 19636627 A1	10/03/1998 12/03/1998
WO 2006129871 A2	07/12/2006	US 2009014143 A1 CN 101189391 A KR 20080014982 A EP 1899528 A2 CA 2605945 A1 JP 2007009389 A	15/01/2009 28/05/2008 15/02/2008 19/03/2008 07/12/2006 18/01/2007
EP 1314819 A2	28/05/2003	DE 10157687 A1	12/06/2003
WO 2008000885 A1	03/01/2008	FI 20065447 A	29/12/2007