



(86) Date de dépôt PCT/PCT Filing Date: 2019/03/08
(87) Date publication PCT/PCT Publication Date: 2019/09/12
(45) Date de délivrance/Issue Date: 2024/04/09
(85) Entrée phase nationale/National Entry: 2020/07/23
(86) N° demande PCT/PCT Application No.: US 2019/021410
(87) N° publication PCT/PCT Publication No.: 2019/173749
(30) Priorités/Priorities: 2018/03/09 (US62/641,096);
2018/05/05 (US62/667,508); 2018/05/30 (US62/677,830);
2019/03/08 (US62/815,723)

(51) Cl.Int./Int.Cl. *B65D 5/20* (2006.01),
B65D 5/38 (2006.01), *B65D 5/42* (2006.01),
B65D 5/72 (2006.01), *B65D 50/02* (2006.01),
B65D 59/04 (2006.01), *B65D 77/04* (2006.01),
B65D 77/22 (2006.01), *B65D 79/00* (2006.01),
B65D 83/04 (2006.01)


(72) Inventeurs/Inventors:
MARKARIAN, MICHAEL, US;
BAZIRGAN, COLETTE, US;
BENJAMIN, EDWARD, US

(73) Propriétaire/Owner:
CONTEMPO CARD COMPANY, US

(74) Agent: PERRY + CURRIER

(54) Titre : RECIPIENT DE STOCKAGE A L'EPREUVE DES ENFANTS

(54) Title: CHILD RESISTANT STORAGE CONTAINER

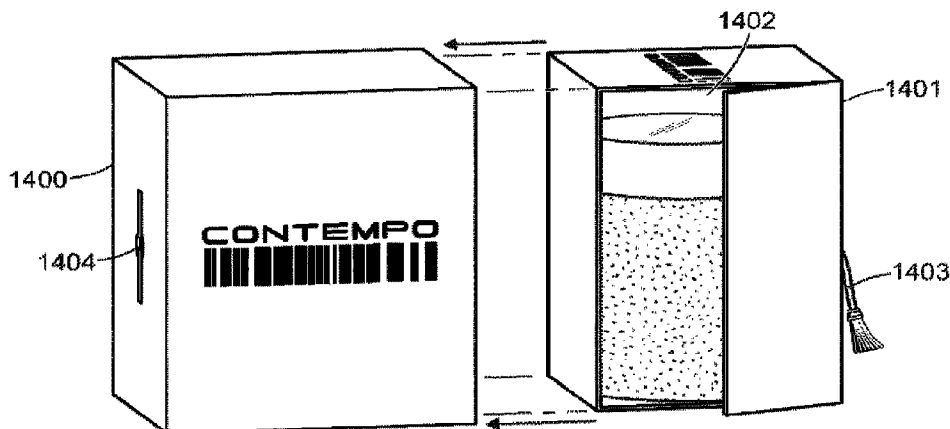

(57) Abrégé/Abstract:

A child-resistant storage container comprising two rigid boxes of relatively equal height and width manufactured from or coated with materials that produce enough friction between the contact points of the boxes to retain the inner box in the outer box when shook.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property

Organization

International Bureau

(43) International Publication Date

12 September 2019 (12.09.2019)



(10) International Publication Number

WO 2019/173749 A1

(51) International Patent Classification:

B65D 5/20 (2006.01) *B65D 59/04* (2006.01)
B65D 5/38 (2006.01) *B65D 77/04* (2006.01)
B65D 5/42 (2006.01) *B65D 77/22* (2006.01)
B65D 5/72 (2006.01) *B65D 79/00* (2006.01)
B65D 50/02 (2006.01) *B65D 83/04* (2006.01)

(21) International Application Number:

PCT/US2019/021410

(22) International Filing Date:

08 March 2019 (08.03.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/641,096	09 March 2018 (09.03.2018)	US
62/667,508	05 May 2018 (05.05.2018)	US
62/677,830	30 May 2018 (30.05.2018)	US
62/815,723	08 March 2019 (08.03.2019)	US

(71) Applicant: **CONTEMPO CARD COMPANY** [US/US];
 69 Tingley Street, Providence, RI 02903 (US).

(72) Inventors: **MARKARIAN, Michael**; Tiverton, RI 02878 (US). **BAZIRGAN, Colette**; West Warwick, RI 02893 (US). **BENJAMIN, Edward**; Cumberland, RI 02895 (US).

(74) Agent: **FEENEY, Alan, F.**; PCK IP Layers (USA) P.C.,
 255 Promenade Street, Suite 245, Providence, RI 02908 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CHILD RESISTANT STORAGE CONTAINER

FIG. 14

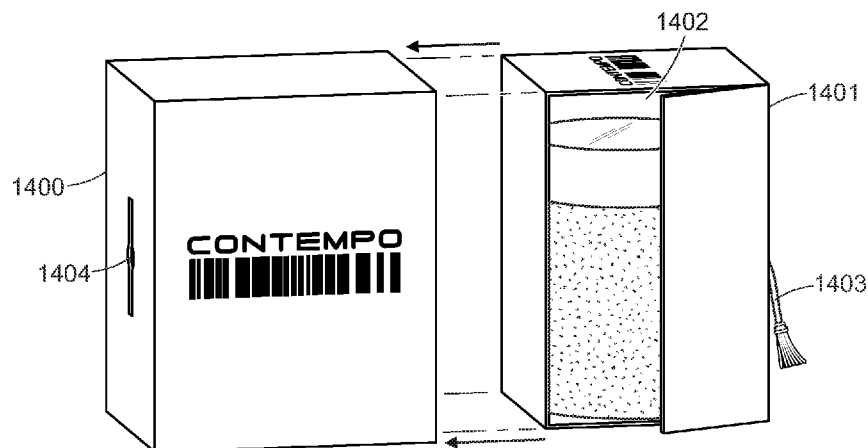

(57) Abstract: A child-resistant storage container comprising two rigid boxes of relatively equal height and width manufactured from or coated with materials that produce enough friction between the contact points of the boxes to retain the inner box in the outer box when shook.

WO 2019/173749 A1

CHILD RESISTANT STORAGE CONTAINER

BACKGROUND OF THE INVENTION

[0001] The American Association of Poison Control Centers reports that Poison Control centers across the US average 3.0 million calls annually and the vast majority of which are calls regarding an exposure. Every day in the United States there are 300 children ages 0-19 treated in the emergency department and 2 of these children die as a result of being poisoned. Accidental exposure to things like household items, chemicals, over-the-counter or prescription drugs poses a real threat to the safety of children around the world. One way to prevent accidental exposure is to package these potentially hazardous products in containers that make it difficult for children to access the contents. This type of packaging is referred to as child-resistant packaging and is regulated by the Poison Prevention Packaging Act.

[0002] The Poison Prevention Packaging Act (PPPA) was first introduced in 1972. The purpose of the PPPA is to protect children under 5 years old from poisonings or deaths that can occur when the child is exposed to hazardous products by opening the container and accessing its contents. A complete list of products that require child-resistant packaging can be found in the Code of Federal Regulations in Title 16, Part 1700.

[0003] A child-resistant package is one that is designed or constructed to be significantly difficult for children under 5 years old to open or obtain a harmful amount of the contents within a reasonable time. At the same time, the package must not be too difficult for an adult to use properly. A child-resistant package must be tested to meet the criteria of the PPPA. 85% of children tested must not be able to open the package within 10 minutes and 90% of adults must be able to open the package and re-close it so that it is child-resistant again within 5 minutes. These criteria must be met in 1-4 testing panels of 50 children between ages 42 and 51 months and a panel of 100 adults aging between 50-70 years.

[0004] It is important to note that a child-resistant package does not mean child-proof package. The criteria required for child-resistant packaging means that still 15% of children under age 5 are able to open the package in under 10 minutes. Child-resistant packaging protects many children from accidental exposure to hazardous substances, but there are still many children that

do gain access the hazardous contents of the package resulting in a poisoning or even death of the child. There is a tremendous need for improved child-resistant packaging in order to protect children across the world. This is especially true in the growing cannabis industry.

[0005] Cannabis, also known as marijuana, is a plant that is commonly used for its psychoactive effect. It is used both medically and recreationally. Medical marijuana is used for conditions like chronic pain, cachexia, and seizures. Marijuana is either inhaled by smoking or vaporizing or it is ingested in edible forms such as baked goods, candies, or beverages. Acute marijuana toxicity is when a person experiences immediate adverse effects from marijuana. The active component of marijuana is delta-9-tetrahydrocannabinoid (THC). THC binds to and activates cannabinoid receptors in various parts of the brain. This affects the normal function of the brain in terms of memory, thought, concentration, time and depth perception, and coordinated movement. Marijuana intoxication symptoms vary with age and size but can include sleepiness, difficulty breathing, seizures, and coma. The long-term effects of acute marijuana exposures on children are unknown.

[0006] The cannabis industry is growing. This once strictly illegal drug has gained legalization medically and recreationally. There are now 30 states and the District of Columbia that have legalized marijuana in some way. This includes 8 states and the District of Columbia that have legalized recreational marijuana. This legalization trend means that cannabis in its various forms is now more accessible than ever. Unintentional pediatric marijuana exposures in children 9 years and under were studied in the United States from 2005 through 2011 by measuring the call volume to U.S. poison centers. This study by Wang *et al.* found that the call rate in states where marijuana was decriminalized increased by 30.3% calls per year while rate in states where marijuana was illegal remained the same. Wang *et al.* also conducted a study of pediatric marijuana exposure in Colorado before and after recreational marijuana legalization compared to the rest of the United States. Colorado and Washington were the first states in the U.S. to legalize recreational marijuana in 2012. The study evaluated hospital admissions and regional poison center cases of children ages 0 through 9 years of age at Children's Hospital Colorado, Aurora from 2009 to 2015. The mean rate of marijuana related hospital visits increased from 1.2 per 100,000 population 2 years before recreational marijuana legalization to 2.3 per 100,000

population 2 years after legalization. The annual regional poison control cases increased more than 5-fold from 2009-2015 with an average increase of 34% per year while the rest of the United States had an increase of 19%. This study suggests that the legalization of marijuana influences the number of pediatric exposures to marijuana. With the legalization trend of marijuana in the United States, it is more important than ever to ensure that children are protected from accidental exposure by providing an improvement to child-resistant packaging for cannabis products.

BRIEF DESCRIPTION OF THE INVENTION

[0007] The disclosure is directed to a child-resistant storage container. More specifically, the device is comprised of two rigid boxes of relatively equal height and width manufactured from or coated with materials with a static co-efficient of friction that is higher than its dynamic co-efficient of friction. When the slightly smaller box is fully inserted into the interior of the slightly larger box, the material that the boxes are constructed from or coated with create enough static friction to retain the inner box in the outer box even when shook. One or more narrow slots is/are embedded into the outer larger box which allows the user to insert a key, coin or tip of a knife into said slot to push the inner box out of the outer box. The claimed container is designed so that the inner rigid box can only be accessed with the use of a key, coin, tip of a knife or the like. No additional bagging, as is required for many prior art containers, is needed for the current invention since the box itself meets the state and federal requirements for child resistant packaging.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

[0008] **FIG. 1** is an illustration of preferred embodiment using rectangular shaped boxes;

[0009] **FIG. 2** is a depiction of **FIG. 1** with an additional inner box in which the inner rectangular box is first inserted into;

[0010] **FIG. 3** is an illustration of a child resistant storage container using cylindrical boxes;

[0011] **FIG. 4** is a depiction of **FIG. 3** wherein the opposing side of the inner cylindrical box is inserted into the second inner cylindrical box;

[0012] **FIG. 5** is a depiction of **FIG. 1** with an additional foam layer inserted between the inner rectangular box and the outer rectangular box;

[0013] **FIG. 6** is an example of the claimed device employing rounded boxes;

[0014] **FIG. 7A** is an example of the claimed device employing octagonal boxes; and **FIG. 7B** depicts an inner clamshell box for insertion in the octagonal box of **FIG. 7A**;

[0015] **FIG. 8** is an example of the claimed device employing triangular boxes;

[0016] **FIG. 9A** depicts the preferred embodiment wherein the inner box has been partially inserted into the interior of the outer box; **FIG. 9B** shows the inner box inserted further into the outer box; **FIG. 9C** shows the claimed device after the inner box has been completely inserted from the perspective of the missing outer wall of the outer box after the inner box has been completely inserted into the outer box; **FIG. 9D** illustrates the inner box having an insert with an indentation capable of accepting and storing a cannabis cigarette; **FIG. 9E** is a side view of the inner box wherein a thin strip of foam is applied to its underside; **FIG. 9F** is the underside of the inner box with a thin strip of foam applied thereto; **FIG. 9G** is the outer box from the perspective of the open side looking into the interior of said outer box; **FIG. 9H** is the outer box from the perspective of the access slot prior to the insertion of the inner box; **FIG. 9I** depicts the box from the perspective of the slot after the inner box has been inserted completely into the interior of the outer box; **FIG. 9J** depicts the outer box imprinted with the inventors' trademark, logo and domain name.

[0017] **FIG. 10A** depicts a front perspective view of the claimed invention when the inner box is fully inserted into the outer box; **FIG. 10B** depicts a rear perspective view of the claimed invention when the inner box is fully inserted into the outer box; and **FIG. 10C** depicts a rear perspective view of the claimed invention when the inner box is partially inserted into the outer box;

[0018] **FIG. 11** are examples of the die cuts for the outer and inner boxes of the preferred embodiment;

[0019] **FIG. 12** is an example of an embodiment in which the inner box further comprises a flap;

[0020] **FIG. 13** is the embodiment of **FIG. 14** in which the flap found on the trailing edge of the inner box has been pushed downward so as to be flush with the upper edges of the inner box.

FIG. 13 also depicts the action of inserting the inner box into the outer box after the flap has been positioned to further prevent access of the inner box by a child;

[0021] **FIG. 14** is a further view of the embodiment of **FIG. 12** which includes a pull on the inner box; and

[0022] **FIG. 15** is the embodiment of **FIG. 10** further comprising a pull attached to one of the walls of the inner box.

DETAILED DESCRIPTION OF THE INVENTION

[0023] In the following detailed description, reference is made to the accompanying drawings. The examples in the description and drawings should be considered illustrative and are not intended as limiting to the specific example or element described. Multiple examples can be derived from the following description and drawings through modification, combination or variation of the different elements.

[0024] The instant invention solves several problems found in prior art child resistance storage containers. Most utilize “locking means,” such as flaps or plastic clips, to make the container child resistant. These additional locking means tend to break, fall off or tear destroying the child resistant capability. Other prior art child resistance storage containers are large and not easily contained in a purse, knapsack or briefcase. Other prior art child resistance storage containers are flat, folding cartons that are complicated and difficult to use. The claimed container is rigid, does not use “locking means” that tend to break while being small enough to put in a purse, knapsack, brief case and the like. The instant invention is inconspicuous and retains its child-resistant properties throughout its lifetime.

[0025] As the cannabis industry is legalized and grows, there is a legitimate demand in the industry for brandable, child resistant packaging that better promotes a company’s cannabis-based products. In addition, states that have legalized recreational cannabis use have compliance requirements that sellers of cannabis-based products use child resistant packaging. There are few options available for sellers that are both child resistant, yet aesthetically pleasing to potential customers.

[0026] As illustrated in **FIG. 1**, the device consists of an outer rectangular body (the “outer rectangular box”) **100** in which a smaller rectangular body (the “inner rectangular box”) **108** fits completely within. The outer rectangular box **100** has a top wall **101**, a bottom wall **102**, two vertical side walls **103**, **104** and a front horizontal wall **105**. The outer rectangular box **100** does not have back horizontal wall so as to provide access to insert the inner rectangular box **108**

completely within interior space **106** of the outer rectangular box **100**. The front horizontal wall **105** contains a narrow slot **107** (the “access slot”) capable of accepting a thin object, such as the tip of a knife or letter opener or a coin such as a penny or dime. It is important for the integrity of the device to prevent access by small children that the narrow slot **107** not be wide enough for a small child’s finger to access the inner rectangular box **108**.

[0027] It should be appreciated that the slot may be formed of varying shapes, sizes or combinations of different shapes and sizes, provided that the slot does not allow a child to access the inner box once it is properly installed in the outer box.

[0028] The inner rectangular box **108** is designed to fit snugly in the interior of the outer rectangular box **100**. It consists of a bottom wall **109**, two vertical walls **110**, **111**, a front horizontal wall **112** and a back horizontal wall **113**. The top wall is missing to provide access to the interior space **114** of the interior rectangular box **108** to store cannabis cigarettes or cartridges and other objects that the user wishes to keep from small children. The inner rectangular box **108** may also contain a pre-formed insert **115** with the shape of the object or objects **115a** the user wishes to store embedded into said insert **115**. In the preferred embodiment, an insert **115** formed with the shape of a cannabis cigarette/ cartridge cutout/indentation **115a** is used to secure said cigarette/cartridge in the claimed device in place without movement. The preferred insert **115** is made from plastic or foam and is made using injection molding, thermal forming, or vacuum forming processes or any other processes known in the art to manufacture mechanical parts.

[0029] It is important that the inner rectangular box **108** have a slightly smaller width and height than the outer rectangular box **100** to ensure that the inner rectangular box **108** remains within the outer rectangular box **100** even when the claimed device is shaken by an infant or toddler. The length of the inner rectangular box **108**, however, is relatively much shorter than the length of the outer rectangular box **100** to prevent a toddler or small child from reaching within the outer rectangular box **100** to retrieve the inner rectangular box **108** when the device is being used. To maintain the child-resistant properties of the claimed device, the various components are, preferably, manufactured from high friction, rigid materials having a static co-efficient of

friction that is greater than said material's dynamic co-efficient of friction. One or more of the bottom wall **109** and/or the two vertical walls **110**, **111** of the inner rectangular box **108** (or in an alternative embodiment one or more of the top wall **101**, bottom wall **102** and/or two vertical side walls **103**, **104** of the outer rectangular box **100**) is coated with a high-friction material such as foam **116**. The additional foam layers **116** insure that the inner rectangular box **108** is retained within the outer rectangular box **100** even when the claimed invention is aggressively shaken. By design, the inner rectangular box **108** is only accessed by inserting a coin or tip of a knife through the narrow slot **107** in front horizontal wall **105** and further within the outer rectangular box **100** until the inner rectangular box **108** extends outward from the outer rectangular box **100** in which it was previously situated.

[0030] It should be appreciated that if the boxes are constructed from materials that create sufficient friction between the inner rectangular box and the outer rectangular box to maintain the inner rectangular box within the outer rectangular box when the claimed device is shaken, then there is no need for additional coating or layers of foam.

[0031] Various types of "coating" material may be used including plastics, rubbers, foams and the like. In the preferred embodiment, a layer of foam **116** is affixed to the bottom wall **109** of the interior rectangular box **108**. Various types of foams, such as open cell polyurethanes, polyethylenes, polystyrenes, and latex rubber, preferably "polyurethane charcoal foam" traditionally found in camera cases, may be employed. The foam may be applied *in situ*. The foam may be pre-made as a thin strip, preferably by die cutting, that is affixed to a wall. Pre-formed strips may be affixed to one of the boxes using any known type of adhesive including, but not limited to, acrylics, contact adhesives, cyanoacrylics, epoxies, ethylene-vinyl acetate-based hot-melts, glue, hot melt adhesives, neoprene, paste, polymer dispersion adhesives, pressure sensitive adhesives, resins, polyimides, polyols, polyurethane, pressure sensitive adhesive, rubber cement, thermoset epoxies, thermosetting polymers, ultraviolet light curing adhesives, and urethanes.

[0032] **FIG. 2** depicts **FIG. 1** with an additional box feature **200**. In this embodiment, a second rectangular box (the "second box") **200**, large enough to completely contain a portion of the

inner rectangular box **201**, but small enough to be slid completely into the outer rectangular box **203**, is used to retain the item stored in the inner rectangular box **201**. In addition, it provides an additional contact with the inner walls of the outer rectangular box **203** which may be covered with a sheet of foam to provide further friction between the two boxes.

[0033] FIG. 3 illustrates the claimed device using cylindrical components. This example uses an outer “cylindrical” tube (the “outer cylindrical tube”) **300** having a narrow slot **301** formed into its front horizontal wall **300a**, an inner cylindrical tube (the “inner cylindrical tube”) **302** having the ability to retain an object, preferably a cannabis cigarette or cartridge, that is slightly smaller than that outer cylindrical tube **300** so that it might be inserted completely into the outer cylindrical tube **300** and a second cylindrical tube (the “second cylindrical tube”) **303** that fits over the inner cylindrical tube **302**, but is slightly smaller than the outer cylindrical tube **300** into which it is inserted. In this embodiment, the inner cylindrical tube **302** must be separated from the second cylindrical tube **303** before the item contained therein can be removed. **FIG. 4** is a depiction of the cylindrical device of **FIG. 3** wherein the second cylindrical tube **403** is slid over the side of the inner cylindrical tube **402** that is first inserted into the outer cylindrical tube **400** whereas in **FIG. 3**, the second cylindrical tube **303** is slid over the end of the inner cylindrical tube **302** that is not initially inserted into the outer cylindrical tube **300**.

[0034] FIG. 5 depicts **FIG. 1** with an additional feature. In this example, a layer of thin foam **500** is secured over the open wall of the inner rectangular box **501**. The inner rectangular box **501** with the additional layer of foam **500** is then inserted into the outer rectangular box **502**. This additional feature, provides friction, as well as securing the items contained in the inner rectangular box **501**.

[0035] FIG. 6 is an example using rounded boxes, having a rounded outer box **600** and an inner box **601** with rounded edges **601a**. The inner box **601** is designed with a rectangular insert **602** designed to hold cannabis cigarettes/cartridges. The outer rounded box **600** has a slot **603** punched into its leading horizontal wall **600a** which allows the user to access the inner box **601** with a coin, key or other flat object to “push” the inner box **601** out of the outer box **600** when the user wants to access the cannabis cigarettes/cartridges contained therein. A resistant foam

layer may also be affixed to the lower wall **604** of the inner box **601** to increase the static friction between the two boxes **600, 601**.

[0036] **FIG. 7A** is an example using an octagon shaped outer box **700** that houses a clamshell box **701**, shown in **FIG. 7B**. The inner clamshell box **701** is inserted into the outer, octagonal box **700** that has a slot **702** punched into its leading horizontal wall **700** which allows the user to access the inner, clamshell box **701** with a coin, key or other flat object to "push" the inner clamshell box **701** out of the outer box **700** when the user wants to access the cannabis cigarettes/cartridges contained therein. A resistant foam layer may also be affixed to the lower wall **703** of the inner clamshell box **701** to increase the static friction between the two boxes **700, 701**.

[0037] **FIG. 8** is an example using triangular boxes. An inner, triangular box **801** having an insert **802** with cigarette-shaped indentations **802a** is inserted into an outer, triangular-shaped box **800** having a slot **803** punched out of its upper horizontal wall **800a**. The slot **803** allows the user to "push" out the inner box **801** with a coin, key or other flat object. The inner triangular box **801** may be encased in a resistant foam layer (not shown) to increase the static friction between the two boxes **800, 801**.

[0038] The preferred embodiment is represented by **FIGs. 9A-9J**. **FIG. 9A-C** illustrate the process of inserting the inner rectangular box completely into the outer box after the inner box has been completely inserted into the outer box **FIG. 9I**. It is important that the inner rectangular box, in its entirety, be situated within the outer rectangular box so as not to compromise the child resistance function. The leading wall of the inner rectangular box should be flush with the wall of the outer box containing the accessible slot **FIG. 9G**. An optional insert **FIG. 9D** formed with an indentation may be used to secure a cannabis cigarette without the cigarette moving around the inner box when the claimed invention is used. In the preferred embodiment of **FIGs. 9E-F**, a thin strip a foam is applied to the underside of the inner rectangular box to increase the static friction between the two boxes. The preferred embodiment uses a five-sided box with an open interior **FIGs. 9G-H**. As the cannabis industry grows and there is more competition between sellers, it will be important for suppliers/sellers to market their brand. As shown in **FIG. 9J**, the outer rectangular box has been imprinted with the

inventors' trademark, logo and domain name. There are few options currently in the market place for suppliers/sellers of cannabis-based products that meet the strict, child resistant requirements while at the same time allowing for attractive packaging and product branding.

[0039] FIGs. 10A-10C illustrate the preferred embodiment in various stages of use. **FIG. 10A** illustrates the view of the device from the perspective of the slot after the inner rectangular box has been inserted into the outer rectangular box. **FIG. 10B** depicts the view from the back of the outer rectangular box after the inner rectangular box has been completely inserted into the outer rectangular box. **FIG. 10C** illustrates the device after the user has inserted a tool into the slot formed into the front horizontal wall (not shown) and partially “pushed out” the inner rectangular box from the outer rectangular box.

[0040] FIG 11 is a depiction of the boxes of the preferred device prior to assembly. As shown, both the top box and bottom box may be formed from one sheet of material using known die cutting techniques, such as a die cutting machine. Indentations are pressed deeply into the die cuts to indicate where a fold is to be located and to insure sharp edges after folding. At this point, either one or both boxes may be covered with decorative paper that has the user's name, trademark, web address or other information printed thereon. In addition, decorative elements may also be printed on and/or attached to said paper. The paper is then glued onto the die cuts, indentations are pressed into the die cut and covering paper, and the boxes are folded. The die cuts may be folded by hand or by machine. As shown in **FIG. 11**, a layer of polyurethane charcoal foam is affixed to one of the exterior walls of the inner box prior to folding. The rectangular foam rubber strip may also be prepared using die cutting or stamping techniques. The foam rubber strip is attached to one of the exterior walls of the inner box prior to assembly. After folding, the various “free edges” are held together with glue and/or other known adhesives. The newly created corners may also be reinforced with staples, brackets, tape and/or any other known materials.

[0041] In yet another embodiment as depicted in **FIGs. 12-14**, the inner box **1301** may additionally include a flap **1302** formed at the upper edge of the vertical wall of the inner box **1301** that is closest to the open end of the outer box **1300** when the inner box **1301** is inserted

into the outer box **1300**. The additional flap **1302** found on the inner box **1301**, when extended downward, prevents a small child from being able to grab the outer wall of the inner box **1301** and pull the inner box **1301** out of the outer box **1300** when the inner box **1301** is installed in the outer box **1300**. This feature provides an additional layer of protection against a child who is able to manipulate the outer box **1300** (by squeezing the outer box) to access the inner box **1301** and “hook” their finger over the outer wall of the inner box **1301** to pull the inner box **1301** out of the outer box **1300**, thereby accessing the contents **1303** of the inner box **1301**. In this embodiment, the outer wall of the inner box **1301** prior to assembly (*See FIG. 11*, for example), is extended upward and a crease is formed in the extended outer wall that coincides with the upper most edges of the inner box **1301** so that when the extended outer wall of the inner box **1301** is folded downward at the crease, the flap **1302** is formed which is flush with the top edges of the vertical side walls of the inner box **1301**. Once folded downward, the flap **1302** is primarily horizontal to the bottom horizontal wall of the inner box **1301**, however, it is possible to push the flap **1302** into the interior of the inner box **1301** provided that no edge is formed that could be grabbed by a child. It should be appreciated that the flap **1302** may be a separate component prior to assembly that is affixed to the upper edge of the inner box **1302**, as described, using any standard affixing means, such as, but not limited to, glue, epoxy and the like. The flap **1302** need not be made from the same material as the inner box **1301** to which it is attached. It should be appreciated that flap **1302** may extend the length of the inner box **1301** essentially covering the opening of the inner box **1301** or may extend only partially over the opening of the inner box **1301** as depicted in **FIGs. 12-14**.

[0042] **FIG. 12**, in particular, illustrates the inner box **1301**, prior to installation in the outer box **1300**. In this embodiment, the inner box **1301** contains a jar **1303**. The flap **1302** extends upward to allow for the loading of the jar **1303** into the interior space of the inner box **1301**. After the desired contents **1303** have been loaded into the inner box **1301**, the flap **1302** is pushed downward, as described before, and the inner box **1301** is installed in the outer box **1300**. The inner box **1301** may be marked with indicia **1306** or have a decorative element embossed thereon.

[0043] **FIG. 13**, in particular, illustrates the embodiment of **FIG. 12**, prior to the installation of the inner box **1301** into the outer box **1300**. After loading the desired contents **1303** into the inner box **1301**, the user “pushes” the flap **1302** of the inner box **1301** downward until it is flush with the upper edges of the vertical walls of the inner box **1301** and is generally parallel with the horizontal lower wall of the inner box **1301**. Once the flap **1302** is properly positioned, the user inserts the inner box **1301** into the outer box **1300** until the inner box **1301** is completely inside the outer box **1301**. In this embodiment, the inner box **1301** is slightly smaller than the outer box **1300** so that when the inner box **1301** is inserted into the outer box **1300**, the vertical side wall of the inner box **1301** opposite of the vertical side wall **1305** of the outer box **1300** that contains the access slot **1304**, is generally flush with the outer edges of the open end of the outer box **1300**.

[0044] **FIG. 14**, in particular, illustrates that action of inserting the inner box **1401** into the interior space of the outer box **1400**. In this embodiment, the inner box **1401** further contains a “pull” **1403** allowing for the user to easily extract the inner box without having to use the access slot **1404**. As designed, if the user does not need the container to be child resistant, they simply insert the inner box **1401** into the outer box **1400** so that the pull **1403** (in this example a tassel, however, it should be appreciated that anything that allows a user to pull the inner box **1401** out of the outer box **1400** may be employed, including, but not limited to, a tab, a hook, a loop, a cutout and the like) faces outward away from the wall of the outer box **1400** having the access slot **1404**. To access the contents contained in the interior **1402** of the inner box **1401**, the user pulls on the tassel **1403**, thereby extracting the inner box **1401** from the outer box **1400**. When the user needs the container to be child resistant, the user merely reverses the inner box **1401** so that the vertical side wall of the inner box **1401** that has the pull **1403** affixed thereon, is flush with the wall of the outer box **1400** having the access slot **1404**. The user, thereafter, would need to access the inner box **1401** by inserting a thin object into the access slot **1404** to push to inner box **1401** out of the outer box **1400**. **FIG. 15** depicts the embodiment of **FIGs. 10A-C** having an access pull **1403** attached to the vertical wall of the inner box **1401** that is opposite of the wall of the outer box **1400** having the access slot (not shown). This embodiment illustrates a situation in which the user desires easy access to the contents **1402** of the inner box **1401** but does not need the container to be child resistant. When the user needs the container to be child resistant, they

merely reverse the inner box **1401** so that that wall of the inner box **1401** with the pull **1403** is flush with the wall of the outer box **1400** having the access slot.

[0045] It should be appreciated that all of the aforementioned embodiments may also have boxes that are generally equal in size, like those embodiments depicted in **FIGs. 12-14**. As illustrated in these examples, both the inner box **1301/1401** and the outer box **1300/1400** may have indicia **1306** embossed on one or more of the outer walls. **FIGs. 12-14** are also illustrative of an embodiment in which the inner **1301/1401** and outer boxes **1300/1400** generally have a cubic shape.

[0046] In yet another embodiment, the child resistant container may be designed as a “box-in-a-box”, wherein the outer box contains a number of smaller inner boxes. The outer box would be formed with a number of access slots capable of accessing inner boxes retained therein. Both the inner and outer boxes would be formed consistent with the description of the single boxes as discussed above.

[0047] All of the aforementioned embodiments, the boxes may be reinforced with additional materials. For instance, a polymer film may be affixed to the outer walls of the inner and outer boxes to prevent tears. The film need not cover the entire outer walls as a strip of said film may need only cover the outer to edges and still make the boxers tear-resistant. Any commercially-available polymer may be used, however, a polymer that increases the static co-efficient of friction between the boxes, as well as being resistant to being torn, is preferred. Ideally, the polymer used should be transparent, able to be formed into a thin layer and not be “tacky” to the touch. The tear-resistant polymer may be applied prior to the assembling of the boxes or thereafter using any procedures known in the art used to coat materials. The film may be comprised of any known materials meeting the aforementioned requirement, such as, but not limited to SEEPS block copolymers, polyurethane, epichlorohydrin, polyester, latex rubber and any combination thereof

[0048] The claimed device may also comprise an additional tamper-indication feature. In this embodiment, the device is affixed with means in which to indicate to the user that the contents of

the inner box have been accessed. In one example, the device further comprises a cellophane sheet situated between the access slot of the outer rectangular box and the outer vertical wall of the inner rectangular box. When the tamper-indication feature is put in place, any attempt to access the inner rectangular box using the access slot would perforate the tamper-indication cellophane film alerting the user of the attempt. It should be appreciated that means to indicate unauthorized use of the device, not specifically described herein, may be employed.

[0049] A “rigid” type box is used in the preferred embodiment. It should be appreciated, however, that the claimed invention may be practiced using other types of boxes. Other box types that may be employed include, but are not limited to, match book, Simplex®, folding, folding carton, drawer style, lid-off, slipcase, paperboard, paperboard carton, set-up, window, one-piece, two-piece, nut and the like. In addition, the outer box and the inner box need not be of the same box type. For illustrative purposes only, it would be possible to use a drawer style box as the inner box and a rigid style box as the outer box.

[0050] The various boxes made be manufactured using a variety of materials, including but not limited to, board, carboard, reinforced cardboard, paper, paperboard, chipboard, wood, plastic such as PVC, ceramic, glass, and/or metals such as tin and aluminum. The “boxes” of the claimed child resistant storage device of the instant application can made by hand or machine or using an additive manufacturing process (“3D printing”), laser cutting, molding, vacuum forming or thermal forming, or any other known processes used to manufacture such items, as one unit. The walls of the “boxes” may also be individually formed and later assembled. For example, each wall can be individually constructed using one or more of stamping, machining, working, casting, extrusion, or any combinations of these. Various types of adhesives may be used to assemble the parts into the components. It is preferable, however, to integrally form the box as one complete unit as depicted in **FIG. 11** using techniques available in the art such as die cutting, because the strength of the device is increased. It is imperative that high friction materials having static coefficients of friction that are higher than its dynamic coefficients of friction be selected or that the contact walls be coated with a material that does, such as foam.

[0051] The boxes may be formed with two layers. The inner layer consists of a flat folding “box,” like boxes that hold standard tubes of toothpaste, with a rigid “box,” like those discussed above, on the outside. The user would be able to extract the inner box, discard after use, and insert a new flat folding box into the original rigid box of the present invention.

[0052] The sizes and dimensions of the boxes may vary provided that the inner rectangular (or other shape) box must fit snugly within the outer rectangular (or other shape) box so that it neither be removed by simple shaking nor grasped and pulled out. The objective of the instant invention is that the inner “box” can only be extracted from the outer “box” by inserting a thin object inserted into the slot of the outer “box” and pushing the inner “box” out of the outer “box”, however, the slot is not large enough to allow a child’s finger to be able to access the inner “box”.

[0053] The narrow slot **107** embedded in the front horizontal wall **105** may be formed when the outer “box” is originally constructed or may be “punched out” after the outer “box” is constructed. The width and length of the slot may vary. The thickness of the walls may vary.

[0054] The exterior of the outer rectangular box may be decorated or embossed with a company’s trademark or logo (**FIG. 11**). In other examples, a pin or other tool is attached to the outer rectangular box. The pin and tool, which is attached via a chain-like connector, can be used to access the inner box. A holding means may also be included to secure the pin/tool to the device when not in use. In yet another embodiment, one or more of the boxes may be formed with a “tool-like” perforation that can be torn from the device when the user wishes to access the interior box. Another embodiment utilizes a “peel away” function wherein a portion of the outer box may be torn off providing the user access to the inner box. The user would simply push the inner box out of the outer box. This embodiment allows for one use and cannot be used again after the initial “peel away” is removed.

[0055] In another embodiment, the outer box does not have a slot. The inner box is formed with a “hooking” means, such as an outward circular extension or slot. The device contains a relatively long hook like device. When the user wants to extract the inner box from the outer

box, he/she uses the hooking device to engage the hooking means, i.e. circular extension or slot, and pulls the inner box out of the out box.

[0056] It should be appreciated that the claimed device need not utilize components of the same shape. For instance, the inner box may be replaced with a glass or tin tube coated with foam or other high-friction material, provided that said tube remains completely within the outer housing when the claim device is shaken. The user would access the inner glass/tin tube by inserting a coin or other flat time into the slot in the outer casing. In this example, the inner glass/tin tube can contain processed cannabis leaves or liquids, such as cannabis oils and the like. The claimed storage container may also be designed to secure a clam shell case. It may also be designed to accommodate more than one interior box.

[0057] The instant invention does not use clips or tab cutouts to be found in prior art child-resistant containers. Clips tend to break and fall out of other child-resistant products whereas tabs tend to rip. Once these components become non-functional, the prior art devices are no longer child-resistant. The claimed device does not utilize similar components, remaining child-resistant for the life of the product, not just for the initial use.

Equivalents

[0058] While specific embodiments of the subject invention have been discussed, the above specification is illustrative and not restrictive. Many variations of the invention will become apparent to those skilled in the art upon review of this specification. The full scope of the invention should be determined by reference to the claims, along with their full scope of equivalents, and the specification, along with such variations.

[0059] Features described in the preceding description may be used in combinations other than the combinations explicitly described.

[0060] Although functions have been described with reference to certain features, those functions may be performable by other features whether described or not.

[0061] Although features have been described with reference to certain examples, those features may also be present in other examples whether described or not.

[0062] Whilst endeavoring in the foregoing specification to draw attention to those features of the disclosure believed to be of particular importance, it should be understood that the Applicant claims protection in respect of any patentable feature or combination of features hereinbefore referred to and/or shown in the drawings whether or not particular emphasis has been placed thereon.

[0063] Unless otherwise indicated, all numbers expressing quantities of claimed features, and so forth used in the specification and claims are to be understood as being modified in all instances by the term "about." Accordingly, unless indicated to the contrary, the numerical parameters set forth in this specification and attached claims are approximations that may vary depending upon the desired properties sought to be obtained by the present invention.

[0064] The above discussion is meant to be illustrative of the principle and various embodiments of the present invention. Numerous variations and modifications will become apparent to those skilled in the art once the above disclosure is fully appreciated. It is intended that the following claims be interpreted to embrace all such variations and modifications.

CLAIMS

We claim:

1. A storage container comprising
an outer box having a height and a width that creates an interior space,
an inner box capable of being inserted into and contained in the interior space of said outer box, and
a means of accessing the inner box when the inner box is inserted into the outer box provided that there is sufficient friction between the contact surfaces of the inner box and the outer box to retain the inner box within the outer box;
further provided that the means of accessing the inner box is the only means in which to extract the inner box from the outer box;
wherein said outer and inner boxes are rigid;
wherein the height and the width of the inner box are slightly less than the height and the width of the outer box provided that when the inner box is inserted into the outer box the inner box is retained in the outer box;
wherein said outer box is comprised of a top wall, a bottom wall, two side walls, a front wall and an opening opposite the front wall in which to insert the inner box into the interior of the outer box, wherein the front wall of the outer box contains one or more slots into which a thin object may be inserted;
wherein said inner box is comprised of a bottom wall, two side walls, a front wall, and a back wall, further wherein the length of the inner box is shorter than the length of the outer box provided that when the inner box is inserted into the outer box, the inner box cannot be retrieved by reaching into the outer box and pulling the inner box out of the outer box; and
wherein either the outer box, the inner box or both are constructed from or coated with a material having a static co-efficient of friction greater than its dynamic co-efficient of friction.
2. The storage container according to claim 1, wherein said means of accessing the inner box when the inner box is inserted into the outer box is said one or more slots formed within the front wall of the outer box.

3. The storage container according to claim 2, wherein said one or more slots is equal to or less than 1.75 mm in width.

4. The storage container according to claim 3, wherein the coating is selected from the group consisting of polyurethane, open cell polyurethane, polyethylene, polystyrene and latex rubber.

5. The storage container according to claim 4, wherein said coating is polyurethane charcoal foam.

6. The storage container according to claim 5, wherein said coating is die cut into one or more strips.

7. The storage container according to claim 6, wherein said one or more strips is/are affixed to one or more exterior surfaces of the outer box or one or more exterior surfaces of the inner box or one or more walls of either the outer or inner boxes using an adhesive.

8. The storage container according to claim 7, wherein said adhesive is selected from the group consisting of acrylics, contact adhesives, cyanoacrylics, epoxies, ethylene-vinyl acetate-based hot-melts, glue, hot melt adhesives, neoprene, paste, polymer dispersion adhesives, pressure sensitive adhesives, resins, polyimides, polyols, polyurethane, pressure sensitive adhesive, rubber cement, thermoset epoxies, thermosetting polymers, ultraviolet light curing adhesives and urethanes.

9. The storage container according to claim 3, wherein said coating is applied to the surface of the boxes as a spray *in situ*.

10. The storage container according to claim 1, wherein the inner box further comprises an opening opposite the bottom wall.

11. The storage container according to claim 10, further comprising an insert that fits within the interior of the inner box.

12. The storage container according to claim 11, wherein said insert comprises one or more indentations in the shape of an object to be contained in said inner box.

13. The storage container according to claim 12, wherein said object is a cannabis cigarette.

14. The storage container according to claim 10, further comprising a layer of foam that covers the opening of the inner box.

15. The storage container according to claim 10, further comprising a sleeve that fits over the inner box prior to insertion into the outer box.

16. The storage container according to claim 15, wherein said sleeve is manufactured from or is coated with a material having a static co-efficient of friction greater than its dynamic co-efficient of friction.

17. The storage container according to claim 1, wherein said boxes are manufactured from a single sheet of material.

18. The storage container according to claim 17, wherein said single sheet of material is manufactured using die cutting.

19. The storage container according to claim 18, further comprising folding pattern indentations that are pressed into said single sheet of material.

20. The storage container according to claim 1, further comprising an outer decorative layer attached to the exterior of the outer box.

21. The storage container according to claim 20, wherein said outer decorative layer is manufactured from paper.

22. The storage container according to claim 21, where said outer decorative layer is embossed with information or a decorative design.

23. The storage container according to claim 19, wherein said boxes are created by folding said single sheet of material and joining free edges together using an adhesive means.

24. The storage container according to claim 23, wherein said adhesive means is selected from the group consisting of acrylics, contact adhesives, cyanoacrylics, epoxies, ethylene-vinyl acetate-based hot-melts, glue, hot melt adhesives, neoprene, paste, polymer dispersion adhesives, pressure sensitive adhesives, resins, polyimides, polyols, polyurethane, pressure sensitive adhesive, rubber cement, thermoset epoxies, thermosetting polymers, ultraviolet light curing adhesives and urethanes.

25. The storage container according to claim 24, further comprising means in which to reinforce the joined free edges.

26. The storage container according to claim 1, wherein said boxes are manufactured from a material selected from the group consisting of board, carboard, reinforced cardboard, paper, paperboard, chipboard, wood, plastic, PVC, ceramic, glass, tin and aluminum.

27. The storage container according to claim 26, wherein said material is board.

28. The storage container according to claim 1, wherein said boxes are manufactured by hand, machining, die cutting, an additive manufacturing process, laser

cutting, molding, vacuum forming, thermal forming, stamping, casting or extrusion, or any combinations thereof.

29. The storage container according to claim 1, further comprising a flat folding box.

30. The storage container according to claim 29, wherein said flat folding box is manufactured from cardboard and is disposable.

31. The storage container according to claim 1, further comprising an attached tool used to access said inner box when said inner box is inserted into said outer box.

32. The storage container according to claim 31, wherein said tool is selected from the group consisting of a detachable pin attached to the outer box or a perforated section of the outer box shaped like a tool that is torn off from the outer box prior to use.

33. The storage container according to claim 2, further comprising means in which to prevent access to said inner box contained in said outer box after said outer box is deformed.

34. The storage container according to claim 33, wherein said outer box is deformed by applying pressure to said outer box.

35. The storage container according to claim 34, wherein said inner box further comprises an opening opposite the bottom wall and wherein said means in which to prevent access to said inner box when said outer box is deformed comprises a flap affixed to the back wall of the inner box and configured to cover the opening of the inner box.

36. The storage container according to claim 35, wherein said flap is formed by folding a crease formed into the back wall of the inner box, wherein when said flap is formed, access to the interior of the inner box by reaching into the opening in the outer box is restricted.

37. The storage container according to claim 1, further comprising a tear-resistant, laminate coating.

38. The storage container according to claim 37, wherein said tear-resistant, laminate coating is applied as a film to all or a part of one or more of the boxes.

39. The storage container according to claim 38, wherein said coating is selected from the group consisting of a styrene-ethylene-ethylene-propylene-styrene (SEEPS) block copolymer, polyurethane, epichlorohydrin, polyester, latex rubber and any combination thereof

40. The storage container according to claim 1, further comprising means in which to extract the inner box after said inner box is installed in said outer box.

41. The storage container according to claim 40, wherein said means is a rope, tassel, loop or pull affixed to the back wall of the outer box, provided that when the user of the storage container desires the container to be child resistant, the user inserts the inner box with the back wall having the rope, tassel, loop or pull facing the front wall of the outer box.

42. The storage container according to claim 1, further comprising means in which to indicate unauthorized access of the inner box.

43. The storage container according to claim 42, wherein said means in which to indicate the unauthorized access of the inner box comprises a cellophane film.



44. The storage container according to claim 28, wherein said additive manufacturing process is 3D printing.

45. A storage container comprising
an outer box having a height and a width that creates an interior space,
an inner box capable of being inserted into and contained in the interior space of said outer box, and
a means of accessing the inner box when the inner box is inserted into the outer box provided that there is sufficient friction between the contact surfaces of the inner box and the outer box to retain the inner box within the outer box;
further provided that the means of accessing the inner box is the only means in which to extract the inner box from the outer box;
wherein said outer and inner boxes are rigid;
wherein the height and the width of the inner box are slightly less than the height and the width of the outer box provided that when the inner box is inserted into the outer box the inner box is retained in the outer box;
wherein said outer box is comprised of at least one side wall, a front wall and an opening opposite the front wall in which to insert the inner box into the interior of the outer box, wherein the front wall of the outer box contains one or more slots into which a thin object may be inserted;
wherein said inner box is comprised of at least one side wall, a front wall, and a back wall, further wherein the length of the inner box is shorter than the length of the outer box provided that when the inner box is inserted into the outer box, the inner box

cannot be retrieved by reaching into the outer box and pulling the inner box out of the outer box; and

wherein either the outer box, the inner box or both are constructed from or coated with a material having a static co-efficient of friction greater than its dynamic co-efficient of friction.

1/12

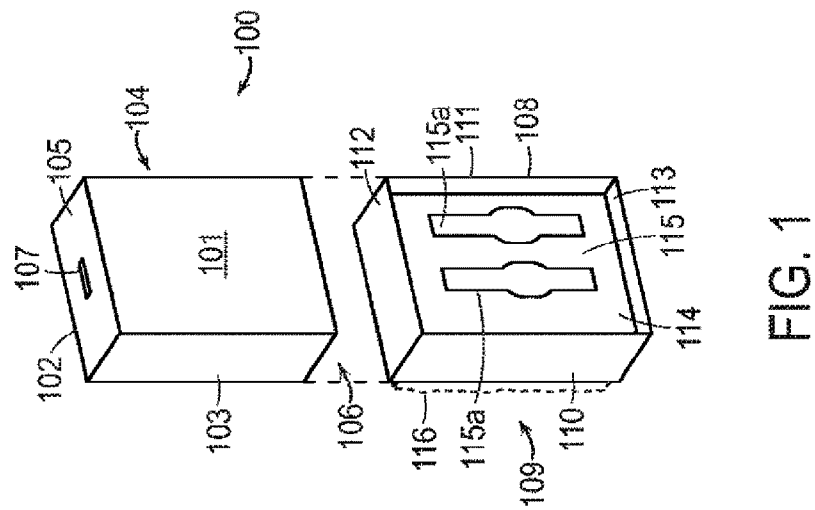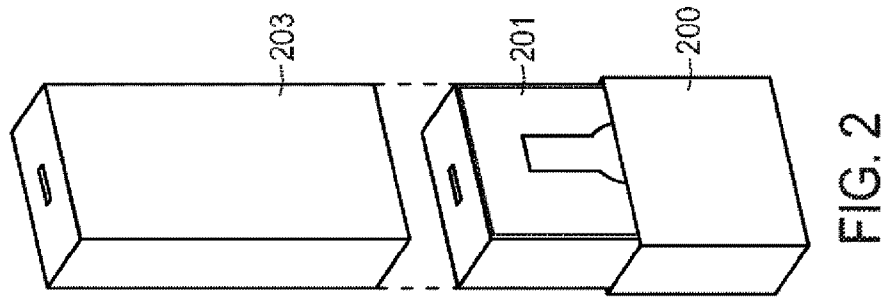

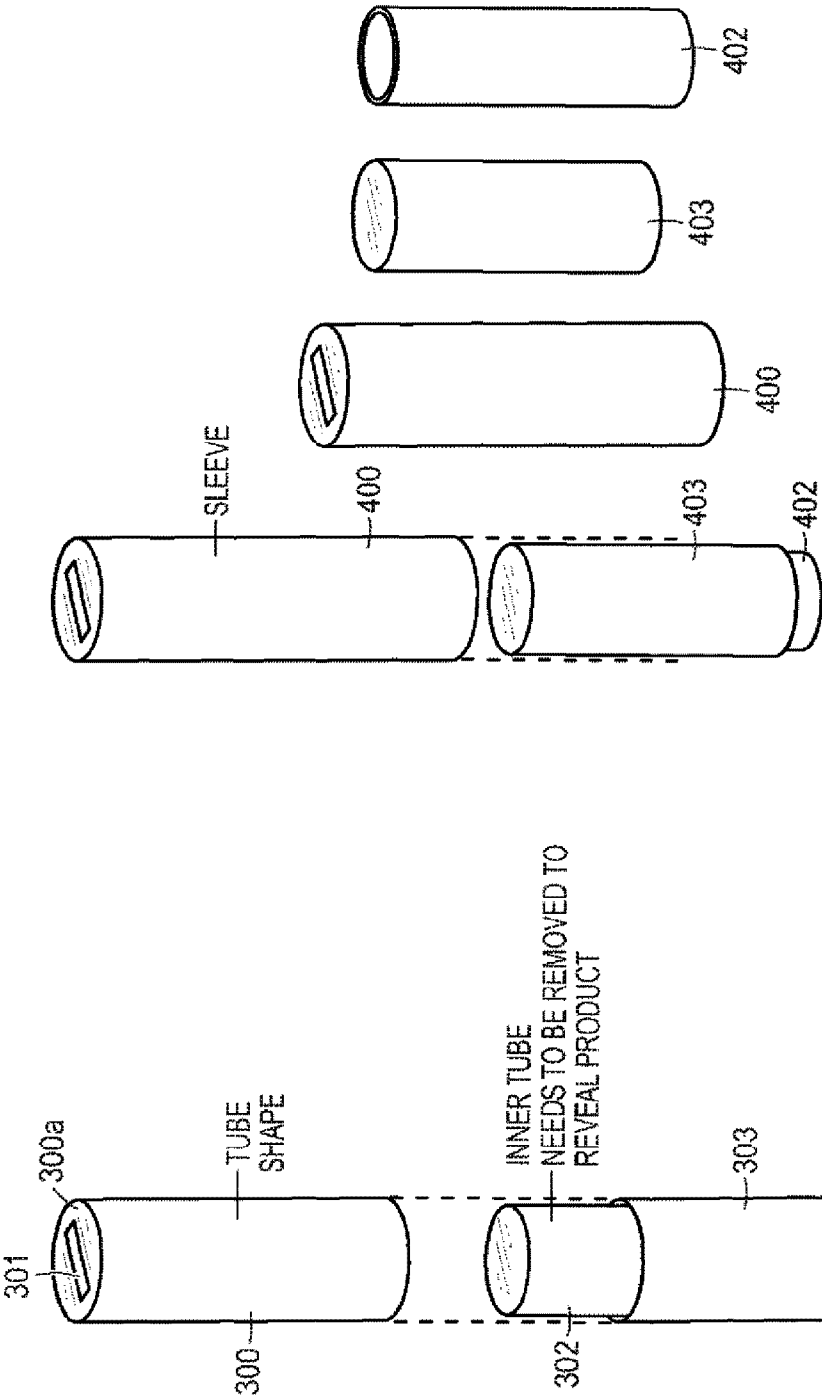


FIG. 4

FIG. 3

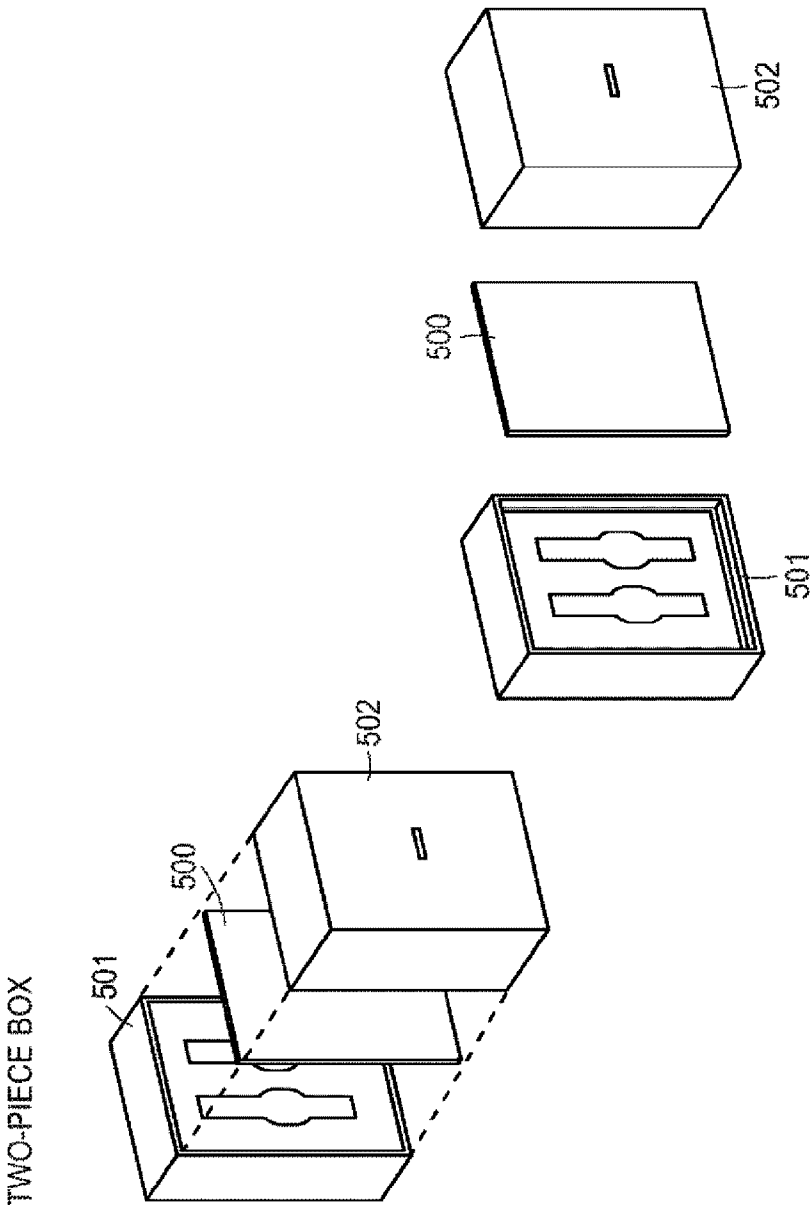
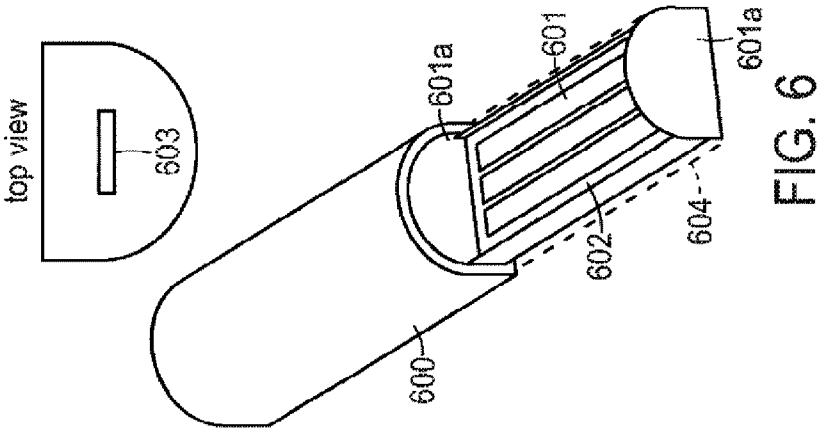
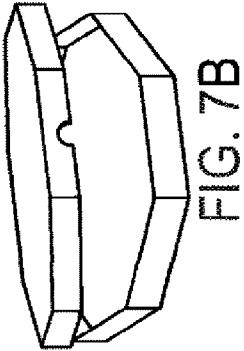
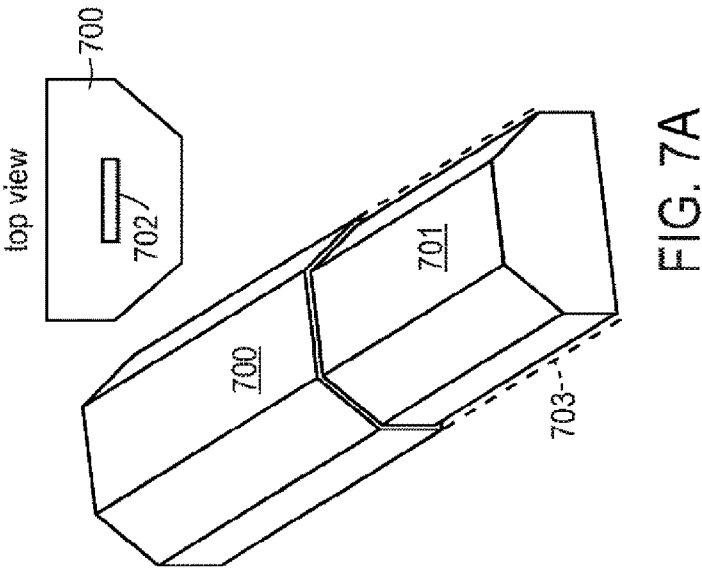


FIG. 5



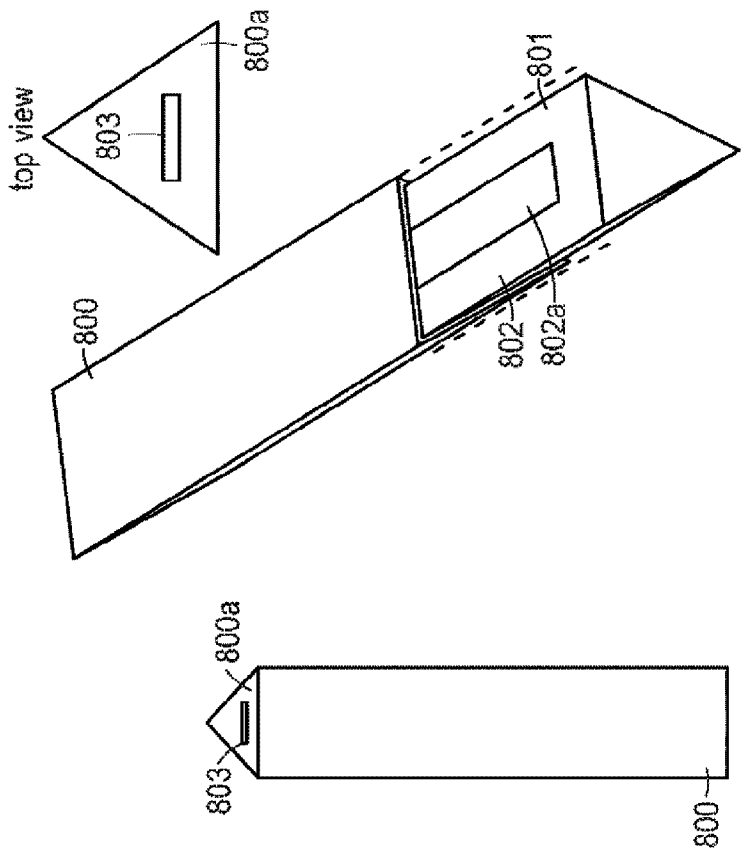


FIG. 8

6/12

FIG. 9A

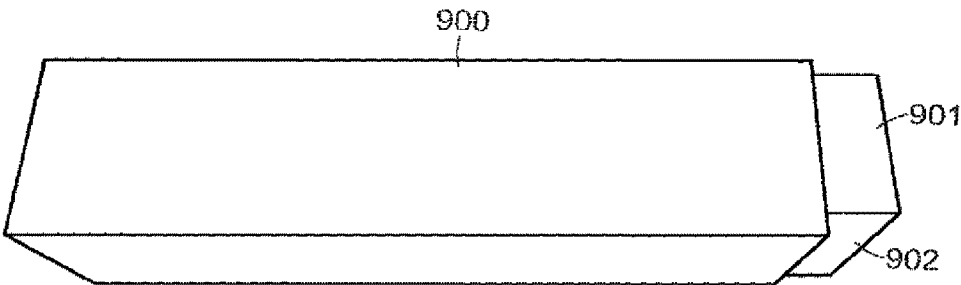
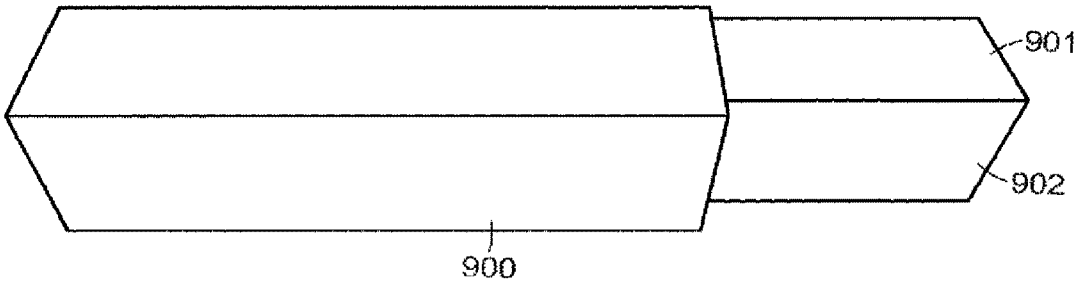


FIG. 9B

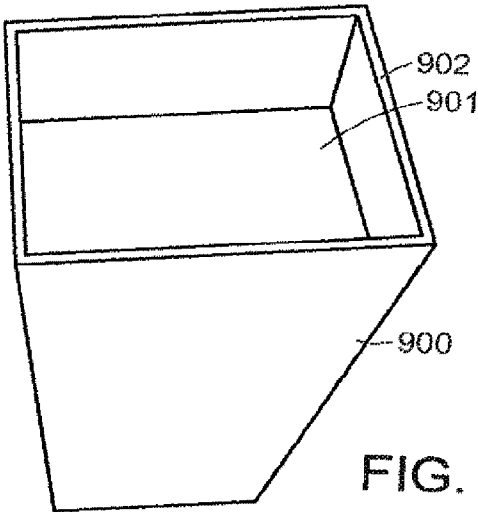


FIG. 9C

7/12

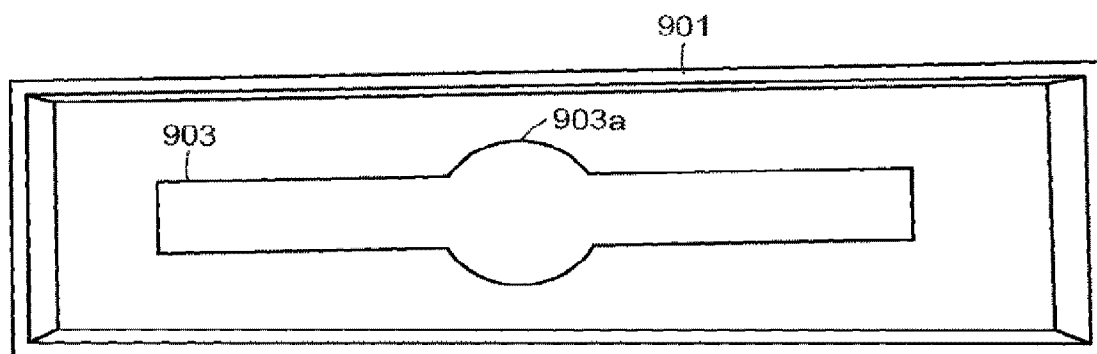


FIG. 9D

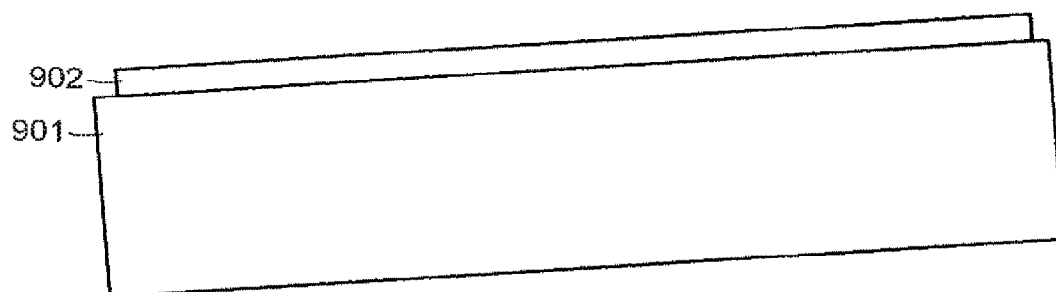


FIG. 9E

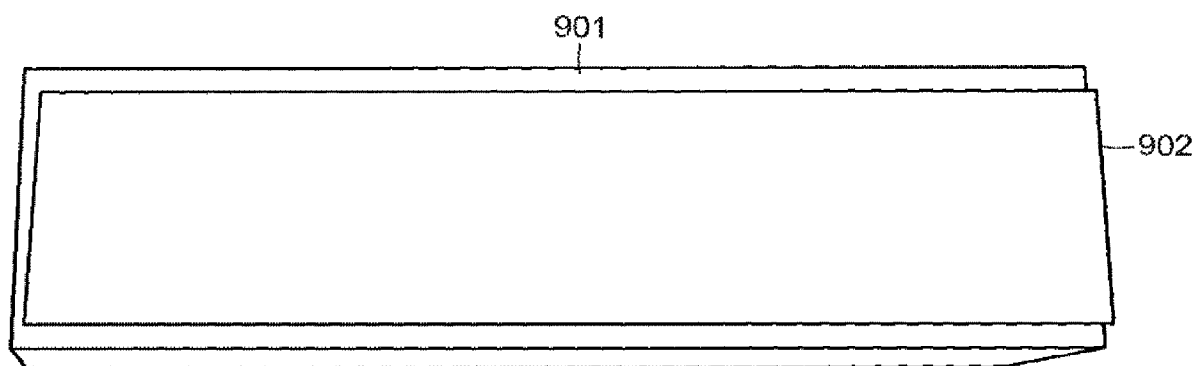


FIG. 9F

8/12

FIG. 9H

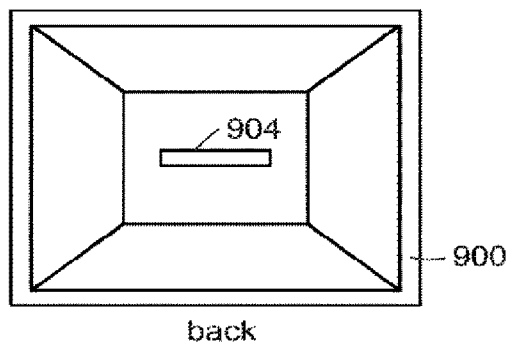


FIG. 9G

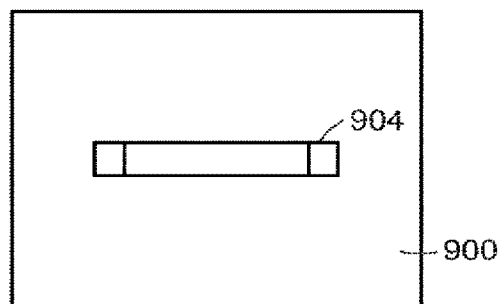


FIG. 9I


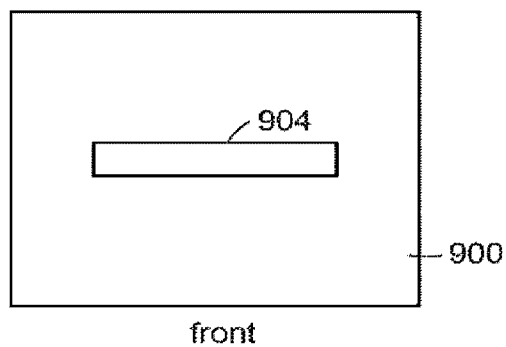


FIG. 9J

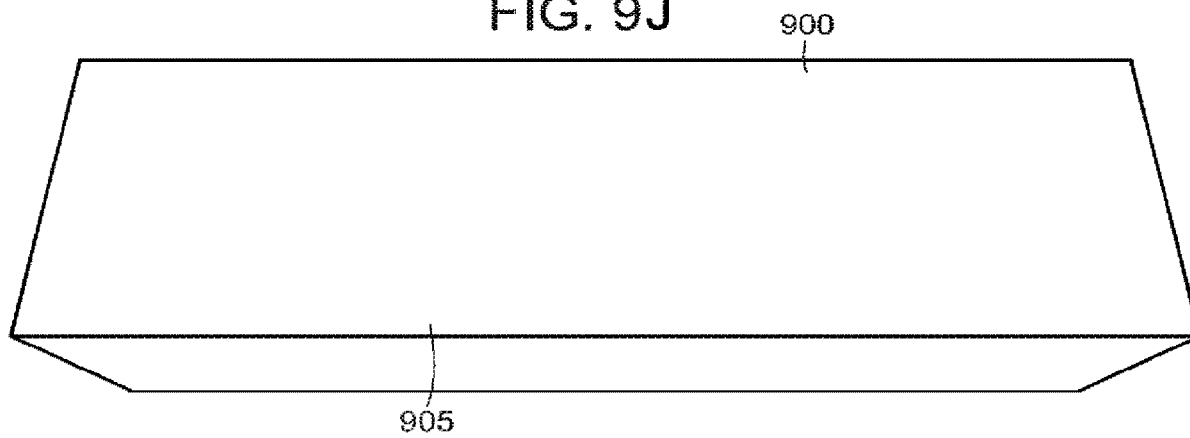

WO 2019/173749

9/12

FIG. 10A

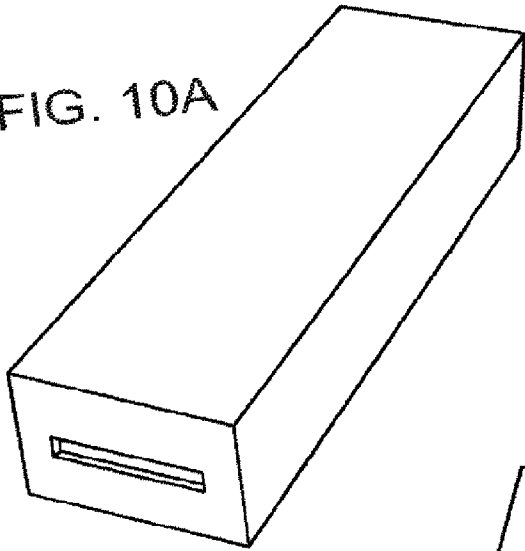


FIG. 10B


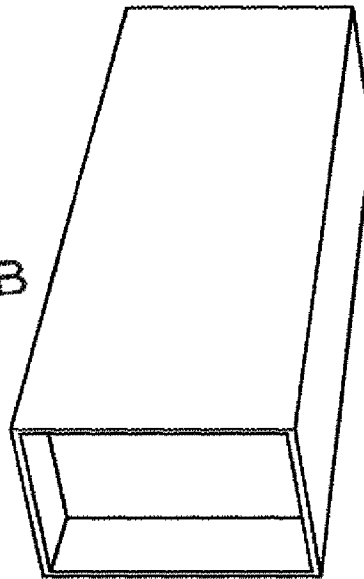


FIG. 10C

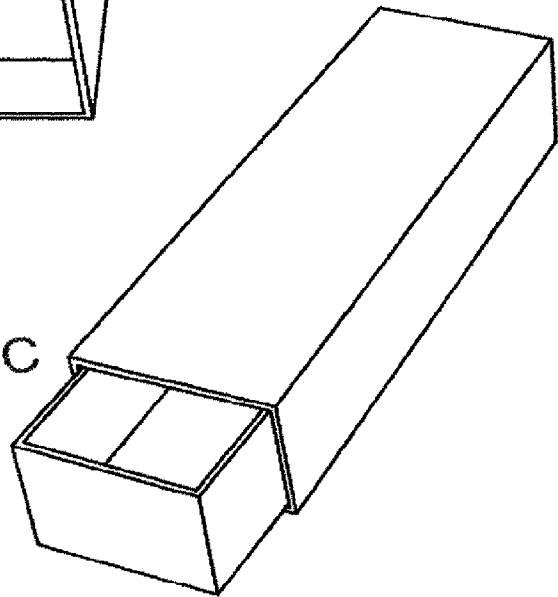

10/12




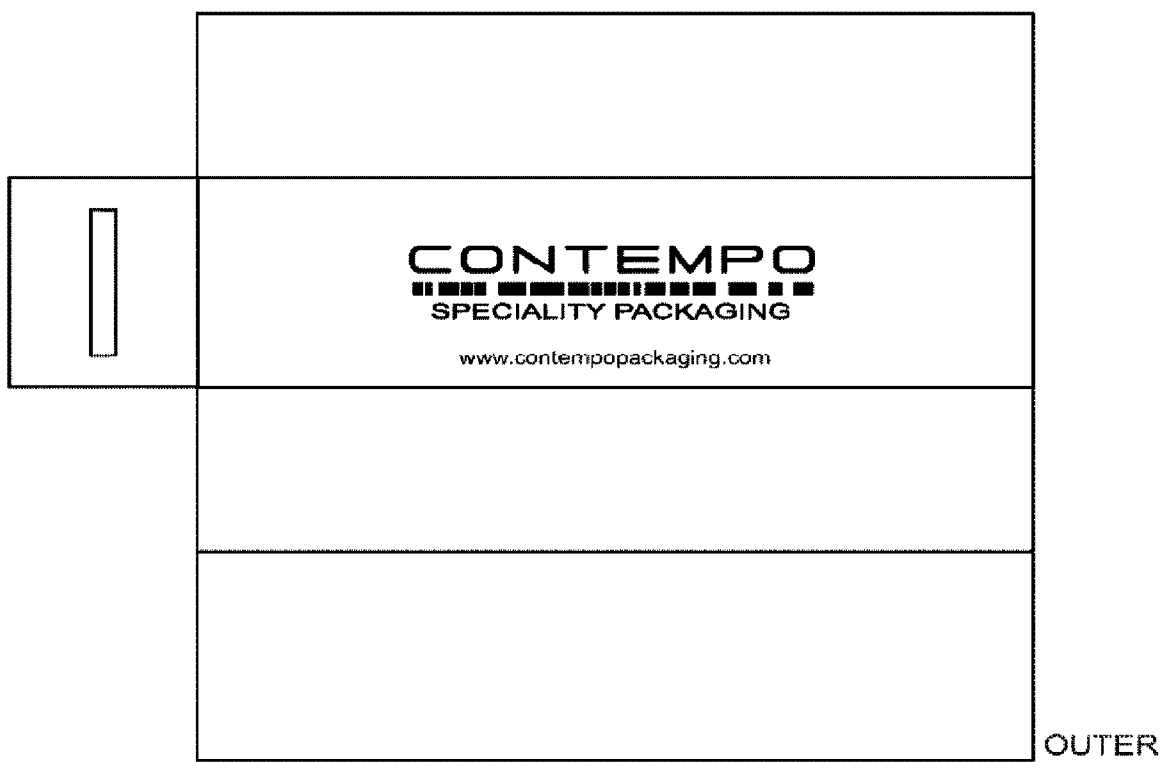


FIG. 11

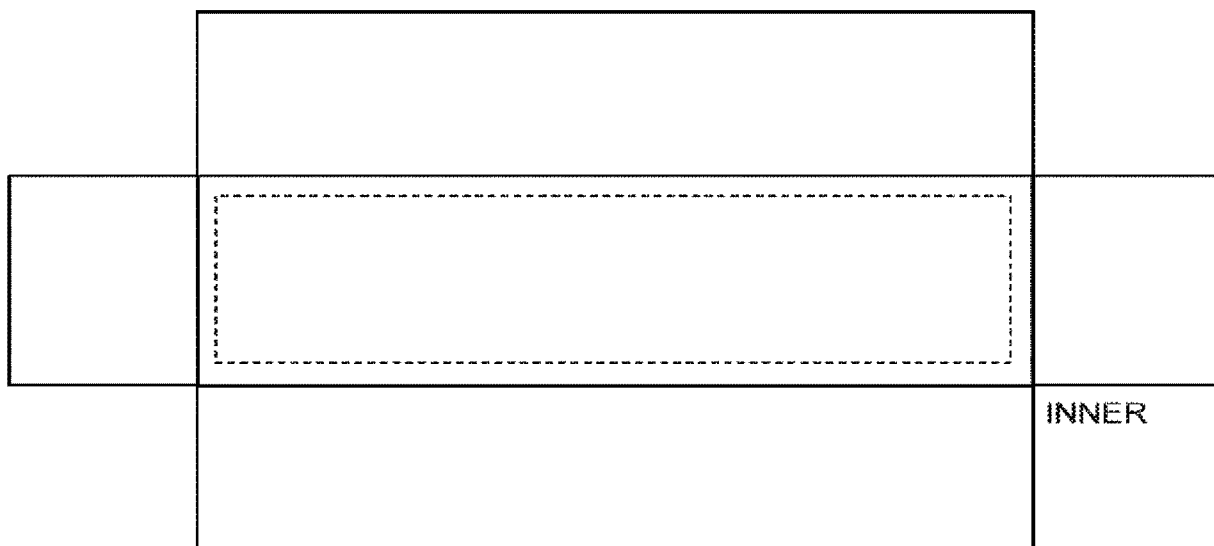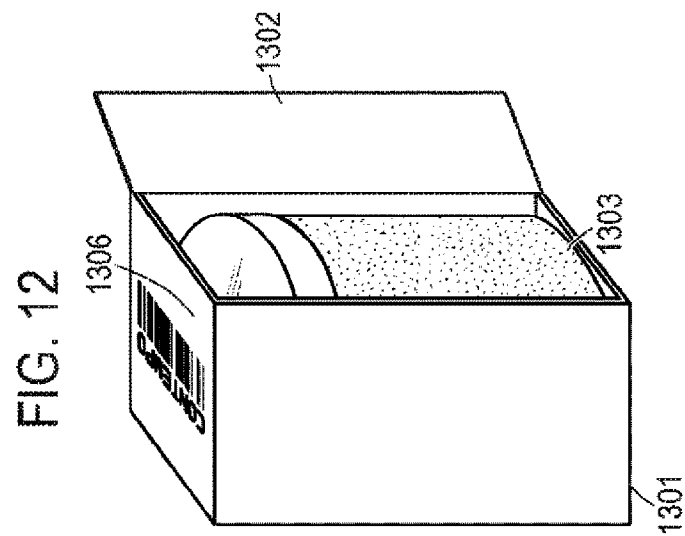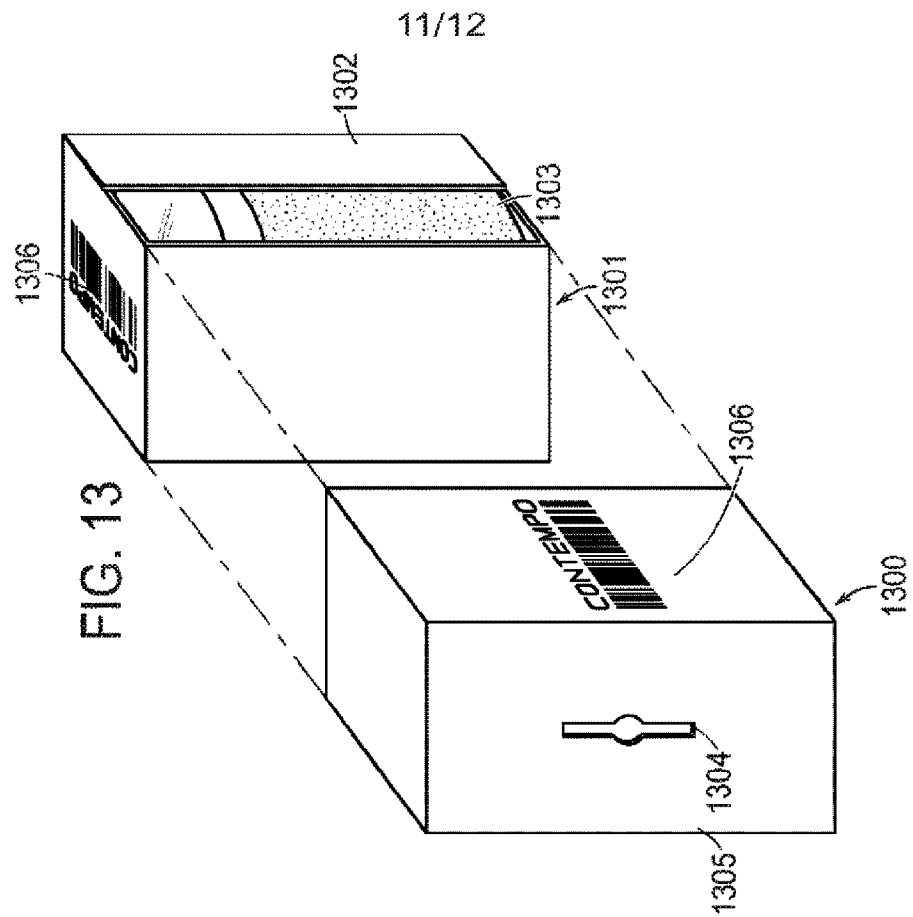

12/12

FIG. 14

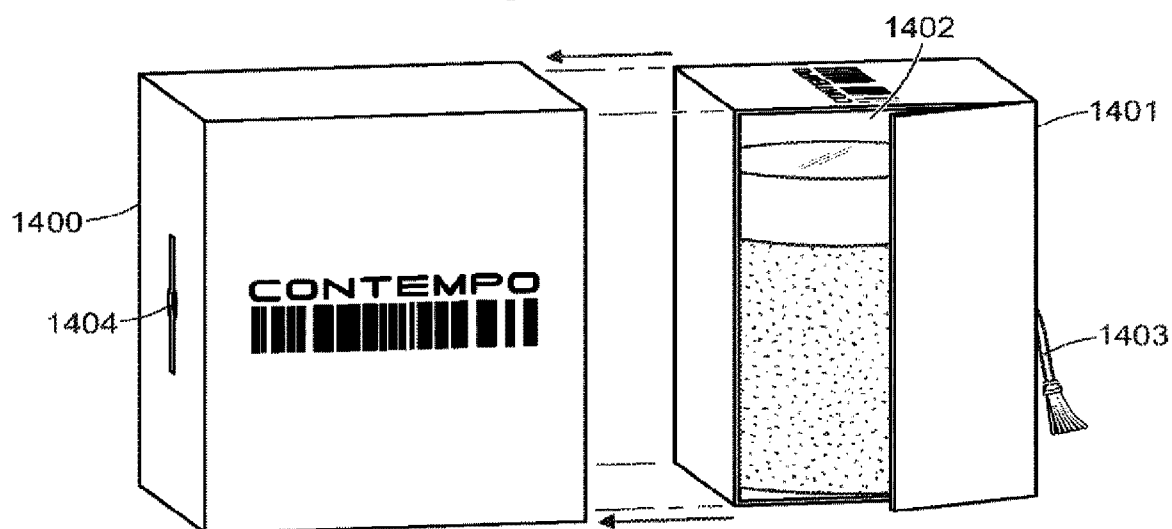


FIG. 15

