

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 August 2005 (04.08.2005)

PCT

(10) International Publication Number
WO 2005/070631 A1

(51) International Patent Classification⁷: B26F 1/44, B31F 1/00, B31B 1/25, B26D 3/08, B65D 5/42

(21) International Application Number:
PCT/US2005/001130

(22) International Filing Date: 12 January 2005 (12.01.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/536,138 12 January 2004 (12.01.2004) US

(71) Applicant: GRAPHIC PACKAGING INTERNATIONAL, INC. [US/US]; 814 Livingston Court, Marietta, GA 30067 (US).

(72) Inventor: LETHERER, Todd, R.; 19 Spring Creek Road, Lawrenceburg, TN 38464 (US).

(74) Agents: ISAF, Louis, T. et al.; Womble Carlyle Sandridge & Rice, PLLC, P.O. Box 7037, Atlanta, GA 30357-0037 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: METHODS AND APPARATUS FOR FORMING A REVERSE KISS CUT AND SCORE LINE IN A SHEET OF DEFORMABLE MATERIAL

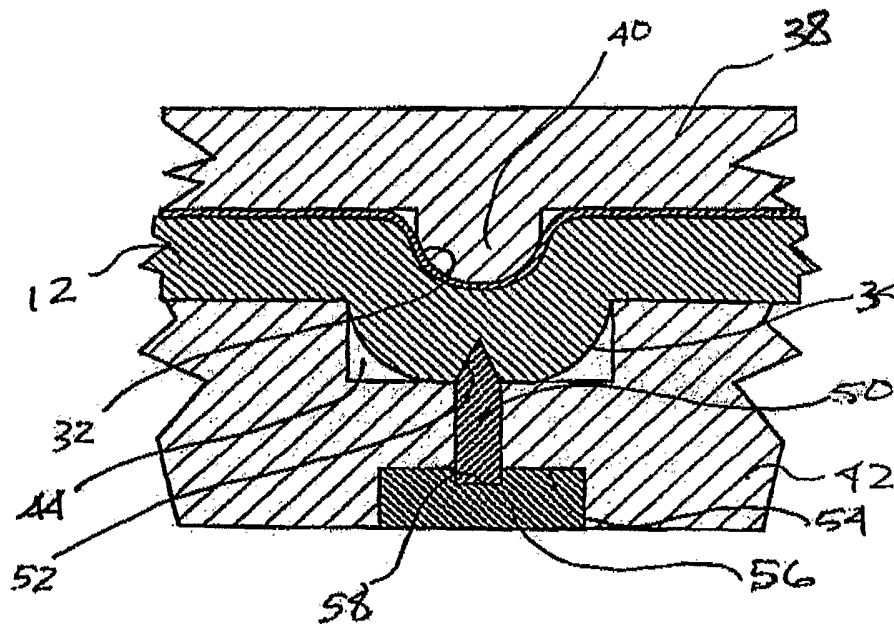

(57) Abstract: Methods and apparatus for forming a score line (18) with a reverse kiss cut in a deformable material (12) are provided. A method can include providing two plates, such as a die plate (38) with a scoring rule (40) thereon and a counter plate (42) with an aligned corresponding recess (44) with a knife edge (50) positioned therein and protruding toward the scoring rule (40). When the die plate (38) is advanced toward the counter plate (42), the deformable material (12) is forced into the recess (44) of the counter plate (42) to form the score line (18) and the knife simultaneously forms a cut or slit in the bottom surface of the deformable material (12) to form a reverse kiss cut.

WO 2005/070631 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**METHODS AND APPARATUS FOR FORMING A REVERSE KISS CUT
AND SCORE LINE IN A SHEET OF DEFORMABLE MATERIAL**

CROSS-REFERENCE TO RELATED APPLICATION

5 The present application claims the benefit of U.S. Provisional Application
No. 60/536,138, filed January 12, 2004, and entitled METHOD OF FORMING A
REVERSE KISS CUT AND A SCORE LINE IN A SHEET OF DEFORMABLE
MATERIAL, and the above-referenced provisional application is incorporated
herein by reference.

10

FIELD OF THE INVENTION

 The present invention relates generally to methods of pre-conditioning
deformable materials such as paperboard products to establish readily foldable
lines to allow the material to be folded into three-dimensional configurations to
15 form containers.

BACKGROUND

 Cardboard containers and the like typically are formed from flat blanks of
deformable paperboard materials. Before forming the container, the flat blanks of
20 material are preconditioned with score lines, perforated lines and/or the like,
which assist or readily enable the blank of material to be folded into a
predetermined three dimensional configuration. Cardboard containers for
numerous products including foods, beverages, pharmaceuticals and the like are
formed in this manner.

25 In order to facilitate tearing, removal or separation of the material along
predetermined lines, tear lines are established in the blank by perforating the
material. The blank can also have score lines formed therein. Generally
described, a score line is an indentation in one surface of the material, which
typically, but not necessarily, causes a corresponding protuberance from the
30 opposite surface of the material. Score lines are utilized to precondition the blank
material for folding and typically are created with a die set, which generally
includes a die plate and a counter plate. The die plate generally has a scoring rule

or protrusion formed therein, while the counter plate generally has a recess complimenting the scoring rule on the die plate. The deformable material being treated is positioned between the die plate and the counter plate so that when the die plate is advanced against the counter plate under pressure, the material is
5 deformed creating a recess in one surface, corresponding to the scoring rule, and a protrusion in the opposite surface, corresponding to the recess in the counter plate. The material is readily folded in the direction of the recess created therein to allow easy configuration of a container from the deformable blank of material.

In order to more easily fold along score lines, it is conventional to form at
10 least one elongate cut in the protrusion that has previously been formed in the blank material, with the cut being formed in the side of the blank material having the protrusion. Cutting operations such as these are commonly used in gusseted corners of containers, for facilitating easier folding inwardly. These gusseted corners are generally formed at adjacent folded walls of the container.

15 It is conventional for the score and associated cut to be formed in a multi-step process. First, the score is formed with the die plate and counter plate and, in a subsequent step that occurs after there being relative movement for alignment purposes, a knife is used to form the cut. The cut typically protrudes approximately fifty percent into the thickness of the blank material.

20 The conventional method for forming a reverse cut along a score line is time consuming and can be inaccurate; therefore, improvements are desired.

SUMMARY OF SOME ASPECTS OF THE PRESENT INVENTION

An aspect of the present invention relates to a process for scoring and
25 reverse kiss cutting a blank of deformable material simultaneously to reduce the time and expense involved in preconditioning a blank of deformable material. In accordance with an aspect of the present invention, score lines and reverse kiss cuts formed in accordance with an embodiment of the present invention enable ready folding of the material, and these lines and cuts can be arranged diagonally,
30 or otherwise, with respect to the deformable material's length.

A method of an embodiment of the present invention utilizes a conventional die plate having a scoring rule or scoring rules in predetermined patterns there along and a complimentary counter plate having a recess or recesses corresponding to the scoring rule or rules. At least one knife blade is positioned within the recesses, with the blade projecting toward the die plate a distance sufficient to establish a cut that is, in one embodiment, approximately halfway through the deformable material. The cut is formed at substantially the same time as the score line. This cut, and similar cuts of different depths, can be referred to as reverse kiss cuts.

Score lines with reverse kiss cuts can be folded more readily than conventional score lines. In one embodiment of the present invention, a score line with a reverse kiss cut has the depression of a conventional score line formed in the same surface as the other score lines in the blank material and the reverse kiss cut is made through approximately half the thickness of the material from the opposite side of the blank material along a protrusion formed on that side of the material during the scoring process.

Accordingly, in a one step process, a score line and reverse kiss cut can be formed in a deformable material to establish a fold line along which the material can be folded more readily than with a generally corresponding standard score line. The method is useful, for example, when preconditioning a sheet of deformable material such as paperboard for use in containers, and it is particularly useful in corner gussets.

Other aspects, features and details of the present invention can be more completely understood by reference to the following detailed description taken in conjunction with the drawings and from the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a top plan view of a flat blank of deformable material that has been preconditioned for folding, in accordance with an embodiment of the present invention.

Fig. 2 is an isometric view of the top blank shown in Fig. 1.

Fig. 3 is an enlarged fragmentary section taken along line 3-3 of Fig. 2.

Fig. 4 is an enlarged fragmentary section taken along line 4-4 of Fig. 2.

Fig. 5 is an isometric view showing end wall portions of the blank having been folded upwardly.

5 Fig. 6 is an isometric view showing side walls of the blank folded upwardly.

Fig. 7 is an isometric view with the closure tabs on the side walls folded over corner gussets.

Fig. 8 is an enlarged fragmentary section taken along line 8-8 of Fig. 7.

10 Fig. 9 is an enlarged fragmentary section taken along line 9-9 of Fig. 7.

Fig. 10 is a fragmentary vertical section taken through a die set used in a method of the present invention and showing a die plate, a counter plate, and a blank piece of deformable material positioned therebetween.

15 Fig. 11 is a vertical section similar to Fig. 10 with the die plate advanced toward the counter plate to form a score line and a reverse kiss cut in the blank of deformable material.

DETAILED DESCRIPTION OF AN EMBODIMENT

20 An embodiment of the present invention is described in connection with a flat blank of deformable material that can be deformed in a manner so as to retain the deformation. An example of such a material is paperboard, with a specific example being a non-clay coated craft board laminated with a polyethylene to a film, or the like. Such a blank material can be conditioned with score lines, perforated lines, score lines with reverse kiss cuts, and the like, which allow the

25 blank of material to be easily folded into a predetermined carton configuration.

With reference to Figs. 1 and 2, a blank of deformable material 12 is illustrated that has been preconditioned with perforated lines 14, score lines 16, and score lines 18 with reverse kiss cuts, in accordance with an exemplary embodiment of the present invention. The blank of material has a base

30 rectangular area 20 that defines the bottom panel of an open-topped container 22 (Fig. 7) formed from the blank of material with end panels 24 integrally formed at

opposite longitudinal ends of the base and side panels 26 along opposite longitudinal sides of the base. The blank 12 and container 22 are not novel per se.

The side panels have flaps 28 defined along the outer edges thereof with the flaps being separated from the remainder of the side panels by a pair of
5 closely spaced perforated lines 14 that are placed in the blank of material in a conventional manner. In each corner of the blank between side panels and end panels, a gusset 30 is defined in a generally square configuration with a diagonal score line 18 and a reverse kiss cut formed therein extending from the corner of the base to the opposite corner of the gusset. Conventional score lines 16 separate
10 the base 20 from the end panels 24 and the side panels 26 and also separate the gusseted corners 30 from the end panels and side panels. These score lines 16 are formed in a conventional manner as described above. In accordance with the exemplary embodiment of the present invention, the score lines 18 with the reverse kiss cut are formed in accordance with the present method as described
15 herein.

Fig. 3 is an enlarged fragmentary section taken along line 3-3 of Fig. 2 and Fig. 4 is an enlarged fragmentary section taken along line 4-4 of Fig. 2. The standard score lines 16 and perforated lines 14 are shown in Fig. 4 with score lines defined by a generally semi-cylindrical recess 32 in the top surface of the
20 panel and a corresponding, but slightly larger, generally semi-cylindrical protrusion or rib 34 in the bottom surface.

The perforations 36 defining the perforated lines are shown as holes or apertures that penetrate the blank of material 12. The perforations in the disclosed material are shown as elongated, slot type perforations even though cylindrical
25 perforations or other shapes could be utilized. The slotted perforations define a fold line that is relatively broad with parallel lines of perforations being formed in the blank material at a spacing corresponding to the width of the desired fold.

Figs. 5-7 illustrate various stages of forming the open topped container 22 from the blank of material 12 shown in Figs. 1 and 2, in accordance with the
30 exemplary embodiment of the present invention. The container 22 can also be referred to as a carton, and aspects of the present invention are applicable to a

wide range of different types of carton blanks and cartons. In Fig. 5, the end panels 24 with the associated gussets 30 are first folded upwardly to be perpendicular to the bottom panel 20 and the side panels 26. Subsequently, as illustrated in Fig. 6, the side panels 26 are folded upwardly with the gusseted corners 30 simultaneously folding inwardly into a position immediately adjacent the inner surface of the side panels. In Fig. 7, the flaps or tabs 28 along the edges of the side panels are folded inwardly and downwardly over the gusseted corners and are secured in position, such as with an adhesive or the like.

Figs. 8 and 9 are vertical and horizontal sections, respectively, taken through a corner of the completed open topped container 22 and illustrating the position of the gusseted corner 30 between the side panel 26 and its associated flap 28. The panel shown can have corners that are sealed and water tight to allow the container to hold beverages and/or ice that might melt, or for other purposes.

As mentioned previously, score lines 18 with reverse kiss cuts fold more readily than reasonably comparable conventional score lines 16 without reverse kiss cuts. Accordingly, when the side panels 26 are folded upwardly, such as shown in Fig. 6, the gusseted corners 30 readily and automatically fold inwardly along the score line 18 with the reverse kiss cut.

Figs. 10 and 11 show a method of forming score lines with reverse kiss cuts in accordance with an exemplary embodiment of the present invention. In Fig. 10, a die plate 38 is illustrated having a longitudinally extending generally semi-cylindrical protrusion 40 along its bottom surface. Differently shaped protrusions 40 are also within the scope of the present invention. The protrusion 40 can be generally referred to as a scoring rule. Opposite the die plate 38 is another die plate that can be referred to as a counter plate 42. The counter plate has a rectangular channel 44 formed therein that extends parallel to the scoring rule 40 of the die plate 38, and the channel 44 is capable of receiving deformed material from the blank of material 12 when the die plate 38 is advanced toward the counter plate 42 with the blank 12 positioned therebetween, or the like. The channel 44 can be shapes other than rectangular. A knife blade 50 is seated in a

longitudinally extending slot 46 formed in a bottom wall 48 of the longitudinal recess in the counter plate. The bottom wall 48 can be more generally referred to as a base wall. As illustrated in Figures 10 and 11, sidewalls 51 of the channel 44 are spaced apart from one another, extend perpendicularly away from the bottom wall 48, and define an opening in the face of the counter plate 42; and the face of the counter plate is in opposing face-to-face relation with the blank of material 12. As mentioned previously, the channel 44 can be shapes other than rectangular. For example, the sidewalls 51 of the channel 44 are not required to extend perpendicularly from the bottom wall 48. As one specific example, the sidewalls 51 can transition smoothly from the bottom wall 48 without forming a sharp angle, or the like.

The knife blade 50 generally is an elongated, preferably metallic, material having an upstanding sharpened edge that protrudes upwardly into the channel 44 in the counter plate 42. The slot 46 opens at its lower end into an elongated chamber 54 of rectangular transverse cross-section and through which the knife blade 50 can be inserted into the slot 46. The knife blade 50 is held in position with a retainer bar 56 having an elongated groove 58 of rectangular cross-section in its upper surface aligned with the knife blade 50. The lower edge of the knife blade 50 can be seated in, and be positively retained by, the retainer bar 56.

In accordance with the exemplary embodiment of the present invention, the sharpened edge of the knife blade 50 generally protrudes into the channel 44 approximately fifty percent of the thickness of the deformable material. Other distances are also within the scope of the present invention. When the deformable material is compressed into the channel 44 by the scoring rule 49 as illustrated in Fig. 11, the edge of the knife 50 simultaneously cuts and thereby forms a slit in the protrusion 34 from the bottom surface of the deformable material. Of course, the knife blade 50 can be of any configuration and can be held to protrude into the channel 44 in any manner, with the description herein being only an exemplary configuration.

When the die plate 38 is retracted upwardly, the deformed blank of material retains the score line therein. In accordance with the exemplary

embodiment, the score line is defined by the longitudinally extending recess 32 in the top surface, with a generally semi-cylindrical configuration, and the corresponding longitudinally extending protrusion 34 along the bottom surface of the material, also with a generally semi-cylindrical cross-sectional configuration.

5 The generally semi-cylindrical protrusion has a slit 52 extending longitudinally therein that protrudes approximately half the thickness of the deformable material, although other depths and shapes of the slit are also within the scope of the present invention.

It should be understood that, in lieu of advancing the die plate toward the
10 counter plate, the counter plate can be advanced toward the die plate or both the die plate and counter plate could be advanced toward each other. In some of the foregoing, reference is made to advancing the die plate toward the counter plate for simplicity of description, although one of ordinary skill in the art will understand that the invention encompasses advancement of the die plate, counter
15 plate, or both to perform the method described above.

Although the present invention has been described with a certain degree of particularity, it is understood that the disclosure has been made by way of example and changes in detail or structure may be made without departing from the spirit of the invention as defined in the appended claims.

CLAIMS:

1. A die for use in substantially simultaneously forming a kiss cut and a score line in a carton blank, the die comprising:
 - a face for being in opposing face-to-face relation with the carton blank,
 - at least one recess having an opening in the face, and
 - at least one cutting edge positioned in the recess, wherein the cutting edge is recessed from the face and oriented toward the recess' opening.
2. The die of claim 1, wherein the cutting edge is part of a blade, and the blade is mounted in a slot that is contiguous with the recess.
3. The die of claim 1, wherein each of the recess and the cutting edge is elongate.
4. The die of claim 1, wherein the recess includes sidewalls that are spaced apart from one another and at least partially define the recess' opening, and the cutting edge is positioned between the sidewalls and distant from each of the sidewalls.
5. The die of claim 4, wherein the recess further includes a base wall that the sidewalls extend away from, and the cutting edge is distant from the base wall.
6. The die of claim 1, wherein:
 - the recess is elongate and at least partially defined by an elongate base wall and elongate sidewalls,
 - the side walls are spaced apart from one another and at least partially define the recess' opening,
 - the sidewalls extend away from the base wall,

the cutting edge is elongate and distant from each of the sidewalls and the base wall,

the cutting edge is part of a knife blade, and

the blade is mounted in a slot that is contiguous with the base wall.

7. A die set for substantially simultaneously forming a kiss cut and a score line in a carton blank, the die set comprising:

a die plate including at least one protrusion; and

a counter plate including at least one recess for that is for being aligned with the protrusion and has at least one knife disposed therein;

wherein the protrusion is for forcing the blank into the aligned recess so that the knife cuts at least partially through the blank.

8. The die set of claim 7, wherein:

the recess is elongate and at least partially defined by an elongate base wall and elongate sidewalls,

the side walls are spaced apart from one another and at least partially define the recess' opening,

the sidewalls extend away from the base wall, and

the knife's cutting edge is elongate and distant from each of the sidewalls and the base wall.

9. The die set of claim 7, wherein the knife's cutting edge is positioned within the recess.

10. The die set of claim 7, wherein the protrusion is semi-circular.

11. The die set of claim 7, wherein the protrusion extends and is open longitudinally along a surface of the die plate, wherein the surface is for being in opposing face-to-face relation with the carton blank.

12. The die set of claim 7, wherein the recess is a rectangular channel.
13. The die set of claim 12, wherein the knife blade is formed of an elongated material having an upstanding sharpened edge protruding upwardly into the channel in the counter plate.
14. The die plate of claim 13, wherein the knife is secured within a center portion of the channel.
15. A method of forming at least one kiss cut and at least one score line in a sheet of deformable material, the method comprising:
substantially simultaneously:
scoring a first face of the deformable material, and
kiss cutting a second face of the deformable material along the score.
16. The method of claim 15, wherein the scoring of the first face of the deformable material and the kiss cutting of the second face of the deformable material respectively include:
providing a die plate having at least one protrusion for forming the score line in the material;
providing a counter plate having at least one recess for receiving a portion of the deformable material, the recess having at least one knife edge therein projecting toward the protrusion;
positioning the deformable material between the die plate and the counter plate; and
advancing at least one of the die plate and the counter plate toward the other of the die plate and the counter plate such that the protrusion forces a portion of the deformable material into the recess and into engagement with the knife edge,

whereby the scoring of the first face of the deformable material and the kiss cutting of the second face of the deformable material along the score occurs substantially simultaneously.

17. The method of claim 16, wherein:
the recess is elongate and at least partially defined by an elongate base wall and elongate sidewalls,
the side walls are spaced apart from one another and at least partially define the recess' opening,
the sidewalls extend away from the base wall,
the knife edge is elongate and distant from each of the sidewalls and the base wall.

18. The method of claim 16, further comprising separating the die plate and the counter plate from one another, removing the deformable material from the die plate and the counter plate, and then erecting a the deformable material into a container.

19. The method of claim 16, wherein the recess is a rectangular channel.

20. The method of claim 19, wherein the knife blade is secured in a center portion at the base of the channel.

21. The method of claim 16, wherein the kiss cut and score line are formed in a corner gusset of the deformable material.

22. The method of claim 16, wherein the kiss cut is formed through approximately half the thickness of the deformable material.

23. The method of claim 16, wherein the protrusion has a semi-cylindrical configuration.

24. The method of claim 16, wherein the protrusion extends longitudinally along the bottom surface of the die plate.

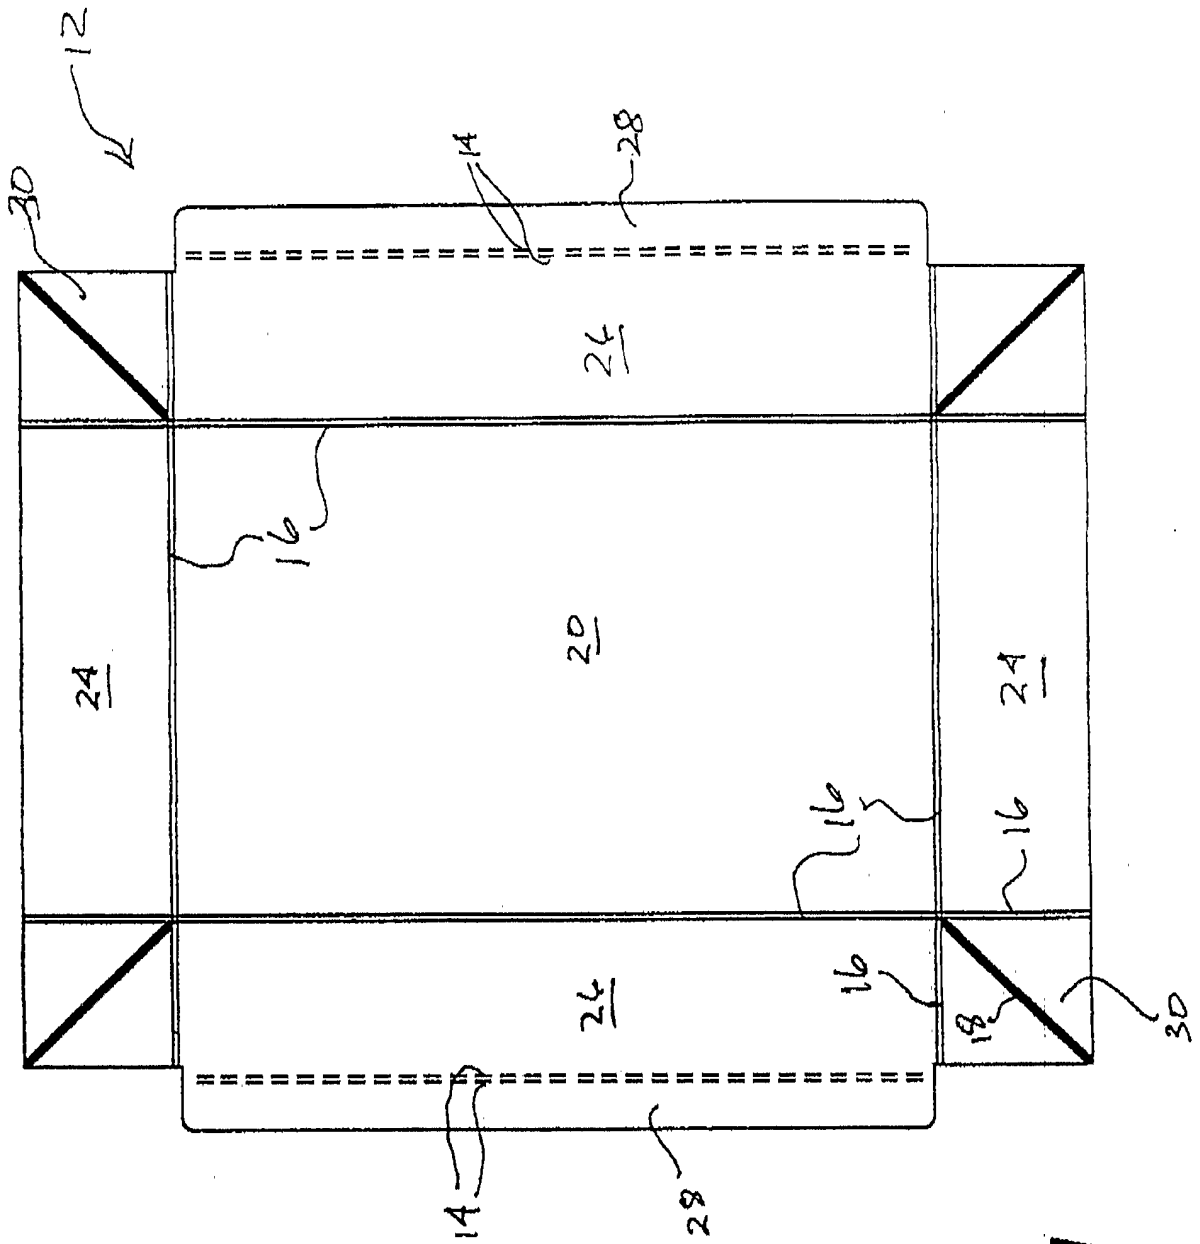


Fig. 1

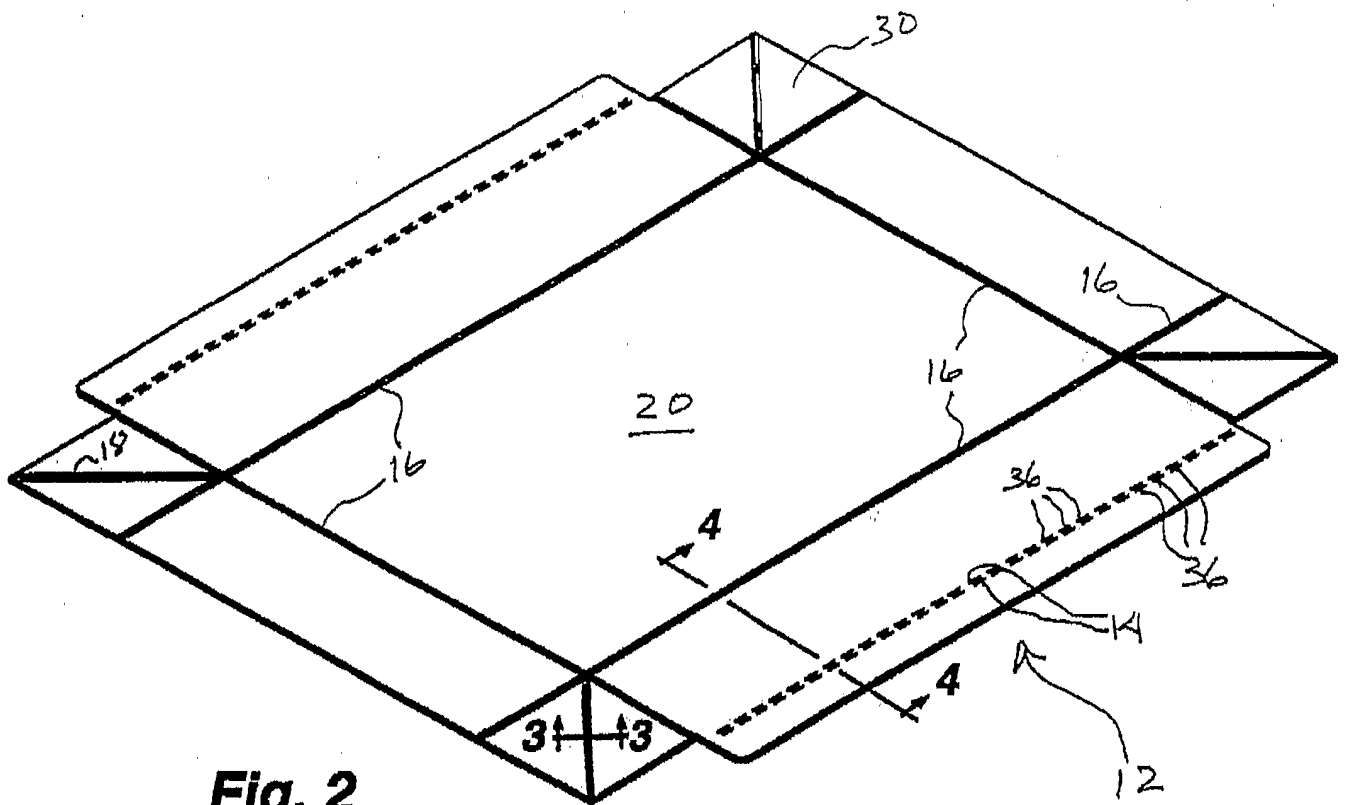


Fig. 2

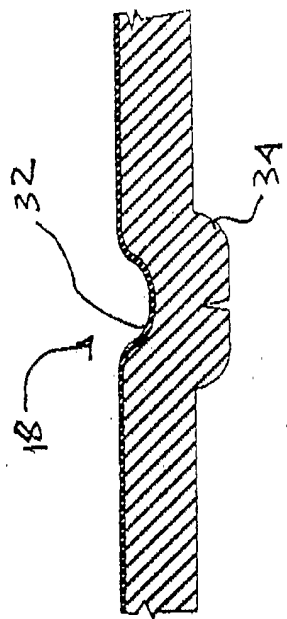


Fig. 3

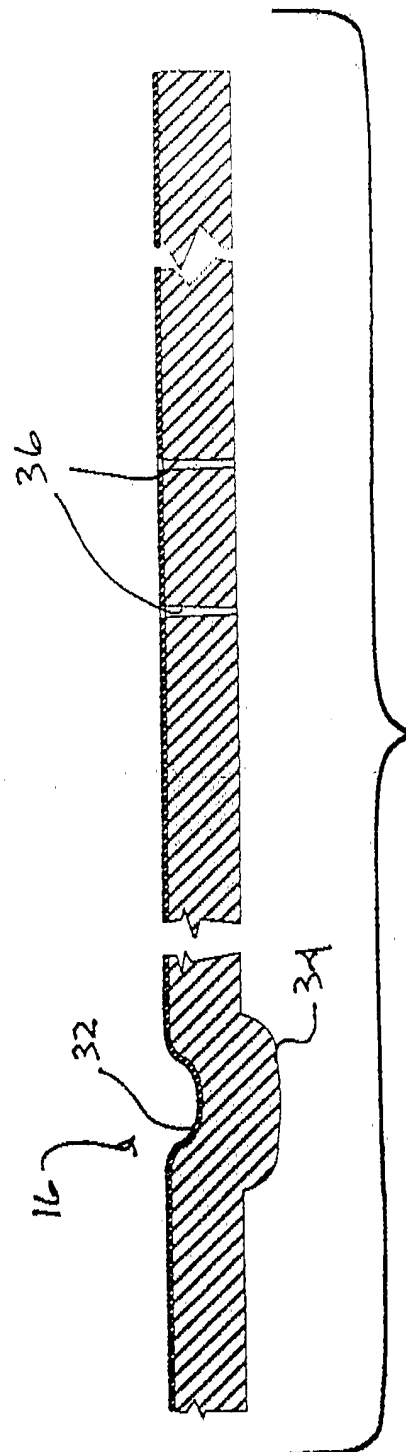
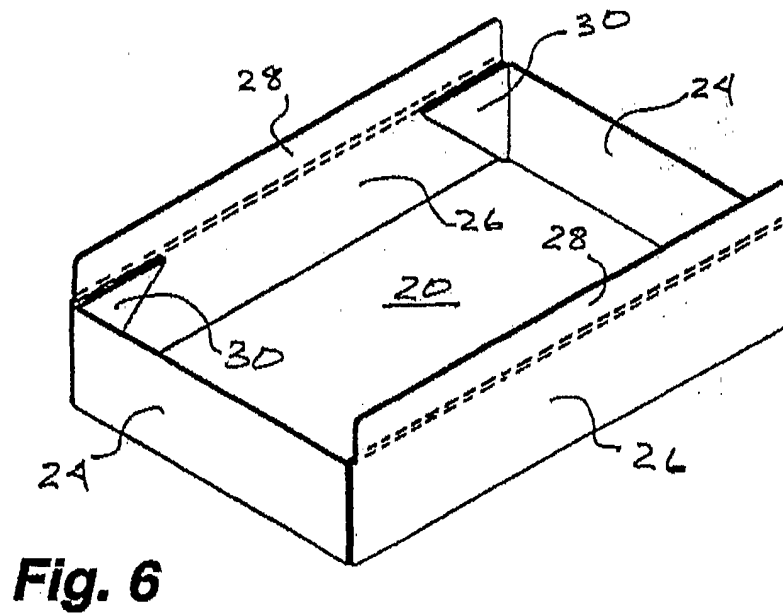
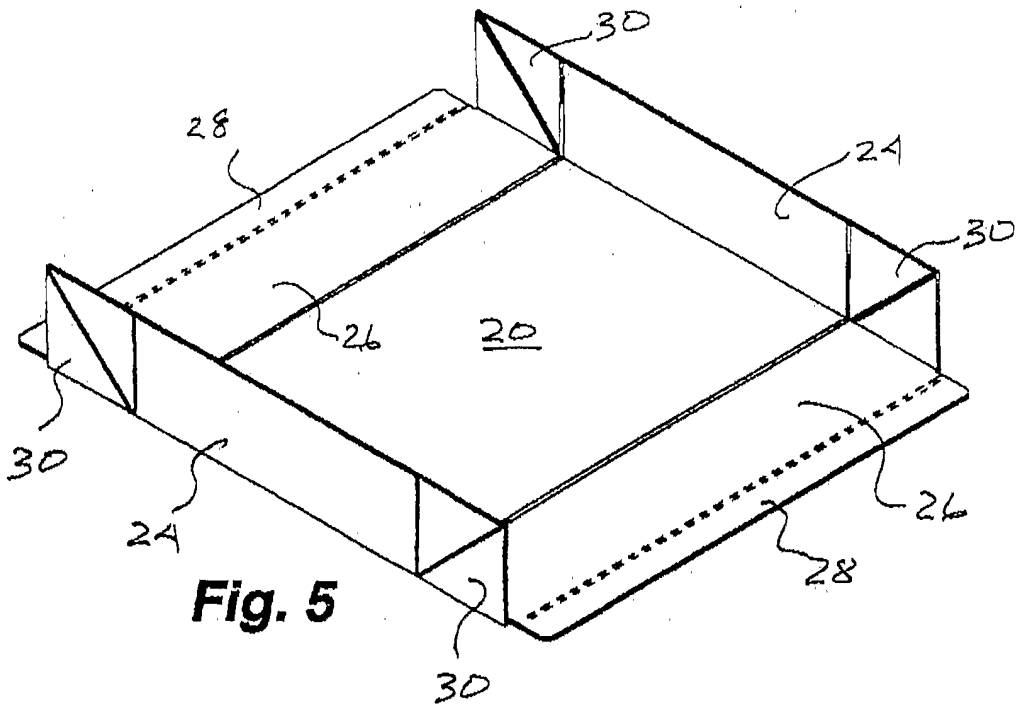


Fig. 4



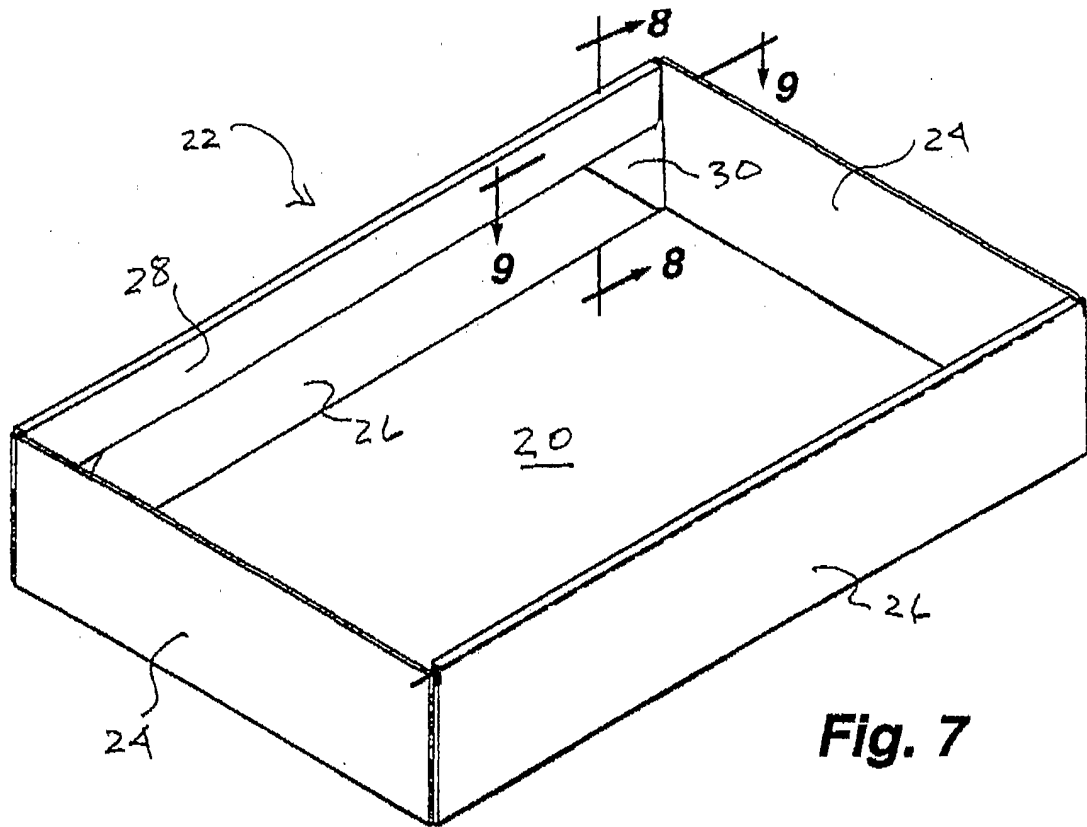


Fig. 7

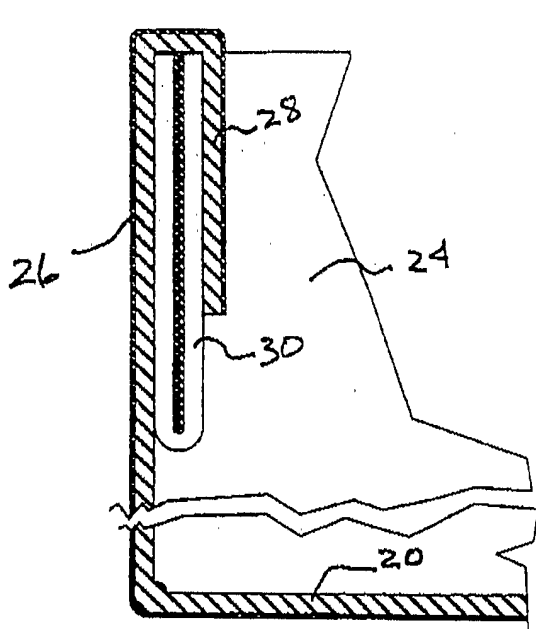


Fig. 8



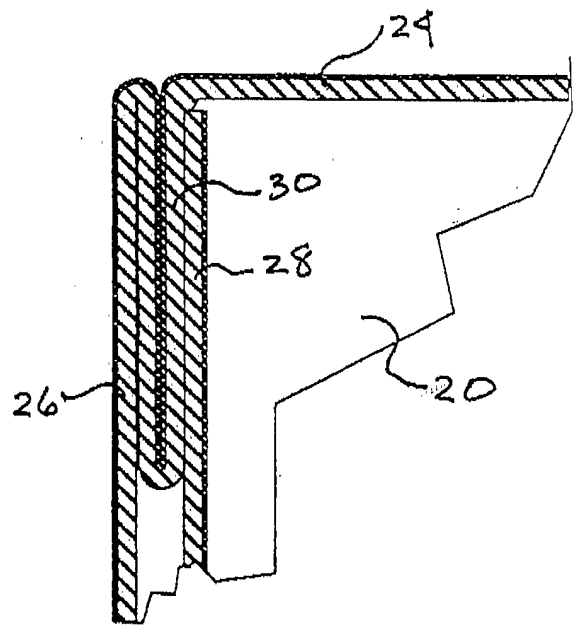


Fig. 9

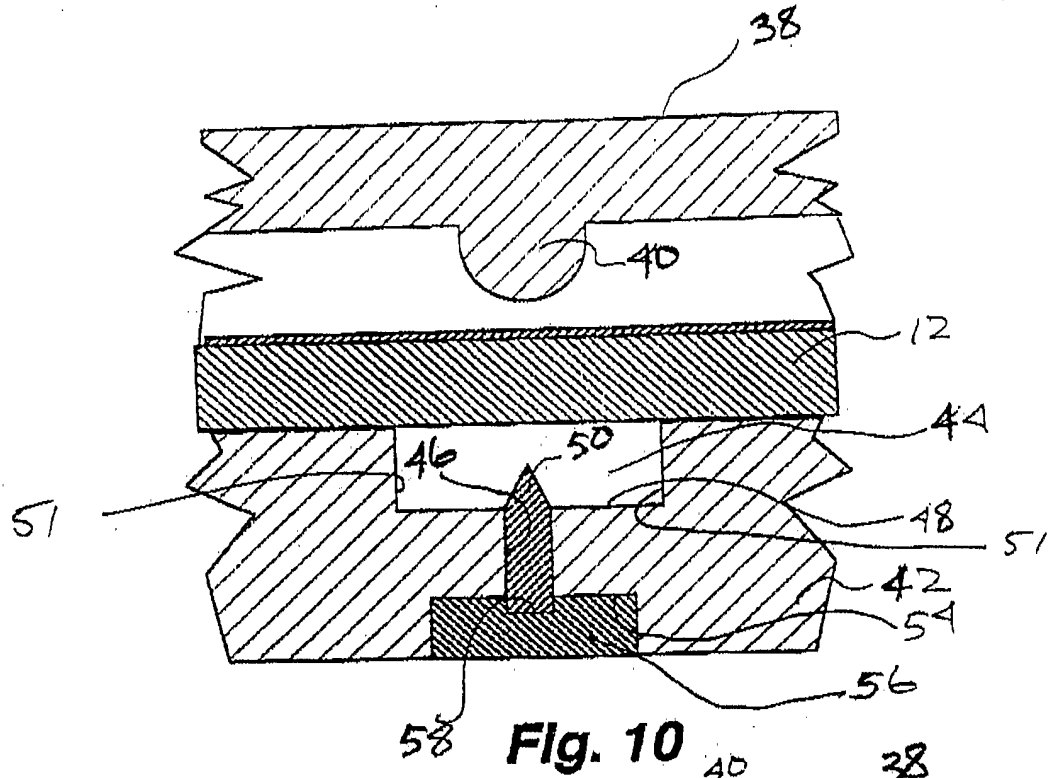

58 Fig. 10

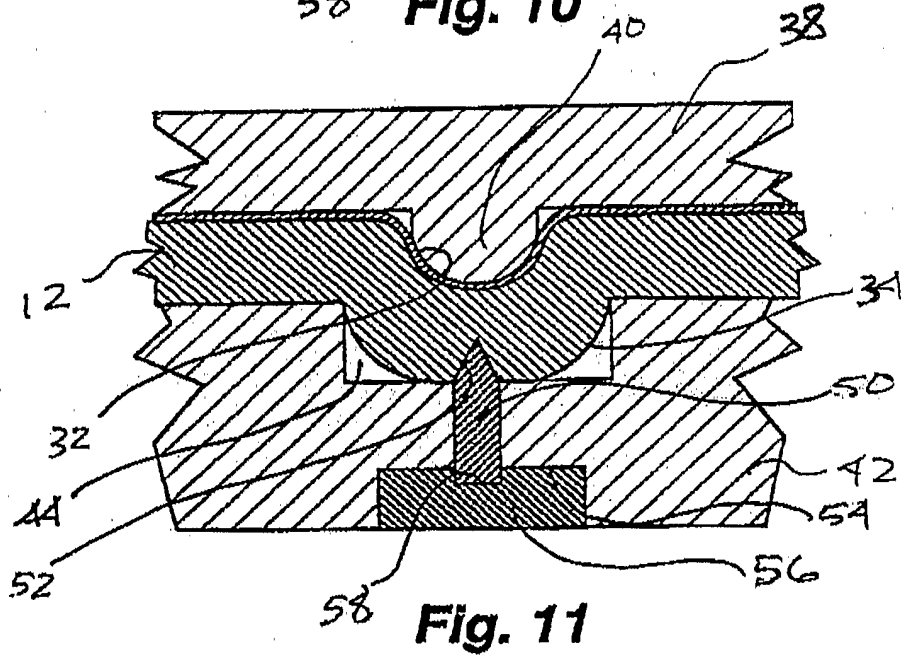

58 Fig. 11

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2005/001130

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 B26F1/44 B31F1/00 B31B1/25 B26D3/08 B65D5/42

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 B26D B26F B65D B31B B31F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
 EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	FR 457 066 A (BRUN) 11 September 1913 (1913-09-11) the whole document	1-11, 13, 14 15
X	FR 462 126 A (TALOBRE, BERTRAND) 20 January 1914 (1914-01-20) the whole document	1, 7
A	US 3 907 193 A (HELLER ET AL) 23 September 1975 (1975-09-23) abstract; figures 1,2	1, 7, 15
A	DE 196 08 690 A1 (SELLNER GMBH, 91564 NEUENDETTELSAU, DE; SELLNER GMBH) 23 October 1997 (1997-10-23)	
A	US 3 570 337 A (BURTON D. MORGAN) 16 March 1971 (1971-03-16)	
	-/--	

Further documents are listed in the continuation of box C. Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family
---	---

Date of the actual completion of the international search 6 May 2005	Date of mailing of the international search report 13/05/2005
--	---

Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer Rabolini, M
--	--

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2005/001130

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 977 069 A (PHILIPS ELECTRONIC AND ASSOCIATED INDUSTRIES LIMITED) 2 December 1964 (1964-12-02) -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No PCT/US2005/001130

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR 457066	A	NONE	
FR 462126	A	NONE	
US 3907193	A	23-09-1975 JP 50146469 A	25-11-1975
DE 19608690	A1	23-10-1997 NONE	
US 3570337	A	16-03-1971 BE 779510 A7 US 3900645 A	16-06-1972 19-08-1975
GB 977069	A	02-12-1964 AT 252703 B BE 626372 A DE 1249065 B NL 272881 A	10-03-1967