
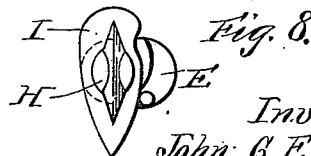
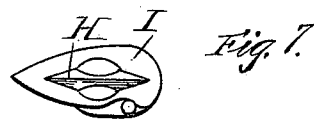
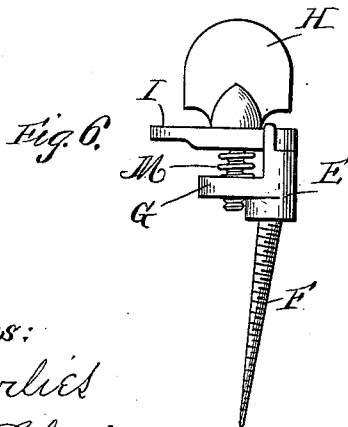
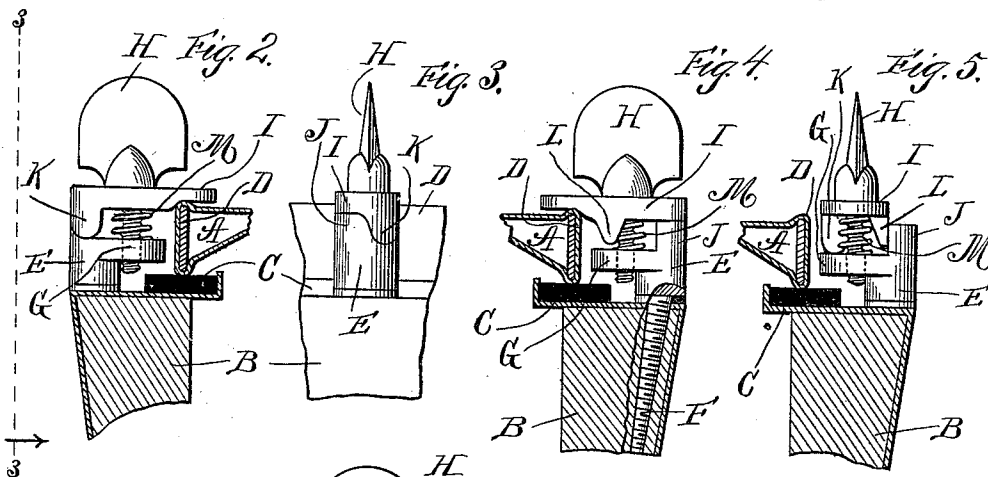


(No Model.)

J. C. EDWARD.
CASKET FASTENER.

No. 525,842.

Patented Sept. 11, 1894.

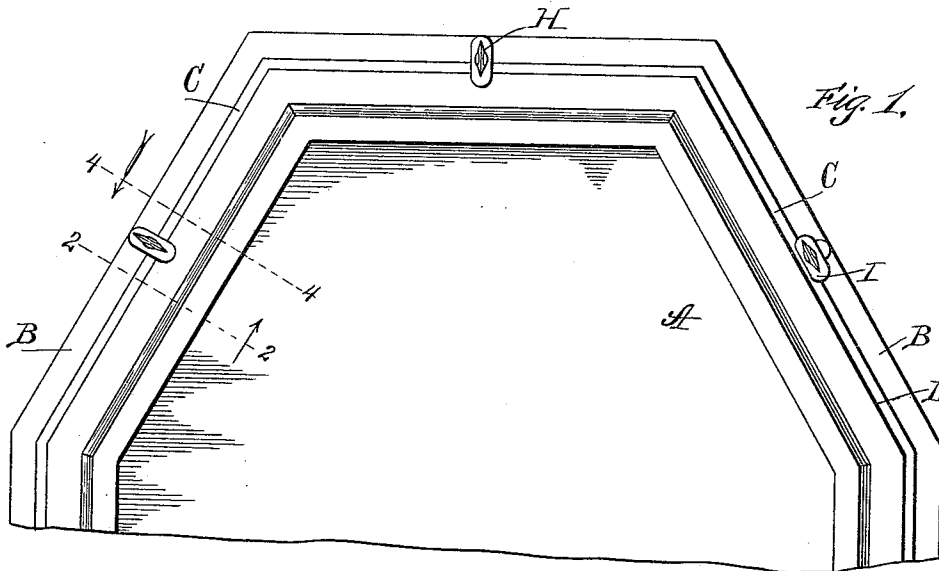

Witnesses:

W. C. Collier

Jno. A. Christianson.

Inventor:

John C. Edward.

By Osburn & Thacher

Attys.

UNITED STATES PATENT OFFICE.

JOHN C. EDWARD, OF CHICAGO, ILLINOIS, ASSIGNOR TO THE F. H. HILL COMPANY, OF SAME PLACE.

CASKET-FASTENER.

SPECIFICATION forming part of Letters Patent No. 525,842, dated September 11, 1894.

Application filed July 9, 1894. Serial No. 516,979. (No model.)

To all whom it may concern:

Be it known that I, JOHN C. EDWARD, a citizen of the United States, residing at Chicago, in the county of Cook and State of Illinois, have invented a certain new and useful Improvement in Casket-Fasteners, which is fully set forth in the following specification, reference being had to the accompanying drawings, in which—

Figure 1 is a top or plan view of one end of the casket, showing a plan view of three fasteners attached. Fig. 2 is a vertical section of a portion of the casket, taken at the line 2—2, Fig. 1, looking in the direction indicated by the arrow. Fig. 3 is a side elevation of a portion of the casket, showing a fastener applied thereto, looking in the direction indicated by the arrow, at line 3—3, Fig. 2. Fig. 4 is a sectional view of a portion of the casket, looking in the direction indicated by the arrow. Fig. 5 is a vertical section of a portion of the casket, with the fastener removed from the casket cover. Fig. 6 is a side elevation of a modified form of my casket fastener. Fig. 7 is a top view of the same; and Fig. 8, a top view, with the top portion of a fastener at right angles from that shown in Fig. 7.

My invention is adapted to be applied to the metallic casket shown and described in Patent No. 482,557, issued to Francis H. Hill April 27, 1892, and consists of an improvement in the fastening device or clamp by which the cover in that casket is secured in place and the casket made air-tight.

In the accompanying drawings, A represents the cover; B, the body of the casket.

C is a rubber gasket upon which the vertical rim, D, of the casket cover rests.

E, is the body of the fastener to which is rigidly secured a wooden screw, F. This screw I preferably make integral with the body of the casket fastener.

G, is an arm or bracket which I also preferably cast with the body E of the casket fastener.

H, is a thumb-screw which passes through the arm or bracket G.

I, is a clamp through which the thumb-screw H also passes, as clearly shown in the drawings. The hole in the clamp I is not

screw-threaded, but the hole in the arm or bracket G is screw-threaded.

There is a projection, J, on the top of the body E of the fastener; and there is also a projecting flange, K, on one side of the clamp I which fits against the projection J and serves as a stop when the clamp is turned over the edge of the casket cover in the position shown in Figs. 2, 3 and 4. There is also a projecting flange, L, on the clamp I which strikes against the portion J of the body of the fastener when the clamp is thrown off from the flange of the casket, as shown in Fig. 5.

M, is a coiled spring placed between the arm or bracket G and the clamp I surrounding the screw-threaded stem of the thumb-screw. This spring holds the clamp up against the shoulder of the thumb-screw in position where it can be readily turned over the end of the body of the fastener and also over the rim of the casket cover. When the thumb-screw is turned to press the clamp downwardly, one end resting on the end of the body of the casket fastener, the other end presses solidly on the rim of the casket cover, giving in a measure a leverage to the clamping action of the force of the thumb-screw.

When it is desired to remove the cover from the casket, the thumb-screw is turned, the screw-thread in the arm G raising the thumb-screw, thereby removing the pressure on the clamp I, when it can be readily turned on the stem of the thumb-screw from over the rim of the casket cover, but the stop, L, prevents it from turning too far. When the cover is replaced, the clamps are swung around on the stem of the thumb-screws into the position shown in Figs. 2, 3 and 4. The thumb-screws are then screwed down clamping the rim firmly down on the rubber gasket C. Instead of placing projections L and K on the side of the clamp to strike against the projection on the body of the casket fastener, the upper end of the body of the casket fastener can be made so that the clamp itself will strike a projection on its upper end, as shown in Figs. 6, 7 and 8, and exactly the same results will be obtained.

I find in actual use of my casket fastener, that the body of the fastener can be readily attached to the body of the casket in a firm

and substantial manner, and that the thumb-
 screws can be readily operated to operate the
 clamp of the fastener and at the same time
 the clamp can be removed from clamping the
 5 cover with facility on account of its stops
 which stop it in the right place; and that the
 clamps can be readily swung over the rim of
 the cover and clamped down with great force.

Having fully described the construction
 10 and operation of my invention, what I claim,
 and desire to secure by Letters Patent, is—

1. A casket fastener having the main por-
 tion or body E provided with a bracket or
 arm, and a device by which it can be firmly
 15 secured to the body of the casket, and also a
 projection on its upper portion serving as a
 stop to the clamp; a clamp adapted to swing
 over the end of the body of the fastener and
 over the rim of the casket cover; and a set-

serew passing through the clamp and the arm 20
 or bracket on the body of the casket fastener
 to force down the clamp.

2. A casket fastener having the following
 elements: a body or main portion provided 25
 with a bracket having a screw-threaded hole
 in it, and also means for attaching it firmly
 to the body of the casket, and a stop on its
 upper end; a clamp with a hole through its
 central portion; a thumb - screw passing 30
 through the hole in the clamp and through
 the bracket or arm of the body of the clamp;
 and a spring between the clamp and the arm
 or bracket, to hold the clamp up against the
 shoulder on the thumb-screw, as specified.

JOHN C. EDWARD.

Witnesses:

ALOYSIA HELMICH,
 ALLAN A. MURRAY.