

(19)



SUOMI - FINLAND

(FI)

PATENTTI- JA REKISTERIHALLITUS

PATENT- OCH REGISTERSTYRELSEN

FINNISH PATENT AND REGISTRATION OFFICE

(10) **FI 128404 B**
(12) **PATENTTIJULKAISU**
PATENTSKRIFT
PATENT SPECIFICATION

(45) Patentti myönnetty - Patent beviljats - Patent granted **30.04.2020**

(51) Kansainvälinen patenttiluokitus - Internationell patentklassifikation -
International patent classification

C11B 3/00 (2006.01)

C11B 11/00 (2006.01)

C10G 17/04 (2006.01)

C10G 31/08 (2006.01)

B01D 21/00 (2006.01)

(21) Patentihakemus - Patentansökning - Patent application 20165733

(22) Tekemispäivä - Ingivningsdag - Filing date **30.09.2016**

(23) Saapumispäivä - Ankomstdag - Reception date **30.09.2016**

(43) Tullut julkiseksi - Blivit offentlig - Available to the public **31.03.2018**

(73) Haltija - Innehavare - Proprietor
1 • Neste Oyj, Keilaranta 21, 02150 ESPOO, SUOMI - FINLAND, (FI)

(72) Keksijä - Uppfinnare - Inventor
1 • TOUKONIITTY, Blanka, ESPOO, SUOMI - FINLAND, (FI)
2 • LINDQVIST, Petri, ESPOO, SUOMI - FINLAND, (FI)

(74) Asiamies - Ombud - Agent
ZACCO DENMARK A/S, Arne Jacobsens Allé 15, 2300 København S

(54) Keksinnön nimitys - Uppfinningens benämning - Title of the invention
Uusi menetelmä muovien poistamiseksi
Ny process för att avlägsna plast
Novel process for removal of plastics

(56) Viitejulkaisut - Anförda publikationer - References cited
US 2011047866 A1, US 2182755 A, US 2728714 A, US 2657224 A, GB 2412664 A, EP 0195991 A2, US 2014087042 A1,
DE 102011055559 A1

(57) Tiivistelmä - Sammandrag - Abstract

Esillä oleva keksintö koskee uutta menetelmää, jolla puhdistetaan lipidimateriaalia, jotta sitä voidaan jatkokäyttää esimerkiksi polttoaineen tai kemikaalien lähteenä.

Present invention relates to a novel process for purification of lipid material for further use as such as e.g. a source of fuel or chemicals.

Novel process for removal of plastics

TECHNICAL FIELD

Present invention relates to a process for removal of plastics from a lipid material . The method enables removal of *i.a.* polyethylene or other plastics. In particular, the invention relates to methods for purifying animal fat that is conventionally seen as containing levels of impurities too high to be commercially profitable to use in a purification process to obtain a purified feedstock of a quality allowing the use thereof as a source of fuel or chemicals. The impurities may be of a character that conventional methods are not able to remove from the feedstock to such a degree that is prescribed as the appropriate quality for further use as a source of fuel or chemicals.

BACKGROUND ART

WO 2010/037772 relates to the problem with polyethylene and other polymers in especially animal fats. The examples in WO 2010/037772 relates to animal fats containing up to 500 ppm PE (polyethylene). However, the purification method for removal of PE (and other insolubles) from the oil is bleaching in combination with filtration.

20 SUMMARY OF THE INVENTION

Present invention provides for a process for removal of plastics from a lipid material, the process comprising the steps of:. Consequently, present invention relates to a process for purification of lipid material originating from such as *e.g.* animal sources, the process comprising the steps of:

- 25 a) heating the lipid material
- b) adding water to the lipid material **c h a r a c t e r i s e d** in that the added water does not comprise an acid

c) allowing efficient contact of water and lipids to enable impurities to transfer to water phase

d) separating the lipid material from step c) by centrifugation, settling, decanting or evaporating

5 e) optionally subjecting the separated lipid material from step d) to a filtration step to remove solid impurities

f) optionally subjecting the lipid material from step d) or filtrate from step e) to a post treatment,

to thereby remove plastics in the lipid material.

10 Moreover, the invention relates to a method for removal of polymers, such as e.g. polyethylene (PE) from a lipid material such as e.g. animal fats (AF).

In present invention the term "lipid material" or fat(s) should be understood as meaning any animal based oils or fats, such as e.g. fish based oils or fats, suet, tallow, blubber,

15 recycled alimentary fats etc. It is to be understood that the term may comprise a mixture of any of the above mentioned examples. However, in other embodiments the

term "lipid material" may comprise any type of lipid or fat. For example, the term may comprise a lipid material/oil of plant, microbial and/or animal origin. Non-limiting

20 distillation processes, vegetable or plant based oil or fat such as e.g. sludge palm oil or used cooking oil, microbial or algae oils, free fatty acids, or any lipids containing phosphorous and/or metals, oils originating from yeast or mould products, oils

originating from biomass, rapeseed oil, canola oil, colza oil, tall oil, sunflower oil, soybean oil, hemp oil, olive oil, linseed oil, cottonseed oil, mustard oil, palm oil, arachis

25 oil, castor oil, coconut oil, starting materials produced by genetic engineering, and biological starting materials produced by microbes such as algae and bacteria or any

mixtures of said lipid materials.

The lipid material used in the process may also be fossil based, such as e.g. various oils used and produced by the oil industry. Non-limiting examples are various

30 petroleum products such as e.g. fuel oils and gasoline (petrol). The term also

encompasses all used products in either the refining process or e.g. used lubrication oils.

The impurities present in the lipid material may be of various character or origin. Specifically, the impurities are such that they may be harmful in the process, *e.g.* they may poison or deactivate catalysts used in any further processing of the lipid material following the process of present invention. The impurities may be of metallic or
5 polymeric origin such as elementary metals or for example phosphorous compounds. Specifically, the polymeric impurities that are removed may be *e.g.* commonly used plastics such a polyethylene (PE).

Consequently, the invention also relates to use of a purified lipid material obtainable by the method according to present invention, as a source of fuel, bulk chemicals such as
10 *e.g.* polymers, solvents, lubricants, or specialty chemicals such as *e.g.* cosmetics, pharmaceuticals etc.

Thus, the method according to the invention provides for a purified lipid material that fulfils the requirements for bulk chemicals or specialty chemicals such that the necessary purity requirements for such chemicals are met.

15 Notably, it has surprisingly been found that the method as described herein is effective with respect to the desired result as well as omitting addition of substances or processes commonly seen in the art.

Moreover, the process takes place by heating a mixture of water and lipid material. However, the process does not include any addition of an acid to the water when used
20 in steps a)-c) according to the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1. illustrates a schematic outline of the method according to the invention, wherein the water pre-treatment is outlined with parenthesis.

DETAILED DESCRIPTION

Present invention relates to a method for purifying a lipid material. Moreover, the invention relates to a method for removal, wholly or partly, of any polymeric material, from a lipid material. Throughout present description, it is to be understood that the

terms “water pre-treatment” and “water degumming” are used interchangeably and for the purpose of present invention have the same meaning.

Specifically, the invention relates to a process for removal of plastics from a lipid material, the process comprising the steps of;

- 5 a) heating the lipid material,
 - b) adding water to the lipid material **c h a r a c t e r i s e d** in that the added water does not comprise an acid,
 - c) allowing efficient contact of water and lipids to enable impurities to transfer to water phase,
 - 10 d) separating the lipid material from step c) by centrifugation, settling, decanting or evaporating,
 - e) optionally subjecting the separated lipid material from step d) to a filtration step to remove solid impurities,
 - f) optionally subjecting the lipid material from step d) or filtrate from step e) to a post
 - 15 treatment,
- to thereby remove plastics in the lipid material.

The post treatment step may comprise one or more subsequent steps that may comprise one or more different post treatment techniques in any order. Consequently,

20 the post treatment step may comprise e.g. bleaching or other degumming techniques or filtration or separation steps which may in turn be combined in any order with one another. With respect to filtration, any filtration technique known in the art can be used. Separation may include any suitable separation technique such as e.g. centrifugation or phase separation. With respect to centrifugation, such operation may be performed

25 during anytime that is deemed suitable, such as e.g. during a period of about 1 minutes to about 30 minutes, such as e.g. about 5 minutes to about 30 minutes or about 10 minutes etc.

Moreover, the temperature at which filtration or centrifugation takes place may be in

30 any suitable range, such as e.g. about 50°C to about 250°C, such as e.g. 60°C to about 240°C, such as e.g. 70°C to about 230°C, such as e.g. 80°C to about 220°C, or about 60°C, about 80°C, about 130°C, or about 220°C.

Specifically, the temperature during filtration or centrifugation may be about 60°C, or about 80°C.

5 The lipid material to be used in present invention is a lipid material to be purified into a material that may serve as a source for fuel of any kind or as a source of chemicals such as e.g. specialty chemicals. The important factor is that the purified lipid material has to be of such a quality that it can serve as a fuel or be used in further processes such as e.g. catalytic cracking without containing levels of impurities that may e.g. jeopardize the full functionality of an engine or poisoning of catalysts or otherwise hampering of any
10 further processes that the purified feedstock may be subjected to. Such further processes may be e.g. catalytic cracking, thermo-catalytic cracking, catalytic hydrotreatment, fluid catalytic cracking, catalytic ketonization, catalytic esterification, or catalytic dehydration. The purified feedstock may also be further processed into various chemicals, such as bulk chemicals (e.g. polymers, solvents, solvent components and
15 lubricants) or specialty chemicals (e.g. cosmetics and pharmaceuticals).

In the art, there are various methods for purification of lipid material for the purposes mentioned herein. However, lipid material that contains high level of impurities may not be able or feasible to be purified by techniques known in the art such that the purified lipid material contains low levels of impurities allowing it to be used as a source of fuel.
20 Present invention solves this problem by the method as disclosed herein, thereby allowing use of a lipid material that would normally be seen as uneconomical or unsuitable for purification.

Lipid material according to the invention may be, but is not limited to, any lipids containing phosphorous and/or metals and/or polymers such as e.g. various plastics.
25 Examples of lipid materials any animal based oils or fats, such as e.g. suet, tallow or blubber. It is to be understood that lipid material may be a mixture of any of the above mentioned examples of lipid material.

Exemplified lipid material include, but is not limited to, low quality animal fat (AF), not accepted to catalytic hydrotreatment process (very high content of nitrogen or nitrogen
30 containing compounds, PE, metals, phosphorus contents etc.).

Such lipid material needs to be purified in order to lower the level of elements known to e.g. act as catalyst poison or otherwise render the material useless for its ultimate intended use.

The lipid material to be purified may contain impurities containing metals and phosphorus in the form of phospholipids, soaps or salts. Moreover, the lipid material may contain polymers and specifically polymers in the context of plastics. Notably such plastics may be e.g. polyethylene (PE). However, any plastic polymer may be removed according to the invention. Exemplary plastics may Bakelite, polystyrene, polyvinyl chloride, poly(methyl methacrylate), rubber or synthetic rubber, polyester, polyethylene terephthalate, high-density polyethylene, polyvinylidene chloride, low-density polyethylene, polypropylene, high impact polystyrene, polyamides, acrylonitrile butadiene styrene, polyethylene/acrylonitrile butadiene styrene, polycarbonate, polycarbonate/acrylonitrile butadiene styrene, polyurethanes. It is also to be understood that the term polymer may comprise a blend of different plastics and/or rubbers.

Moreover, the method may be used to remove other impurities such as e.g. metals and nitrogen or nitrogen containing compounds. The nitrogen containing compounds may be simple amines or nitrates, nitrites or ammonium salts of any kind.

Metal impurities that may be present in the lipid material may be e.g. alkali metals or alkali earth metals, such as sodium or potassium salts or magnesium or calcium salts or any compounds of said metals. The impurities may also be in form of phosphates or sulphates, iron salts or organic salts, soaps or e.g. phospholipids.

According to the invention, the process of purification takes place under heating. Specifically, according to the invention, the elevated temperature in step a) -c) is such that the temperature is sufficiently high to allow the lipid material to be purified to become liquid. Thus, the lipid material is heated to about 40°C to about 200°C, such as e.g. about 40°C to about 120°C, such as e.g. about 50°C to about 110°C, such as e.g. about 60°C, about 100°C, or about 40°C, about 50°C, about 60°C, about 70°C, about 80°C, about 90°C, about 100°C, about 110°C or about 120°C. Preferably, the temperature range is about 50°C to about 120°C.

The heating of the lipid material is maintained as long as the lipid material stays liquid. The time during which the lipid material is heated and held at the desired temperature is about 1 day to about 7 days, such as e.g. about 2 days, such as e.g. about 3 days etc. However, the mixing time may be any time suitable to allow for an efficient contact
5 between the water and the lipid material. Such time depends on the type of mixing. For example, high shear mixing typically requires shorter times than slow mixing methods. Mixing time may thus be e.g. 0,1 s or about 2 seconds, or about 1 minute, about 20 minutes, about 30 minutes, about 40 minutes, about 60 minutes, or about 2 hours, about 4 hours, about 6 hours, about 8 hours, about 12 hours etc.

10 Water is added to the heated oil in step b) of the invention. Typical amounts of water added is about 0,1 % to about 5 % (wt%). Water may be added in any suitable fashion, notably so to avoid any explosive evolution of steam. This may mean that water is added in a slow fashion. Slow addition of water is only necessary when temperature of the lipid material exceeds 100°C. After addition of the water, any means allowing for
15 an efficient contact between the water and the lipid material is employed. Thus in step c) according to the invention, vigorous mixing, slow mixing, counter current flow, dynamic cavitation or acoustic irradiation or any combination thereof may be employed.

After mixing water with the lipid material, the water is separated from the lipid material.
20 This may take place by allowing the lipid material to separate spontaneously from the lipid material by stopping any form of mixing function and thereafter separate the lipid material from the water by decantation. However, other techniques for phase separation may be employed such as e.g. centrifugation, settling, or evaporating. Furthermore, a combination of the mentioned separation techniques may also be
25 employed in any order as seen suitable. For example, if water is evaporated from the lipid material, the solid impurities remaining in the lipid material thereafter may be removed by e.g. filtration.

Optionally, the method according to the invention may also comprise a filtration step of the separated lipid material from step d) according to the invention. It has been
30 surprisingly found that the water degumming/water pre-treatment of the lipid material greatly improves the filterability of the lipid material compared to acid degumming. This has the advantage that change of filters need to be undertaken with less frequently

which in turn affects the economy of the process favourably. Another important effect of this is also that the process needs to be stopped less frequently for change of filters.

Furthermore, the method according to the invention may optionally further comprise subjecting the lipid material from step d) or filtrate from step e) to a bleaching unit to

5 remove any additional impurities which may be a part of the post treatment according to the method. However, it should be noted that the polymers such as e.g. plastics of some sort present in the non-purified lipid material is removed during water degumming/water pre-treatment in steps a)-d) of the invention. Thus, a post treatment method may not be necessary if the purity of the obtained lipid material is satisfactory
10 depending on the specification thereof.

The lipid material may be further processed by any suitable method to remove the remaining impurities from the lipid material, should such impurities be present. In the process according to the invention, most of or the entirety of the plastics present in the non-purified lipid material is removed, such as e.g. at least about 20%, or at least
15 about 30%, at least about 40%, at least about 50%, at least about 60%, at least about 70%, at least about 80%, at least about 90%, at least about 95%, at least about 98%, at least about 99%, or 100% of the plastics present in the lipid material to be purified. The plastic or polymeric material to be removed may be e.g. polyethylene or a combination thereof with other types of plastics or polymers as listed herein.

20 With respect to the purified lipid material, the remaining plastics, such as e.g. polyethylene, is below about 500 ppm, such as e.g. below about 400 ppm, such as e.g. below about 300 ppm, such as e.g. below about 200 ppm, such as e.g. below about 100 ppm, such as e.g. about 50 ppm, such as e.g. below about 30 ppm, such as e.g. below about 20 ppm, such as e.g. below about 15 ppm, such as e.g. below about
25 10 ppm, such as e.g. below about 5 ppm.

Thus the method according to the invention provides for a purified lipid material that is suitable for further use such as e.g. a source of fuel or chemicals, such as bulk chemicals or specialty chemicals.

The invention is further illustrated by the below seen non-limiting examples.

30

EXAMPLES

- Water degumming test were carried using 3 wt.-% water addition and temperature 60°C. After water addition high shear mixing was applied for 2 min and then slow mixing for 60 min. Impurities and water were separated by centrifugation. Small sample was still filtered over 0.4 µm paper to check whether all chelated impurities were separated during centrifugation tests. As mentioned previously in the description, it is to be noted that the terms “water degumming” and “water pre-treatment” are used interchangeably and have the same meaning.
- 10 Acid degumming test were carried out using 1500 ppm of citric acid, 3 wt.-% water addition and temperature 60°C. After acid addition high shear mixing was applied for 2 min after that 3 wt.-% water was added and high shear mixing was again applied for 2 min and then slow mixing for 60 min. Impurities and water were separated by centrifuge. Small sample was still filtered over 0.4 µm paper to check whether all
- 15 chelated impurities were separated during centrifugation tests.

Basic bleaching tests were carried out using 1500 ppm citric acid (CA) and 0.2 wt.-% water additions. After acid + water addition, oil/acid/water mixture was stirred for 2 min by a high shear mixer and then followed by slow mixing for 5 min. Then 1.0 wt.-% of

20 bleaching earth was added to the mixture and wet (80 °C, 800 mbar, 30 min) + dry (105 °C, 80 mbar, 25 min) bleaching were executed. Treated oil + body-feed were filtered over the pre-coat (bleaching earth, 0.2 wt.-%) at 105 °C in Dahlman filtration system with constant pressure of 2.5 bars over the filter cake.

Example 1

25 *PE (polyethylene) removal by water degumming + filtration*

PE removal by water degumming + filtration can be seen from Table I and II.

As can be seen from Table I., PE (252 ppm) can be fully removed from AF (animal fat) by water degumming and filtration. Such efficient removal of PE cannot be achieved by acid degumming + bleaching nor only bleaching process. Same observations were

30 obtained with different types of AF feedstock containing high PE content (Table II.).

Furthermore, filterability properties of water degummed oil are better in comparison to as oil as received and thus process pre-treatment capacity is also intensified by this process concept.

By utilization of this method, PE content in AF purchase specifications can be significantly increased. Process costs and production capacity will thus be enhanced as well.

Table I.

Water degumming (W-C), Water degumming + filtration (W-C-F*) and Water degumming + bleaching (W-C-AT-W-A-F) of AF and their effect on PE removal

			Feed	W-C	W-C-F*	W-C-AT-W-A-F
						1 wt-%
ASTMC4629	N	mg/kg	740	720	710	540
ISO 6656	PE	Wt-ppm	252	22	<10	12
ASTMD5185	Si	mg/kg	1,4	0,3	<0,3	0,3
ASTMD5185	Al	mg/kg	<0,3	<0,3	<0,3	0,45
ASTMD5185	Fe	mg/kg	1,9	1,5	1,4	0,13
ASTMD5185	Na	mg/kg	25	5	5	<1,0
ASTMD5185	Ca	mg/kg	30	13	13	<0,3
ASTMD5185	Mg	mg/kg	3,7	2,1	2	<0,3
ASTMD5185	P	mg/kg	57	29	28	4,9

Table II.

Water degumming (W-C), Water degumming + bleaching (W-C-AT-W-A-F) and Bleaching (AT-W-A-F) of AF and their effect on PE removal

			Feed	W-C	W-C-AT-W-A-F	AT-W-A-F
ASTMC4629	N	mg/kg	330	270	210	228
ISO 6656	PE	Wt-ppm	332	101	70	273
ASTMD5185	Si	mg/kg	1,4	1,2	0,99	1,5
ASTMD5185	Al	mg/kg	<0,3	<0,3	<0,3	1,5

ASTMD5185	Fe	mg/kg	2	1,4	<0,1	0,47
ASTMD5185	Na	mg/kg	61	11	<1,0	2
ASTMD5185	Ca	mg/kg	11	7,9	<0,3	0,74
ASTMD5185	Mg	mg/kg	1,8	1,2	<0,3	1,2
ASTMD5185	P	mg/kg	81	27	4,4	14

5

10

15

20

25

Claims

1. A process for removal of plastics from a lipid material, the process comprising the
5 steps of:
- a) heating the lipid material,
 - b) adding water to the lipid material **characterised** in that the added water does not comprise an acid,
 - c) allowing efficient contact of water and lipids to enable impurities to transfer to water
10 phase,
 - d) separating the lipid material from step c) by centrifugation, settling, decanting or evaporating,
 - e) optionally subjecting the separated lipid material from step d) to a filtration step to remove solid impurities,
 - 15 f) optionally subjecting the lipid material from step d) or filtrate from step e) to a post treatment,
to thereby remove plastics in the lipid material.
2. The process according to claim 1, wherein the lipid material is selected from fats or
20 oils of animal origin selected from fish based oils or fats, suet, tallow, blubber, recycled alimentary fats, or a lipid material/oil of plant, microbial selected from one or more of tall oil or the residual bottom fraction from tall oil distillation processes, vegetable or plant based oil or fat selected from sludge palm oil or used cooking oil, microbial or algae oils, free fatty acids, oils originating from yeast or mould products, oils originating
25 from biomass, rapeseed oil, canola oil, colza oil, tall oil, sunflower oil, soybean oil, hemp oil, olive oil, linseed oil, cottonseed oil, mustard oil, palm oil, arachis oil, castor oil, coconut oil, starting materials produced by genetic engineering, and biological starting materials produced by microbes selected from algae and bacteria or any mixtures of said feedstocks, or a lipid material used in the process may also be fossil
30 based, selected from various oils used and produced by the oil industry.
3. The process according to any of the preceding claims wherein the lipid material is of any type of animal origin selected from fats or oils or any mixtures thereof and selected from fish based oils or fats, suet, tallow, blubber, recycled alimentary fats.

4. The process according to any of the preceding claims, wherein the lipid material is heated to a temperature of about 40°C to about 170°C to about 40°C to about 200°C, selected from about 40°C to about 120°C, . about 50°C to about 110°C, about 60°C, 5 about 100°C, or about 40°C, about 50°C, about 60°C, about 70°C, about 80°C, about 90°C, about 100°C, about 110°C or about 120°C.
5. The process according to any of the preceding claims, wherein step c) is performed by vigorous mixing, slow mixing, counter current flow, dynamic cavitation or acoustic 10 irradiation.
6. The process according to any of the preceding claims, wherein the process does not include a bleaching step.
7. The process according to claim 1, wherein the plastics is selected from polyethylene, Bakelite, polystyrene, polyvinyl chloride, poly(methyl methacrylate), rubber or synthetic rubber, polyester, polyethylene terephthalate, high-density polyethylene, polyvinylidene chloride, low-density polyethylene, polypropylene, high impact polystyrene, polyamides, acrylonitrile butadiene styrene, polyethylene/acrylonitrile butadiene 15 styrene, polycarbonate, polycarbonate/acrylonitrile butadiene styrene, polyurethanes, 20 or any mixtures thereof.
8. The process according to claim 1, wherein the polymer is polyethylene.
9. The process according to claim 8 wherein up to 100 %, original content of polyethylene in the lipid material is removed, or at least about 20%, or at least about 30%, at least about 40%, at least about 50%, at least about 60%, at least about 70%, at least about 80%, at least about 90%, at least about 95%, at least about 98%, at least about 99% of polyethylene is removed. 25 30

Patenttivaatimukset

1. Menetelmä muovien poistamiseksi lipidimateriaalista, jossa menetelmä käsittää seuraavat vaiheet:

- 5 a) lipidimateriaalin kuumentaminen
- b) veden lisääminen lipidimateriaaliin, jossa lisättävä vesi ei käsitä happoa
- c) veden ja lipidien tehokkaan kontaktin salliminen, jotta mahdollistetaan epäpuhtauksien siirtyminen vesifaasiin
- d) kohdan c) lipidimateriaalin erottamisen sentrifugoinnilla, selkeytyksellä,
- 10 dekantoinnilla tai haihduttamisella
- e) valinnaisesti vaiheen d) erotetun lipidimateriaalin altistamisen suodatusvaiheelle kiinteiden epäpuhtauksien poistamiseksi
- f) valinnaisesti vaiheen d) lipidimateriaalin tai vaiheen e) suodoksen altistamisen jatkokäsittelylle
- 15 lipidimateriaalissa olevien muovien poistamiseksi.

2. Patenttivaatimuksen 1 mukainen menetelmä, jossa lipidimateriaali on valittu eläinperäisistä rasvoista tai öljyistä valittuna kalapohjaisista öljyistä tai rasvoista, talista, eläinrasvasta, valaanrasvasta, kierrätetyistä ravintorasvoista, tai kasvin

20 lipidimateriaalista/öljystä, mikrobiperäisistä valittuna yhdestä tai useammasta mäntyöljystä tai jäljelle jäävästä pohjafraktiosta mäntyöljyn tislausprosesseista, kasvis- tai kasviperäisestä öljystä tai rasvasta valittuna palmuöljylietteestä tai käytetystä ruokaöljystä, mikrobi- tai leväöljyistä, vapaista rasvahapoista, hiiva- tai hometuotteista

25 peräisin olevista öljyistä, biomassasta peräisin olevista öljyistä, rypsiöljystä, canolaöljystä, rapsiöljystä, mäntyöljystä, auringonkukkaöljystä, soijapapuöljystä, hamppuöljystä, oliiviöljystä, pellavansiemenöljystä, puuvillansiemenöljystä, sinappiöljystä, palmuöljystä, maapähkinäöljystä, risiiniöljystä, kookosöljystä, geenimuuntelulla tuotetuista lähtöaineista, ja mikrobien, valittuna levästä ja

30 bakteereista, tuottamista biologisista lähtöaineista tai mistä tahansa mainittujen syötteiden seoksista, tai menetelmässä käytettävä lipidimateriaali voi myös olla fossiilipohjainen, valittuna erilaisista öljyteollisuudessa käytettävistä ja sen tuottamista öljyistä.

3. Jonkin edeltävistä patenttivaatimuksista mukainen menetelmä, jossa lipidimateriaali on mitä tahansa eläinperäistä tyyppiä valittuna rasvoista tai öljyistä tai mistä tahansa niiden seoksista ja valittuna kalapohjaisista öljyistä ja rasvoista, talista, eläinrasvasta, valaanrasvasta, kierrätetyistä ravintorasvoista.

5

4. Jonkin edeltävistä patenttivaatimuksista mukainen menetelmä, jossa lipidimateriaali kuumennetaan lämpötilaan, joka on noin 40 °C – noin 170 °C tai noin 40 °C – noin 200 °C, valittuna seuraavista: noin 40 °C - noin 120 °C, noin 50 °C - noin 110 °C, noin 60 °C, noin 100 °C, tai noin 40 °C, noin 50 °C, noin 60 °C, noin 70 °C, noin 80 °C, noin 90 °C, noin 100 °C, noin 110 °C tai noin 120 °C.

10

5. Jonkin edeltävistä patenttivaatimuksista mukainen menetelmä, jossa vaihe c) suoritetaan voimakkaasti sekoittamalla, hitaasti sekoittamalla, vastavirtauksella, dynaamisella kavitaatiolla tai akustisella säteilytyksellä.

15

6. Jonkin edeltävistä patenttivaatimuksista mukainen menetelmä, jossa menetelmä ei sisällä valkaisuvaihetta.

7. Patenttivaatimuksen 1 mukainen menetelmä, jossa muovit on valittu seuraavista: polyetylenei, bakeliitti, polystyreeni, polyvinyylikloridi, poly(metyylimetakrylaatti), kumi tai synteettinen kumi, polyesteri, polyetyleenitereftalaatti, suurtiheysinen polyetylenei, polyvinylideenikloridi, matalatiheyksinen polyetylenei, polypropyleeni, iskunkestävä polystyreeni, polyamidit, akrylonitriilibutadieenistyreeni, polyetylenei/akrylonitriilibutadieenistyreeni, polykarbonaatti, polykarbonaatti/akrylonitriilibutadieenistyreeni, polyuretaanit, tai mitkä tahansa niiden seokset.

25

8. Patenttivaatimuksen 1 mukainen menetelmä, jossa polymeeri on polyetylenei.

9. Patenttivaatimuksen 8 mukainen menetelmä, jossa korkeintaan 100 % polyetyleenin alkuperäisestä sisällöstä lipidimateriaalissa poistetaan, tai vähintään noin 20 %, tai vähintään noin 30 %, vähintään noin 40 %, vähintään noin 50 %, vähintään noin 60 %, vähintään noin 70 %, vähintään noin 80 %, vähintään noin 90 %, vähintään noin 95 %, vähintään noin 98 %, vähintään noin 99 % polyetyleenistä poistetaan.

30

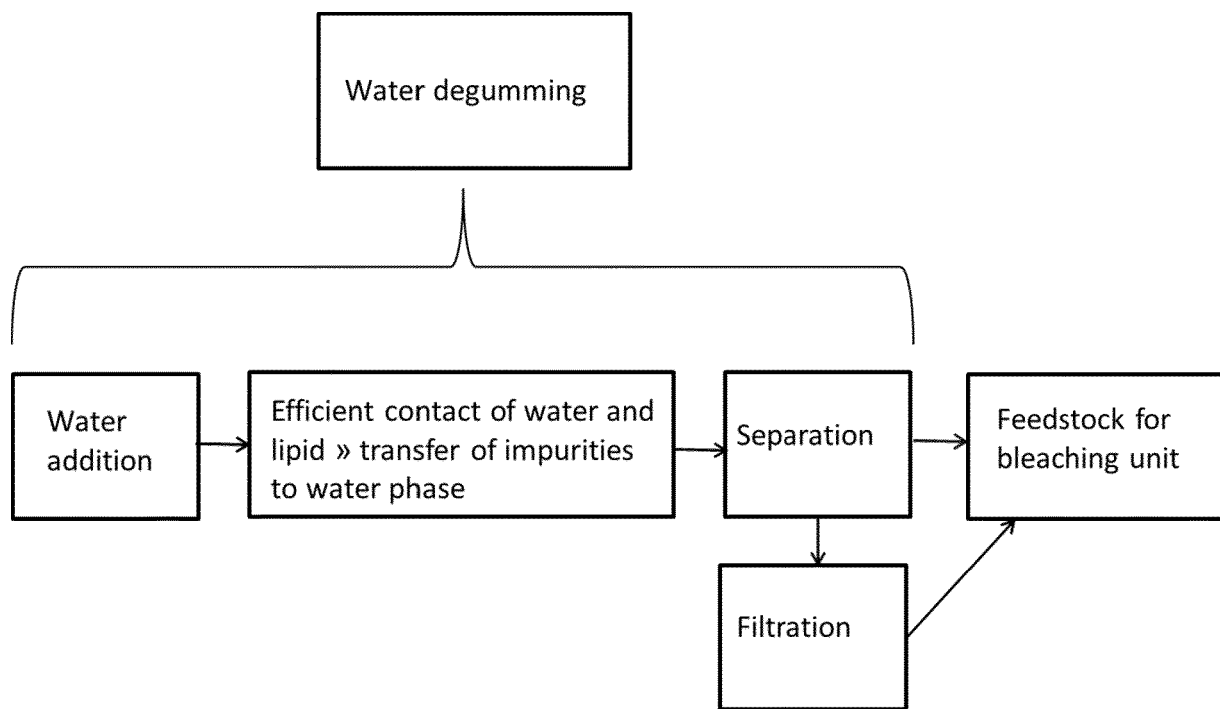


Fig. 1