

(51) International Patent Classification:
G06F 3/01 (2006.01)(21) International Application Number:
PCT/US2019/024164(22) International Filing Date:
27 March 2019 (27.03.2019)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
15/951,685 12 April 2018 (12.04.2018) US

(71) Applicant: MICROSOFT TECHNOLOGY LICENSING, LLC [US/US]; One Microsoft Way, Redmond, Washington 98052-6399 (US).

(72) Inventor: KAUFTHAL, Jonathan S.; MICROSOFT TECHNOLOGY LICENSING, LLC, One Microsoft Way, Redmond, Washington 98052-6399 (US).

(74) Agent: MINHAS, Sandip S. et al.; MICROSOFT TECHNOLOGY LICENSING, LLC, One Microsoft Way, Redmond, Washington 98052-6399 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: REAL-WORLD AWARENESS FOR VIRTUAL REALITY

FIG. 1A

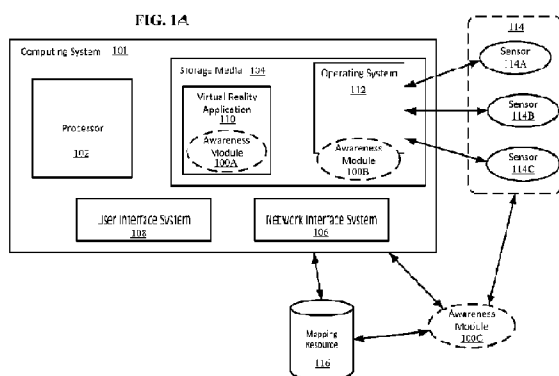

(57) Abstract: Techniques and systems for providing real-world awareness for virtual reality are disclosed. In response to determining that a virtual reality application is in use, an awareness module can begin monitoring for external signals by at least accessing an available sensor of a computing device. In response to detecting the at least one external signal, the awareness module can determine a level of notification for an interruption notification of the virtual reality application based on the at least one external signal. The awareness module can receive context of the virtual reality application. A type for the interruption notification of the virtual reality application can be determined based on the determined level of notification and the context of the virtual reality application. The interruption notification may be provided to the virtual reality application based on the determined type.

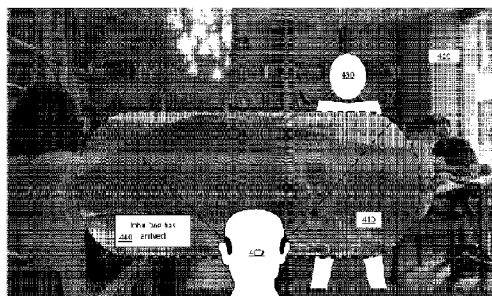


FIG. 4C

REAL-WORLD AWARENESS FOR VIRTUAL REALITY

BACKGROUND

[0001] Virtual reality can refer to a fully immersive, computer-generated experience. For example, a user can put on a headset, and everything in the user's field of view is a pixel. In comparison, augmented reality and mixed reality include experiences in which reality is supplemented with additional information such as available on a heads-up display, overlay, or on a mobile device. Augmented reality and mixed reality are similar, but mixed reality takes augmented reality one step further so that not only is the real world and the digitally represented world available, the digitally represented objects interact with the real-world element. For example, holograms can be rendered in the real world and appear to interact with objects in the physical world.

[0002] When operating in virtual reality, a user may interact with the virtual environment and manipulate objects or perform actions. The scenarios enacted in virtual reality can be grounded in reality or be fantastical. Many virtual reality programs are directed to simulations for medical or military training, involve games, or enable a user to explore a destination, including famous landmarks and galleries.

[0003] Virtual reality headsets are one mechanism to provide an immersive virtual reality experience to a user. Virtual reality (VR) headsets may fall within one of three categories: mobile (e.g., supported by a mobile device or smartphone), console (e.g., for use with a gaming system), personal computer (e.g., connected to a computing system for extensive processing), and stand-alone VR. In general, VR headsets include or can be connected to a stereoscopic display, speakers, and tracking sensors (e.g., for detecting head motion).

BRIEF SUMMARY

[0004] Techniques and systems for providing real-world awareness for virtual reality are disclosed. Cameras, microphones, and other sensors can be utilized to let a user quickly "peek" into the real world without leaving the VR environment. The "peek" into the real world can happen instantly and without the user needing to remove any hardware.

[0005] An awareness module executing on a computing device associated with a VR headset can determine that a virtual reality application is in use. In response to determining that the virtual reality application is in use, the awareness module can begin monitoring for external signals by at least accessing an available sensor of a computing device. The awareness module can detect at least one external signal while monitoring for

the external signals. In response to detecting the at least one external signal, the awareness module can determine a level of notification for an interruption notification of the virtual reality application based on the at least one external signal. The awareness module can receive context of the virtual reality application. A type for the interruption notification of the virtual reality application can be determined based on the determined level of notification and the context of the virtual reality application. The interruption notification may be provided to the virtual reality application based on the determined type.

[0006] This Summary is provided to introduce a selection of concepts in a simplified form that are further described below in the Detailed Description. This Summary is not intended to identify key features or essential features of the claimed subject matter, nor is it intended to be used to limit the scope of the claimed subject matter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] **Figure 1A** illustrates an example operating environment in which real-world awareness for virtual reality may be carried out.

[0008] **Figure 1B** illustrates an example operating architecture.

[0009] **Figure 2** illustrates an example process flow for performing real-world awareness for virtual reality.

[0010] **Figure 3** illustrates an example mapping data structure used to map the type of interruption notification.

[0011] **Figures 4A-4D** illustrate an example scenario of real-world awareness for virtual reality.

[0012] **Figure 5** an example computing system of a VR device. illustrate example configurations of a VR device.

[0013] **Figures 6A and 6B** illustrate example configurations of a VR device.

DETAILED DESCRIPTION

[0014] Techniques and systems for providing real-world awareness for virtual reality are disclosed. Virtual reality (VR) can isolate users from the outside world. Advantageously, the described techniques and systems allow a user to remain immersed in the VR environment, yet not feel apprehensive about working in a public space or busy office environment. The described techniques and systems perform real-world awareness for virtual reality by providing interruption notifications to a VR application. Indeed, cameras, microphones, and other sensors can be utilized to let a user quickly "peek" into the real world without leaving the VR environment. The "peek" into the real world can happen instantly and without the user needing to remove any hardware.

[0015] Certain techniques set forth herein with respect to real-world awareness may be described in the general context of computer-executable instructions, such as program modules, executed by one or more computing devices including VR devices. Generally, program modules include routines, programs, objects, components, and data structures that perform particular tasks or implement particular abstract data types.

[0016] Alternatively, or in addition, the functionality, methods, and processes described herein can be implemented, at least in part, by one or more hardware modules (or logic components). For example, the hardware modules can include, but are not limited to, application-specific integrated circuit (ASIC) chips, field programmable gate arrays (FPGAs), system-on-a-chip (SoC) systems, complex programmable logic devices (CPLDs) and other programmable logic devices now known or later developed. When the hardware modules are activated, the hardware modules perform the functionality, methods and processes included within the hardware modules.

[0017] The described techniques and systems are applicable for any applications running in a virtual reality environment, and are referenced to herein as “virtual reality applications”. The virtual reality applications may be media applications (e.g., videos, television, movies), gaming applications, and productivity applications. Productivity applications include content creation and content consumption applications including, but not limited to, word processing applications, spreadsheet applications, presentation applications, note-taking application, whiteboard applications, email or messaging applications, drawing applications, web browser applications, search and research applications, and reader applications.

[0018] An awareness module can determine that a virtual reality application is in use. In response to determining that the virtual reality application is in use, the awareness module can begin monitoring for external signals by at least accessing an available sensor of a computing device. The awareness module can detect at least one external signal while monitoring for the external signals. In response to detecting the at least one external signal, the awareness module can determine a level of notification for an interruption notification of the virtual reality application based on the at least one external signal. The awareness module can receive context of the virtual reality application. A type for the interruption notification of the virtual reality application can be determined based on the determined level of notification and the context of the virtual reality application. The interruption notification may be provided to the virtual reality application based on the determined type.

[0019] An “interruption” of a VR environment is anything that may take the user

outside of their activity. An interruption may be, for example, a pause to operation or a pop-up of audio or still or moving images from outside the application. A level of notification refers to how important and/or urgent an interruption is to the user of a VR system. An interruption notification refers to a notification provided to the user of a VR system of information about the real-world surroundings. The interruption notification may include a text-based or audio-based notification of an event and/or images or video of the real-world environment. Through the described techniques, the interruption notification can vary in intensity and form based on the context of operation of the device and the user interaction.

[0020] The described techniques and systems can optimize a VR experience around the goal of respecting the user's intention and balancing their immersion with a desire to not be completely isolated. A user immersed in a VR environment can be provided the ability to interact with the real-world environment when the context calls for it, such as in an emergency, necessary interaction (such as if the user is waiting for a friend when the friend arrived), and in response to specific events.

[0021] An interruption notification can be initiated a variety of ways. A user may ask for an interruption notification through, for example, a voice command, a gesture, or a click. In some cases, the interruption notification may be initiated through a pre-set interval or alarm. In some cases, the interruption notification may be initiated when a loud noise or high amount of movement is detected. In some cases, the interruption notification may be initiated when a keyword, such as a user's name, "excuse me", or "help!" is spoken or a VIP face or voice is recognized. For example, a user may indicate that the awareness module should always interrupt for a boss or a spouse.

[0022] For example, if a user is in a coffee shop working on a spreadsheet using a VR device and a friend, boss, or spouse of the user walks in the coffee shop, as detected by the external camera of the VR device and recognized by the system, an interruption notification that the person of interest is in view may be provided to the user. A person of interest can include a friend, a relative, a contact, colleague, a friend of a friend, a person the user traded email with but isn't included in the user's contact list, even a celebrity, or a felon, etc.

[0023] Further, different types of interruption notifications may be provided. For example, for certain persons of interest, the VR device may show real-time video of the surrounding in varying degrees of transparency so that the user can interact with those persons of interest immediately. For other persons of interest, a simple interruption notification on the side of the screen may be provided. In another example, if the context is

that the user is working on a high-importance document or watching a live stream of an important meeting, the interruption notification may be minimized so as not to interrupt the work. But if context is that the user is watching a video of cats playing with a toy, then the video may be paused, and live videos of the surrounding may be shown.

5 **[0024]** Figure 1A illustrates an example operating environment in which real-world awareness for virtual reality may be carried out; Figure 1B illustrates an example operating architecture. An awareness module **100** (e.g., awareness module **100A**, awareness module **100B**, and awareness module **100C**) performing processes such as process **200** described with respect to Figure 2 can be implemented by a system **101**, which can be embodied as
10 described with respect to computing system **500** as described with respect to Figure 5.

[0025] Referring to Figure 1A, system **101** can include at least a processor **102**, storage media **104**, a network interface system **106** (e.g., supporting a wired communication or wireless communications such as Bluetooth, Wi-Fi, or other near-field communication), a user interface system **108**, a VR application **110** stored on the storage media **104**, and an
15 operating system **112** stored on the storage media **104**. System **101** can include or communicate with one or more sensors **114** (e.g., sensor **114A**, sensor **114B**, and sensor **114C**). System **101** can include or communicate with a mapping resource **116**, which can be managed by the awareness module **100**. The mapping resource **116** may store a mapping data structure that includes various types of interruption notifications associated with levels
20 of notification and VR application context.

[0026] Communication to and from system **101** may be carried out, in some cases, via application programming interfaces (APIs). An API is an interface implemented by a program code component or hardware component (hereinafter “API-implementing component”) that allows a different program code component or hardware component
25 (hereinafter “API-calling component”) to access and use one or more functions, methods, procedures, data structures, classes, and/or other services provided by the API-implementing component. An API can define one or more parameters that are passed between the API-calling component and the API-implementing component. The API is generally a set of programming instructions and standards for enabling two or more
30 applications to communicate with each other and is commonly implemented over the Internet as a set of Hypertext Transfer Protocol (HTTP) request messages and a specified format or structure for response messages according to a REST (Representational state transfer) or SOAP (Simple Object Access Protocol) architecture.

[0027] In some cases, the awareness module **100** (e.g., awareness module **100A**) is

part of the VR application **110**. In some cases, the awareness module **100** (e.g., awareness module **100B**) is included as a layer on the operating system **112** as an application. In some cases, the awareness module **100** (e.g., awareness module **100C**) is a separate module running on the same or a separate system.

5 **[0028]** Referring to Figure 1A and Figure 1B, awareness module **100** can receive VR application information **150**, device input information **155**, sensor information **160**, and context information **165**. The information the awareness module **100** receives may be received through a variety of channels and in a number of ways. The awareness module **100** communicates with the VR application **110**, the OS **112**, one or more sensors **114**, context
10 resources (not shown), such as a social graph, enterprise graph, and user contacts list, or a combination thereof, to obtain the information needed to perform real-world awareness for virtual reality. It should be understood that access to context resources will be based on permissions provided by the user.

[0029] VR application information **150** can include detailed information about the
15 application, such as the current state. Device input information **155** can include user input, for example, from input devices such as a VR controller, a mouse, track pad, keyboard, a touch device for receiving a touch gesture from a user, a motion input device for detecting non-touch gestures and other motions by a user, a microphone for detecting speech, and other types of input devices and their associated processing elements capable of receiving
20 user input. Device input information **155** can also include information about battery consumption.

[0030] Sensor information **160** may be received from one or more sensors **114**. The one or more sensors can include, for example, an optical sensor, a position sensor, a gaze detection sensor, a microphone, a biometric sensor, an environmental sensor, or a multiple
25 and/or combination thereof. A more detailed description of potentially available sensors is provided later.

[0031] The one or more sensors **114** may be included in or communicate with the computing system **101**. For example, in the HMD device described with respect to Figure 6A, one or more sensors may be included in the HMD device embedded in the headset. In
30 the HMD device described with respect to Figure 6B, one or more sensors may be included in the HMD device and/or in a mobile device (e.g., removable smart phone) used to support the HMD device.

[0032] Context information **165** can include information from local resources or external resources available via the network interface system **106** and can be obtained from

a variety of sources. For example, the awareness module may access (when given permission) a social graph, an enterprise graph, or one or more data resources, such as a contact list, that are accessible over the Internet, other networks (private and/or public), or even on a user's local machine.

5 **[0033]** The VR application **110** can include the awareness module (e.g., awareness module **100A**), be aware of the possibility of an awareness module or other application that may want information of state (e.g., by providing APIs), or be closed to communication with outside applications. For the case the VR application **110** provides APIs, the APIs may involve general availability of state information or for when expecting communication with
10 an awareness module, the VR application **110** may provide a level of openness to interruption.

[0034] In cases where the awareness module **100** (e.g., awareness module **100A**) is included in the VR application **110**, the awareness module **100** can receive signals from the VR application **110** for any VR application information **150**. In this case, the awareness
15 module **100** may not need to receive device input information **155** to perform its analysis.

[0035] In cases where the awareness module **100** (e.g., awareness module **100B**) is included as a layer in the OS **112**, the awareness module **100** may or may not have access to activities of the VR application **110**. In some cases, the VR application **110** is aware of the awareness module and/or has APIs for querying or communicating about what is
20 happening in the VR application **110**. In cases where the awareness module **100** has access to the VR application **110**, the awareness module **100** may receive signals from the VR application **110**. The awareness module **100** may contact the VR application **110** and ask for the current status, for example, application state and other context (which may be available via an API). As another example, the awareness module **100** may ask how
25 interruptible the user currently is (which may be available via an API). In some cases, the VR application **110** has levels understood by both the awareness module **100** and VR application **110** (e.g., interruption level 1, interruption level 2, interruption level intermediate, etc.). In some cases, the request regarding how interruptible the user currently is may be a request for what types of interruptions are available. The VR application **110**
30 may then communicate VR application information **150** to the awareness module **100**, such as its current state or level of openness to interruption. For example, the VR application **110** may communicate what is currently happening or whether interruptions are allowed.

[0036] In cases where the awareness module **100** (e.g., awareness module **100C**) is a separate module, the awareness module **100** may or may not have access to the VR

application **110** and the OS **112**. In cases where the awareness module **100** has access to the VR application **110**, the awareness module **100** may receive signals from the VR application **110**. The awareness module **100** may contact the VR application **110** and ask for the current status or openness to interruption. The VR application **110** may then communicate VR application information **150** to the awareness module **100**, such as its current state or level of openness to interruption. For example, the VR application **110** may communicate what is currently happening or whether interruptions are allowed.

[0037] In cases where the awareness module **100** does not have access to the VR application **110**, but has access to the OS **112**, the awareness module **100** may receive signals from the OS **112**, such as the device input information **155** (that is being used by the VR application **110**). The awareness module **100** can analyze the received signals and determine information about the VR application **110**. For instance, the awareness module **100** may receive any VR signals the VR application **110** is using in the OS **112**. Thus, even though the awareness module **100** does not have access to the VR application **110**, the awareness module **100** may be able to see information about the VR application **110**, such as the intensity of a user's actions through the device input information **155**.

[0038] In cases where the awareness module **100** does not have access to both the VR application **110** and the OS **112**, the awareness module **100** may only have access to the sensor information **160**. Here, the sensor information **160** may or may not be via the same sensors used by the computing system **101**. In this case, the awareness module **100** may receive signals from various sensors, such as an optical sensor or a microphone. The awareness module **100** can then analyze the received signals to perform real-world awareness.

[0039] Figure 2 illustrates an example process flow diagram for performing real-world awareness for virtual reality. Referring to Figure 2, an awareness module, such as implemented by system **101** as described with respect to Figure 1A, can perform process **200** for a VR application running on a computing device. The computing device can be any computing device such as, but not limited to, a laptop computer, a desktop computer, a tablet, a personal digital assistant, a smart phone, a smart television, a gaming console, wearable device, headset, and the like. For example, the computing device may be a HMD-based VR device, such as described with respect to Figures 6A and 6B.

[0040] To begin process **200**, the awareness module can determine that a VR application is in use (**202**). The determination can be made a number of ways. The awareness module can receive one or more signals (e.g., VR application signals, OS signals, or sensor

signals) and analyze the received signals to determine that the application is in use.

[0041] In one example, the awareness module may receive signals from one or more sensors on the computing device, such as a proximity sensor such as an IR sensor or a contact-based sensor such as a pressure sensor, indicating the user is wearing the headset.

5 [0042] In another example, the awareness module may receive signals from the VR application indicating a user is currently operating the VR application. In yet another example, the awareness module may receive signals from the OS indicating user interaction with the VR application.

[0043] In response to determining that the VR application is in use (202), the
10 awareness module can begin monitoring (204) for external signals. The awareness module can monitor for external signals by at least accessing an available sensor of the computing device. The available sensor of the computing device can include, for example, an optical sensor, a position sensor, a gaze detection sensor, a microphone, a biometric sensor, an environmental sensor, or a combination thereof. A more detailed description of each of these
15 sensors is provided later.

[0044] As previously described, the computing device may include or communicate with the available sensor. For example, in the HMD device described with respect to Figure 6A, the available sensor may be included in the HMD device. In the HMD device described with respect to Figure 6B, the available sensor may be included in the HMD device and/or
20 in a mobile device (e.g., removable smart phone) used to support the HMD device.

[0045] Examples of external signals may include, but are not limited to, an audio signal, a video signal, or a combination thereof. The external signals can include information about the real-world, as opposed to a digital signal, such as a received email or phone call. For example, in case where a user is operating a VR application in a coffee shop,
25 the external signals may include a video signal showing any other customer in the coffee shop or an audio signal of the current noise level of the coffee shop. The external signals may also include digital signals or biometric signals from, for example, a personal body monitor or a smart watch.

[0046] In some cases, the awareness module may not actually perform the
30 monitoring. In this case, the awareness module may communicate with one or more services that can perform the monitoring. For example, the awareness module may be triggered by an event to start monitoring for external signals. Then, instead of the awareness module performing the monitoring itself, the awareness module can tell another service capable of performing the monitoring to start monitoring for external signals.

[0047] In some cases, the awareness module will only monitor for external signals when it determines there is a VR application in use. In other cases, the awareness module may continuously monitor for external signals.

[0048] In some cases, the awareness module may be triggered to begin monitoring for external signals for reasons other than determining that the VR application is in use. In one example, the awareness module may have access (upon permission) to a user's location information and may begin monitoring anytime the user is in a public place, such as a library, instead of at home. In another example, the awareness module may have access (upon permission) to a user's calendar. The awareness module can determine that the user has a work meeting with a colleague soon and can start monitoring for external signals to allow for an interruption notification when the colleague arrives. In yet another example, the awareness module may have access to a user's smart watch. The awareness module can determine that the user is having a health issue, such as a rise in heart rate, and can start monitoring for external signals.

[0049] While monitoring (204) for the external signals, the awareness module may detect (206) at least one external signal (in any combination of described external signals). As previously described, the at least one external signal may include an audio signal or a video signal.

[0050] The external signals may also include digital signals. In some cases, the awareness module may receive digital signals about weather information or news information. For example, the awareness module may receive a news alert about a robbery in the user's area. In another example, the awareness module may receive a weather alert about severe weather in the user's area.

[0051] In response to detecting (206) the at least one external signal, the awareness module may determine (208) a level of notification for an interruption notification of the VR application based on the at least one external signal.

[0052] The awareness module may determine the level of notification for the interruption notification by applying a signal analysis to the at least one external signal. The awareness module can assign a notification value to a result of the signal analysis. Any result of the signal analysis may be a potential interruption and a notification value can be assigned to each of these potential interruptions (e.g., results). For each result with a notification value that meets a threshold value, the awareness module can map the notification value to an appropriate level of notification. The appropriate level of notification can be the determined level of notification for the interruption notification.

[0053] There may be a spectrum of information about the real-world that can have different degrees of importance and urgency. The awareness module may be continuously detecting audio signals and video signals and analyzing the signals to determine if the notification values of the signals meet the threshold level.

5 [0054] The signal analysis can include performing an analysis to identify different aspects of the at least one signal. The signal analysis for an audio signal can include, for example, identifying the volume level of the audio, identifying what words were spoken and/or who spoke those words. For example, the audio signal analysis may identify that a keyword was spoken, such as the name of the user of the VR application or the words
10 “excuse me” or “help.” The audio signal analysis may also identify that the noise level in a particular room rose quickly. The audio signal analysis can be completed, for example, by performing a voice recognition analysis, performing a speech-to-text analysis, or performing a sound analysis. In some cases, the analysis is performed locally. In some cases, the analysis is carried out by communication with various services available over the
15 Internet/network.

[0055] The signal analysis for a video signal can include, for example, identifying a movement level or light level of the video and identifying one or more people or objects. For example, the audio signal analysis may identify that a person is holding a gun, or, in a case where everyone in the room starts rushing out, that there is a high level of movement.
20 The video signal analysis can be completed, for example, by performing a facial recognition analysis or object recognition analysis on the video signal or performing a movement analysis or light analysis. In some cases, the analysis is performed locally. In some cases, the analysis is carried out by communication with various services available over the Internet/network.

25 [0056] In some cases, the awareness module may detect the at least one external signal and then send the detected external signal to a separate service to perform the analysis. For example, the awareness module may detect an audio signal and then send the detected audio signal to a speech-to-text service to have a speech-to-text analysis performed. The speech-to-text service may then return the results of the analysis to the awareness module.

30 [0057] Once the signal analysis is performed, the notification value can be assigned to the result. The notification value can be based on the importance and/or urgency of the result. Results that are more important or more urgent will have a higher notification value than less important or less urgent results.

[0058] In an example where the signal analysis includes performing a sound analysis

on an audio signal to identify a sound level in the audio signal, the notification value can be assigned based on the identified sound level. If the sound level is determined to be low (e.g., ambient noise), the assigned notification value will be low. If the sound level is determined to be high, such as a loud noise (e.g., a gunshot or the sound of an object crashing to the floor) or one or more people shouting, the assigned notification value will be higher. The real-world awareness process can allow for the sound level can be continuously monitored and provide an interruption notification for any sudden changes, such as a loud noise or shouting.

[0059] In an example where the signal analysis includes performing a movement analysis on a video signal to identify a movement level in the video signal, the notification value can be assigned based on the identified movement level. If the movement level is determined to be low, such as most people around the user sitting at tables or walking, the assigned notification value will be low. If the movement level is determined to be high, such as multiple people in a particular room running, the assigned notification value will be higher. The real-world awareness process can allow for the movement level can be continuously monitored and provide an interruption notification for any sudden changes, such as a sudden high amount of movement.

[0060] In an example where the signal analysis includes performing an object recognition analysis on a video signal to identify any objects in the video signal, the notification value can be assigned based on the identified objects. If the object is determined to be important, such as a person walks in with a gun, the assigned notification value will be higher than if the object is determined to be a common object. The real-world awareness process can allow for objects to be continuously monitored and provide an interruption notification for any predetermined objects of interest, such as a gun.

[0061] In some cases, the signal analysis can also include obtaining and using user context information to help determine what information is important and/or urgent to the user, and thus what notification value to assign. In this case, the signal analysis can be performed as described above. The awareness module can obtain user context information and can use the obtained user context information to help determine how important and/or urgent the results of the signal analysis are to the user.

[0062] The awareness module may obtain the user context information in a variety of ways. The awareness module may access a social graph, an enterprise graph, or one or more data resources, such as a contact list, that are accessible over the Internet, other networks (private and/or public), or even on a user's local machine.

[0063] In an example where the at least one external signal is a video signal, the awareness module may perform facial recognition on the video signal to identify one or more people in the video. The awareness module can obtain user context information, such as contact information of the user of the VR application. Based on the obtained user context information, the awareness module can determine whether each of the one or more identified people from the video signal is a person of interest to the user. For example, the system may compare the results of the facial recognition to the user's friends list (e.g., from a social graph), the user's contact list (e.g., email contacts, phonebook, enterprise graph), or even a curated list set up by the user or another party to indicate the people of interest.

[0064] In one example where the at least one external signal is an audio signal, the awareness module may perform voice recognition on the audio signal to identify one or more people in the audio signal. The awareness module can obtain user context information, such as contact information of the user of the VR application. Based on the obtained user context information, the awareness module can determine whether each of the one or more identified people from the audio signal is a person of interest to the user.

[0065] In another example where the at least one external signal is an audio signal, the awareness module may perform a speech-to-text analysis on the audio signal to identify one or more words spoken in the audio signal. The awareness module can obtain user context information, such as contact information of the user of the VR application, or a list of keywords. The keywords may be defined by the user or a default list. Based on the obtained user context information, the awareness module can determine whether each of the one or more identified words from the audio signal is important to the user, such as the name of a contact of the user or one of the keywords.

[0066] In some cases, the awareness module may access a social graph of the user to help determine the relationship an identified person has with the user.

[0067] The awareness module can assign the notification value based on whether each of the identified people are determined to be a person of interest to the user and the relationship of the identified person to the user. A person with a close relationship to the user, such as a spouse or a boss, are likely to be more important to a user than a person that does not have a close relationship. Therefore, a person with a close relationship to the user is assigned a higher notification value.

[0068] In some cases, a result may be assigned a notification value and the awareness module may then adjust the notification value based on the obtained user context information. It should be understood that multiple types of analyses may be performed on

each of the external signals.

[0069] The awareness module can receive (210) context of the VR application. The context of the VR application can include, for example, a variety of settings information, such as, but not limited to, a privacy level set by the user of the VR application, what the user is currently working on, what information is currently being detected, the current location of the user, or the current time.

[0070] Examples of information used to determine the level of openness a user is to interruption can include, for example, whether the user giving a live presentation/phone call, whether the user has set a “do not disturb” preference, whether the user is in a home/shell type experience versus deeply into an immersive experience, what is scheduled on the user’s calendar, and whether the user is active versus stationary.

[0071] The context of the VR application can be obtained a number of ways. In one case, the context is obtained directly via API with VR application. In one case, the awareness module can detect user inputs to the VR application. In one case, the awareness module may access a social graph, an enterprise graph, or one or more data resources, such as a contact list, that are accessible over the Internet, other networks (private and/or public), or even on a user’s local machine to obtain context of the VR application. For example, the awareness module may access an enterprise graph to help determine the importance of a project the user is currently working on. In another example, the awareness module can access a calendar of the user and an enterprise graph to determine if the user is currently in a meeting and how important a meeting is.

[0072] The context of the VR application can be analyzed to determine, for example, the type of VR application (e.g., media, gaming, etc.), a level of importance of a current activity, or a level of productivity or immersion. This context information can be used to determine how open the user of the VR application is likely to be to interruption.

[0073] In one case, the type of VR application can be used to determine how open the user of the VR application is to interruption. For example, if the VR application is a video game with high-intensity actions being performed, the user may be less open to interruption than if the VR application is a media application with low-intensity actions being performed, such as reading a book or watching a movie. In some cases, type of VR application and the user’s actions can be analyzed to determine the intensity of the actions being performed. For example, if the user input signals include a lot of selecting a button, then the VR application may be determined to be a high-intensity application.

[0074] In some cases where the VR application is determined to be a low-intensity

application, the awareness module can also use context information about where the user is in the VR application to determine how open the user is to interruption. In an example where the user is watching a movie, the awareness module can determine that the user is at the climax of the movie and is less open to interruption.

5 **[0075]** In one case, the awareness module can analyze the context information obtained from accessing the graphs and/or data resources to determine a level of importance for a current activity. In an example, the awareness module may access a user's calendar to determine the importance of a meeting the user is currently attending. In another example, the awareness module may access the one or more data resources to determine the
10 importance of the user's current location. In yet another example, the awareness module may access an enterprise graph to determine the importance of a project the user is currently working on.

[0076] The awareness module may also analyze the obtained context information to determine the user's level of productivity or immersion. In one example, the user may be
15 connected to a virtual conference call, such as a MICROSOFT SKYPE, GOOGLE HANGOUTS, CISCO WEBEX, or AMAZON CHIME conference call, and may be less open to interruption. In another example, the awareness module may determine that a user is in a highly productive state and less open to interruptions because the user has been adding content to a word document for an extended period of time. In yet another example, the
20 awareness module may determine that a user is in a highly immersive state and may be less open to interruptions because the user has a presentation maximized or is watching a video in full-screen. The awareness module can determine the presentation is maximized or the video is being watched in full-screen, for example, by receiving a signal from the OS that a full-screen API is being utilized.

25 **[0077]** The awareness module can determine (212) a type for the interruption notification of the VR application based on the determined level of notification and the context of the VR application. The interruption notification may be provided (214) to the VR application based on the determined type. The awareness module can determine the type for the interruption notification, for example, by accessing a mapping resource to identify
30 the type of interruption notification associated with the determined level of notification and the context of the virtual reality application.

[0078] The mapping resource may store a mapping data structure that includes various types of interruption notifications associated with levels of notification and VR application context. The level of notification and VR application context may be mapped to

a type of interruption notification a variety of ways. In one case, the level of notification may indicate an initial type of interruption notification and the context of the VR application can indicate the degree of “loudness” or intensity of the interruption notification. In one case, the level of notification can indicate what the interruption notification will display and the context of the VR application can indicate where the interruption notification will be displayed. For example, the awareness module can match the determined level of openness a user is to interruption to how “loud” to make the interruption to determine the type of interruption notification to provide.

[0079] The interruption notification can vary in form and “loudness” or intensity. Several different types of interruption notifications may be provided, such as, but not limited to, a still image, a live video, an activity indicator, or an abstract representation. The live video can include audio. The activity indicator may be a dot or pulse at the edge of a user’s field of view. The abstract representation can include, for example, a volume or activity indicator, an indicator of a number of people in the user’s field of view, or even display the names of the people in the field of view based on facial recognition, voice recognition, or a device fingerprint.

[0080] The type of interruption notification may vary in degree of “loudness” or intensity. The degrees of “loudness” or intensity may include, but is not limited to, the size of an image, video, or representation, the position of an image, video, or representation (e.g., an edge or a corner), the transparency of an image, video, or representation, with or without audio, just an activity indicator, or just an abstract representation. In some cases, where animation or motion is part of the interruption notification, the “loudness” or intensity may include, but is not limited to, speed, frequency, and movement through the view space (e.g., amount of area or locations within the viewing area that the motion or animation covers during its path).

[0081] In some cases where the user is immersed in a three-dimensional environment, the awareness module can use distance or real-world size to determine the type of interruption notification. For example, the interruption notification can be displayed on a table in front of the user or blended into a distant wall.

[0082] Examples of interruption notifications can include a full-size video screen, a still image that is 50% transparent, a still image that is positioned at the top corner of the field of view. For example, if the interruption seems important and the user is not in a highly immersed experience, a “loud” version of an interruption notification may be provided, such as a large popover video with audio in the center of the user’s field of view. If the user has

set a “Do Not Disturb” preference, no interruption notification, or a very subtle interruption notification, would be provided. It should be understood that the examples of interruption notifications provided herein are included for the purpose of example and are not intended to be limiting in any manner, as any other suitable interruption notification and/or combination of interruption notifications may be utilized.

[0083] The type and/or degree of “loudness” can be pre-set or user selected. In some cases, the type and/or degree of “loudness” is based on user preferences. For example, user intervention can adjust the “loudness” of the interruption notification up or down from its initial state.

[0084] Figure 3 illustrates an example mapping data structure used to map the type of interruption notification. Referring to Figure 3, a simplified version of a mapping data structure is shown. The mapping structure can be managed by the awareness module. In the illustrated scenario of Figure 3, three levels of notification and four types of virtual reality context is shown. The type of the interruption notification may be identified by mapping the associated level of notification and the context of the VR application.

[0085] In this scenario, if the determined level of notification is “2” and the context of the VR application is that the user is operating a low-intensity VR application, then the type of notification provided to the user is a still image displayed at the center of the field of view. In another example, if the determined level of notification is “3” and the context of the VR application is that the user is operating a high-intensity VR application, then the type of notification provided to the user is a still image with 50% transparency displayed at the edge of the field of view. Categories of applications considered low-intensity and high-intensity may be based on a list (that may be associated with the mapping) of application types (e.g., media application, productivity application, gaming application, etc.) and/or action/state of the virtual reality application.

[0086] Returning to Figure 2, the interruption notification may be provided (214) to the VR application based on the determined type.

[0087] In some cases, when the interruption notification is provided to the VR application, a pause command may be sent to the VR application. For example, if the interruption notification is a full-screen notification and the user’s view of the VR application is blocked, the awareness module may also send a pause command.

[0088] In some cases, instead of providing the interruption notification to the VR application based on the determined type, the awareness module may send the VR application a message that there is an interruption and the level of that interruption. The VR

application can then determine how to incorporate the interruption into the VR application.

[0089] In some cases, the functionality may include a manual interruption, such as a user-initiated interruption. For example, the user may be at a point between tasks, or just curious, and decide to manually initiate a peek into the real world.

5 [0090] Figures 4A-4D illustrate an example scenario of real-world awareness in virtual reality. Referring to Figure 4A, a user **400** may run a VR application on a computing device such as the VR devices described with respect to Figures 6A and 6B. In the illustrated scenario, the user **400** is exploring Machu Picchu through a VR device while sitting in a coffee shop. The user's VR device field of view **410** is a simulated environment of Machu
10 Picchu and the user's external environment **420** is the coffee shop.

[0091] Since the user is fully immersed in the VR environment, the user may want to be provided with real-world awareness. To provide the real-world awareness, an awareness module may determine that the VR application is in use and begin monitoring for external signals.

15 [0092] Referring to Figure 4B, a person **430** may walk into the coffee shop. In this scenario, since the user is immersed in the VR application, the person **430** is shown in only the user's external environment **420** and not the user's field of view **410**.

[0093] The awareness module may detect that the person **430** has entered the coffee shop and can determine a level of notification to provide the user **400** based on the detected
20 person. The awareness module may detect that the person **430** entered the coffee shop by receiving either a video signal or an audio signal. The awareness module may perform a signal analysis on the received audio or video signal to determine a level of notification corresponding to detecting the person **430** in the external environment. For example, the awareness module may perform a signal analysis on the video signal, (through facial
25 recognition and obtaining user context information) to determine that the person **430** is a colleague named "John Doe".

[0094] The awareness module may also receive context of the VR application and determine a type of interruption notification to provide the user **400** based on the level of notification and the context of the VR application. For example, the awareness module may
30 determine that the user **400** is waiting to meet the person **430** for an important meeting (e.g., by accessing the calendar of user **100** or other source of meeting information that the access module is given access to by the user **100**).

[0095] Referring to Figure 4C, an example interruption notification is provided to the user **400** though the user's field of view **410**. In the illustrated scenario, an abstract

representation **440** is provided to the user **400** in the lower corner of the field of view **410**. The abstract representation **440** displays a message “John Doe has arrived” to notify the user **400** that the person **430** has arrived.

[0096] Referring to Figure 4D, an example interruption notification is provided to the user **400** though the user’s field of view **410**. In the illustrated scenario, a live video **450** is provided to the user **400** in the center of the field of view **410**. The live video **440** streams a camera view of the external environment **420** to notify the user **400** that the person **430** has arrived. In this case, the user **400** is provided a “peek” of the external environment **420** without removing the VR device.

[0097] Figure 5 illustrates an example computing system of a VR device; and Figures 6A and 6B illustrate example head-mounted display-based VR devices that may be used in certain implementations described herein. The illustrated VR devices are wearable computing devices. Wearable computing devices with near-eye displays may also be referred to as “head-mountable displays”, “head-mounted displays,” “head-mounted devices,” or “head-mountable devices.” A head-mountable display places a graphic display or displays close to one or both eyes of a wearer. To generate the images on a display, a computer processing system may be used. Such displays may occupy a wearer's entire field of view, or only occupy part of wearer's field of view. Further, head-mounted displays may vary in size, taking a smaller form such as a glasses-style display or a larger form such as a helmet, for example.

[0098] Referring to Figure 5, a computing system **500** of a VR device can include a processing system **502**, storage system **504** storing VR application **505** (e.g., VR application **110** as described with respect to Figure 1A) and awareness module **503** (e.g., awareness module **100** as described with respect to Figures 1A and 1B), including instructions for processes **200**, display subsystem **506**, input subsystem **508**, communication subsystem **510**, and network interface and subsystem **512** (described in more detail below). Depending on implementation, more or fewer of these systems may be included. Referring to Figures 6A and 6B, a head-mounted display (HMD) can be worn by a user and can generate graphics, such as a view of a virtual space, in a display portion of the HMD. The graphics presented on a head-mounted display can cover a large portion or even all of a user's field of view, providing an immersive experience to the user.

[0099] Figures 6A and 6B illustrate example configurations of a VR device. Referring to Figure 6A, a VR device **600** may provide an immersive experience and be in the form of a mask. Referring to Figure 6B, a VR device **620** can include a slot or holder

for receiving a smartphone; and include clips or other means for securing the smartphone to the headset. The VR device can include straps or other structure to secure or attach the VR device to a user's head. The screen of the smartphone would thus be viewable to the user much in the same way as a conventional HMD has an integrated screen. The smartphone
5 can be leveraged to support the VR applications and provide any of the computing elements described with respect to Figure 5.

[0100] The HMD devices **600** and **620** can include an optical sensor system (not shown) that may include one or more optical sensors. In one example, the optical sensor system can include one or more outward facing optical sensors that may be configured to
10 acquire and detect the real-world background and/or physical space from a similar vantage point (e.g., line of sight) as observed by the user through the lenses. The optical sensor system may include a variety of sensors, such as one or both of a depth camera/sensor and an RGB camera/sensor. In some cases, a high definition camera or other resolutions for image sensing may be used.

[0101] The sensors included with the HMD devices **600** and **620** can support various functionalities including head tracking to determine the 3D (three-dimensional) position and orientation of the user's head within the physical real-world space; and gaze tracking to ascertain a direction of the user's gaze.

[0102] For example, the HMD devices **600** and **620** can include a position sensor system (not shown) that may include one or more position sensors such as accelerometer(s),
20 gyroscope(s), magnetometer(s), global positioning system(s) (GPS), multilateration tracker(s) (not shown), and/or other sensors that output position sensor information useable as a position, orientation, and/or movement of the relevant sensor.

[0103] When position sensor system includes one or more motion sensors (e.g.,
25 inertial, multi-axis gyroscopic or acceleration sensors), movement and position/orientation/pose of a user's head may be detected when the user is wearing the system.

[0104] The HMD devices **600** and **620** may further include a gaze detection subsystem (not shown) configured for detecting a direction of gaze of each eye of a user or
30 a direction or location of focus. Gaze detection subsystem may be configured to determine gaze directions of each of a user's eyes in any suitable manner. For example, in the illustrative example shown, a gaze detection subsystem includes one or more glint sources, such as infrared light sources, that are configured to cause a glint of light to reflect from each eyeball of a user, and one or more image sensors, such as inward-facing sensors, that

are configured to capture an image of each eyeball of the user. Changes in the glints from the user's eyeballs and/or a location of a user's pupil, as determined from image data gathered using the image sensor(s), may be used to determine a direction of gaze.

5 [0105] In addition, a location at which gaze lines projected from the user's eyes intersect the external display may be used to determine an object at which the user is gazing (e.g. a displayed virtual object and/or real background object). Gaze detection subsystem may have any suitable number and arrangement of light sources and image sensors. In some implementations, the gaze detection subsystem may be omitted.

10 [0106] The HMD devices 600 and 620 may include one or more microphones (not shown) configured to detect sounds, such as voice commands from a user.

[0107] Position sensor system (including motion sensors), as well as microphone(s) and gaze detection subsystem, also may be employed as user input devices, such that a user may interact with the HMD devices 600 and 620 via gestures of the eye, neck and/or head, as well as via verbal commands in some cases. These systems are represented as input
15 subsystem 508 in Figure 5.

[0108] The HMD devices 600 and 620 can be configured with one or more audio transducers (e.g., speakers, earphones, etc.) (not shown) so that audio can be utilized as part of the user experience.

[0109] The HMD devices 600 and 620 can further include a controller (not shown),
20 which includes components described with respect to computing system 500, such as processing system 502 and storage system 504. Controller can be in communication with the sensors, gaze detection subsystem, lenses, and/or other components through, for example, a communications subsystem 510. The communications subsystem 510 can operate with a network interface and subsystem 512 to facilitate the display system being
25 operated in conjunction with remotely located resources, such as processing, storage, power, data, and services. That is, in some implementations, an HMD device can be operated as part of a system that can distribute resources and capabilities among different components and subsystems.

[0110] The HMD devices 600 and 620 may include instructions stored on the
30 storage system 504 for image production that direct the HMD devices 600 and 620 to display virtual objects to the user, which are visually superimposed onto the physical environment so as to be perceived at various depths and locations. The HMD devices 600 and 620 may use stereoscopy to visually place a virtual object at a desired depth by displaying separate images of the virtual object to both of the user's eyes. To achieve the perception of depth,

the instructions for image product may render the two images of the virtual object at a rendering focal plane of the HMD devices **600** and **620**, such that there is a binocular disparity between the relative positions of the virtual object in the two images. For example, this binocular disparity may be a horizontal disparity where the relative positions of the virtual object in the two images is separated by a distance in the x axis direction. Here, the x axis may be defined as the axis extending to the left and the right relative to the user, the y axis extending upward and downward relative to the user, and the z axis extending forward and backward relative to the user.

[0111] The horizontal disparity between the relative positions of the virtual object in the two images will cause the user to perceive that the virtual object is located at a certain depth within the viewed physical environment due to stereopsis. Using this stereoscopy technique, the HMD devices **600** and **620** may control the displayed images of the virtual objects, such that the user will perceive that the virtual objects exist at a desired depth and location in the viewed physical environment.

[0112] Optical sensor information received from the optical sensor system and/or position sensor information received from position sensor system may be used to assess a position and orientation of the vantage point of the at least partially see-through stereoscopic display relative to other environmental objects. In some embodiments, the position and orientation of the vantage point may be characterized with six degrees of freedom (e.g., world-space X, Y, Z, pitch, roll, and yaw). The vantage point may be characterized globally or independent of the real-world background. The position and/or orientation may be determined with an on-board computing system (e.g., controller) and/or an off-board computing system.

[0113] Furthermore, the optical sensor information and the position sensor information may be used by a computing system to perform analysis of the real-world background, such as depth analysis, surface reconstruction, environmental color and lighting analysis, or other suitable operations. In particular, the optical and positional sensor information may be used to create a virtual model of the real-world background. In some embodiments, the position and orientation of the vantage point may be characterized relative to this virtual space. Moreover, the virtual model may be used to determine positions of virtual objects in the virtual space and add additional virtual objects to be displayed to the user at a desired depth and location within the virtual world.

[0114] When the position sensor system includes GPS (not shown), the system can use the GPS to determine a location of the HMD devices **600** and **620**. This may help to

identify real world objects, such as buildings, etc. that may be located in the user's adjoining physical environment.

[0115] A power management subsystem (not shown) may include one or more batteries and/or protection circuit modules (PCMs) and an associated charger interface and/or remote power interface for supplying power to components in the HMD devices 600 and 620.

[0116] It may be understood that sensors illustrated in, and described with respect to, Figures 6A and 6B are included for the purpose of example and are not intended to be limiting in any manner, as any other suitable sensors and/or combination of sensors may be utilized to meet the needs of a particular implementation of a head-mounted VR device. For example, biometric sensors (e.g., for detecting heart and respiration rates, blood pressure, brain activity, body temperature, etc.) or environmental sensors (e.g., for detecting temperature, humidity, elevation, UV (ultraviolet) light levels, etc.) may be utilized in some implementations.

[0117] It is to be understood that the VR devices may include additional and/or alternative sensors, cameras, microphones, input devices, output devices, etc. than those shown without departing from the scope of the present arrangement. Additionally, the physical configuration of a display device and its various sensors and subcomponents may take a variety of different forms without departing from the scope of the present arrangement.

[0118] As mentioned above, computing system 500 can implement a VR device, including, but not limited to HMD devices 600 and 620.

[0119] Processing system 502 (e.g., processor 102 as described with respect to Figure 1A) may include one or more physical processors (hardware) configured to execute software instructions. Additionally or alternatively, the logic processor may include one or more hardware logic circuits or firmware devices configured to execute hardware-implemented logic or firmware instructions. Processors of the processing system 502 may be single-core or multi-core, and the instructions executed thereon may be configured for sequential, parallel, and/or distributed processing. Individual components of the processing system 502 optionally may be distributed among two or more separate devices, which may be remotely located and/or configured for coordinated processing. Aspects of the processing system 502 may be virtualized and executed by remotely accessible, networked computing devices configured in a cloud-computing configuration. In such a case, these virtualized aspects are run on different physical logic processors of various different machines, it will

be understood.

[0120] Processing system **502** includes one or more physical devices configured to execute instructions. The processing system **502** may be configured to execute instructions that are part of one or more applications, programs, routines, libraries, objects, components, data structures, or other logical constructs. Such instructions may be implemented to perform a task, implement a data type, transform the state of one or more components, achieve a technical effect, or otherwise arrive at a desired result. When the instructions are software based (as opposed to hardware-based such as implemented in a field programmable gate array (FPGA) or digital logic), the instructions can be stored as software **505** in the storage system **504**.

[0121] Storage system **504** (e.g., storage media **104** as described with respect to Figure 1A) may include physical devices that are removable and/or built-in. Storage system **504** can include one or more volatile and non-volatile storage devices such as optical memory (e.g., CD, DVD, HD-DVD, Blu-Ray Disc, etc.), semiconductor memory (e.g., RAM, SRAM, DRAM, ROM, EPROM, EEPROM, FLASH memory, etc.), and/or magnetic memory (e.g., hard-disk drive, floppy-disk drive, tape drive, MRAM, etc.), or other mass storage device technology. Storage system **504** may include dynamic, static, read/write, read-only, random-access, sequential-access, location-addressable, file-addressable, and/or content-addressable devices. It should be understood that a storage device or a storage medium of the storage system includes one or more physical devices and excludes propagating signals per se.

[0122] The storage system **504** can include an operating system **507** (e.g., OS **112** as described with respect to Figure 1A). Device operating systems generally control and coordinate the functions of the various components in the computing device, providing an easier way for applications to connect with lower level interfaces like the networking interface. Non-limiting examples of operating systems include Windows® from Microsoft Corp., Apple® iOS™ from Apple, Inc., Android® OS from Google, Inc., and the Ubuntu variety of the Linux OS from Canonical.

[0123] It should be noted that the operating system may be implemented both natively on the computing device and on software virtualization layers running atop the native device operating system (OS). Virtualized OS layers, while not depicted in Figure 5, can be thought of as additional, nested groupings within the operating system space, each containing an OS, application programs, and APIs.

[0124] Aspects of processing system **502** and storage system **504** may be integrated

together into one or more hardware-logic components. Such hardware-logic components may include field-programmable gate arrays (FPGAs), program- and application-specific integrated circuits (PASIC / ASICs), program- and application-specific standard products (PSSP / ASSPs), system-on-a-chip (SOC), and complex programmable logic devices (CPLDs), for example.

[0125] When included, display subsystem **506** may be used to present a visual representation of data held by storage system **504**. This visual representation may take the form of a graphical user interface (GUI). As the herein described methods and processes change the data held by the storage system, and thus transform the state of the storage system, the state of display subsystem **506** may likewise be transformed to visually represent changes in the underlying data. Display subsystem **506** may include one or more display devices utilizing virtually any type of technology. Such display devices may be combined with processing system **502** and/or storage system **504** in a shared enclosure, or such display devices may be peripheral display devices. For VR device **600**, the display subsystem **506** may be part of the headset. For VR device **620**, the display subsystem **506** may be part of the removable mobile device.

[0126] When included, input subsystem **508** (e.g., user interface system **108** of Figure 1A) may include or interface with peripherals or input devices such as an input controller, keyboard, or mouse. Input subsystem **508** may include or interface with selected natural user input (NUI) componentry. Such componentry may be integrated or peripheral, and the transduction and/or processing of input actions may be handled on- or off-board. Example NUI componentry may include a microphone for speech and/or voice recognition; an infrared, color, stereoscopic, and/or depth camera for machine vision and/or gesture recognition; a head tracker, eye tracker, accelerometer, and/or gyroscope for motion detection and/or intent recognition; as well as electric-field sensing componentry for assessing brain activity; any of the sensors described above with respect to Figures 6A and 6B and/or any other suitable sensor.

[0127] When included, network interface and subsystem **512** (e.g., network interface system **106** of Figure 1A) may be configured to communicatively couple computing system **500** with one or more other computing devices. Network interface and subsystem **512** may include wired and/or wireless communication devices compatible with one or more different communication protocols. As non-limiting examples, the network interface and subsystem **512** may be configured for communication via a wireless telephone network, or a wired or wireless, near-field, local- or wide-area network. In some

embodiments, the network interface and subsystem **512** may allow computing system **500** to send and/or receive messages to and/or from other devices via a network such as the Internet.

5 **[0128]** Although the subject matter has been described in language specific to structural features and/or acts, it is to be understood that the subject matter defined in the appended claims is not necessarily limited to the specific features or acts described above. Rather, the specific features and acts described above are disclosed as examples of implementing the claims and other equivalent features and acts are intended to be within the scope of the claims.

CLAIMS

1. A method comprising:
 - determining that a virtual reality application is in use;
 - in response to determining that the virtual reality application is in use, begin monitoring for external signals by at least accessing an available sensor of a computing device;
 - detecting at least one external signal while monitoring for the external signals;
 - in response to detecting the at least one external signal, determining a level of notification for an interruption notification of the virtual reality application based on the at least one external signal;
 - receiving context of the virtual reality application;
 - determining a type for the interruption notification of the virtual reality application based on the determined level of notification and the context of the virtual reality application; and
 - providing the interruption notification to the virtual reality application based on the determined type.
2. The method of claim 1, wherein the determining of the type for the interruption notification of the virtual reality application comprises:
 - accessing a mapping resource storing a mapping data structure to identify the type associated with the determined level of notification and the context of the virtual reality application.
3. The method of claim 1, wherein the receiving of the context of the virtual reality application comprises:
 - detecting user input signals to the virtual reality application or accessing a graph structure.
4. The method of claim 1, wherein the determining of the level of notification for the interruption notification of the virtual reality application comprises:
 - from the at least one external signal, applying a signal analysis;
 - assigning a notification value to a result of the signal analysis; and
 - for each result with a notification value that meets a threshold value, mapping the notification value to an appropriate level of notification, the appropriate level being the level of notification for the interruption notification.
5. The method of claim 4, wherein the at least one external signal is a video signal and applying the signal analysis comprises:

performing facial recognition on the video signal to identify one or more people in the video signal;

obtaining user context information, wherein the user context information comprises contact information of the user of the virtual reality application; and

determining whether each of the one or more identified people is a person of interest to the user based on the obtained contact information; and

wherein assigning the notification value to the result of the signal analysis comprises:

assigning the notification value based on whether each of the one or more people are determined to be the person of interest and the relationship to the user.

6. The method of claim 4, wherein the at least one external signal is an audio signal and applying the signal analysis comprises:

performing voice recognition on the audio signal to identify one or more people in the audio signal;

obtaining user context information, wherein the user context information comprises user contact information of the user of the virtual reality application; and

determining whether each of the one or more identified people is a person of interest to the user based on the obtained contact information; and

wherein assigning the notification value to the result of the signal analysis comprises:

assigning the notification value based on whether each of the one or more people are determined to be the person of interest and the relationship to the user.

7. The method of claim 4, wherein the at least one external signal is a video signal and applying the signal analysis comprises performing a movement analyses on the video signal to identify a movement level in the video signal and wherein assigning the notification value to the result of the signal analysis comprises assigning the notification value based on the identified movement level.

8. The method of claim 4, wherein the at least one external signal is an audio signal and applying the signal analysis comprises performing a sound analyses on the audio signal to identify a sound level in the audio signal and wherein assigning the notification value to the result of the signal analysis comprises assigning the notification value based on the identified sound level.

9. A system comprising:

a processing system;

a storage system; and
instructions for supporting real-world awareness stored on the storage system that, when executed by the processing system, direct the processing system to:

- determine that a virtual reality application is in use;
- in response to determining that the virtual reality application is in use, begin monitoring for external signals by at least accessing an available sensor of a computing device;
- detect at least one external signal while monitoring for the external signals;
- in response to detecting the at least one external signal, determine a level of notification for an interruption notification of the virtual reality application based on the at least one external signal;
- receive context of the virtual reality application;
- determine a type for the interruption notification of the virtual reality application based on the determined level of notification and the context of the virtual reality application; and
- provide the interruption notification to the virtual reality application based on the determined type.

10. The system of claim 9, wherein the at least one external signal comprises at least one of an audio signal or a video signal.

11. The system of claim 9, wherein the instructions that determine the type for the interruption notification of the virtual reality application further direct the processing system to:

- access a mapping resource storing a mapping data structure to identify the type associated with the determined level of notification and the context of the virtual reality application.

12. The system of claim 9, wherein the instructions that receive of the context of the virtual reality application further direct the processing system to:

- detect user input signals to the virtual reality application or accessing a graph structure.

13. The system of claim 9, wherein the instructions that determine of the level of notification for the interruption notification of the virtual reality application further direct the processing system to:

- from the at least one external signal, apply a signal analysis;
- assign a notification value to a result of the signal analysis; and

for each result with a notification value that meets a threshold value, map the notification value to an appropriate level of notification, the appropriate level being the level of notification for the interruption notification.

14. One or more computer readable storage media having instructions stored thereon that, when executed by a processor, direct the processor to at least:

- determine that a virtual reality application is in use;

- in response to determining that the virtual reality application is in use, begin monitoring for external signals by at least accessing an available sensor of a computing device;

- detect at least one external signal while monitoring for the external signals;

- in response to detecting the at least one external signal, determine a level of notification for an interruption notification of the virtual reality application based on the at least one external signal, wherein determining the level of notification for an interruption notification comprises:

- from the at least one external signal, apply a signal analysis,

- assign a notification value to a result of the signal analysis, and

- for each result with a notification value that meets a threshold value, map the notification value to an appropriate level of notification, the appropriate level being the level of notification for the interruption notification,

- receive context of the virtual reality application;

- determine a type for the interruption notification of the virtual reality application based on the determined level of notification and the context of the virtual reality application; and

- provide the interruption notification to the virtual reality application based on the determined type.

15. The media of claim 14, wherein the at least one external signal comprises at least one of an audio signal or a video signal.

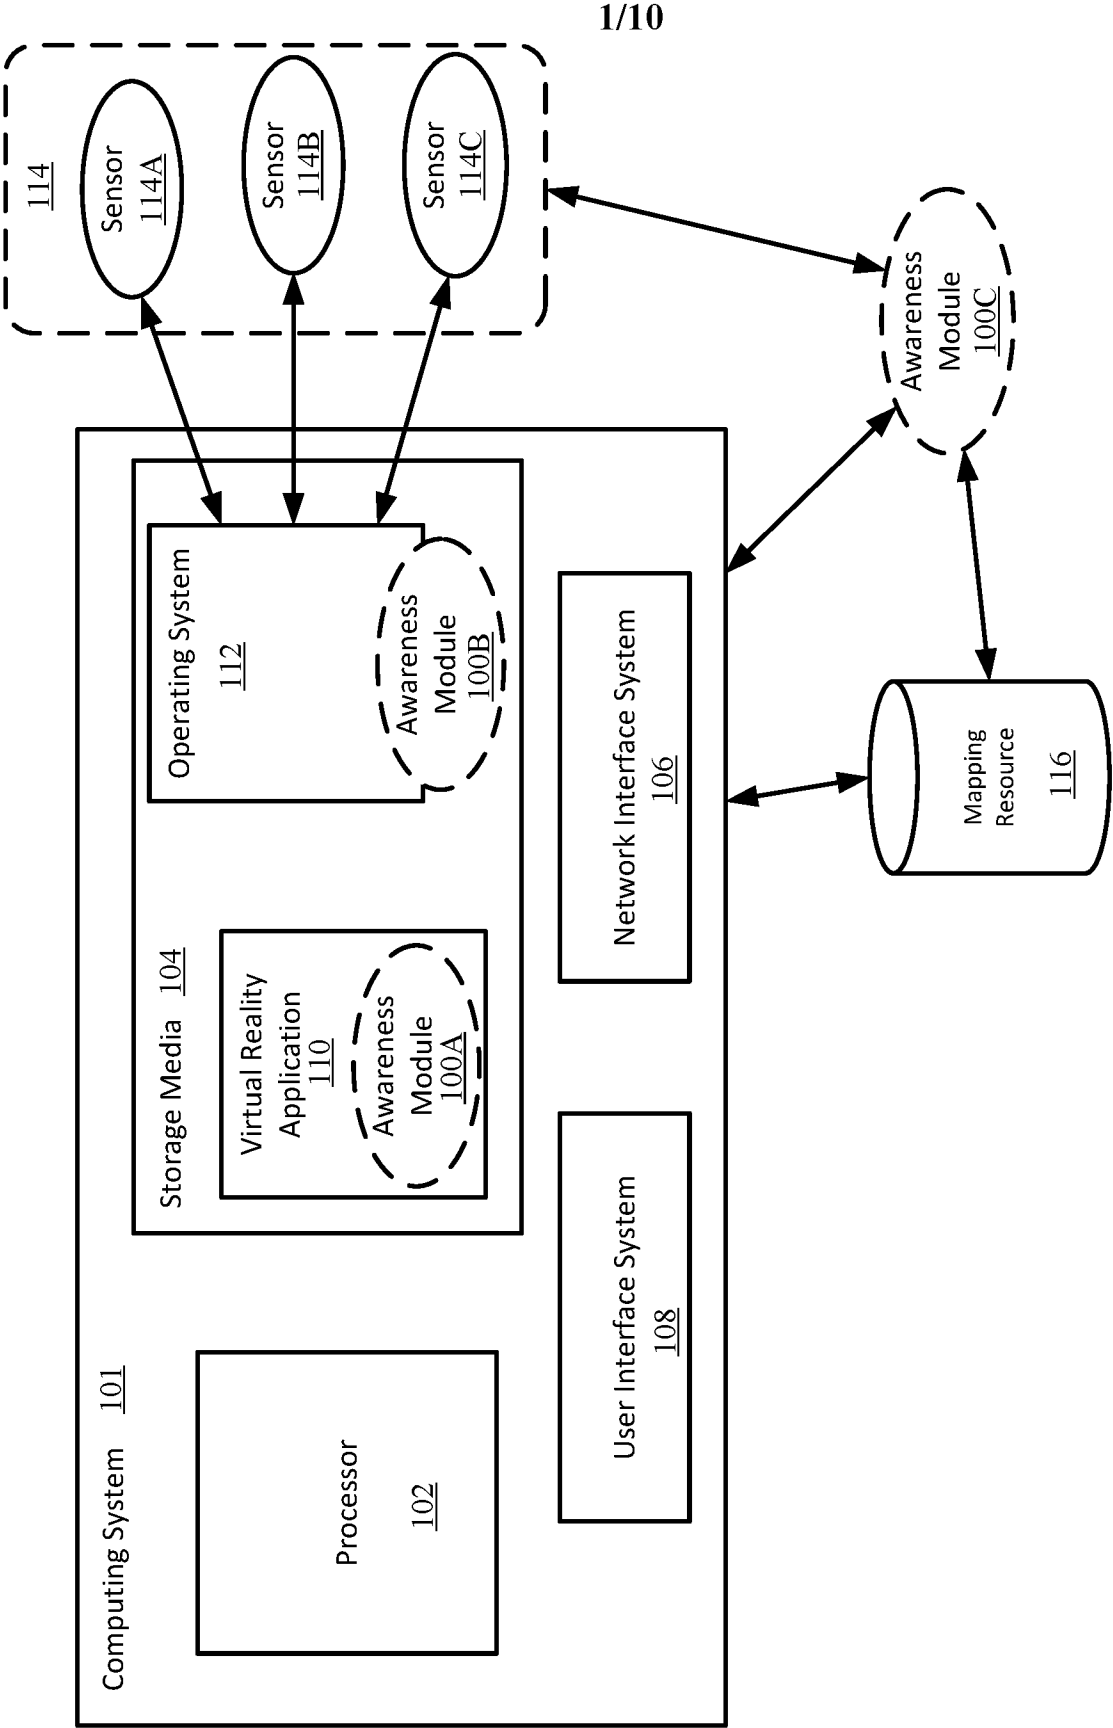
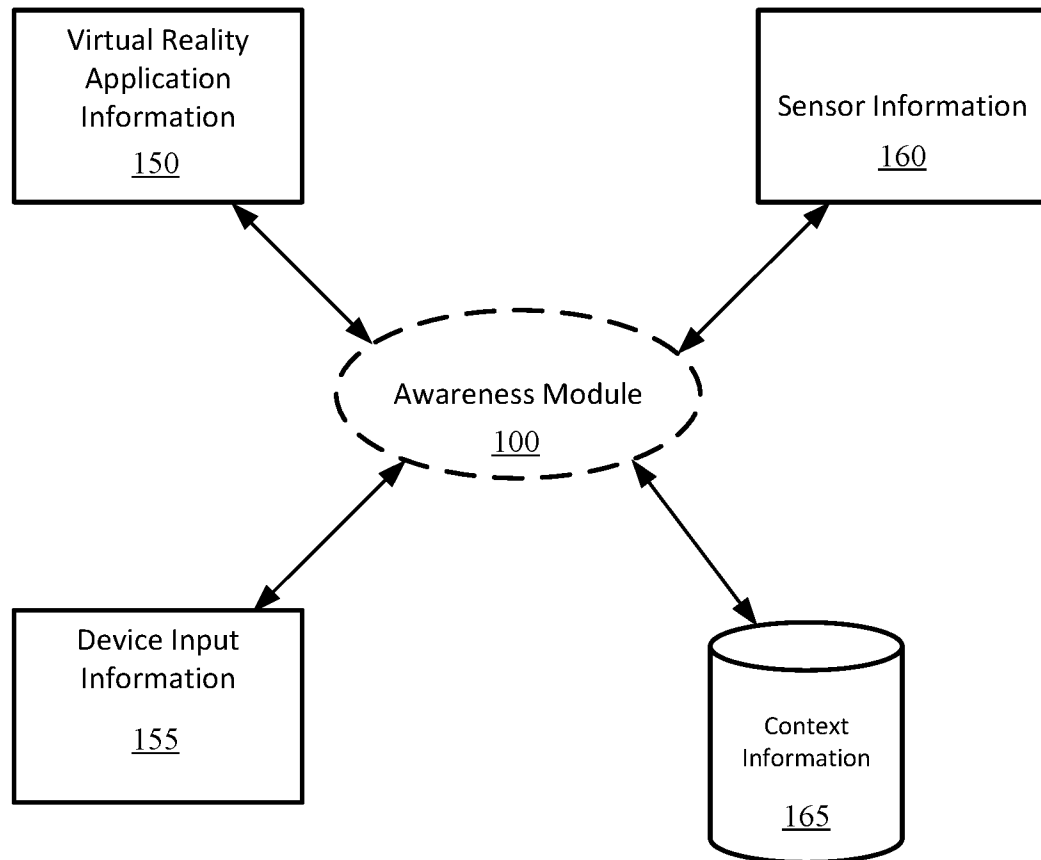
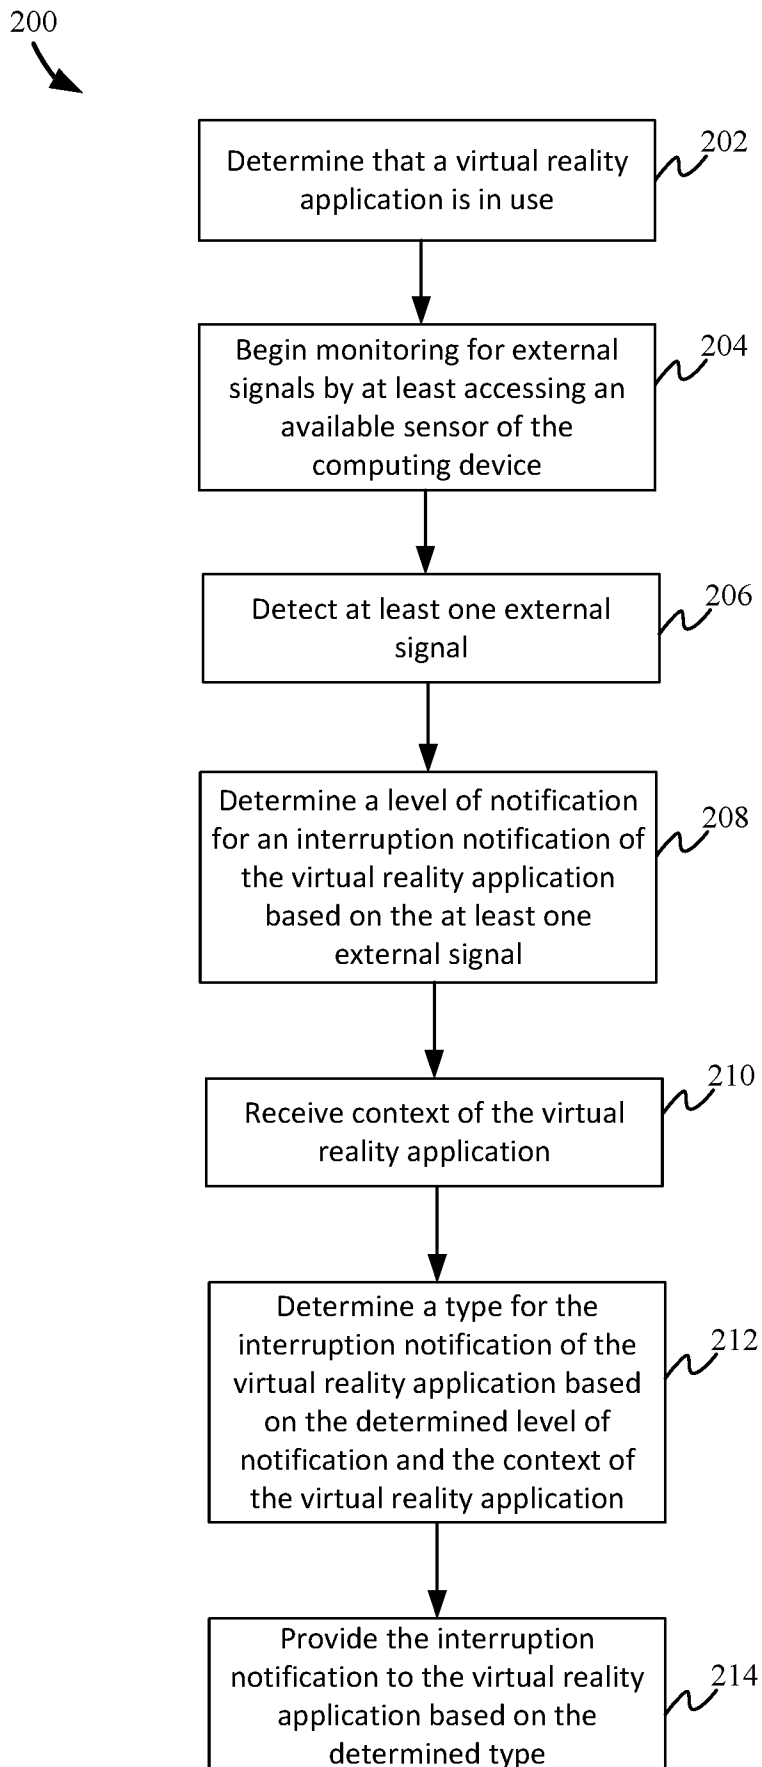


FIG. 1A

2/10

**FIG. 1B**

3/10

**FIG. 2**

Type of Interruption Notification		Level of Notification		
		1	2	3
Context of Virtual Reality Application	High-Intensity VR Application	Only Activity Indicator	Abstract Representation at Edge of View; 50% Transparent	Still Image at Edge of View; 50% Transparent
	Low-Intensity VR Application	Still Image at Top Right Corner of View	Still Image at Center of View	Live Video at Full Screen
	High Level of Productivity or Immersion	Only Activity Indicator	Abstract Representation at Edge of View	Abstract Representation at Center of View
	Low Level of Productivity or Immersion	Abstract Representation at Top Right Corner of View	Still Image at Top Left Corner of View	Still Image at Center of View

FIG. 3

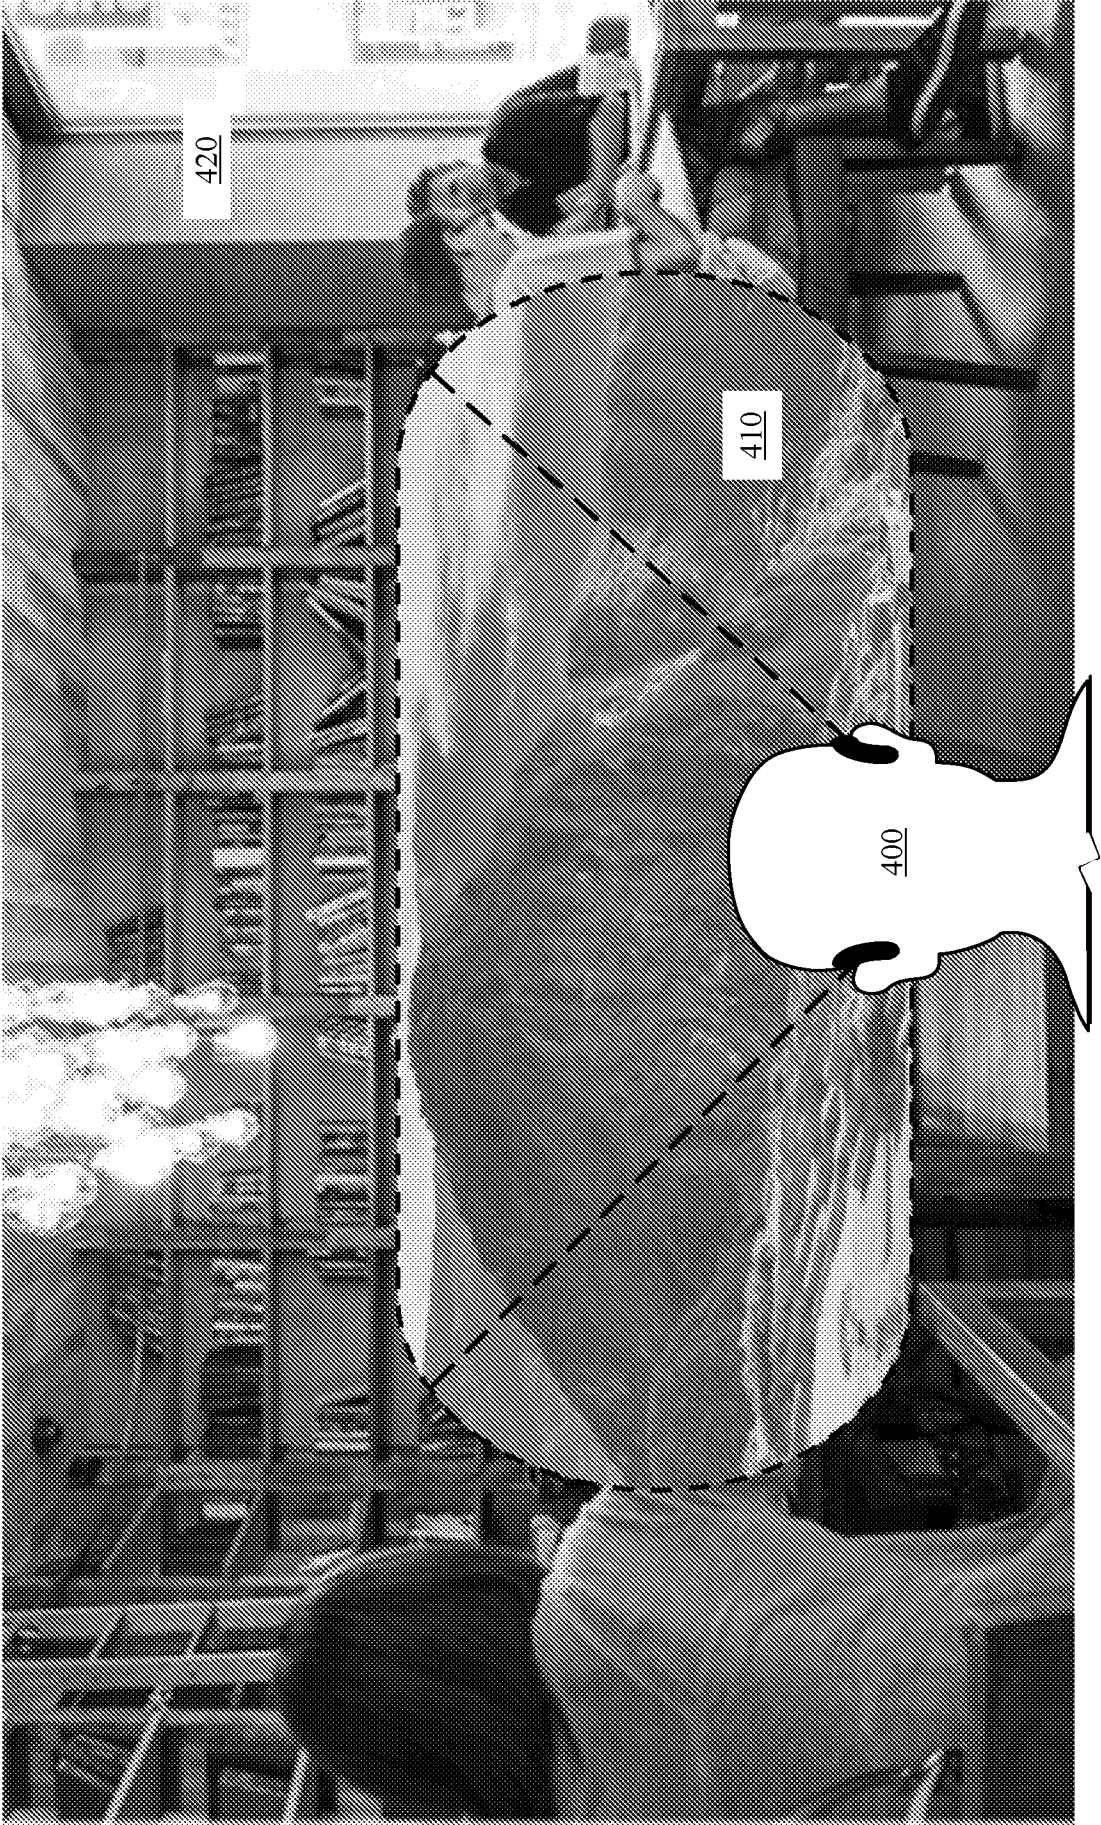


FIG. 4A

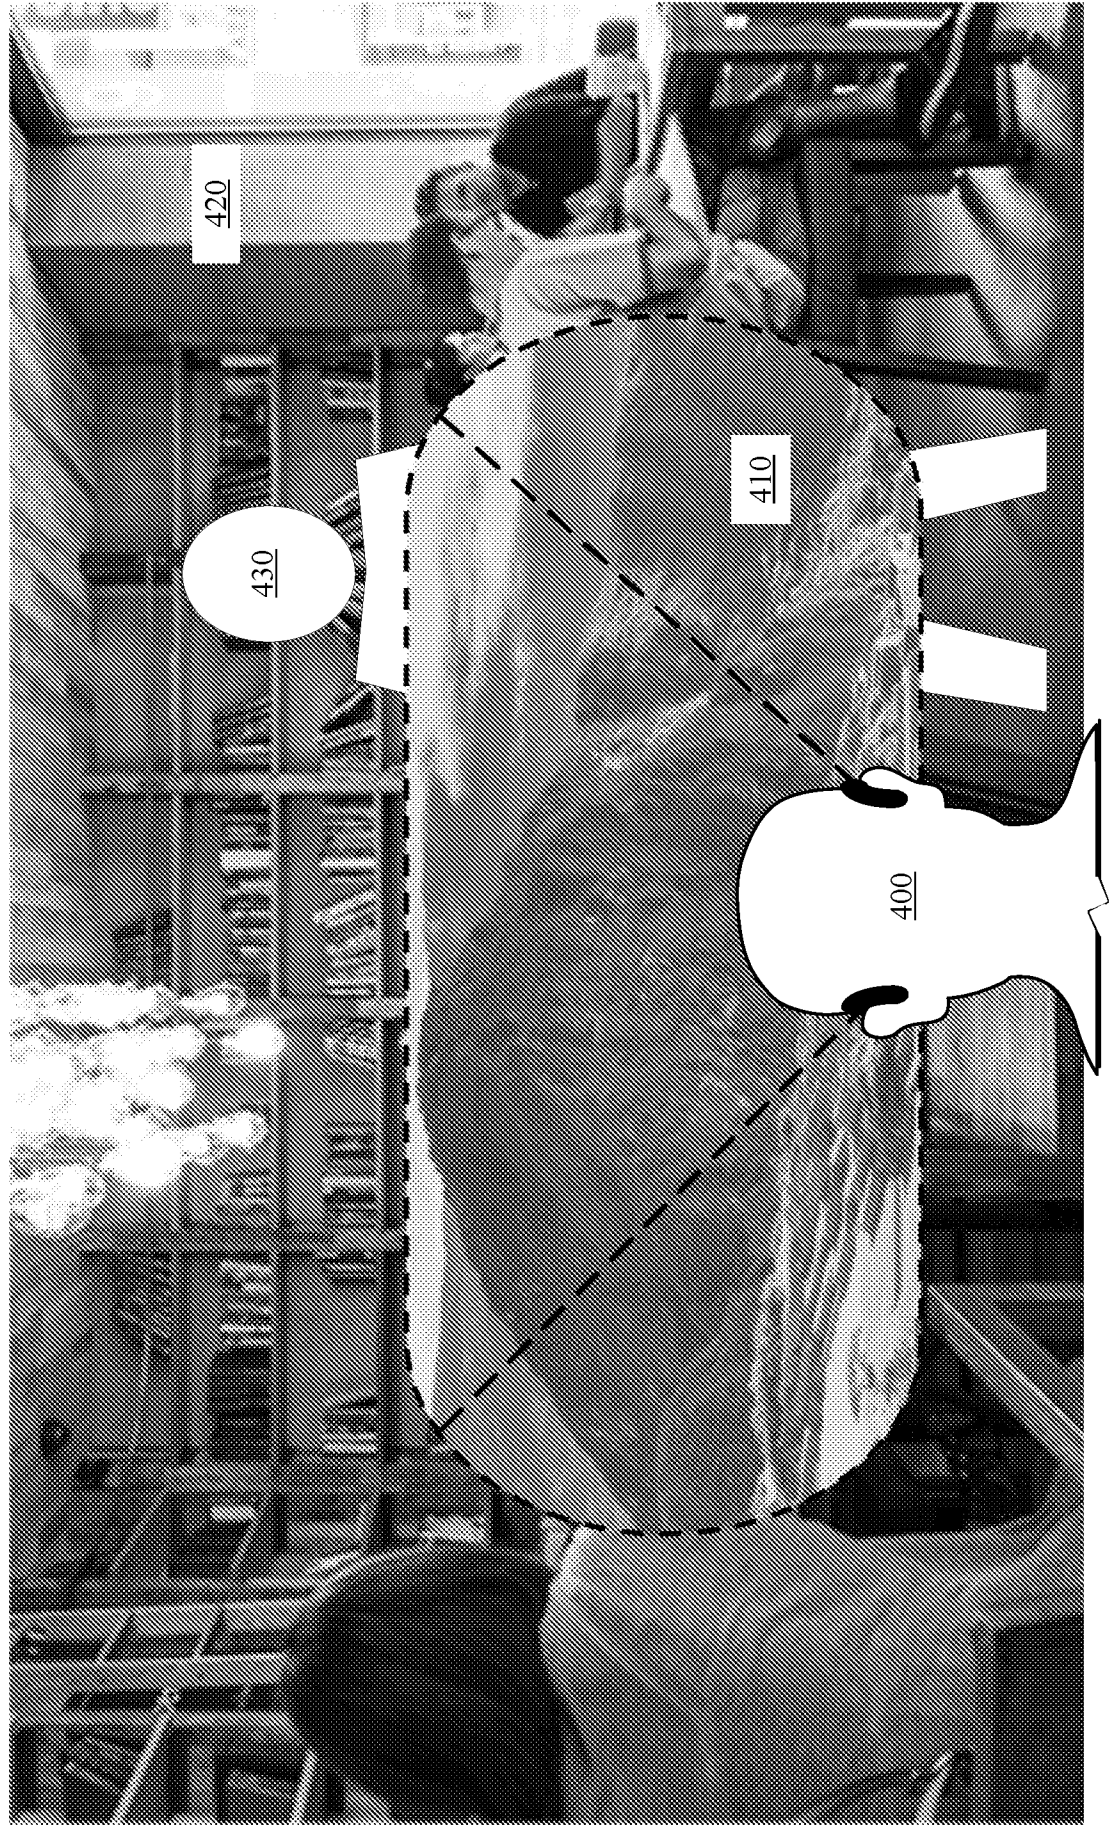


FIG. 4B

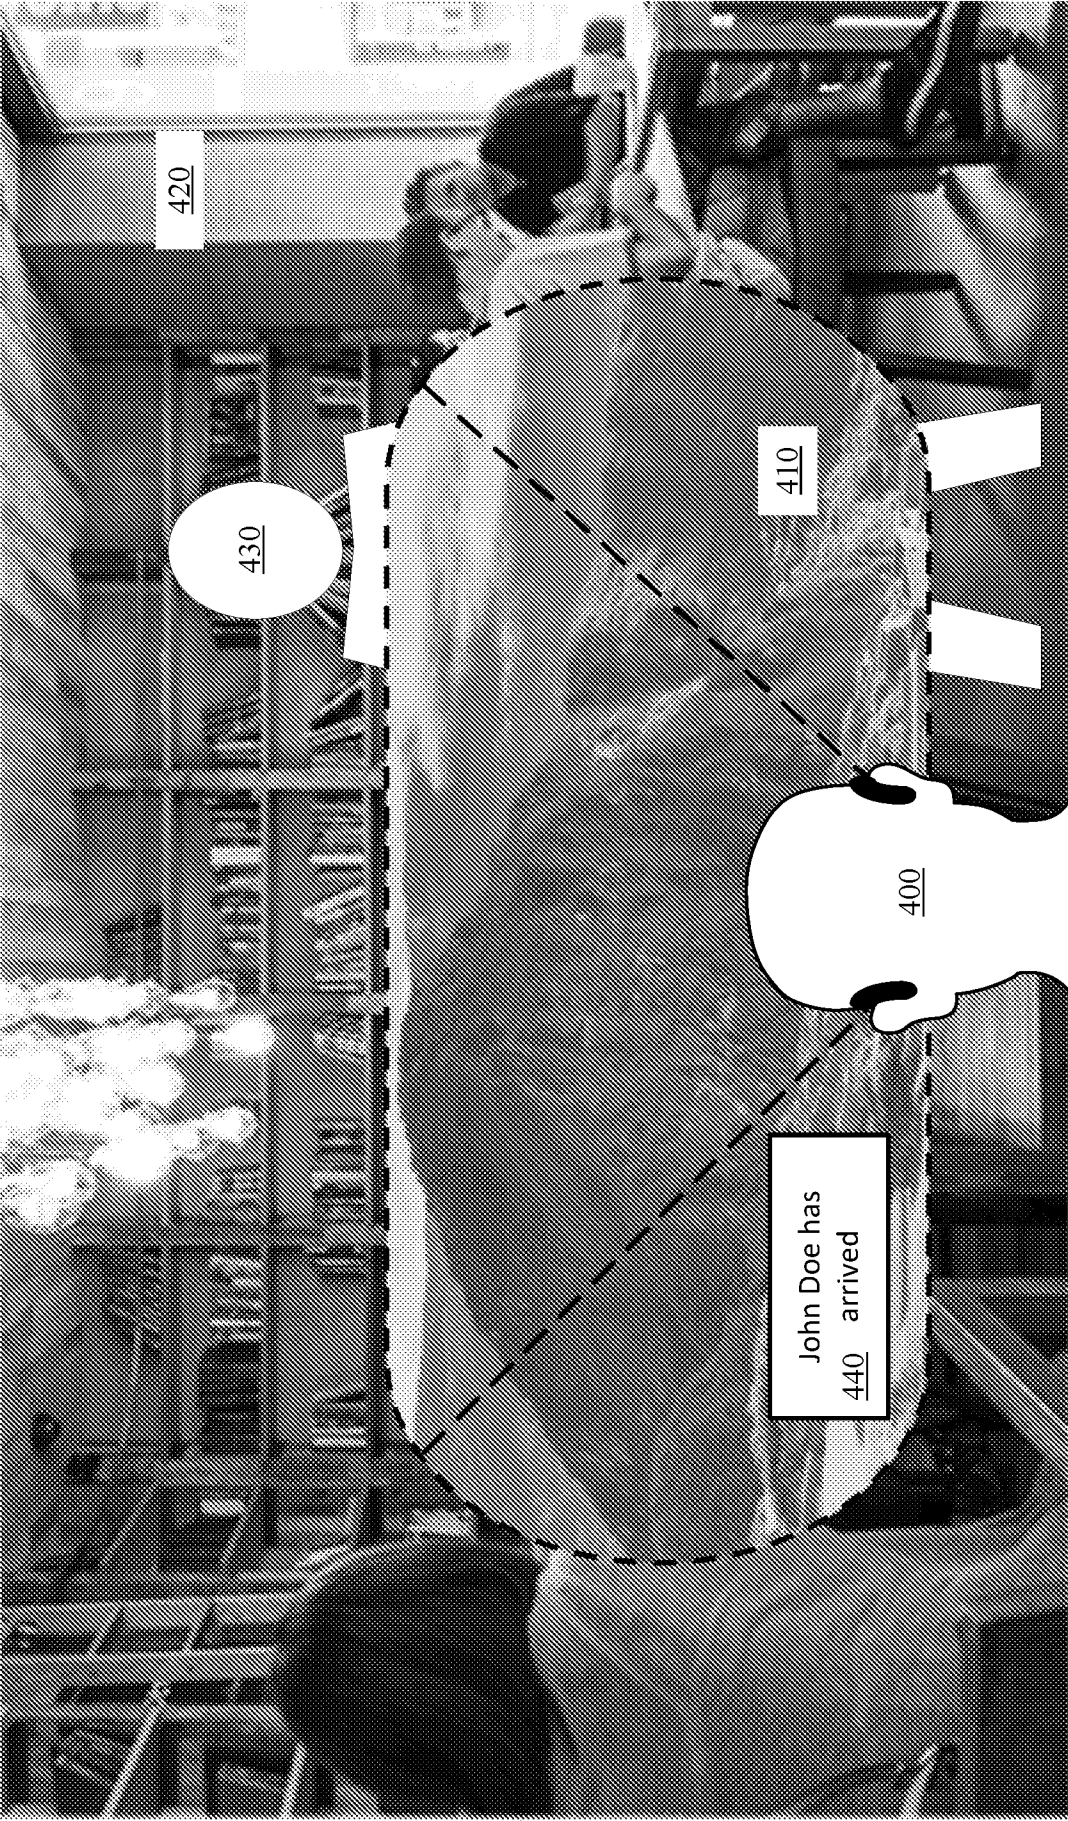
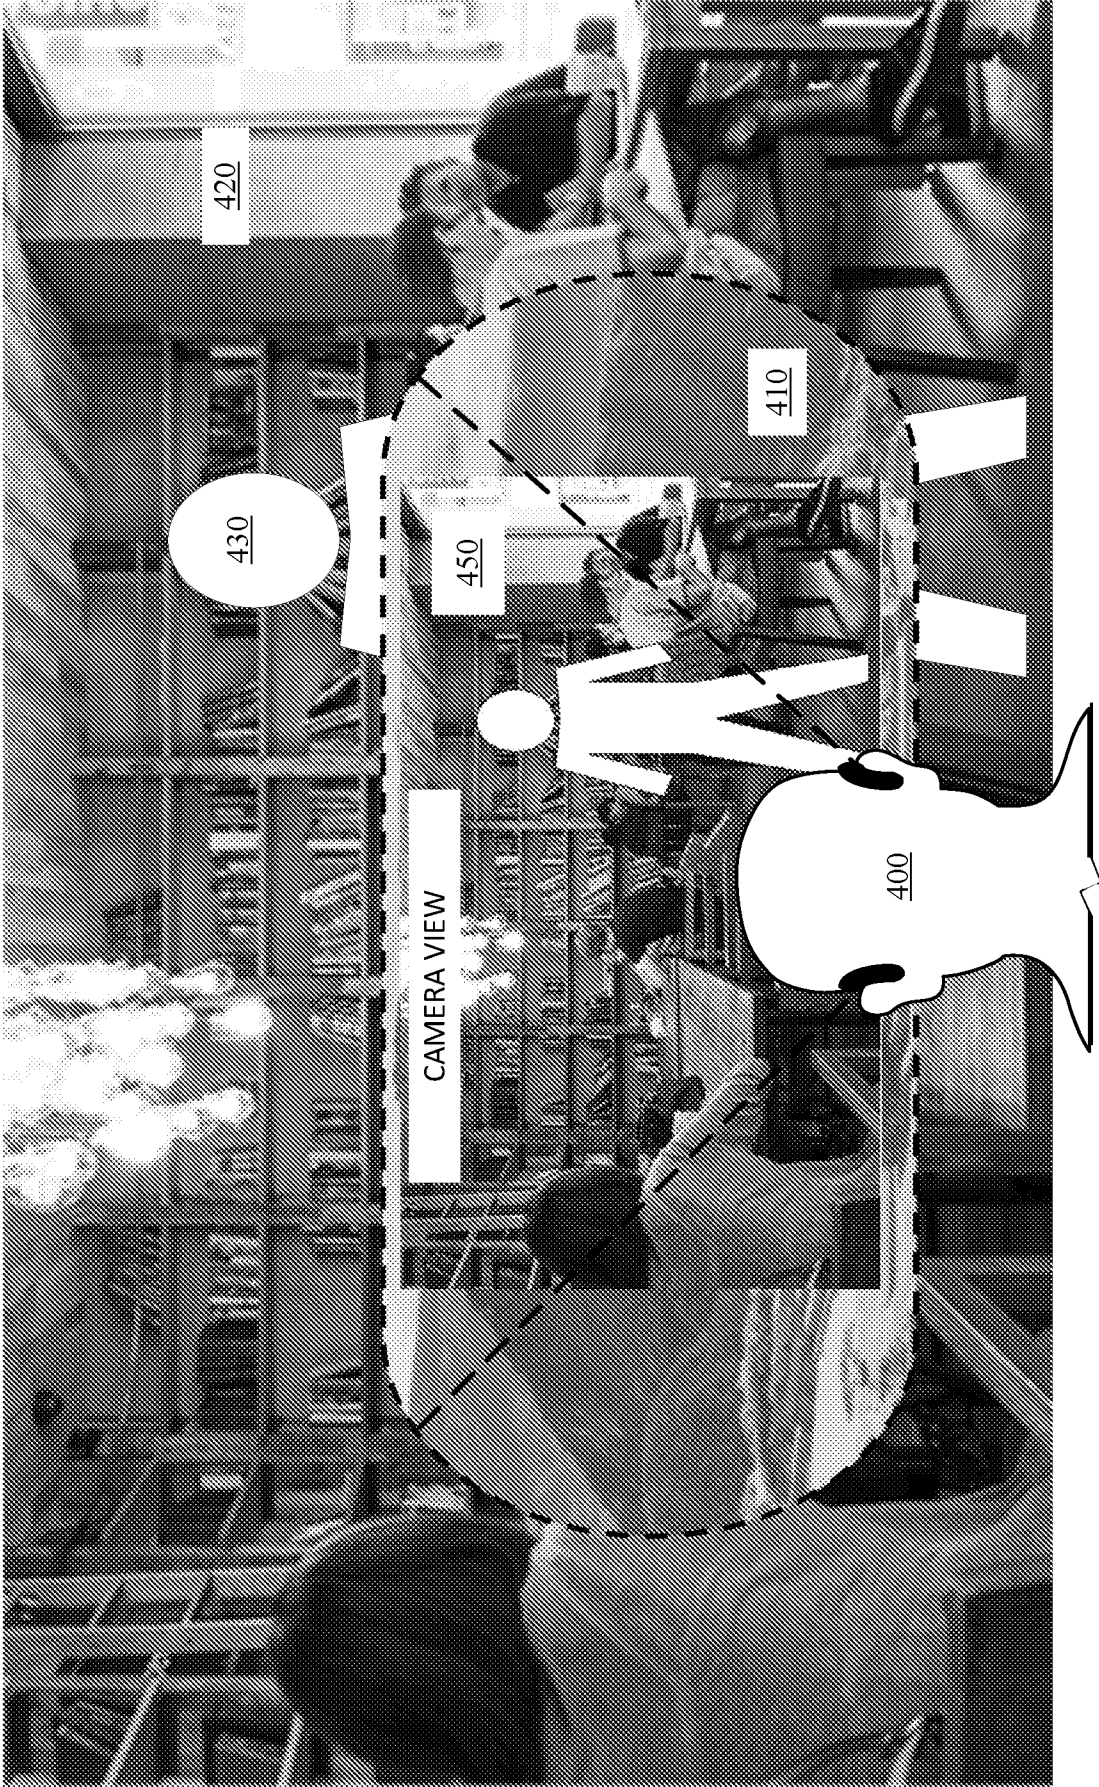


FIG. 4C



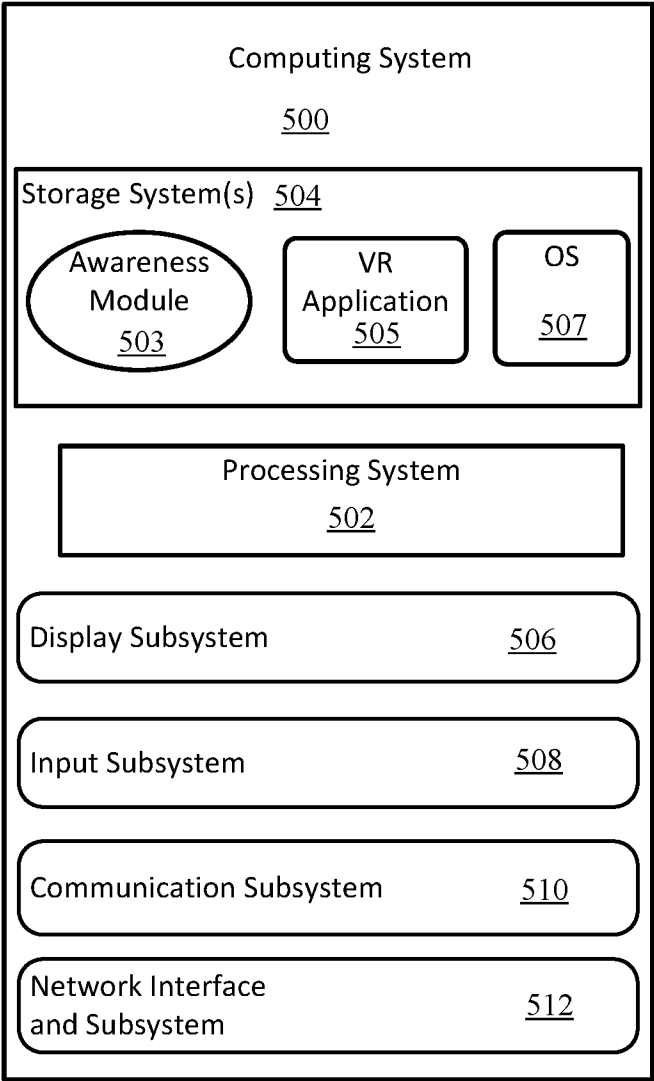


FIG. 5

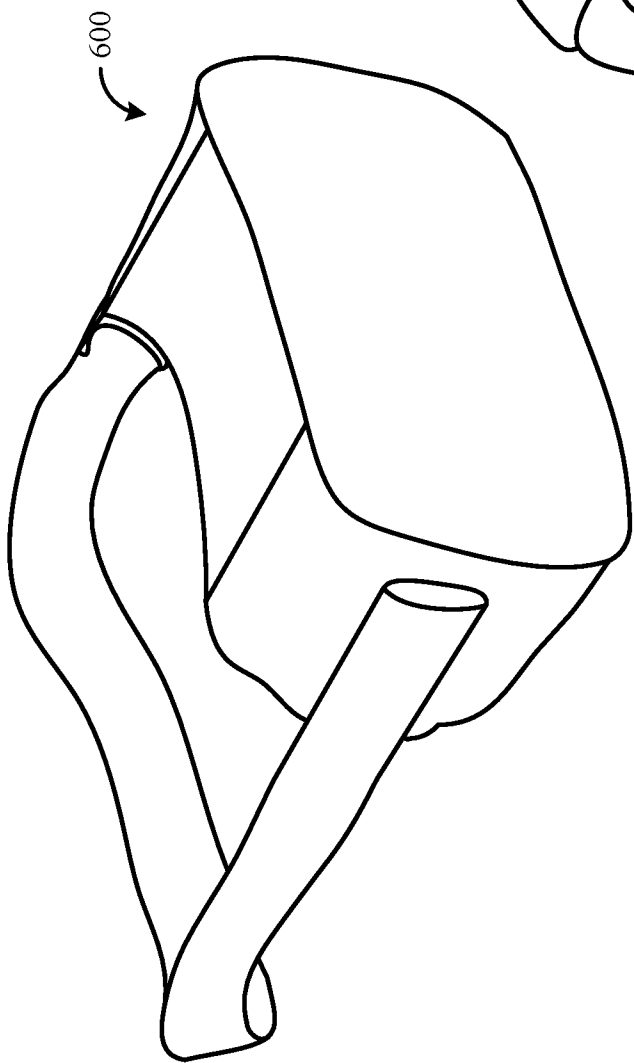


FIG. 6A

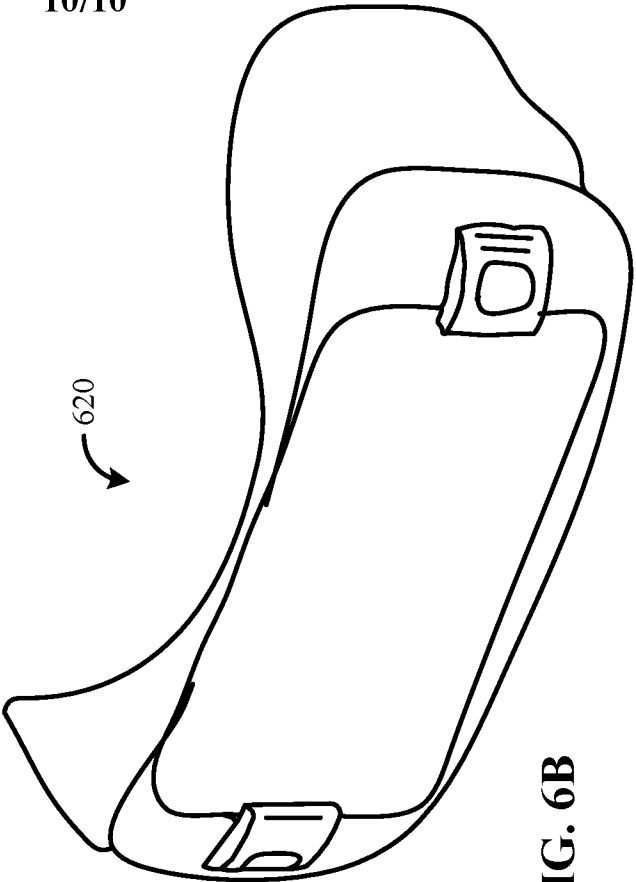


FIG. 6B

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2019/024164

A. CLASSIFICATION OF SUBJECT MATTER
INV. G06F3/01
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G06F G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2016/054565 A1 (IZUMIHARA ATSUSHI [JP] ET AL) 25 February 2016 (2016-02-25) abstract; figures 4A, 4B, 7, 15 paragraphs [0002], [0058], [0063], [0068], [0070], [0080], [0089], [0104], [0139], [0140], [0173], [0201] -----	1-15
X	US 2017/287215 A1 (LALONDE PAUL ALBERT [US] ET AL) 5 October 2017 (2017-10-05) abstract paragraphs [0004], [0038], [0073], [0074], [0081] -----	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 June 2019

Date of mailing of the international search report

08/07/2019

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Pfaffelhuber, Thomas

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2019/024164

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2016054565 A1	25-02-2016	US 2016054565 A1 WO 2014156389 A1	25-02-2016 02-10-2014
US 2017287215 A1	05-10-2017	CN 108700936 A EP 3391183 A1 JP 2019510321 A KR 20180102171 A US 2017287215 A1 WO 2017171943 A1	23-10-2018 24-10-2018 11-04-2019 14-09-2018 05-10-2017 05-10-2017