



(86) Date de dépôt PCT/PCT Filing Date: 2015/03/13
(87) Date publication PCT/PCT Publication Date: 2015/09/17
(45) Date de délivrance/Issue Date: 2022/07/19
(85) Entrée phase nationale/National Entry: 2016/08/29
(86) N° demande PCT/PCT Application No.: IB 2015/051851
(87) N° publication PCT/PCT Publication No.: 2015/136493
(30) Priorité/Priority: 2014/03/14 (US61/952,978)


(51) Cl.Int./Int.Cl. B31B 70/00(2017.01),
B31B 50/00 (2017.01), B65D 65/40 (2006.01),
D21H 19/10 (2006.01), D21H 21/00 (2006.01),
D21H 27/30 (2006.01)

(72) Inventeurs/Inventors:
MIIKKI, NINA, FI;
SIRVIO, PETRI, FI;
BACKFOLK, KAJ, FI

(73) Propriétaire/Owner:
STORA ENSO OYJ, FI

(74) Agent: SMART & BIGGAR IP AGENCY CO.

(54) Titre : PROCEDE DE FABRICATION DE MATERIAU D'EMBALLAGE, ET MATERIAU D'EMBALLAGE FABRIQUE PAR LE PROCEDE
(54) Title: A METHOD FOR MANUFACTURING A PACKAGING MATERIAL AND A PACKAGING MATERIAL MADE BY THE METHOD

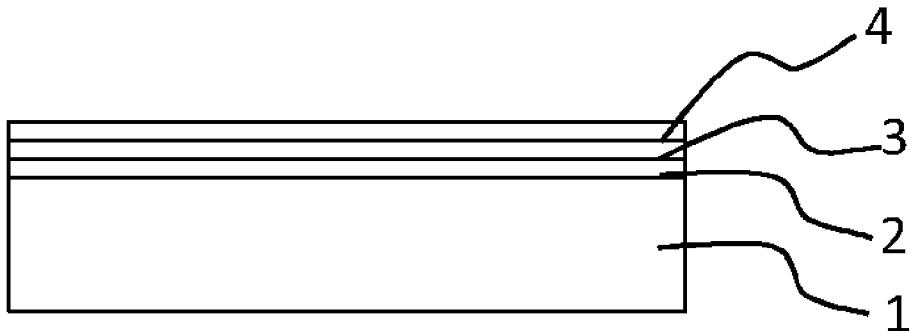

(57) Abrégé/Abstract:

The invention refers to a method to produce a packaging material comprising the steps of; treating at least one surface of a paperboard substrate with a binder and with a metal salt, printing at least a part of said treated surface with ink, and applying at least one polymer layer on said printed surface. The packaging material produced in accordance with the invention shows good printability and simultaneously good adhesion of the applied polymer layer.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(10) International Publication Number

WO 2015/136493 A1

(43) International Publication Date
17 September 2015 (17.09.2015)

(51) International Patent Classification:

D21H 19/10 (2006.01) **D21H 21/00** (2006.01)
B65D 65/40 (2006.01) **D21H 27/30** (2006.01)

(21) International Application Number:

PCT/IB2015/051851

(22) International Filing Date:

13 March 2015 (13.03.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/952,978 14 March 2014 (14.03.2014) US

(71) Applicant: **STORA ENSO OYJ** [FI/FI]; P.O. 309, FIN-00101 Helsinki (FI).

(72) Inventors: **MIIKKI, Nina**; Miikinpalkki 11, FIN-55100 Imatra (FI). **SIRVIÖ, Petri**; Papukatu 11, FIN-55100 Imatra (FI). **BACKFOLK, Kaj**; Valto Käkelän Katu 5, FIN-53130 Lappeenranta (FI).

(74) Agent: **KLING, Susanna**; Stora Enso AB, Group IP, S-65009 Karlstad (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A METHOD FOR MANUFACTURING A PACKAGING MATERIAL AND A PACKAGING MATERIAL MADE BY THE METHOD

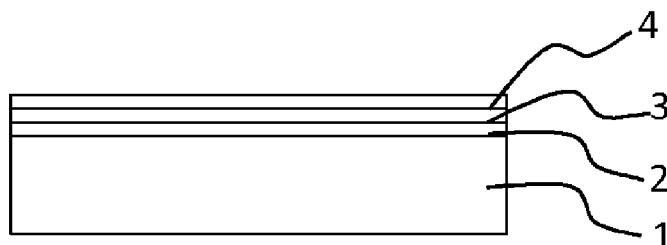


Fig. 1

(57) Abstract: The invention refers to a method to produce a packaging material comprising the steps of; treating at least one surface of a paperboard substrate with a binder and with a metal salt, printing at least a part of said treated surface with ink, and applying at least one polymer layer on said printed surface. The packaging material produced in accordance with the invention shows good printability and simultaneously good adhesion of the applied polymer layer.

WO 2015/136493 A1

1

A method for manufacturing a packaging material and a
packaging material made by the method

Technical field

5

The present invention relates to a method of manufacturing a packaging material and a packaging material made by the method.

10 Background of the invention

Fibre-based packaging materials for liquid containers and food product packages are usually provided with a barrier layer, typically in the form of a tight film on the 15 paperboard substrate. Barrier layers in packaging materials, usually refers to the use of polymers as thin layers on the base paperboard substrate. These polymers give excellent product protection properties and are effective barriers for packaging of e.g. liquid or food products. Polymers 20 frequently used as barriers are thermoplastic polymers such as PE (polyethylene), PP (polypropylene) and PLA (polylactic acid).

The barrier polymers may be extrusion coated or laminated 25 onto the paperboard substrate. A good adhesion between the paperboard surface and the polymer layer is necessary to provide an efficient barrier, but also to prevent raw edge penetration and ensure good convertability. Surface treatments of paperboard in order to raise the surface energy 30 of the surface, such as corona, plasma or flame treatment, are commonly used to enhance the adhesion between the board surface and the polymer layer.

2

Another important quality of packaging material is its printability. The most prevailing printing techniques for printing of packaging board materials are sheet-fed offset process, rotogravure or flexogravure. However, in recent 5 years, digital printing and especially ink jet printing, which has previously mostly been applied in the printing of paper, has also become of interest in the printing of paperboard. Ink jet printing techniques put high demands on the printing substrate, since the ink must be quickly dried 10 on the substrate and yet provide a high print quality. A desired print quality involves a high optical print density, minimized feathering and bleeding, good dot sharpness, high print evenness and low strike-through. The adhesion of inkjet inks, and then especially pigment-based colorants, to the 15 paperboard surface is quite low due to the limitation set by the printing process, i.e. drop size, nozzle diameter, ejection method, etc. Typically, the viscosity and surface tension of inkjet inks are relatively low, which then may lead to a relatively weakly bounded ink layer on the board. 20 Moreover, recent developed inks usually show a fairly weak adhesion to fibers, to enable efficient de-inking. Consequently, the adhesion of a barrier polymer layer to the printed ink layer and to the surface of the substrate may be negatively affected, due to the formed weak boundary layer 25 (i.e. the ink layer).

In connection with printing paper, it is well-known that addition of metal salts, preferably multivalent salts such as calcium chloride, to the surface size, gives rise to a 30 significant improvement in ink-jet print quality. US6207258 discloses a composition useful for surface treating a paper sheet for ink jet printing, the composition comprising a salt of a divalent metal. However, metal salts have not been used

successfully in the treatment of packaging board material.

Since packaging board materials generally has a much rougher and more porous surface than paper, the salts have a tendency to absorb and penetrate much more into the substrate, leaving

5 much less surface accessible salts for the deposited ink colorants. Consequently, a high amount of multivalent cations is needed to get the desired effect on the printing quality.

However, applying higher concentration of metal salts may cause saturation, which in turn gives rise to precipitation

10 of the salt into crystals. Such precipitates may cause problems in the adhesion of a barrier polymer layer to the paperboard base substrate. Another risk is that the surface treatment formulations comprising binders such as starch

prior for the base board might cause a weak boundary layer if

15 the binder is not physic-chemically compatible with the multivalent metal salts. Thus, the prevailing assumption of today is that paperboard materials that is to be polymer laminated or coated cannot be treated with metal salts, since this affects the adhesion of the polymer layer negatively.

20 One way to solve this problem is to print on the applied barrier polymer layer. However, if the ink is to be printed on the polymer layer, the ink needs to be UV, EB or based on specific solvents, which involves a safety risk.

25 Summary of the invention

The object of the invention is to provide a polymer extrusion coated or laminated paperboard material, suitable for

30 packaging of e.g. foods or liquids, which paperboard material

shows excellent barrier properties, good adhesion between the base board and the polymer layer and good print quality.

According to the invention, this object has surprisingly been achieved by treating at least one surface of a paperboard substrate, which substrate comprises cellulosic fibres, with a binder and with a metal salt, printing at 5 least a part of said treated surface with ink, and applying at least one polymer layer on said printed surface.

In one aspect, the present invention provides a method of manufacturing a packaging material comprising the steps of; 10 providing a paperboard substrate, comprising cellulosic fibres, treating at least one surface of the substrate with a binder and with a metal salt, printing at least a part of said treated surface with ink, and applying at least one polymer layer on the printed surface, wherein 15 the binder comprises polyDADMAC and starch or polyDADMAC and microfibrillated cellulose (MFC) .

In another aspect, the present invention provides a packaging material comprising; a paperboard substrate, a 20 first, innermost, layer comprising a binder, a second layer, applied on the first layer, comprising a metal salt, aqueous based ink printed on at least a part of the second layer, and a thermoplastic polymer layer applied on the printed second layer, wherein the binder 25 comprises polyDADMAC and starch or polyDADMAC and microfibrillated cellulose (MFC) .

In yet another aspect, the present invention provides a packaging material comprising; a paperboard substrate, an 30 innermost layer comprising a binder and a metal salt, aqueous based ink printed on at least a part of the

innermost layer, and a thermoplastic polymer layer applied on the printed innermost layer, wherein the binder comprises polyDADMAC and starch or polyDADMAC and microfibrillated cellulose (MFC).

5

The packaging material produced in accordance with the invention shows good printability and simultaneously good adhesion of the applied polymer layer. It has surprisingly been shown that paperboard substrates may be surface treated

10 with a metal salt of a mono- or multivalent ion and yet allow good adhesion of a polymer layer, if a binder is applied prior to, and/or together with, the application of the mono- or multivalent metal salt to the surface. The binder prevents penetration of the metal salt into the
15 surface of the board. Without being bound to any theory, it is believed that the binder system disclosed herein positively enhanced the accessibility of the metal salt to the deposited colorants. Consequently, the mono- or multivalent metal salt may be applied in a relatively small
20 amount, whereby the risk for saturation, crystallisation and/or formation of precipitated binder-salt aggregates is avoided. The treatment in accordance with the invention enhances both the print quality and the adhesion of the polymer to the surface of the paperboard.

25

The binder applied may be chosen from the group comprising microfibrillated cellulose (MFC), nanocellulose, nanocrystalline cellulose, starch and/or polyDADMAC, carboxymethyl cellulose (CMC), polyvinylpyrrolidone (PVP), polyvinyl alcohol (PVA), polyethyleneimine (PEI) and/or polyethylene glycol (PEG) or any combination or modifications of these. In one

5

embodiment, the binder comprises a cationic binder (e.g. cationic starch and/or polyDADMAC). Cationic binders have shown to give good adhesion of the ink particles to the substrate surface. In another preferred embodiment, the binder comprises MFC. MFC plugs the pores of the surface and thus reduce penetration of the mono- or multivalent metal salt into the substrate. The MFC may e.g. be anionic modified. Anionic modified MFC may interact with the mono- or multivalent cations thus providing cationic sites for fixation of anionic colorants. Moreover, applied MFC gives rise to a smooth surface and enhance absorption of water and/or (co-)solvent in the ink, which improves the print quality even further due to faster ink layer immobilization. MFC may be applied to the surface in an amount of at least 0.1 g/m² (dry).

15

The binder, e.g. MFC, may be applied to the surface as a dispersion separately from, and prior to, the application of the metal salt. In this way, the binder may form a film between the paperboard surface and the polymer and prevent penetration of the metal salt into the surface of the porous paperboard.

Alternatively, the binder and the metal salt may be added to the surface of the paperboard substrate in the same step, i.e. as a composition comprising said binder and the mono- or multivalent metal salt. This makes the process more efficient and it has been shown that the binder still prevents penetration of the metal salt into the surface of the paperboard. It has been surprisingly found, that the said binder formulations is very stable even at high electrolyte concentrations.

The binder, the metal salt and/or the composition comprising the binder and the metal salt may be applied to the surface

of the paperboard substrate by use of any known application technique such as surface sizing, lamination or coating, including but not limited to, spraying, curtain coating, extrusion coating, film press coating, blade coating or foam coating.

The metal salt is of a monovalent or, more preferably, a multivalent metal, such as a divalent or trivalent metal.

Said salts may e.g. be calcium chloride, aluminum chloride, magnesium chloride, magnesium bromide, calcium bromide, barium chloride, calcium nitrate, magnesium nitrate, barium nitrate, calcium acetate, magnesium acetate or barium acetate or a mixture of these. Most preferably, the salt is calcium chloride. The multivalent metal salt may be applied to the surface in an amount of at least 0.01 g/m², preferably in an amount of at least 0.1 g/m². Most preferably, the metal salt is applied to the surface in an amount of between 0.01 – 1 g/m². The method of the invention allows a small amount of the metal salt to be added to the surface of the substrate, and still affect the print quality positively, since the binder avoids penetration of the salt into the surface.

The polymer layer may comprise a thermoplastic polymer. The polymer may, for example, comprise polyethylene (PE), polyethylene terephthalate (PET), polypropylene (PP) and/or polylactic acid (PLA) and/or biobased materials of any of these including modifications of the mentioned thermoplastics. The polymer may be applied to the printed surface by use of any known coating or film application technique, e.g. by extrusion coating. The polymer barrier coating layer can also be applied in one or several layers.

The invention further relates to a packaging material made by the method described above. A packaging material in accordance with the invention is suitable for packaging of e.g. dry or liquid food, cosmetic or pharmaceuticals.

5

The invention further relates to a packaging material comprising; a paperboard substrate, a first, innermost, layer comprising a binder, a second layer, applied on said first layer, comprising a metal salt of a mono- or multivalent metal, aqueous based ink printed on at least a part of said second layer and a polymer layer applied on said printed second layer.

15 The invention further relates to a packaging material comprising; a paperboard substrate, an innermost layer comprising a binder and a metal salt, aqueous based ink printed on at least a part of said innermost layer, and a polymer layer applied on said printed innermost layer.

20 Detailed Description

By "paperboard substrate comprising cellulosic fibres" is meant a base paperboard with a grammage of at least 150 gsm, more preferably of at least 180 gsm, comprising fibres from unbleached or bleached pulp which can be chemical pulp such as sulfate, kraft, soda or sulfite pulp, mechanical pulp, high refined pulp (MFC), thermomechanical pulp or chemi-thermomechanical pulp and the raw material can be based on softwood, hardwood, recycled fibres or non-wood suitable for making paperboard. Preferably, the paperboard substrate is a multilayer paperboard substrate comprising at least two plies, such as three plies; e.g. a top ply, a back ply and a middle ply. The paperboard substrate may be surface sized on

the surface of the top ply with e.g. starch and additives including pigmentation. Also the back ply may be surface sized and/or, pigmented or single or double coated.

5 By "microfibrillated cellulose" (MFC) is meant a material typically made from wood cellulosic fibres, both from hard-wood or softwood fibres. It can also be made from microbial sources, agricultural fibres such as wheat straw pulp, bamboo or other non-wood fibre sources. MFC is prepared from un-
10 treated, chemically (e.g. TEMPO oxidized or carboxymethylated) or enzymatically treated pulps followed by mechanically delamination of the fibers. In microfibrillated cellulose, the individual microfibrils have been detached from each other. A microfibrillated cellulose fibre is very thin (about 20
15 nm or less) and the length is often between 100 nm to 10 μm . However, the microfibrils may also be longer, for example between 10-200 μm . Microfibrillated cellulose (MFC) mentioned as a nanoparticle is also known as nanocellulose, nanofibrillated cellulose or cellulose nanofibrils (CNF). Nanocellulose
20 obtained by e.g. strong hydrolysis using sulphuric acid or HCl forms cellulose nanocrystals (CNC). By all these definitions, including combination of these materials, are in this context equally meant microfibrillated cellulose, MFC.

25 Fig. 1 is a schematic figure of a packaging material accord-
ing to the invention
Fig. 2 is a schematic figure of a second packaging material
according to the invention.

30 The packaging material shown in Fig. 1 comprises a paperboard substrate, an innermost layer (2) in direct contact with the paperboard substrate, which innermost layer comprises a bind-
er and a multivalent metal salt. The innermost layer is

printed with ink (3) and a polymer layer (4) is applied on said printed surface.

The packaging material shown in Fig. 2 comprises a paperboard substrate (1), a first, innermost, layer (2) comprising a binder, a second layer (3), applied on said first layer, which second layer comprises a metal salt, ink (4) printed on at least a part of said second layer (3) and a polymer layer (5) applied on said printed second layer.

10

In the context of this application, the term "innermost" means that the layer is applied directly on the paperboard substrate.

15

The ink used in the invention comprises pigments, or pigments and dyes, and may be aqueous or solvent based, or a mixture of aqueous and (co-)solvent thus forming a suitable carrier medium for the ink particles. Preferably, the ink comprises anionic nanoparticles (as colorants). Preferably, the ink is printed by use of inkjet printing, thus most preferably high speed inkjet either reel to reel or sheet fed, but other printing techniques are also applicable, such as flexographic, offset, liquid toner electrophotography printing and/or hybrid printing meaning for example a combination of flexography and inkjet. The substrate may be provided with an additional primer layer before being printed with the ink comprising pigments. Such a primer layer may comprise salt or ink without pigments and can be applied with either normal flexography, rotogravure methods which are obvious for a person skilled in the art. Thus, an additional primer layer can also be applied with the high speed inkjet prior to deposition of the inkjet inks.

10

The packaging material of the invention may be provided with further barrier layers. The back ply may e.g. be provided with polymer barriers in one or several layers.

5 Example

In order to evaluate the paperboard materials of the invention, a test series was performed in which the print quality and the polymer adhesion of paperboards treated in accordance with the invention was compared with a 10 conventional, untreated, paperboard. All paperboards in the test were of a three-ply construction, having top and back plies and a middle ply. The top ply comprised bleached sulphate pulp, the middle ply comprised CTMP and unbleached sulphate pulp and the back ply comprised unbleached sulphate 15 pulp. The basis weight of the paperboards was approximately 255 gsm. The inventive samples (2 - 5) were blade coated (blade coater equipped with applicator roll) in an amount of approximately 3 g/m² with multivalent metal salt (CaCl₂) and binder in accordance with table 1.

20

Comparative tests were performed on the reference paperboard (sample 1) and the paperboards of the invention (sample 2 - 5). All samples were printed with a Kodak desktop printer ESP 5 with colour ink cartridge 10, CAT394 7066 and black ink 25 cartridge 10, CAT 394 7058 (The said ink is comprises nanoparticle colorants). The print quality was evaluated by measuring Optical(Print) Density (OD), print mottle and horizontal bleeding. "Optical Density" was measured by color filter according to DIN 16536, by use of Greta Macbeth D19C 30 47B/P. SUM YCM means the sum of yellow, cyan and magenta, 100% tone areas, and is an indicative of the colour density. "Print Mottle" was measured in accordance with ISO 13660 by use of Scanner IAS. "Horizontal bleeding black" means that

the bleed of a black line printed on yellow printed background is measured in accordance to ISO 13660, by use of Scanner IAS.

5 Table 1

	Sample 1 (ref)	Sample 2	Sample 3	Sample 4	Sample 5
Cationic starch (15%), [pph]		70	50		60
MFC (2%), [pph]				60	
CaCl ₂ (30%) [pph]		30	20	20	20
PolyDADMAC [pph]				20	20
CMC [pph]			30		
Optical Density, K100 []	1,7	2,6	2,8	2,6	2,8
Optical Density SUM YCM100 []	2,4	3,4	3,5	3,4	3,7
Print mottle, magenta (100% area). []- com- ment other sa- me trend	2,3	1,2	1,0	0,6	0,7
Horizontal Bleeding black, line width [μm]	1680	1350	1340	1330	1320

The print quality measurements are also summarized in table 1. The comparison shows that the print quality was remarkable better for the samples treated in accordance with the 10 invention compared to the reference paperboard. The highest optical density, lowest mottle and lowest bleeding were

12

observed for the sample treated with polyDADMAC, starch and salt.

All paperboards were thereafter coated in a blade coater with 5 polyethylene in an amount of approximately 14 g/m². The polymer adhesion to the reference paperboard (sample 1), to the paperboard treated with MFC, polyDADMAC and salt and to the paperboard treated with polyDADMAC, starch and salt was measured. The polymer adhesion measurements are summarized in 10 table 2.

Table 2

	Sample 1 (ref)	Sample 4	Sample 5
PE adhesion, [N/m]	70,9	67,4	PE was too tight to release.

As can be seen in table 2, the paperboard treated with MFC, 15 polyDADMAC and metal salt showed comparable polymer adhesion as the reference board, while the paperboard treated with polyDADMAC, cationic starch and metal salt showed much stronger polymer adhesion. Thus, the results show that the treatment according to the invention gives rise to paperboard 20 with much higher print quality and comparable or enhanced polymer adhesion.

Claims

1. A method of manufacturing a packaging material comprising the steps of;
 - 5 - providing a paperboard substrate, comprising cellulosic fibres,
 - treating at least one surface of said substrate with a binder and with a metal salt,
 - printing at least a part of said treated surface
 - 10 with ink, and
 - applying at least one polymer layer on said printed surface,wherein said binder comprises polyDADMAC and starch or polyDADMAC and microfibrillated cellulose (MFC).
15
2. A method according to claim 1, wherein MFC is applied to the surface in an amount of at least 0.1 g/m².
- 20 3. A method according to claim 1, wherein starch is applied to the surface in an amount of at least 0.1 g/m².
4. A method according to any one of claims 1 - 3, wherein polyDADMAC is applied to the surface in an amount of at
25 least 0.05 g/m².
5. A method according to anyone of claims 1 - 4, wherein the binder is applied in a separate step, prior to the treatment of the surface with a metal salt.
30
6. A method according to anyone of claims 1 - 4, wherein the treatment with a binder and a metal salt is done by

addition of a composition comprising a binder and a metal salt to the surface of the paperboard substrate.

7. A method according to any one of claims 1 - 6, wherein the
5 metal salt is applied to the surface in an amount of at least 0.01 g/m².

8. A method according to any one of claims 1 - 7, wherein the
10 polymer layer comprises polyethylene (PE), polyethylene terephthalate (PET), polypropylene (PP), polylactic acid (PLA), or any biobased material thereof.

9. A packaging material comprising;
15 - a paperboard substrate,
 - a first, innermost, layer comprising a binder,
 - a second layer, applied on said first layer, comprising a metal salt,
 - aqueous based ink printed on at least a part
20 of said second layer, and
 - a thermoplastic polymer layer applied on said printed second layer,
 wherein said binder comprises polyDADMAC and starch or polyDADMAC and microfibrillated
25 cellulose (MFC) .

10. A packaging material comprising;
30 - a paperboard substrate,
 - an innermost layer comprising a binder and a metal salt,
 - aqueous based ink printed on at least a part
 of said innermost layer, and

- a thermoplastic polymer layer applied on said printed innermost layer,
wherein said binder comprises polyDADMAC and starch or polyDADMAC and microfibrillated cellulose (MFC).
5

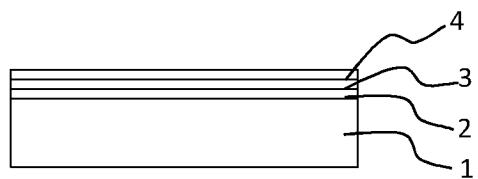


Fig. 1

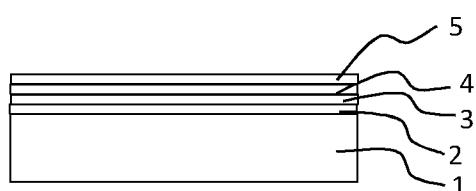


Fig. 2

