




(86) Date de dépôt PCT/PCT Filing Date: 2009/10/30
(87) Date publication PCT/PCT Publication Date: 2010/06/03
(45) Date de délivrance/Issue Date: 2018/02/06
(85) Entrée phase nationale/National Entry: 2011/05/31
(86) N° demande PCT/PCT Application No.: US 2009/005902
(87) N° publication PCT/PCT Publication No.: 2010/062361
(30) Priorité/Priority: 2008/10/31 (US61/197,981)

(51) Cl.Int./Int.Cl. *C08G 65/40* (2006.01),
C08L 71/10 (2006.01)
(72) Inventeurs/Inventors:
WANG, YI-FENG, US;
HSU, TIM, US;
HAY, ALLAN S., CA
(73) Propriétaire/Owner:
POLYMICS, LTD, US
(74) Agent: PERRY + CURRIER

(54) Titre : POLY(ARYLETHERCETONE) SEMI-CRISTALLINE TRANSFORMABLE A L'ETAT FONDU A HAUTE TEMPERATURE CONTENANT UN MOTIF COMONOMERE DE (4-HYDROXYPHENYL)PHTALAZIN-1(2H)-ONE
(54) Title: HIGH TEMPERATURE MELT PROCESSABLE SEMI-CRYSTALLINE POLY (ARYL ETHER KETONE) CONTAINING A (4-HYDROXYPHENYL) PHTHALAZIN-1(2H)-ONE COMONOMER UNIT

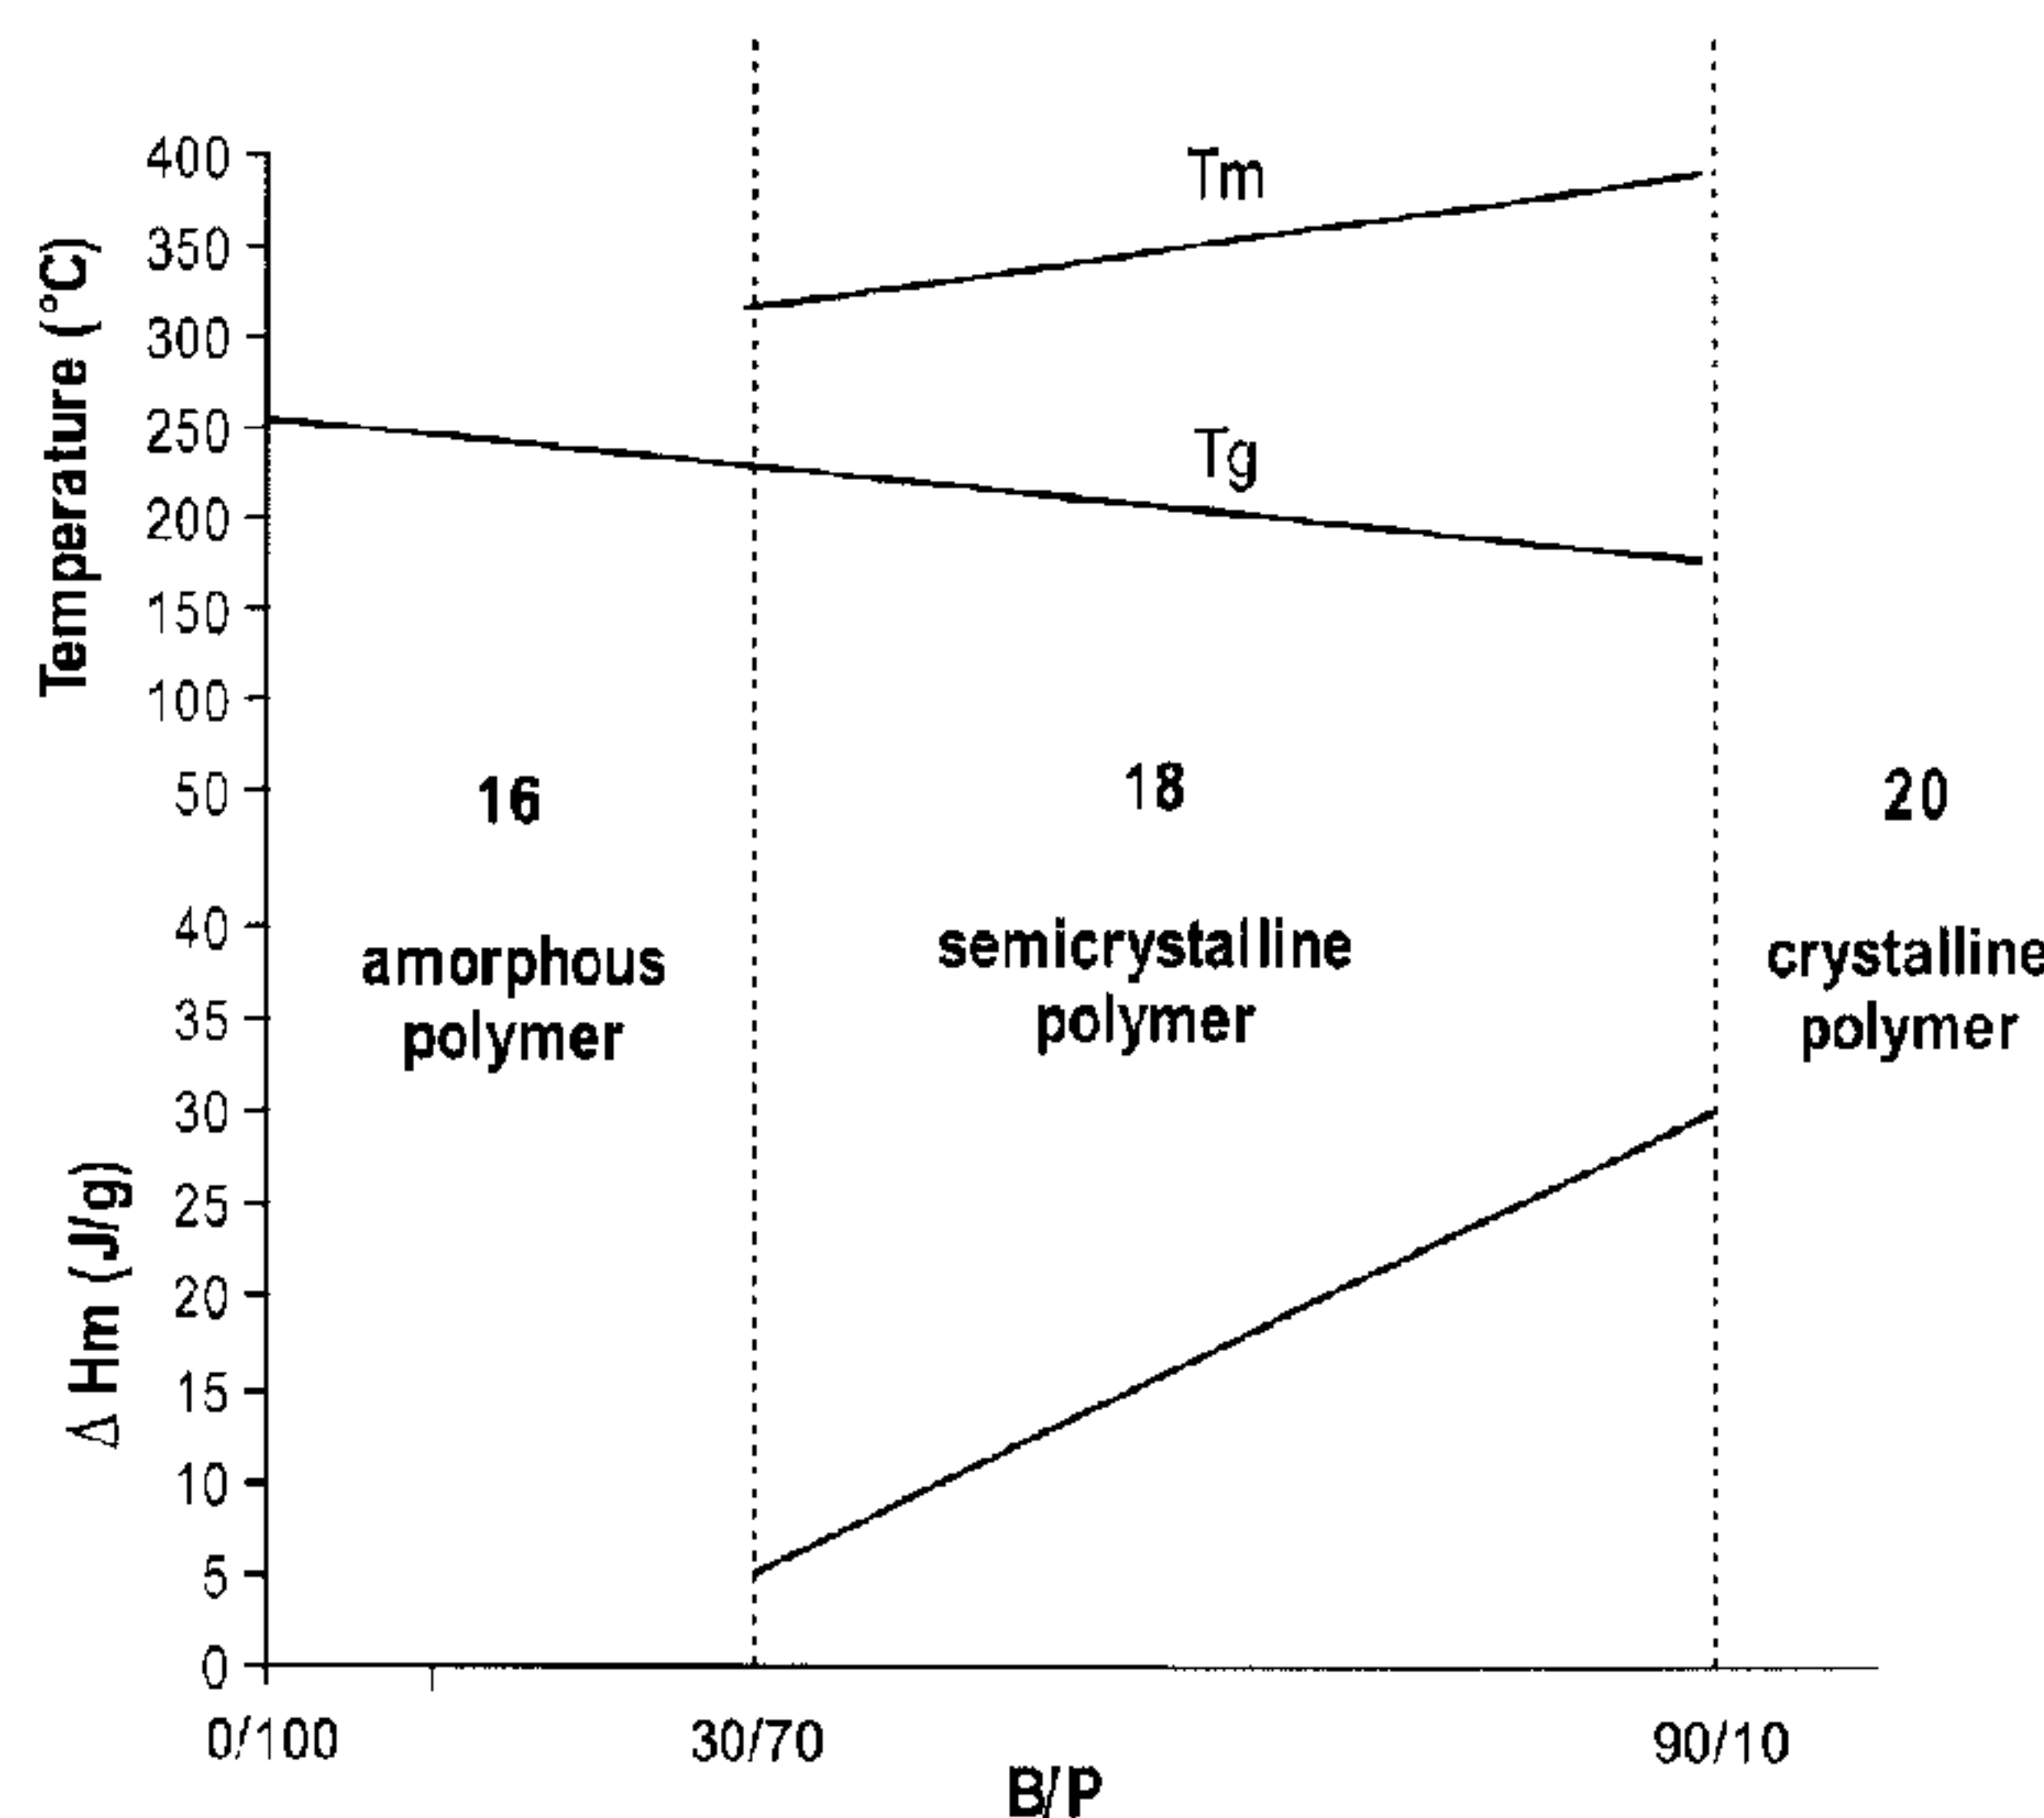

16: amorphous polymer
18: semicrystalline polymer
20: crystalline polymer

(57) Abrégé/Abstract:

Compositions and methods for a melt processable semicrystalline poly(aryl ether ketone) incorporating phthalazinone and 4,4'-biphenol as comonomer units are described herein. The polymers are resistant to and insoluble in common organic solvents and liquids as well as in aggressive organic solvents such as chloroform and chlorinated liquids. The polymers are melt processable via techniques such as extrusion, injection molding, and compression molding. The semicrystalline poly(aryl ether ketone) containing phthalazinone comonomer units have properties which make them suitable for manufacturing high temperature resistant molded systems and other articles.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
3 June 2010 (03.06.2010)

PCT

(10) International Publication Number
WO 2010/062361 A1(51) International Patent Classification:
C08G 63/02 (2006.01)(21) International Application Number:
PCT/US2009/005902(22) International Filing Date:
30 October 2009 (30.10.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/197,981 31 October 2008 (31.10.2008) US(71) Applicant (for all designated States except US):
POLYMICS, LTD [US/US]; 2215 High Tech Road,
State College, PA 16803 (US).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **WANG, Yi-Feng**
[CA/US]; 21 Stablegate Drive, Clifton Park, NY 12065
(US). **HSU, Tim** [US/US]; 1345 Megan Drive, State Col-
lege, PA 16803 (US). **HAY, Allan, S.** [CA/CA]; 5015
Glencairn Avenue, Montreal, QC H3W 2B3 (CA).(74) Agent: **OLUWOLE, Livinia, N.**; McQuaide, Blasko,
Fleming & Faulkner, Inc., 811 University Drive, State
College, Pennsylvania 16801 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT,
TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

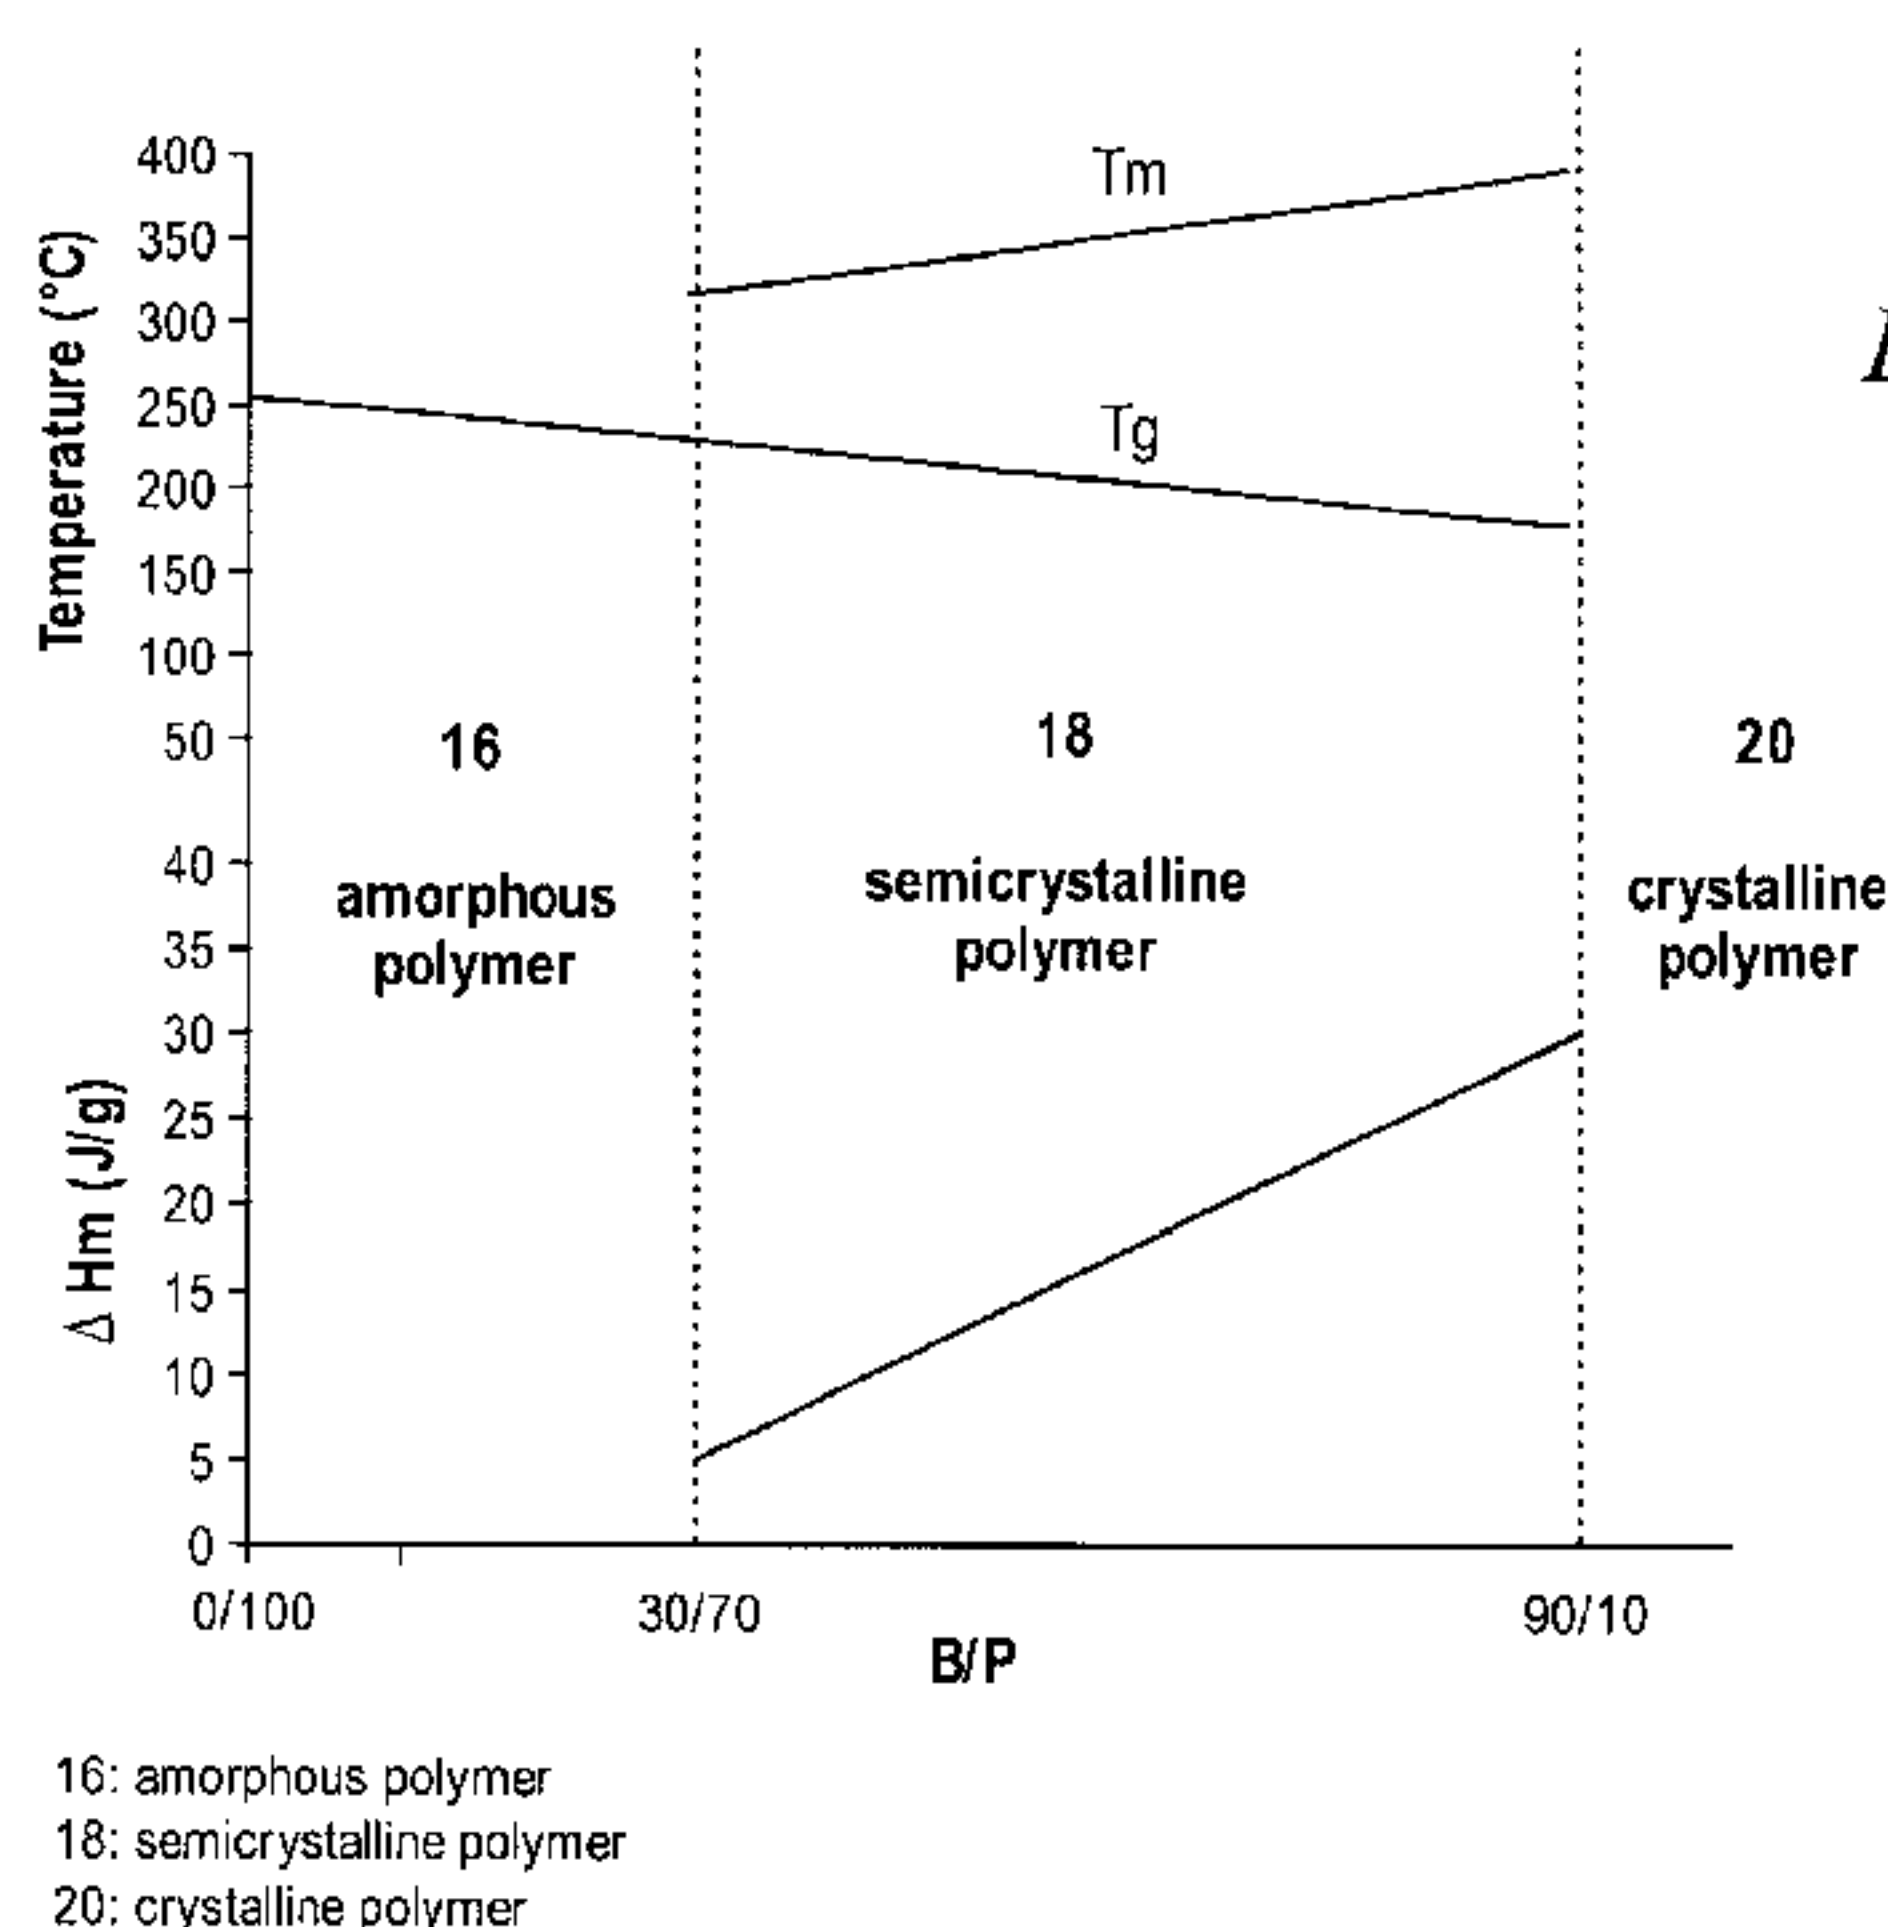(54) Title: HIGH TEMPERATURE MELT PROCESSABLE SEMI-CRYSTALLINE POLY (ARYL ETHER KETONE) CON-
TAINING A (4-HYDROXYPHENYL) PHTHALAZIN-1(2H)-ONE COMONOMER UNIT(57) Abstract: Compositions and methods for a melt processable semicrystalline poly(aryl ether ketone) incorporating phthalazi-
none and 4,4'-biphenol as comonomer units are described herein. The polymers are resistant to and insoluble in common organic
solvents and liquids as well as in aggressive organic solvents such as chloroform and chlorinated liquids. The polymers are melt
processable via techniques such as extrusion, injection molding, and compression molding. The semicrystalline poly(aryl ether ke-
tone) containing phthalazinone comonomer units have properties which make them suitable for manufacturing high temperature
resistant molded systems and other articles.

WO 2010/062361 A1

HIGH TEMPERATURE MELT PROCESSABLE SEMI-CRYSTALLINE POLY(ARYL ETHER KETONE) CONTAINING A (4- HYDROXYPHENYL)PHTHALAZIN-1(2H)-ONE COMONOMER UNIT

RELATED APPLICATIONS

This application claims priority to U.S. Provisional Application No. 61/197,981, filed
5 October 31, 2008.

INTRODUCTION


The present teachings are directed to semicrystalline poly(aryl ether ketone) polymers
in which are incorporated a (4-hydroxyphenyl)phthalazin-1(2h)-one (phthalazinone)
10 comonomer unit, which polymers exhibit ultra high temperature properties suitable for
manufacturing high temperature resistant molded systems and other articles of manufacture.

Poly(aryl ether ketone)s with high heat resistance and chemical resistance are highly
desirable for the manufacture of molded articles for demanding automotive, aerospace,
electronics and oil field applications. Poly(aryl ether ketone)s are important engineering
15 resins because of their generally excellent properties, such as good mechanical properties at
elevated temperatures, exceptional chemical resistance against organic solvents, and strong
acids and bases, fire resistance and electrical insulating.


In fact, certain poly(aryl ether)s such as poly(aryl ether sulfone)s and poly(aryl ether
ketone)s are high temperature engineering thermoplastic resins that have been extensively
20 used for a wide range of commercial applications when resistance to high temperatures is
required. However, all currently known polymers of this type have significant commercial
disadvantages. For instance, commercially available poly(aryl ether sulfone)s typically have
glass transition temperatures (T_g) from 180°C to 220°C, but they are amorphous and thus
have poor resistance to organic solvents and liquids. Thus, they are not suitable for use in
25 many industrial or commercial applications. Similarly, commercially available poly(aryl
ether ketone)s are crystalline and have excellent resistance to organic solvents and liquids.
However, their T_g is low, typically in the range of 143°C to 170°C. This limits their use
commercially and industrially.

The present teachings disclose a family of melt processable semicrystalline polymers that have a Tg of about 185°C to 240°C and maintain good chemical resistance to organic solvents and liquids.

In order to describe the novelty and usefulness of the present inventors' new family of polymers, a brief summary of known synthetic methods is necessary. One route to the synthesis of poly(aryl ether ketone) polymers is by the reaction of salts of dihydroxyaromatic compounds, such as hydroquinone, with activated dihaloaromatic molecules. One commercially available group of poly(ether ether ketone), available from Victrex® PEEK Polymers, is conventionally made by the nucleophilic polycondensation of hydroquinone with 4,4'-difluorobenzophenone in the presence of anhydrous potassium carbonate and is prepared at elevated temperatures (320°C) in diphenyl sulphone as such solvent as described, for example, in U.S. Patent No. 4,320,220. This polymer has a melting temperature (Tm) of 334°C and a glass transition temperature (Tg) of about 143°C.

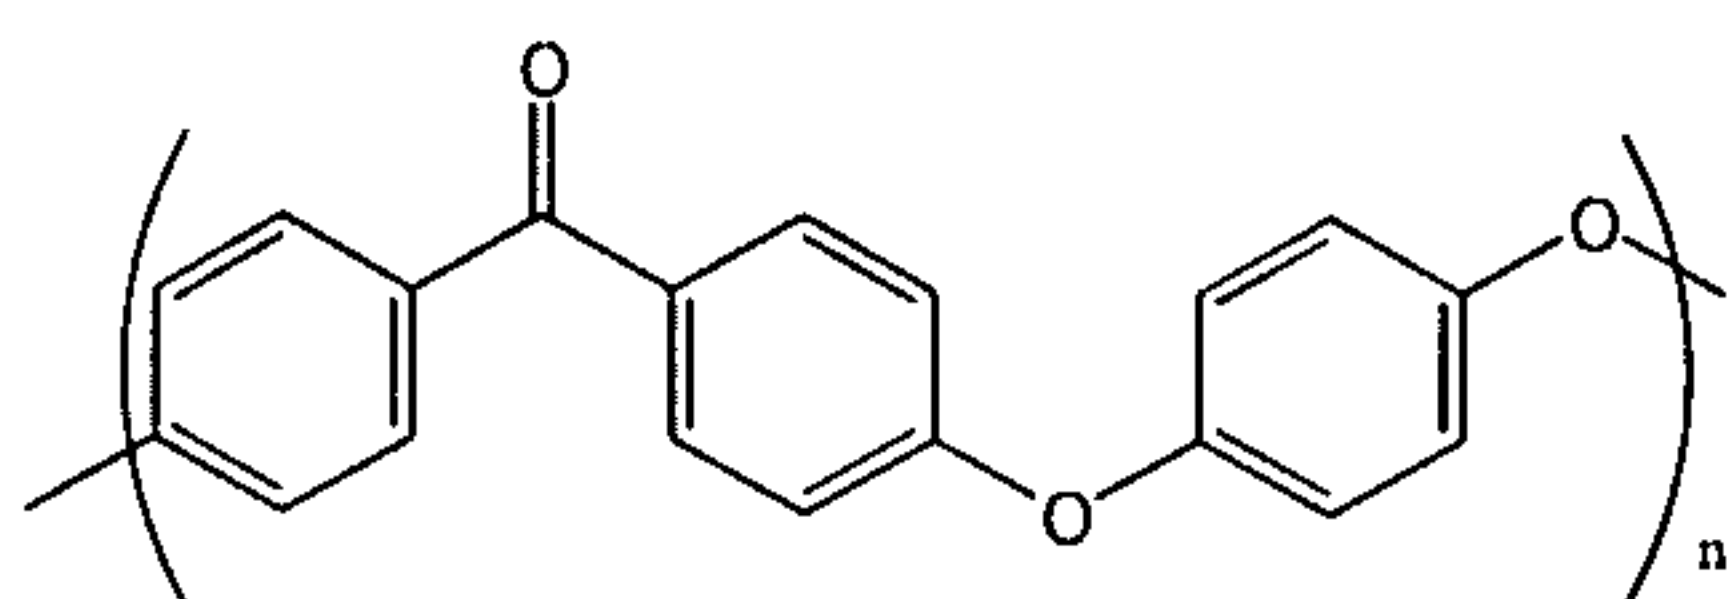

Subsequently in U.S. Patent No. 4,717,761, the corresponding poly(biphenol ether ketone) from 4,4'-biphenol was synthesized. This polymer has a melting point of 416°C and a Tg of 167°C, and is not melt processable.

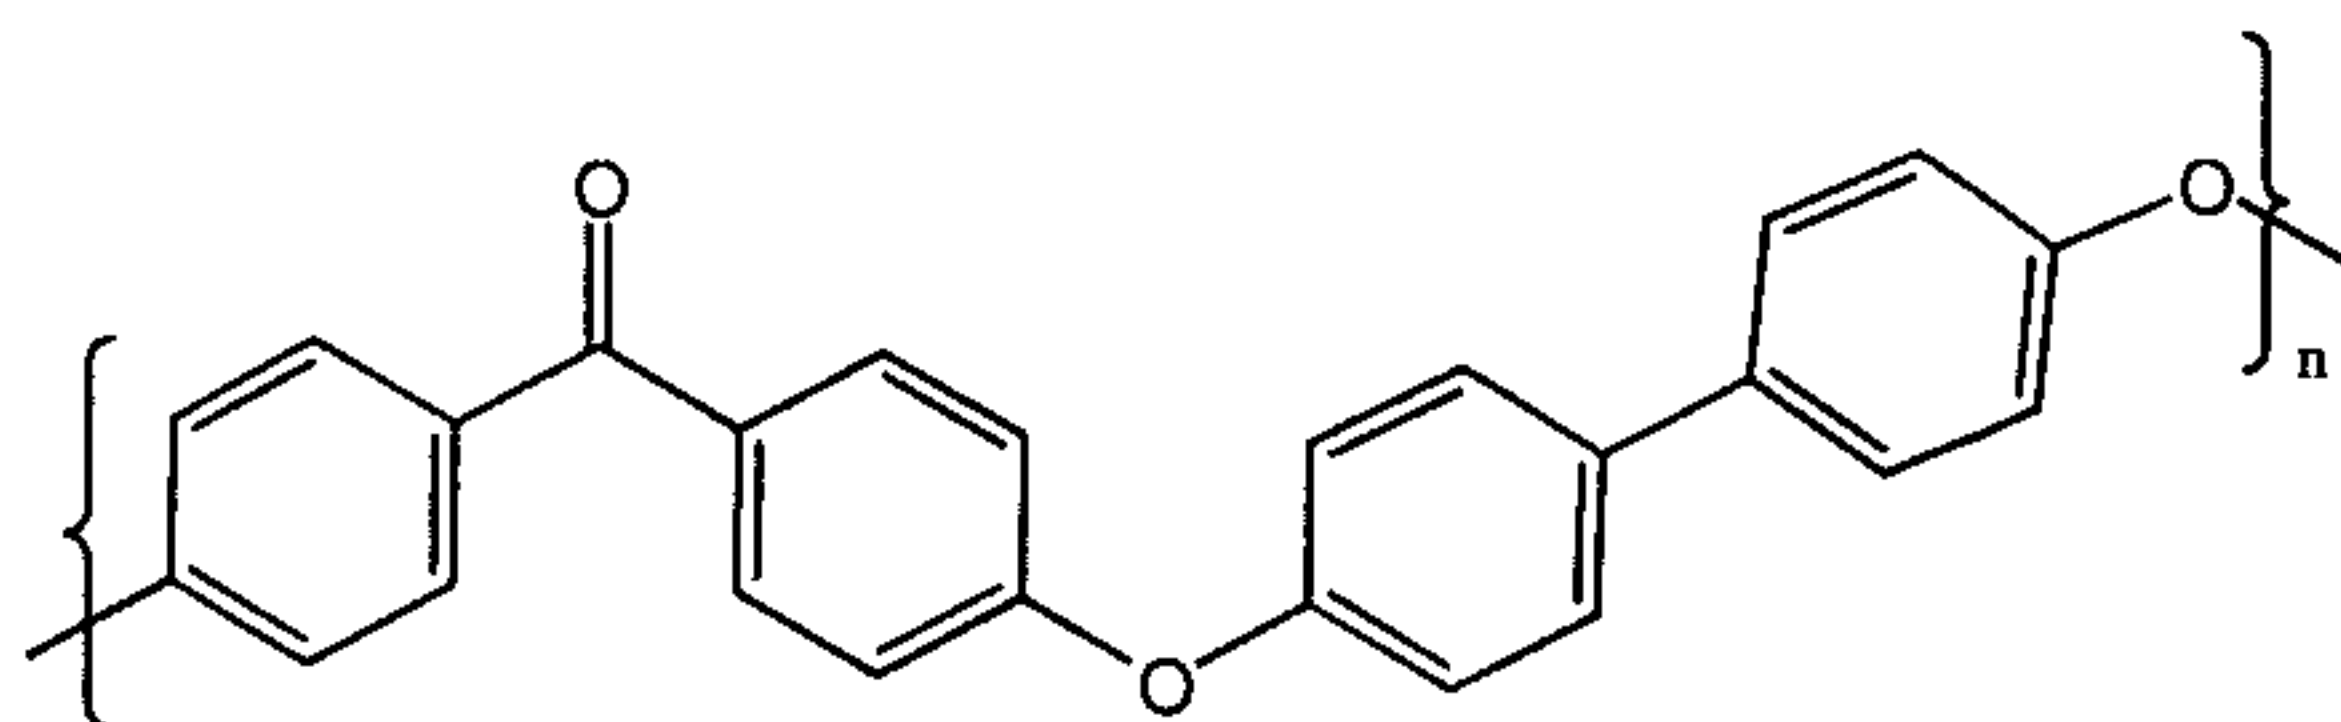

Copoly(ether ether ketone)s of hydroquinone (I) and 4,4'-biphenol (II) were also synthesized with a Tm and a Tg between those of the two homopolymers as illustrated in Table I.

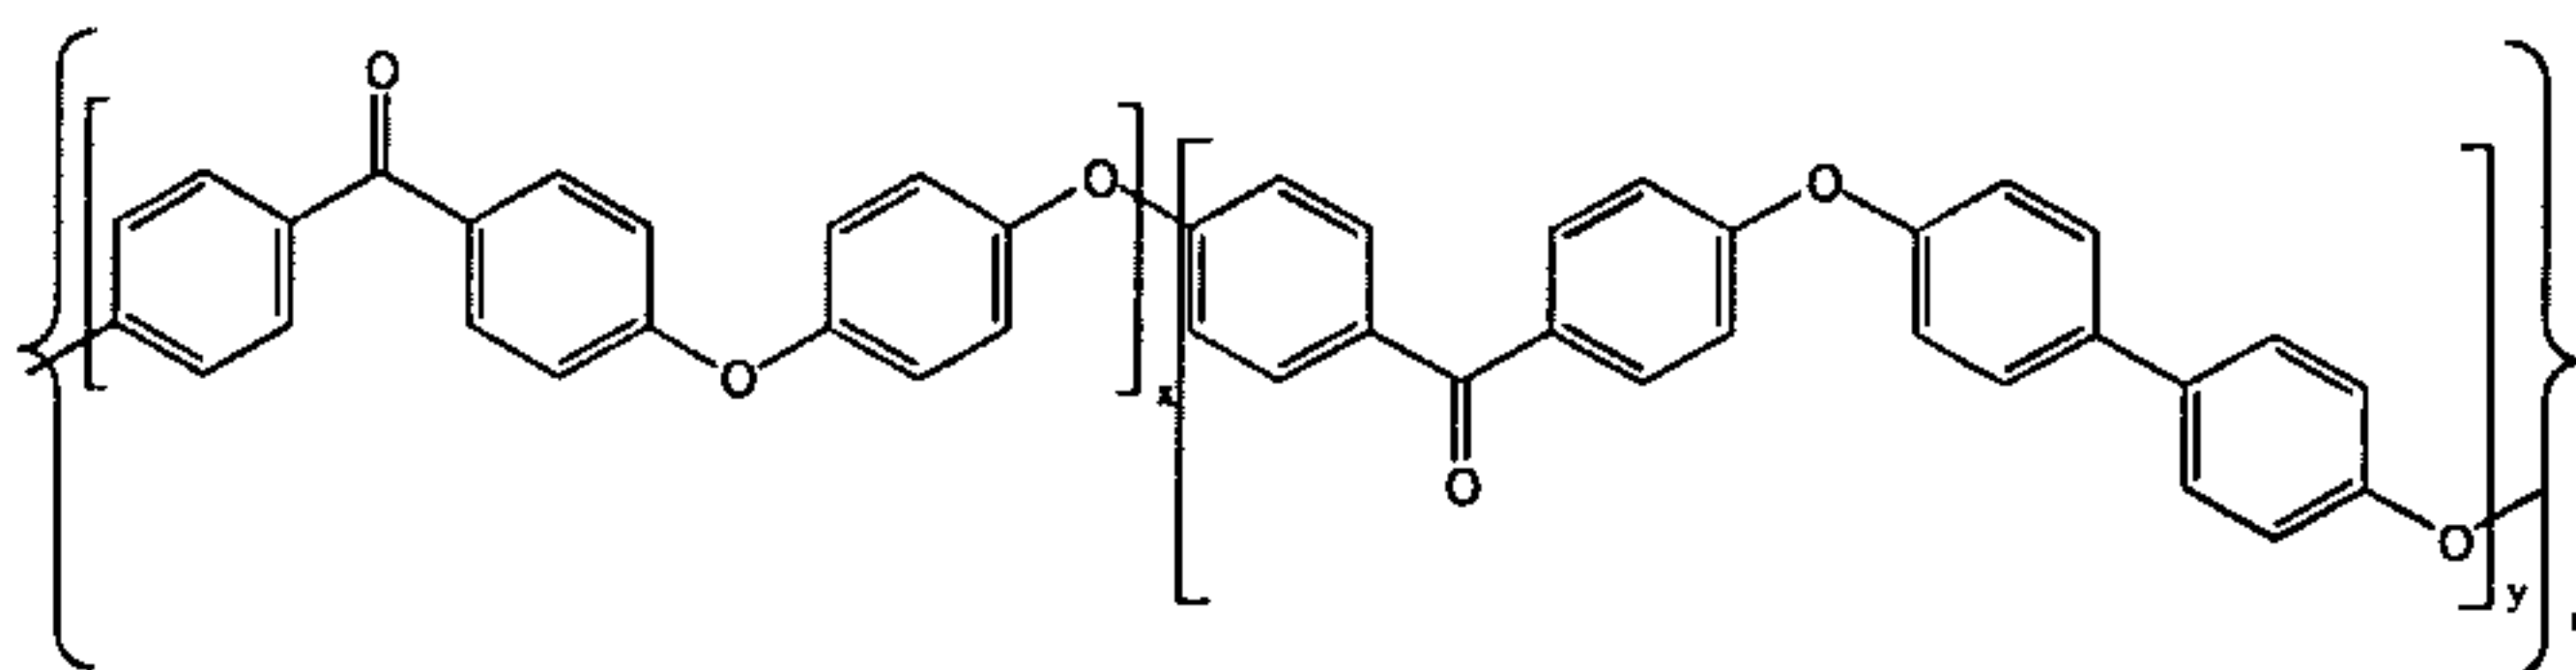


TABLE I

Example or Comp. Example	Molar Proportions		T _g (a) (°C)	T _m (b) (°C)	MV (c) (kN · s · m · ⁻²)
	I (%)	II (%)			
A	100	0	143	334	0.49
4	95	5	146	328	0.40
2	90	10	146	322	0.65
3	85	15	148	315	0.45
1	80	20	149	309	0.43
5	65	35	156	313	0.26 [*]
B	50	50	160	341	1.2 ^{**}
C	0	100	167	416	0.58 ^{**}

(a) is the glass transition temperature

(b) is the crystalline melting temperature

(c) MV is the melt viscosity

(U.S. Patent No. 4,717,761)

It was demonstrated in U.S. Patent No. 4,868,273 to Daniels that poly(aryl ether ketone)s are generally highly crystalline with T_m of at least 300°C but with T_g typically below 180°C and often in the range of 140°C to 160°C. Daniels states that these polymers are therefore not suitable for applications that require mechanical properties at elevated temperatures since an appreciable portion of their mechanical properties are lost at temperatures around the T_g. These polymers are not suitable for applications that require the retention of mechanical properties such as modulus at temperatures of 180°C or higher.


Daniels teaches preparing poly(aryl ether) block copolymers by polymerization of 4-(4-chlorobenzoyl)-4'-hydroxybiphenyl in the presence of the poly(ether sulfone) synthesized from 4,4'-(-(4-chlorophenylsulphonyl)biphenyl and 4,4'-dihydroxydiphenylsulphone. The resulting block copolymer has a T_g of 213°C and a T_m of 388°C. This high T_g block copolymer is prepared in two steps: synthesis of high T_g amorphous poly(aryl ether sulfone) block followed by copolymerization with a ketone monomer to form a crystalline poly(aryl

* The intrinsic viscosity (IV) of the polymer was measured at 25°C on a solution of the polymer in concentrated sulphuric acid of density 1.84 g cm⁻³, said solution containing 0.1 g of polymer per 100 cm³ of solution. An IV of 0.92 is equivalent to an MV of about 0.26.

** The reduced viscosity (RV) of the polymer was measured at 25°C on a solution of the polymer in concentrated sulphuric acid of density 1.84 g cm⁻³, said solution containing 1 g of polymer per 100 cm³ of solution, the measurement being taken immediately after dissolution of the polymer is complete. An RV of 1.78 is equivalent to an MV of about 1.2. An RV of 1.28 is equivalent to an MV of about 0.58.

15


10

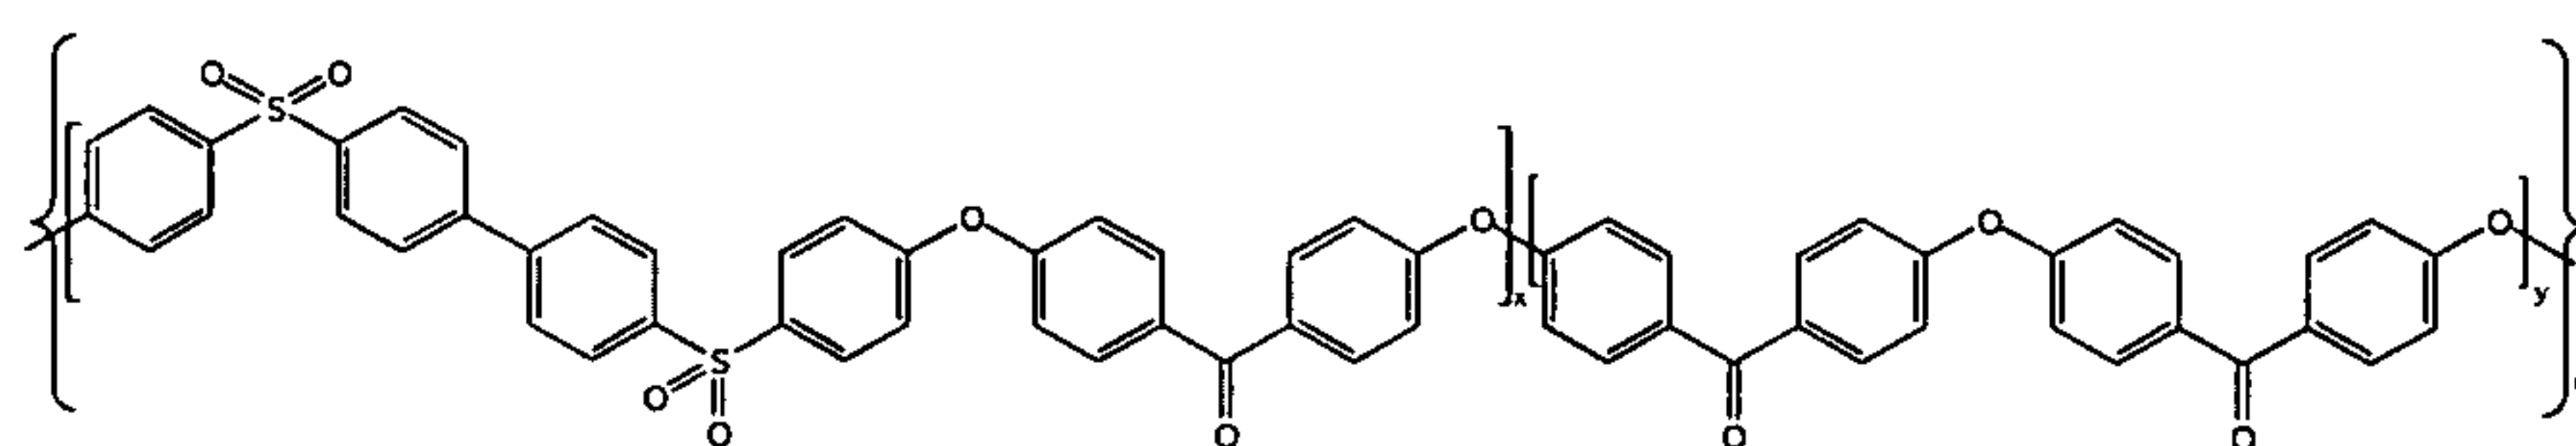


20

(U.S. Patent No. 5,654,393)

25

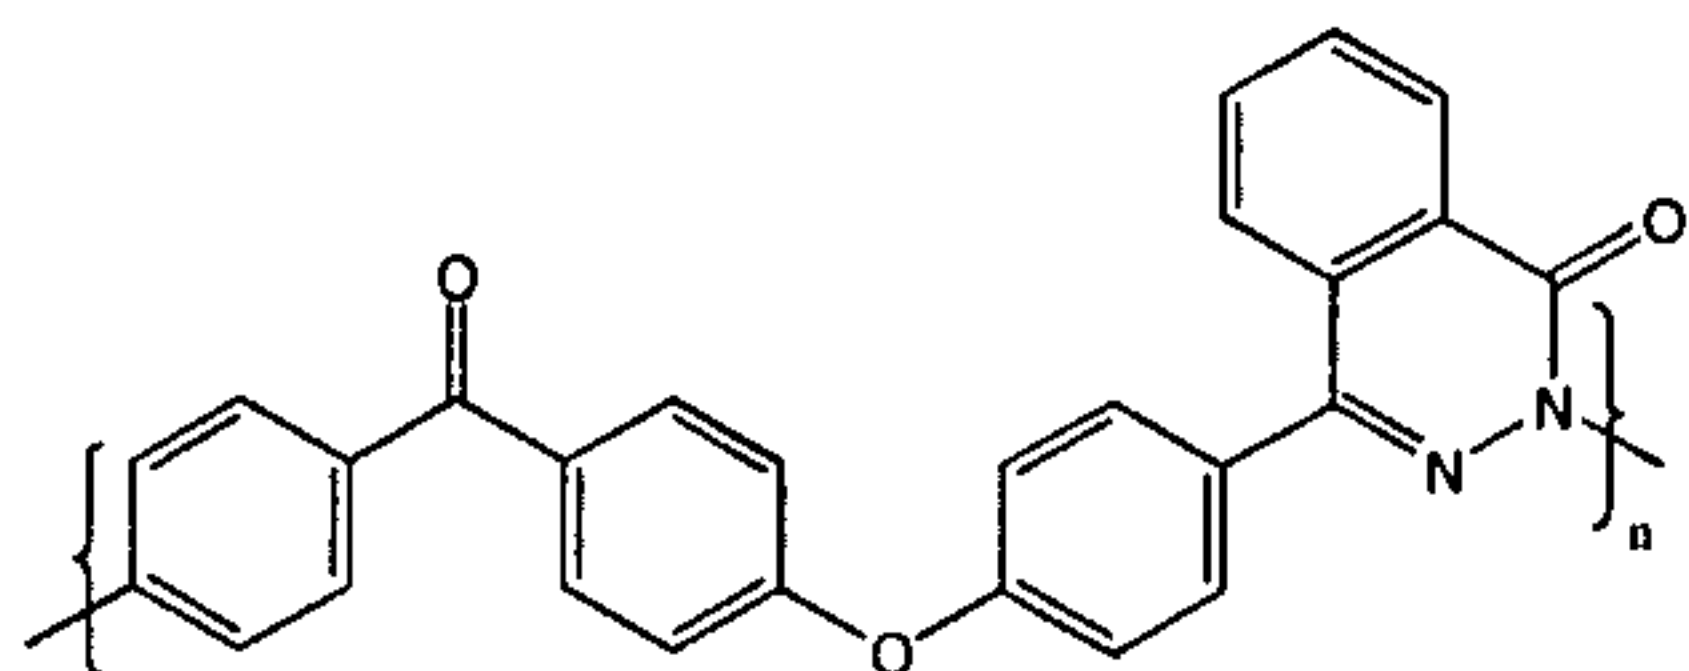

Hay, et al. (*Journal of Polymer Science: Part A: Polymer Chemistry*, Vol. 37, 1781–1788, 1999) also teach preparing poly(aryl ether ketone) copolymer from 4,4'-difluorobenzophenone, hydroquinone and 4-(4-hydroxyphenyl)phthalazin-1(2H)-one (phthalazinone).

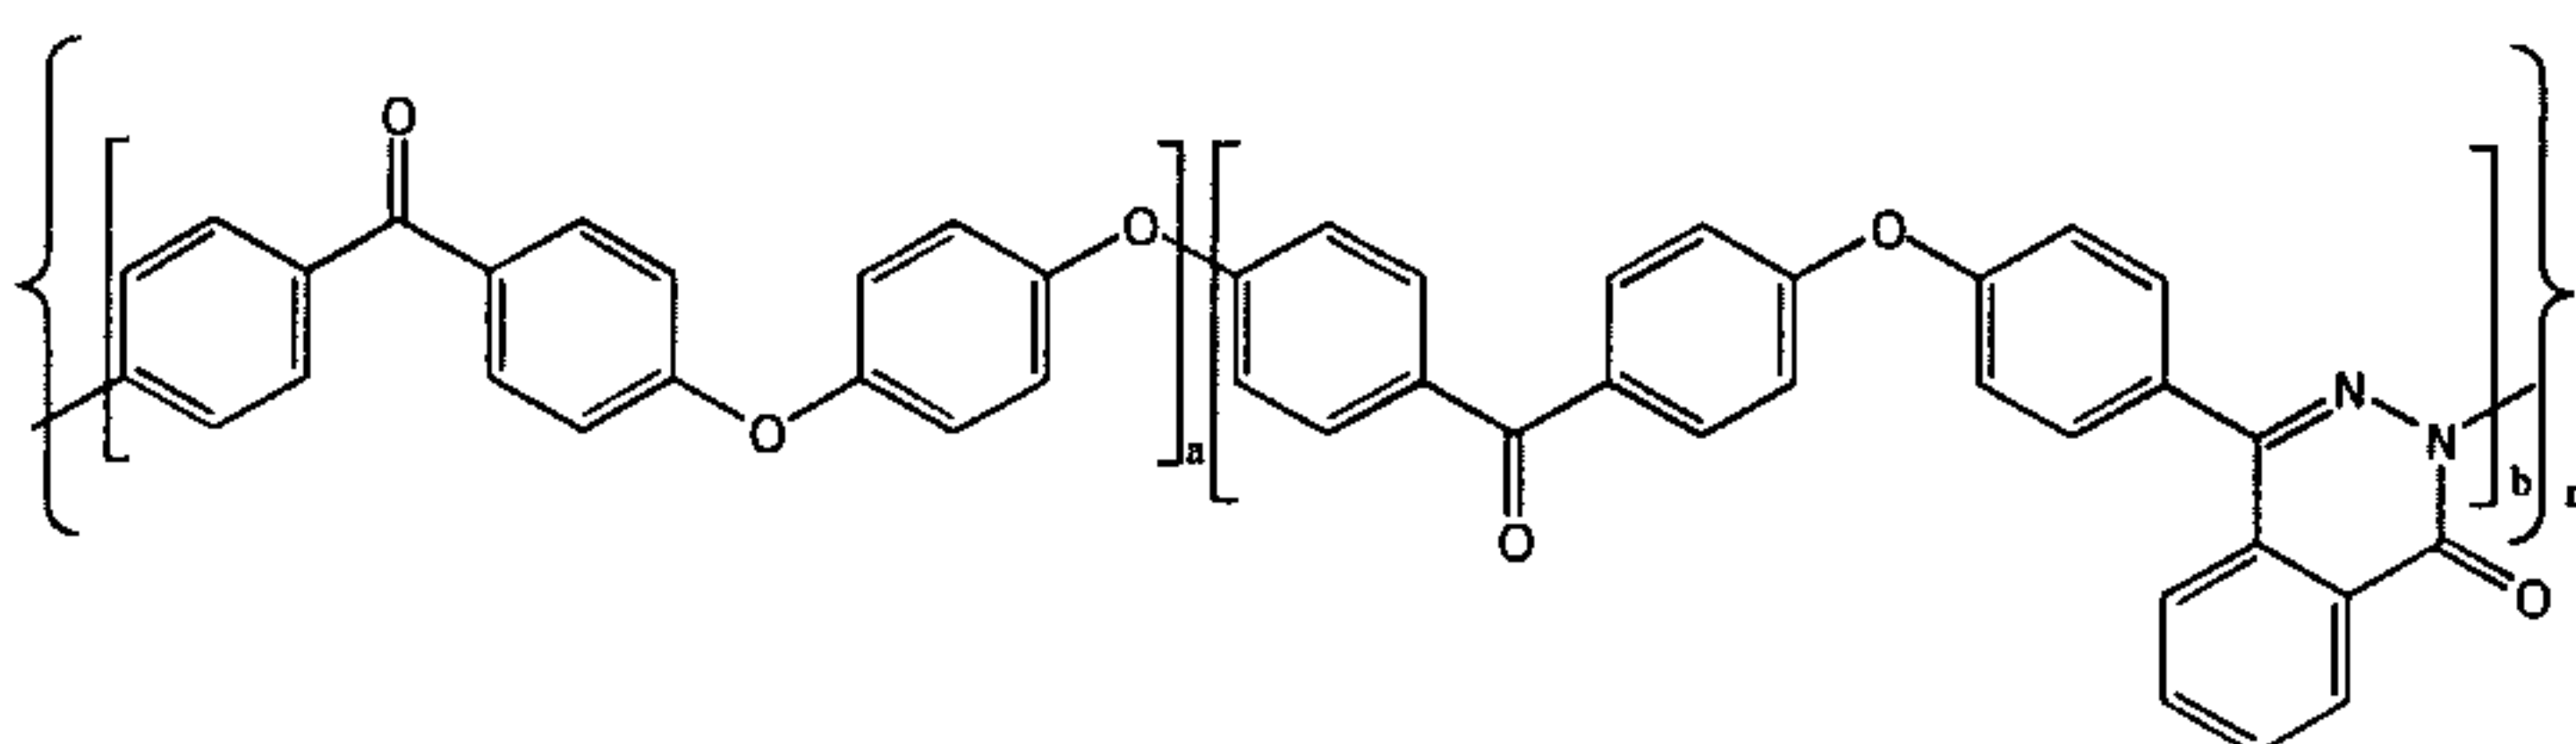

With the incorporation of 4-(4-hydroxyphenyl)phthalazin-1(2H)-one, the resulting poly(aryl ether ketone) copolymer has a higher glass transition temperature than poly(ether ether ketone) (PEEK). However, the crystallinity of the copolymer is dramatically reduced. Consequently, the chemical resistance of this higher Tg copolymer is significantly reduced. For example, when the molar ratio of phthalazinone monomer and hydroquinone is 35/65, the resulting copolymer is completely soluble in chloroform. (The inherent viscosities and molecular weights in Table III were measured using chloroform as a solvent.) This copolymer has a Tg of 194°C and a melting point of 252°C, with a weak melting endotherm of 0.5 J/g after melt as shown in Table IV. This indicates that this copolymer has very poor chemical resistance against organic solvents after melt processing. Even when the molar ratio of phthalazinone monomer and hydroquinone is reduced to 20/80, the resulting copolymer has a low melting point of 288°C with a very weak melting endotherm of 0.1 J/g after melt (Table IV). To maintain sufficient crystallinity, only 10 mol% phthalazinone can be incorporated. The resulting copoly(aryl ether ketone) has a Tg of 161°C and a Tm of 315°C with a strong melting endotherm of 21.8 J/g after melt (Table IV). The result is that although the Tg is 18°C higher than PEEK, the melting temperature is 28°C lower than PEEK such that it does not improve thermal performance significantly.

TABLE III

Molecular Weights of PAEKs

PAEK	η_{inh} (dL/g)	$\overline{M}_n$	$\overline{M}_x$	MDI ^a	Yield (%)
PAEK(10/90)	0.84 ^b	c	c		99.5
PAEK(20/80)	0.83 ^b	c	c		93.0
PAEK(35/65)	0.65	28,389	89,365	3.15	88.1
PAEK(50/50)	0.60	24,967	100,336	4.02	86.0
PAEK(65/35)	0.63	26,003	118,280	4.36	80.0
PAEK(80/20)	0.36	9,218	19,753	2.14	81.2
PAEK(1000/0)	0.39	11,809	26,371	2.23	80.0

5 $\overline{M}_n$ and $\overline{M}_w$ were determined by GPC using chloroform as solvent.

^a Molecular weight distribution index

^b 0.5g/dL in 98% sulfuric acid

^c Insoluble in CHCl_3

10 (*Journal of Polymer Science: Part A: Polymer Chemistry*, Vol. 37, 1781–1788, 1999)

TABLE IV

Thermal Properties for PAEKs


PAEK	1 st Scan			2 nd Scan			TGA		
	T_g (°C)	T_m (°C)	ΔH (J/g)	T_g (°C)	T_c (°C)	T_m (°C)	ΔH (J/g)	T_{ca} (°C)	T_{max} (°C)
PAEK (10/90)		322.1	49.2	161.8	234.0	315.2	21.8	554.5	560.3
PAEK (20/80)	178.8	288.8	16.9	171.9		288.8	0.1	508.2	516.3
PAEK (35/65)	206.4	258.8	5.7	194.2		253.8	0.5	501.0	551.8
PAEK (50/50)	208.8	253.9	0.5	210.0		252.8	0.5	500.9	520.8
PAEK (65/35)	220.5	252.4	0.2	222.3		252.1	0.1	495.4	516.9
PAEK (80/20)	230.5	252.4	0.1	233.9		251.2	0.1	499.9	516.0
PAEK (100/0)	264.0			264.0				482.8	508.0

^a T_{max} is the maximum loss temperature of PAEKs determined by TGA.

Finally, Jian, et al. (*Journal of Applied Polymer Science*, Vol. 104, 1744–1753, 2007)

20 teach preparing poly(ether ether ketone ketone) (PEEKK) by polymerization of 1,4-bis(4-fluorobenzoyl)benzene with hydroquinone (HQ) and 4-(4-hydroxyphenyl)phthalazin-1(2H)-

one (DHPZ) (Table V) with T_g of 171 to 232°C and T_m of 292 to 355°C as shown in Table VI.

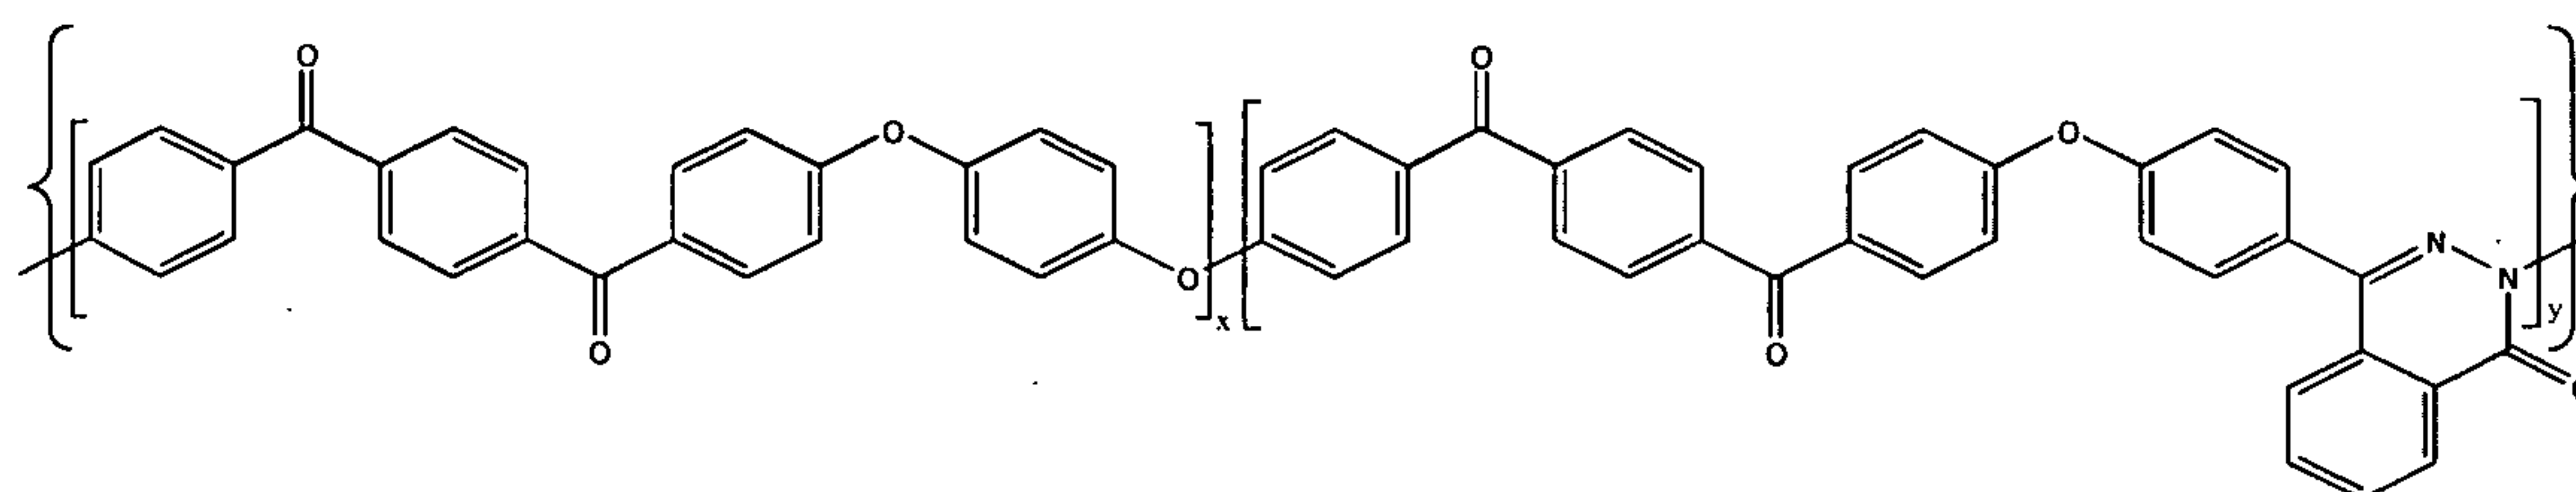

5

TABLE V

The Compositions and Physical Properties of PAEK Copolymers

Copolymers	Copolymer Composition DHPZ/HQ	Yield (%)	Color	$\bar{M}_n^a$	MDI ^b	Weight Loss ^c (%)
PAEK19	10/90	90	Yellow	6,700 ^d	— ^e	0.82
PAEK28	20/80	90	Yellow	7,500 ^d	—	0.71
PAEK37	30/70	90	Yellow	8,200 ^d	—	0.55
PAEK46	40/60	90	White	9,800 ^d	—	1.38
PAEK55	50/50	90	White	11,000 ^d	—	1.42
PAEK64	60/40	93	White	56,000	2.01	1.01 ^f
PAEK73	70/30	93	White	71,000	2.63	0.76 ^f
PAEK82	80/20	93	White	29,000	3.95	0.67 ^f
PAEK91	90/10	93	White	27,000	2.45	0.31 ^f

10 ^a Detected in chloroform by GPC.

^b Molecular weight distribution index.

^c Determined by measuring the residual polymers extracted with chloroform.

^d Measured in concentrated sulfuric acid by ¹⁰FNMR.

^e Not tested.

15 ^f Determined by measuring the polymers precipitated from chloroform.

(*Journal of Applied Polymer Science*, Vol. 104, 1744-1753, 2007.)

20

TABLE VI

 T_g and T_m Values of PAEK Copolymers

Copolymers	Solubility ^a					
	$T_g(^{\circ}\text{C})^a$	$T_g(^{\circ}\text{C})^b$	$T_g(^{\circ}\text{C})^c$	$T_m(^{\circ}\text{C})^a$	$\Delta H(\text{Jg}^{-1})^a$	$T_m(^{\circ}\text{C})^b$
PEKK	162	162	162(T_{gl})	362	46.7	362
PAEK19	171	168	169	355	38.2	352
PAEK28	182	179	177	347	30.1	344
PAEK37	192	188	185	338	26.4	336
PAEK46	199	195	193	327	22.3	323

PAEK55	202	200	201	313	12.9	309	10.7
PAEK64	207	208	209	297	8.5	293	5.9
PAEK73	216	216	218	288	0.3	285	0.1
PAEK82	222	224	227	292	0.1	290	0.1
PAEK91	233	235	236	— ^d	—	—	—
PPEKK	245	245	246(T _{g2})	—	—	—	—

^a Values of the first scan from DSC measurements conducted at a heating rate of 10°C min⁻¹ in nitrogen.

^b Values of the second scan from DSC measurements conducted at a heating rate of 10°C min⁻¹ in nitrogen.

^c Calculated from the Fox equation.

5 ^d No obvious peak was detected.

(*Journal of Applied Polymer Science*, Vol. 104, 1744-1753, 2007.)

10 In this family of polymers, in order to maintain good chemical resistance of the resulting polymer, the phthalazinone/hydroquinone ratio has to be less than 40/60. As illustrated in Table VII, polymers with phthalazinone/hydroquinone ratios of 40/60 (e.g., PAEK46) or higher (PAEK55, PAEK64, PAEK73, PAEK82 and PAEK91) are either partially or fully soluble in organic solvents such as chloroform, dimethylformamide (DMF), and tetrahydrofuran (THF). Thus, these polymers do not have good chemical resistance to
15 organic solvents or liquids.

Although polymers with phthalazinone/hydroquinone ratios of 30/70 or less (e.g., PAEK37, PAEK28 and PAEK19 in Table VII) are insoluble in these organic solvents, the resulting polymers are typically low molecular weight oligomers with Mn from 6700 to 11,000 (Table V). These polymers thus have poor mechanical properties and are brittle.
20 These oligomers, such as PAEK37, have an inherent viscosity (IV) of only 0.35 g/dL or less in 98% sulfuric acid. As a consequence, the oligomers have no practical use due to their poor mechanical properties.

TABLE VII

25

Solubility of PAEK Copolymers

Copolymers	Solubility ^a								Conc. H ₂ SO
	CHCl ₃	NMP	NB	TCE	DMA	DMF	THF	DMSO	
PEEK	—	—	—	—	—	—	—	—	+
PAEK19	—	—	—	—	—	—	—	—	+
PAEK28	—	—	—	—	—	—	—	—	+
PAEK37	—	—	—	—	—	—	—	—	+
PAEK46	±	±	±	±	—	—	—	—	+

PAEK55	±	±	±	±	—	—	—	—	+
PAEK64	+	+	+	+	±	±	±	—	+
PAEK73	+	+	+	+	±	±	±	—	+
PAEK82	+	+	+	+	±	±	±	—	+
PAEK91	+	+	+	+	±	±	±	—	+
PPEKK	+	+	+	+	±	±	±	—	+

^a Tested with 50 mg of the polymers in 1 ml of the solvent: +, totally soluble at 25°C for 12 h; ± partially soluble at 25°C for 12 h; — insoluble at 25°C for 12 h.

5 (Journal of Applied Polymer Science, Vol. 104, 1744-1753, 2007)

There is, therefore, a need for an ultra high temperature semicrystalline polymer (UHTSP) that is melt processable, and which exhibits, *inter alia*, the following defining characteristics:

A. Excellent Environmental Resistance.

i. Resistance to chlorinated solvents and strong polar solvents such as methyl ether ketone (MEK), methyl propyl ketone (MPK), strong acids and bases, etc.;

ii. Radiation resistance; and

15 iii. Hydrolysis resistance.

B. Mechanical Performance.

i. Wear resistance;

ii. Adequate stiffness, strength and impact properties; and

iii. Adequate ductility, with sufficient elongation to break.

20 **C. High Thermal Transitions.**

i. High glass transition temperature ($> 180^{\circ}\text{C}$); and

ii. High melt temperature ($> 300^{\circ}\text{C}$).

In addition, in order to achieve reasonable mechanical properties for commercially useful material, a UHTSP must achieve a sufficient degree of polymerization, typically measured by intrinsic viscosity (IV). A UHTSP with an IV of 0.5 is usually the threshold, but an IV of ≥ 0.7 is typically required to be a commercially viable polymer.

Environmental and high temperature resistance typically require a UHTSP to achieve a reasonable degree of crystallinity and crystallization rate when the polymer is further

processed using commercially available methods such as extrusion, injection molding and compression molding. In most engineering applications, a reasonable degree of crystallinity in UHTSP products will enhance the thermal resistance closer to the melting transition temperature as opposed to the glass transition temperature for amorphous polymer.

5 Semicrystalline polymers also typically manifest better chemical resistance to most aggressive solvents in harsh use conditions.

Based upon the above-described limitations, there is a need for a poly(aryl ether ketone) with a high molecular weight, good mechanical properties, and with an inherent viscosity greater than 0.5, that has a high T_g ($> 180^\circ\text{C}$) semicrystalline polymer with a

10 melting point higher than about 300°C , but less than about 380°C , in order to be melt processed below typical polymer degradation temperatures of about 400°C , and which polymer is not soluble in common organic solvents such as chloroform. Similarly, there is a need for a high molecular weight semicrystalline poly(aryl ether ketone) with a glass transition temperature (T_g) above 180°C that can be used to manufacture articles, films,

15 sheets and fibers via melt processing techniques such as extrusion, injection molding, and blow molding.

SUMMARY

The present teachings provide a melt processable semicrystalline poly(aryl ether ketone) that incorporates phthalazinone and 4,4'-biphenol as comonomer units. The

20 semicrystalline poly(aryl ether ketone) containing phthalazinone and 4,4'-biphenol comonomer units according to the present teachings has a T_g of about 180°C to about 240°C with a melting point of about 310°C to about 376°C . These polymers are insoluble and resistant to common organic solvents and liquids. The polymers of the present teachings are

25 also insoluble in aggressive organic solvents such as chloroform and chlorinated liquids. The present polymers are melt processable via extrusion, injection molding, compression molding and the like. The semicrystalline poly(aryl ether ketone) containing phthalazinone comonomer units according to the present teachings have properties which make them suitable for manufacturing high temperature resistant molded systems and other articles of

30 manufacture.

These and other features of the present teachings are set forth herein.

BRIEF DESCRIPTION OF THE DRAWINGS

The skilled artisan will understand that the drawings described herein are for illustration purposes only. The drawings are not intended to limit the scope of the present teachings in any way.

5 **Figure 1** is a stack graph describing the physical characteristics of the polymer family of the present teachings.

Figure 2 is a graph showing the relationship of mechanical properties to inherent viscosity, and the properties exhibited by the polymers of the present teachings.

10 DESCRIPTION OF VARIOUS EMBODIMENTS

As referred to in this application, the following definitions and terms are used:

“T_g” means glass transition temperature.

“T_m” means the peak temperature at which the melting endotherm is observed.

15 “IV” means inherent viscosity. The inherent viscosity of each polymer was measured at 30°C on a solution of 0.5 g of polymer in 100 cm³ of solution in 98% sulfuric acid.

“ΔH_m” means the enthalpy of melting endotherm.

“B/P Ratio” means the molar ratio (Q/C_p) of 4,4'-biphenol to phthalazinone as incorporated into the polymers of the present teachings.

20 “Semicrystalline”, as shown in Figure 1, means a polymer of the present teachings with a B/P ratio between about 30/70 to 90/10, and with a ΔH_m of between about 5 and 26 J/g.

25 “UHTSP” means an Ultra High Temperature Semicrystalline Polymer, which is a melt processable polymer exhibiting, *inter alia*, the following characteristics: a high temperature performance, a high T_g over 180°C, a high T_m that is above 310°C but less than 380°C, a continuous use temperature greater than or equal to 250°C, a heat deflection temperature (HDT) of 200°C or higher, and insolubility in polar organic solvents and chlorinated solvents such as chloroform.

A. Composition and Properties.

30 In accordance with the present teachings, the inventors have discovered that the incorporation of 4,4'-biphenol as a comonomer unit into poly(aryl ether ketone)s containing

a phthalazinone monomer, as described and disclosed herein, can unexpectedly result in a melt processable semicrystalline polymer with a $T_g > 180^\circ\text{C}$ that is not soluble in organic solvents such as chloroform. Even with the incorporation of 4,4'-biphenol as low as 30 mol%, the resulting poly(aryl ether ketone) is still semicrystalline with a T_g of 230°C , a melt temperature of 316°C , and a melting endotherm of 5.0 J/g. Given the relatively small amount of the 4,4'-biphenol comonomer incorporated, such a result is entirely unexpected. Advantageously, this polymer is not soluble in chloroform, and compression molded film has good resistance to organic solvents.

In accordance with the present teachings, it has been discovered that semicrystalline poly(aryl ether ketone) with a high glass transition temperature (T_g) ($>180^\circ\text{C}$) can be prepared by polymerization of 4,4'-difluorobenzophenone with 4,4'-biphenol and 4-(4-hydroxyphenyl)phthalazin-1(2H)-one (phthalazinone). These polymers can be processed via melt processes such as extrusion and injection molding. The present teachings comprise, but are not limited to, the following:

- Semicrystalline poly(aryl ether ketone) containing 4,4'-biphenol and a phthalazinone comonomer unit.
- Semicrystalline poly(aryl ether ketone) containing a B/P ratio of between about 30/70 and about 90/10.
- Semicrystalline poly(aryl ether ketone) having a T_g from about 185°C to about 240°C .
- Semicrystalline poly(aryl ether ketone) having a melting temperature (T_m) from about 310°C to about 380°C
- Semicrystalline poly(aryl ether ketone) containing a phthalazinone comonomer unit that can be melt processed via common techniques such as extrusion or injection molding.

Pursuant to the present teachings, the T_g and melting temperature of crystalline poly(ether ketone)s containing phthalazinone comonomer units can be adjusted with varying levels of incorporation of 4,4'-biphenol monomer, and high T_g semicrystalline copolymers are thereby obtained. Examples are set forth below.

The glass transition temperature (T_g), melting temperature (T_m), and enthalpy of melting endotherm (ΔH_m) of each polymer was measured by Differential Scanning Calorimetry (DSC) using a TA Instruments Q-100 DSC machine with a heating rate of 20°C/minutes. The inherent viscosity of each polymer was measured at 30°C on a solution
5 of 0.5 g of polymer in 100 cm³ of solution in 98% sulfuric acid.


Incorporation of the biphenyl unit, by substituting 4,4'-biphenol for a portion of the phthalazinone in poly(aryl ether ketone) with a phthalazinone unit results in high molecular weight semicrystalline polymers with good ductility **12** (as defined in Figure 2), which retain high melting temperatures, and which can be further prepared at reaction temperatures of
10 about 360°C or less. Due to the consistent limitations of the prior art and the molecular size and orientation of 4,4'-biphenol, the commercially desirable properties of the polymers described herein are neither anticipated nor expected.

The polymers of the present teachings have, for example, high melting temperatures of about 310°C or above and 380°C or less, glass transition temperatures of about 185°C to
15 240°C, moderate to good crystallinity that is measured as enthalpy of melting endotherm of the polymers from about 5 J/g to about 26 J/g, as shown in **Figure 1**, which can be synthesized with a high molecular weight that is measured as inherent viscosity (IV) of at least 0.7 or higher.

As shown in **Figure 1**, which is a stack graph, the polymers of the present teachings
20 **18** are semicrystalline, and comprise a B/P ratio of between about 30/70 through about 90/10, and a ΔH_m of between about 5 and about 26. Those polymers with a B/P ratio less than 30 percent B and/or a ΔH_m less than 5 are amorphous, and those polymers **20** with greater than 90 percent B (4,4'-biphenol) are crystalline.


As shown in **Figure 2**, polymers of the present teachings **12** have an inherent
25 viscosity of between about 0.5 and about 2.0, and generally exhibit adequate mechanical properties; meaning, the polymers are ductile in nature, as opposed to brittle (lower molecular weight), or have decreased processability (higher molecular weight). Those polymers **14** with an inherent viscosity less than 0.5 are too brittle, and those polymers **10** with an inherent viscosity greater than 2.0, have decreased processability, and cannot be melt
30 processed.

The novel poly(aryl ether ketone) of the present teachings can be characterized as containing the following aryetherketone repeating units:

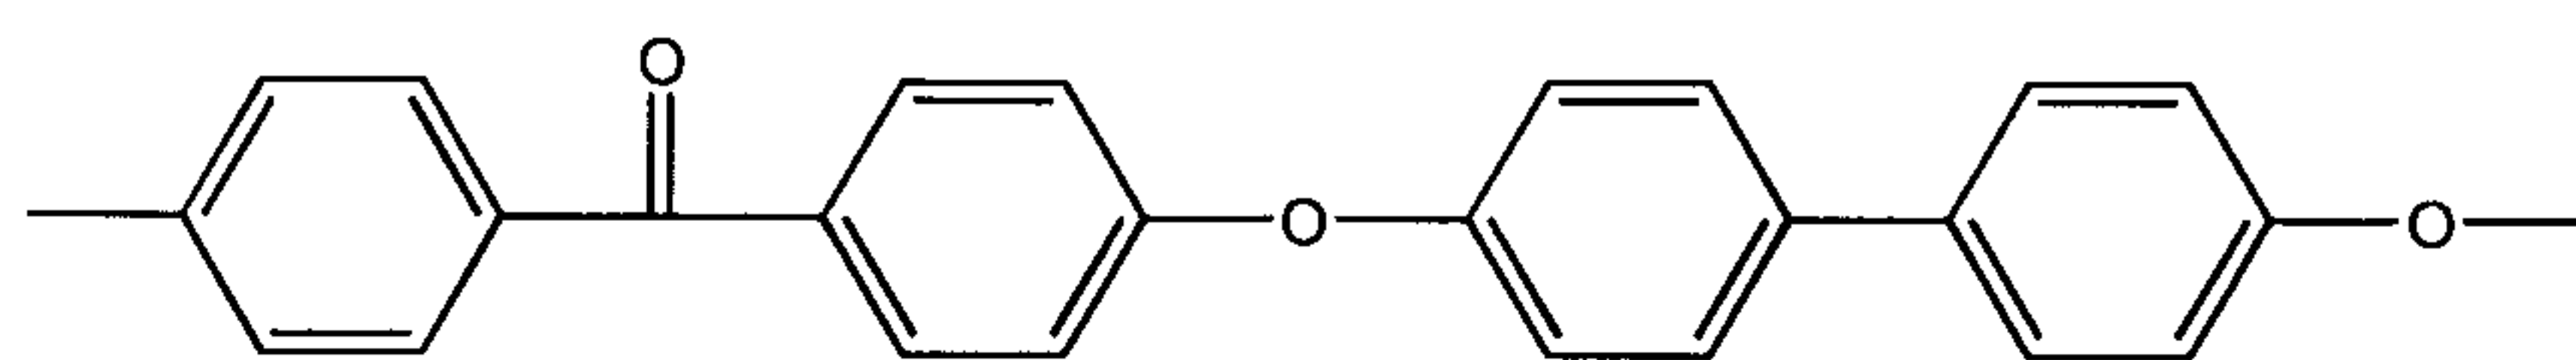


I

and

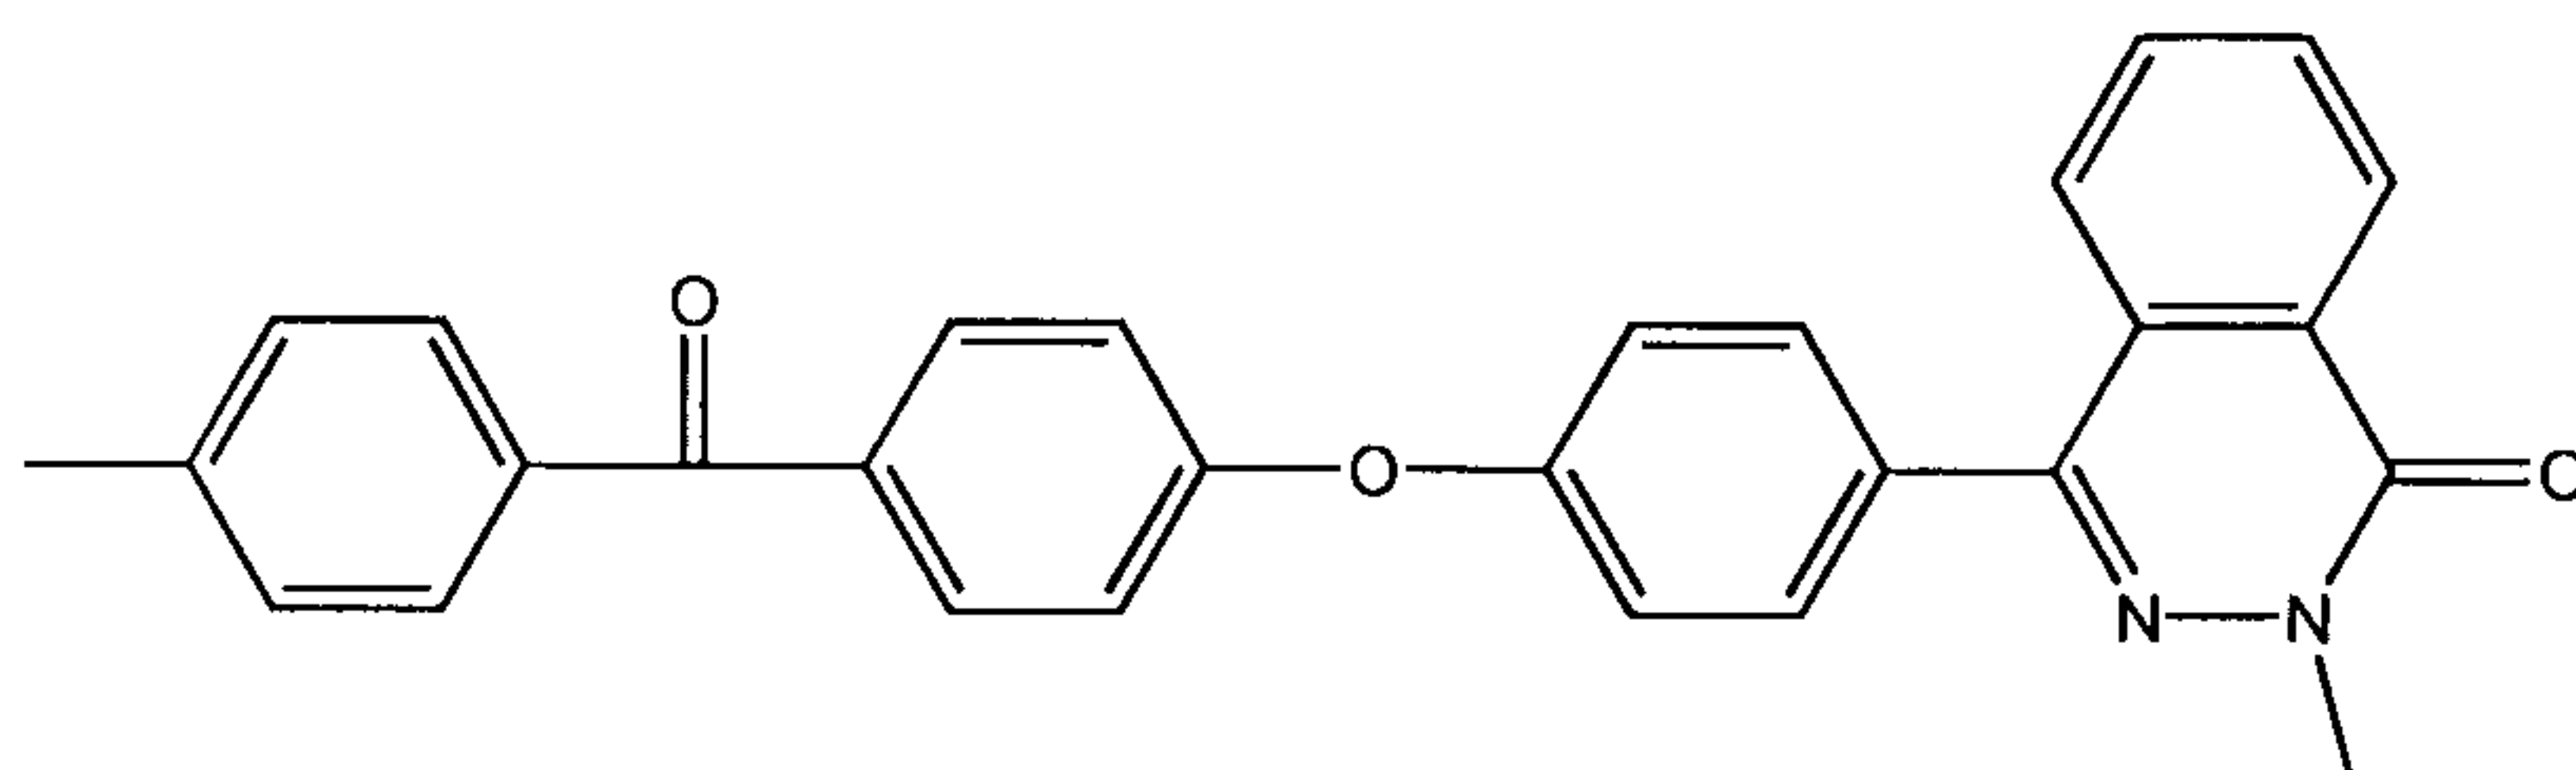


II

The starting monomers which are used to prepare the poly(aryl ether ketone)s of the present teachings comprise, for example, the following units:

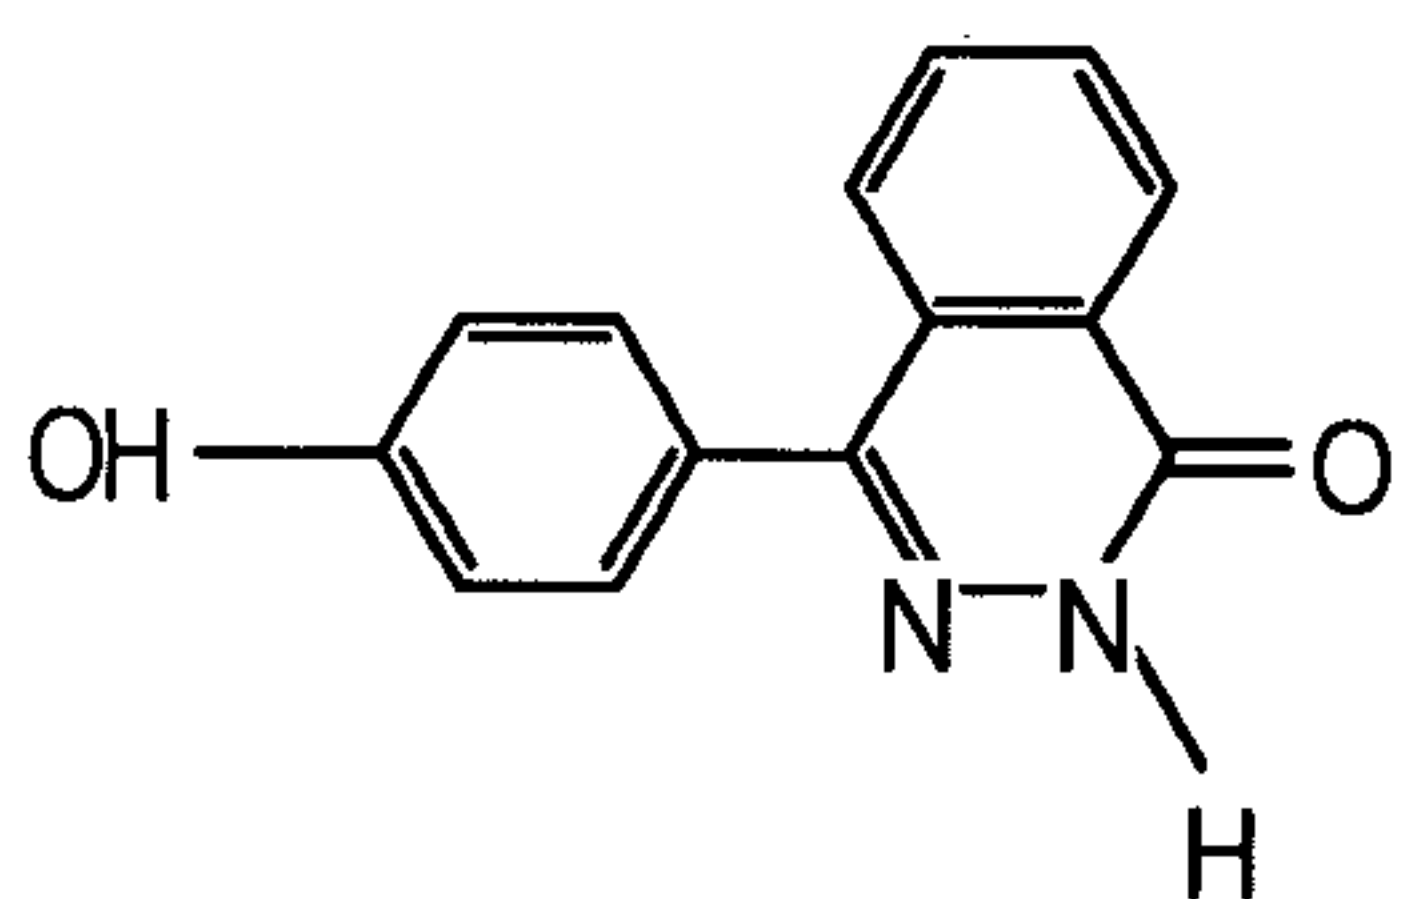


and

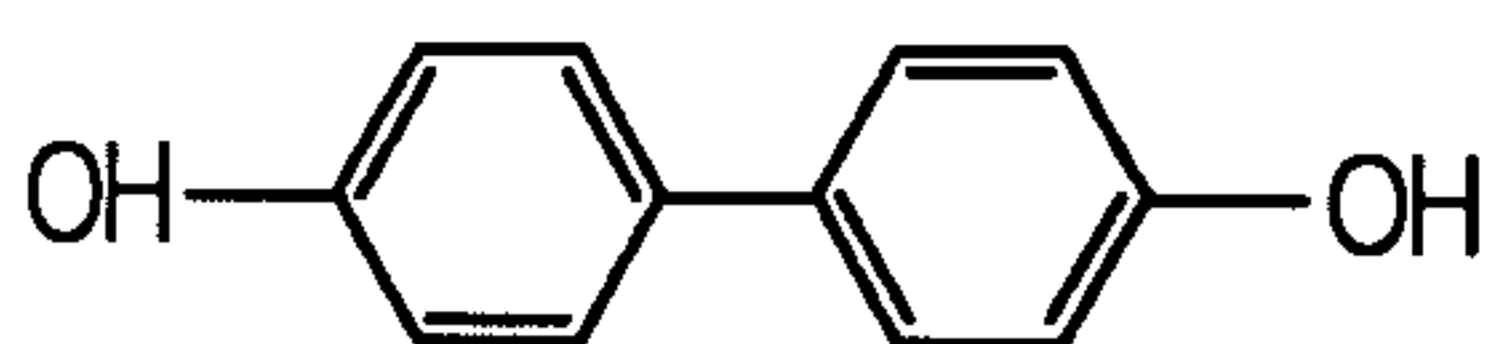


15


and

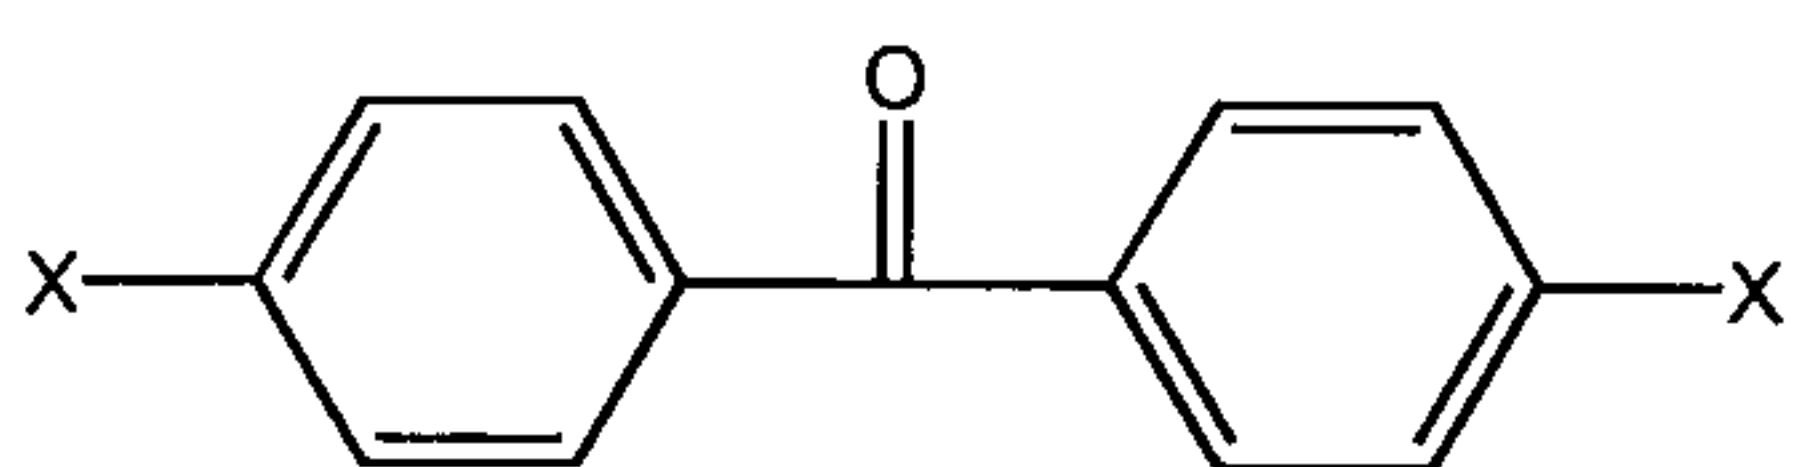

20 or

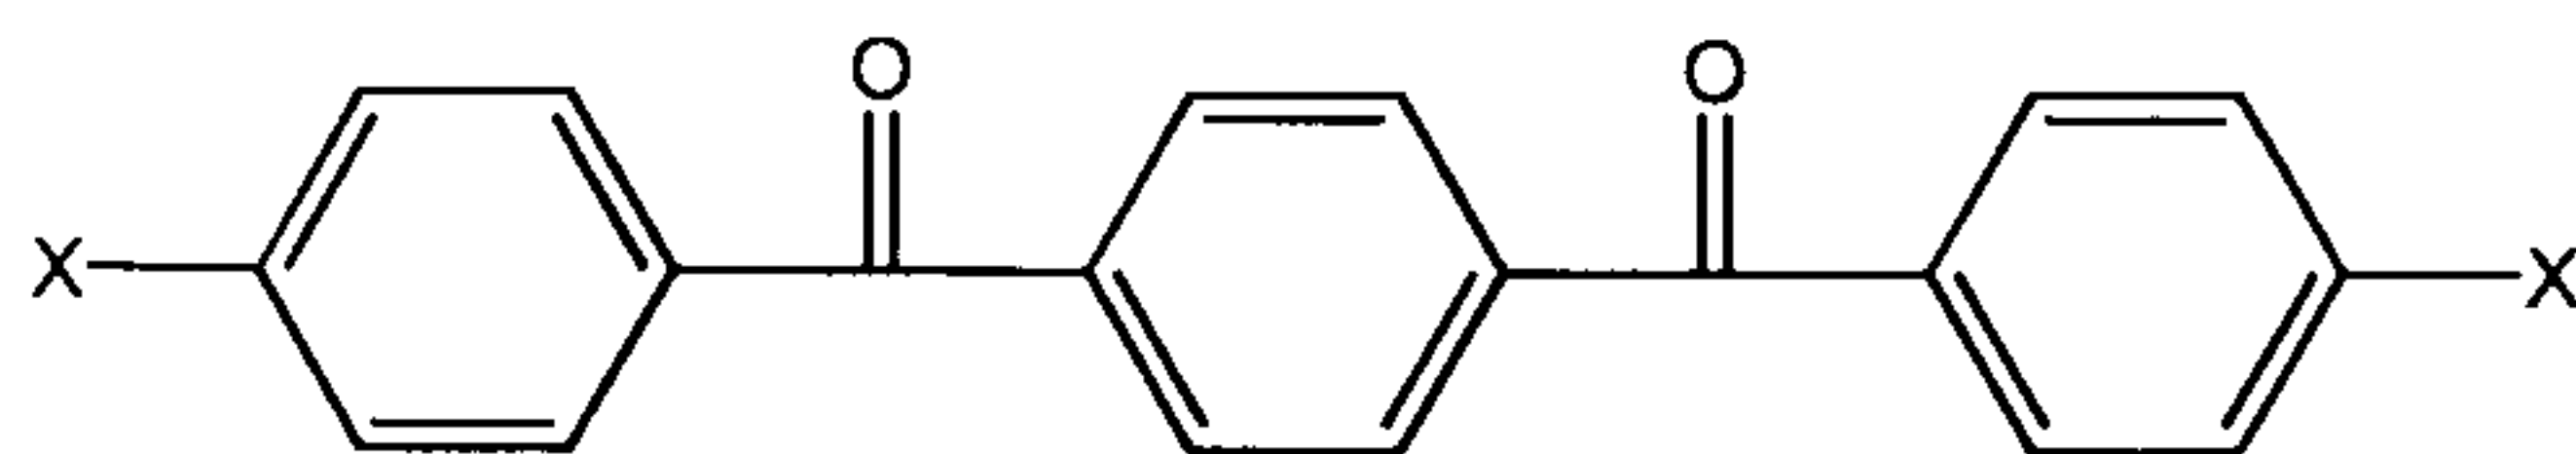

or

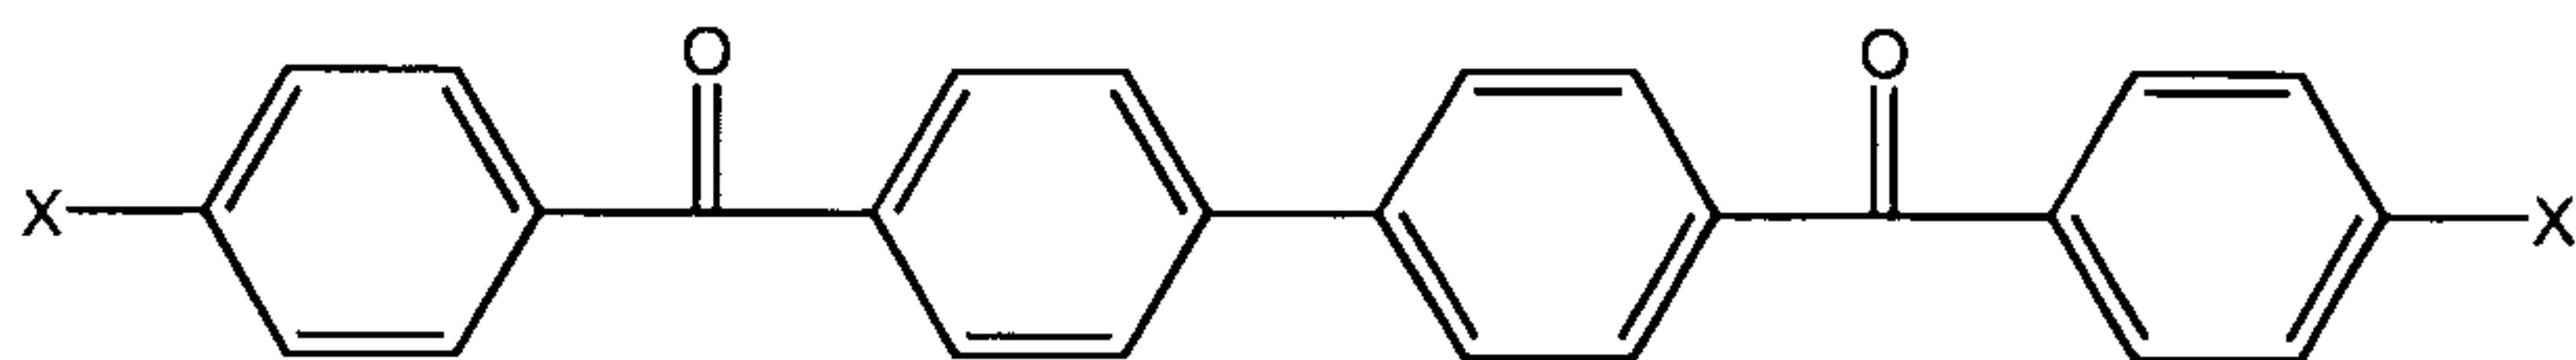

where X is fluorine or chlorine.

In various embodiments of the present teachings, the amount of biphenol to prepare the copolymers herein is such that the molar ratio (B/P) of co-monomer biphenol (B) to phthalazinone (P) is from about 30/70 to about 90/10. In some embodiments, the molar ratio is from about 35/65 to about 80/20. In some embodiments, the molar ratio is from about 40/60 to about 70/30, such that the resulting copolymer has a T_g greater than about 180°C, a T_m greater than about 310°C and less than about 380°C, and a ΔH_m of at least about 5.0 J/g or higher.

In various embodiments of the present teachings, a melt processable polymer comprises an inherent viscosity (IV) of not more than about 2.0 dL/g. In some embodiments, the IV is not more than about 1.5. In some embodiments, the IV is not more than about 1.2. For ease of processing, the IV comprises a range of at least about 0.5 to about 1.1 dL/g. The lower range can be increased to at least 0.7 during processing.

Some examples of melt processable polymers according to the present teachings are characterized by one or more of the following properties: (1) being semicrystalline with a ΔH_m of at least about 5.0 J/g and in some embodiments about 15 J/g or higher, (2) being ductile when compression molded into a film, (3) being resistant to a wide range of organic solvents, and being “essentially unaffected” after immersion for 24 hours in chloroform at 25°C, without gaining more than about 10% by weight, and (4) having a T_g equal to or greater than about 180°C, and a T_m equal to or less than about 380°C. Because of their unique properties, the polymers of the present teachings are particularly useful for applications that require resistance to both high temperatures and to organic solvents.

The polymers according to the present teachings can be fabricated into any desired shape such as, for example, moldings, films, coatings or fibers. In particular, the polymers are useful for those applications which require a combination of good electrical insulating properties, good resistance to a wide range of chemicals, retention of mechanical properties at high temperatures, good resistance to burning with low emission of toxic fumes, and low smoke density on burning.

The polymers of the present teachings can also include and/or incorporate mineral fillers (e.g. mica, glass, quartz, clay) as well as various fibers (e.g. glass fibers, carbon fibers, polyarylamide fibers, ceramic fibers). The polymers can additionally comprise additives such as colorants, pigments, thermal stabilizers, and ultra violet stabilizers through means well known in the art.

The polymers of the present teachings can be melt blended with one or more other polymers which include but are not limited to polybenzimidazole, polyarylamide, polysulfones, polyketones, polyimides, polyetherimides, polyphenylene sulfides, fluoropolymers, polyesters and polycarbonates.

The technical approach to polymerization of the present teachings differs significantly from the art, including the '663 patent to Hay. In contrast to the art, the polymerization herein is carried out in a non-polar solvent, and the resulting polymers are semicrystalline. Moreover, the use of 4,4'-biphenol as a comonomer is not reported in the art. In addition, the present teachings disclose polymerization reactions conducted at significantly higher temperatures, generally between about 280°C and about 320°C. In contrast, polymers containing a phthalazinone moiety currently reported in the art are processed at temperatures of 225°C or less. These differences in polymerization methods and processes are novel.

B. Preparation.

The polymers of the present teachings can be prepared in solution by heating the monomers with alkali metal carbonate or a mixture of alkali metal carbonates. The alkali metal carbonates are typically sodium carbonate, potassium carbonate or a mixture of sodium carbonate, potassium carbonate and cesium carbonate.

The alkali metal carbonates can be anhydrous, if hydrated salts are employed, where the polymerization temperature is less than about 250°C. Water can be removed, e.g. by

heating under reduced pressure or dehydration via azeotropic distillation with organic solvent such as toluene or o-dichlorobenzene, prior to reaching the polymerization temperature.

Where the polymerization temperature is greater than 250°C, such as 270°C, it is not necessary to dehydrate the carbonate first, as any water is driven off rapidly before it can adversely affect the polymerization reaction.

The total amount of alkali metal carbonate used can be such that there is at least 1 atom of alkali metal for each phenol OH or phthalazinone NH group. An excess of alkali metal carbonate can be employed, and there may be 1 to 1.2 atoms of alkali metal per phenol OH or phthalazinone NH group.


In various embodiments of the present teachings, the polymerization is carried out in an inert solvent such as diphenyl sulfone and benzophenone. In some embodiments, the polymerization is carried out at temperatures from about 200°C to about 400°C. In some embodiments, the polymerization temperature is above about 260°C. The reactions are generally performed under atmospheric pressure; however, the reactions can also be performed at higher or lower pressures.

For preparation of some polymers, it may be desirable to commence polymerization at one temperature, e.g. between about 180°C and about 250°C, and then increase the temperature as polymerization ensues. This is particularly advantageous when fabricating polymers having only a low solubility in the solvent. Thus, it is desirable to increase the temperature progressively to maintain the polymer in solution as its molecular weight increases. In some embodiments, the process comprises an elevated temperature of about 180°C to about 360°C. In other embodiments, the process comprises an elevated temperature of about 220°C to about 340°C. In order to minimize degradation reactions in some embodiments, the maximum polymerization temperature can be below 360°C.

The following examples are illustrative of the practice of the present teachings and are not intended in any way to limit their scope.

C. Examples.

Preparation of Poly(aryl ether ketone) from 4,4'-Biphenol and Phthalazinone Monomer.

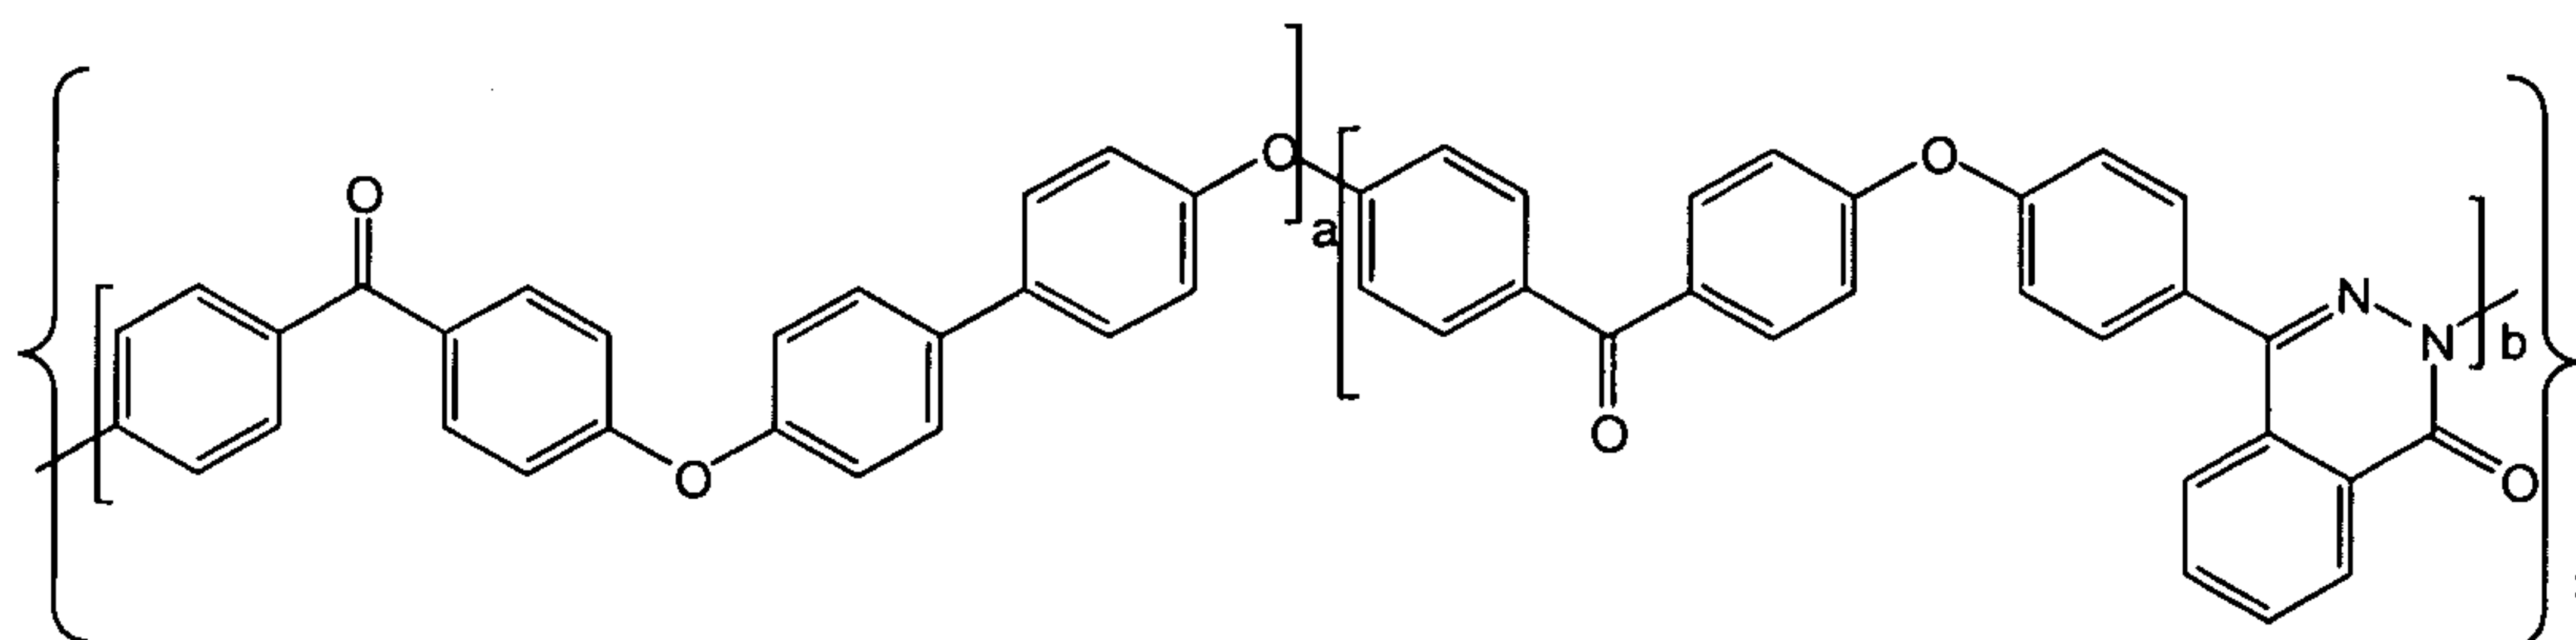

Example 1 – Copolymer with Molar Ratio of 4,4'-Biphenol and Phthalazinone B/P = 30/70

5 To a 250 mL three-neck round-bottomed flask, equipped with a nitrogen inlet, thermocouple, mechanical stirrer, Dean-Stark trap and condenser, 21.82 grams (100.0 mmol) of dried 4,4'-difluorobenzophenone, 16.76 grams (70.0 mmol) of dried phthalazinone monomer, 5.59 grams (30.0 mmol) of dried 4,4'-biphenol and 14.65 grams (106.0 mmol) of anhydrous potassium carbonate were charged. Diphenyl sulfone (132.5 grams) and
10 chlorobenzene (30.0 ml) were then added. The reaction medium was heated to 170°C, and chlorobenzene was distilled to remove water over one hour. The reaction mixture was then heated to 200°C and maintained for two hrs. The reaction mixture was further heated to 300°C and maintained for four hrs. The reaction was terminated, and the mixture was cast into sheet on a glass surface in a glass tray and cooled to room temperature. The cooled solid
15 was then hammer milled to fine particles less than about 60 mesh.

The fine particles were placed into a flask with 500 ml acetone, heated under reflux for one hour, and then filtered. This process was repeated five times to remove diphenylsulfone. The resulting powder material was then placed into a flask with 500 ml de-ionized water, heated under reflux for one hour, and then filtered. This process was repeated
20 five times to remove inorganic salts.

The resulting solid polymer was then dried at 120°C under vacuum overnight. The white polymer has an inherent viscosity (IV) of about 0.78 dL/g (0.5 g/dL solution of the polymer in 98% sulfuric acid at 30°C), a glass transition temperature of about 230°C, a melting temperature of about 316°C and a melting endotherm of about 5.0 J/g. The polymer
25 is insoluble in chloroform, dimethylformamide (DMF) and N-cyclohexylpyrrolidinone (CHP).

The powdered polymer was compression molded at 375°C for five minutes to give a tough opaque film. A sample of film immersed in chloroform at 25°C for 24 hours showed a

weight increase of 1.8%. The film remained resistant with no visible effects of attack by chloroform.

Example 2 – Copolymer with Molar Ratio of 4,4'-Biphenol and Phthalazinone B/P = 40/60

5 A copolymer with a 40/60 molar ratio of 4,4'-biphenol and phthalazinone monomer was prepared according to the procedure described in Example 1. The resulting polymer has an inherent viscosity (IV) of about 0.74 dL/g, a glass transition temperature of about 225°C, a melting temperature of about 336°C and a melting endotherm of about 8.0 J/g. The polymer is insoluble in chloroform, dimethylformamide (DMF) and N-
10 cyclohexylpyrrolidinone (CHP).

Example 3 – Copolymer with Molar Ratio of 4,4'-Biphenol and Phthalazinone B/P = 60/40

A copolymer with a 60/40 molar ratio of 4,4'-biphenol and phthalazinone monomer was prepared according to the procedure described in Example 1. The resulting polymer has
15 an inherent viscosity (IV) of about 0.79 dL/g, a glass transition temperature of about 204°C, melting temperature of about 357°C and a melting endotherm of about 16.0 J/g. The polymer is insoluble in chloroform, dimethylformamide (DMF) and N-cyclohexylpyrrolidinone (CHP).

20 *Example 4 – Copolymer with Molar Ratio of 4,4'-Biphenol and Phthalazinone B/P = 65/35*

A copolymer with a 65/35 molar ratio of 4,4'-biphenol and phthalazinone monomer was prepared according to the procedure described in Example 1. The resulting polymer has an inherent viscosity (IV) of about 1.48 dL/g, a glass transition temperature of about 205°C, a melting temperature of about 347°C and a melting endotherm of about 14.0 J/g. The
25 polymer is insoluble in chloroform, dimethylformamide (DMF) and N-cyclohexylpyrrolidinone (CHP).

Example 5 – Copolymer with Molar Ratio of 4,4'-Biphenol and Phthalazinone B/P = 70/30

30 A copolymer with a 70/30 molar ratio of 4,4'-biphenol and phthalazinone monomer was prepared according to the procedure described in Example 1. The resulting polymer has an inherent viscosity (IV) of about 0.75 dL/g, a glass transition temperature of about 200°C,

a melting temperature of about 368°C and a melting endotherm of about 25.0 J/g. The polymer is insoluble in chloroform, dimethylformamide (DMF) and N-cyclohexylpyrrolidinone (CHP).

5 *Example 6 – Copolymer with Molar Ratio of 4,4'-Biphenol and Phthalazinone B/P =75/25*

A copolymer with a 75/25 molar ratio of 4,4'-biphenol and phthalazinone monomer was prepared according to the procedure described in Example 1. The resulting polymer has an inherent viscosity (IV) of about 0.73 dL/g, a glass transition temperature of about 190°C, a melting temperature of about 376°C and a melting endotherm of about 26.0 J/g. The
10 polymer is insoluble in chloroform, dimethylformamide (DMF) and N-cyclohexylpyrrolidinone (CHP).

Example 7 – Copolymer with Molar Ratio of 4,4'-Biphenol and Phthalazinone B/P =80/20

A copolymer with an 80/20 molar ratio of 4,4'-biphenol and phthalazinone monomer
15 was prepared according to the procedure described in Example 1. The resulting polymer has an inherent viscosity (IV) of about 0.95 dL/g, a glass transition temperature of about 185°C, a melting temperature of about 367°C and a melting endotherm of about 24.0 J/g. The polymer is insoluble in chloroform, dimethylformamide (DMF) and N-cyclohexylpyrrolidinone (CHP).

20

Comparative Example A – Amorphous Copolymer with Molar Ratio of 4,4'-Biphenol and Phthalazinone B/P =20/80

A copolymer with a 20/80 molar ratio of 4,4'-biphenol and phthalazinone monomer was prepared according to the procedure described in Example 1. The resulting amorphous
25 polymer has an inherent viscosity (IV) of about 1.02 dL/g (0.5 g/dL solution of polymer in chloroform at 25°C) and a glass transition temperature of about 240°C. The polymer is soluble in chloroform, dimethylformamide (DMF) and N-cyclohexylpyrrolidinone (CHP) at room temperature.

30 *Comparative Example B – Amorphous Copolymer with Molar Ratio of 4,4'-Biphenol and Phthalazinone B/P =25/75*

A copolymer with a 25/75 molar ratio of 4,4'-biphenol and phthalazinone monomer was prepared according to the procedure described in Example 1. The resulting amorphous polymer has an inherent viscosity (IV) of about 0.78 dL/g (0.5g/dL solution of the polymer in 98% sulfuric acid at 30°C), and a glass transition temperature of about 232°C. The polymer is insoluble in chloroform, dimethylformamide (DMF) and N-cyclohexylpyrrolidinone (CHP) at room temperature.

Comparative Example C – Low Molecular Weight Copolymer with Molar Ratio of 4,4'-Biphenol and Phthalazinone B/P =70/30 Using N-cyclohexylpyrrolidinone (CHP) as Polymerization Solvent

To a 100 mL three-neck round-bottomed flask, equipped with a nitrogen inlet, thermal couple, mechanical stirrer, Dean-Stark trap and condenser, 8.77 grams (40.0 mmol) of dried 4,4'-difluorobenzophenone, 2.87 grams (12.0 mmol) of dried phthalazinone monomer, 5.24 grams (28.0 mmol) of dried 4,4'-biphenol and 5.88 grams (42.4 mmol) of anhydrous potassium carbonate were charged. N-cyclohexylpyrrolidinone (CHP) (31.1 ml) and chlorobenzene (19.0 ml) were then added. The reaction medium was heated to 170°C, and chlorobenzene was distilled to remove water over one hour. The reaction mixture was then heated to 230°C and maintained for four hours. At the end of the reaction, the mixture was poured into 200 ml of a mixture of methanol and water (ratio of 1:4). After filtration, the polymer powder was washed with methanol three times to remove any residual CHP. The resulting polymer powder was then placed into a 250 ml flask with 150 ml de-ionized water. The mixture was heated to reflux for three hours to remove any remaining potassium salt. After filtration, the white polymer powder was dried at 120°C under vacuum over 24 hrs.

The resulting polymer has an inherent viscosity (IV) of about 0.23 dL/g (0.5g/dL solution of the polymer in 98% sulfuric acid at 30°C), a glass transition temperature of about 185°C, a melting temperature of about 340°C and a melting endotherm of about 37.0 J/g. The polymer is insoluble in chloroform, dimethylformamide (DMF) and N-cyclohexylpyrrolidinone (CHP). The powdered polymer was compression molded at 375°C between two metal sheets for five minutes to obtain a brittle opaque film. The film was so brittle that it broke into small pieces when it was demolded from the metal sheet.


The section headings used herein are for organizational purposes only and are not to be construed as limiting the subject matter described in any way.

While the present teachings are described in conjunction with various embodiments, it is not intended that the present teachings be limited to such embodiments. On the contrary,
5 the present teachings encompass various alternatives, modifications, and equivalents, as will be appreciated by those of skill in the art.


CLAIMS

What is claimed is:


1. A composition, comprising a melt processable semicrystalline aromatic polyetherketone polymer according to formula (I):

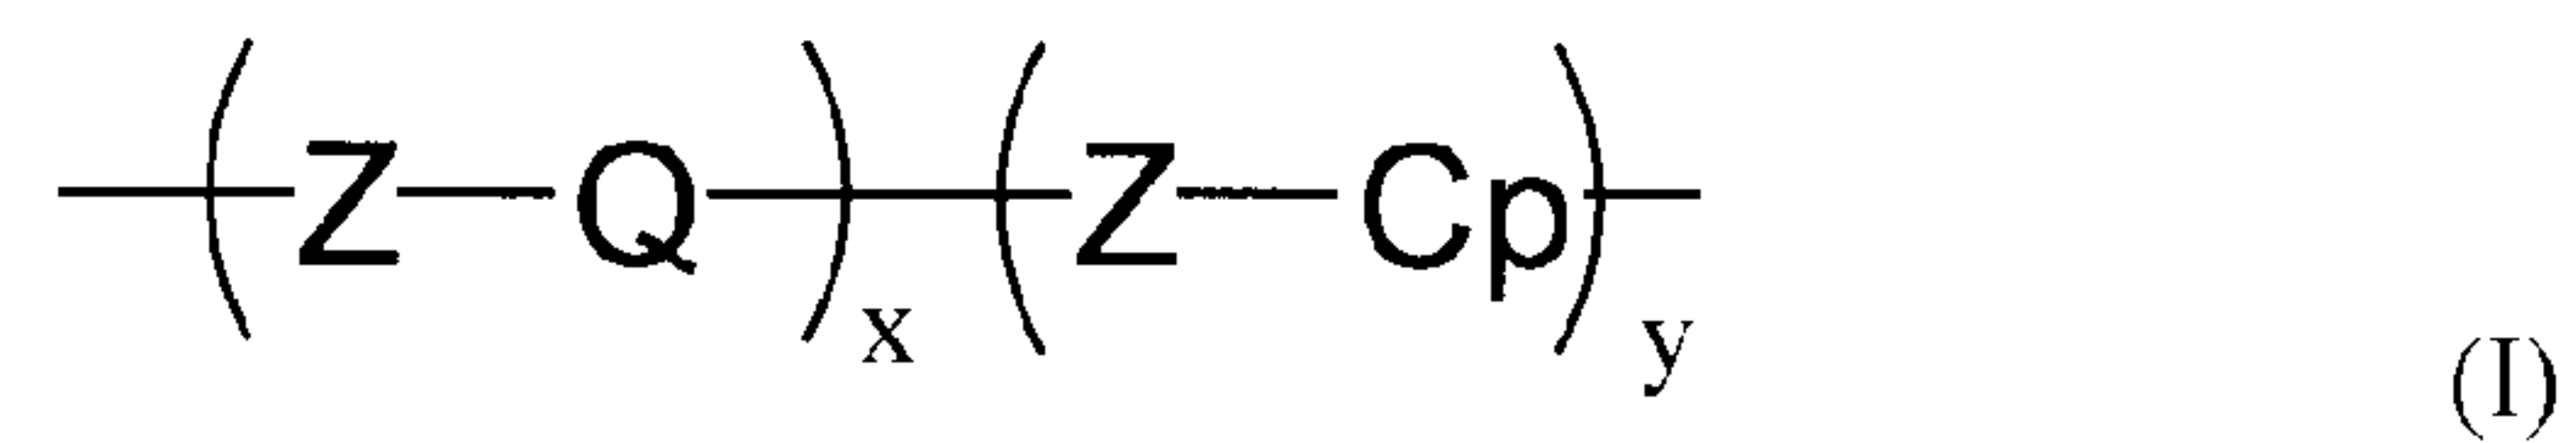


wherein Cp is a phthalazinone unit of formula (II);

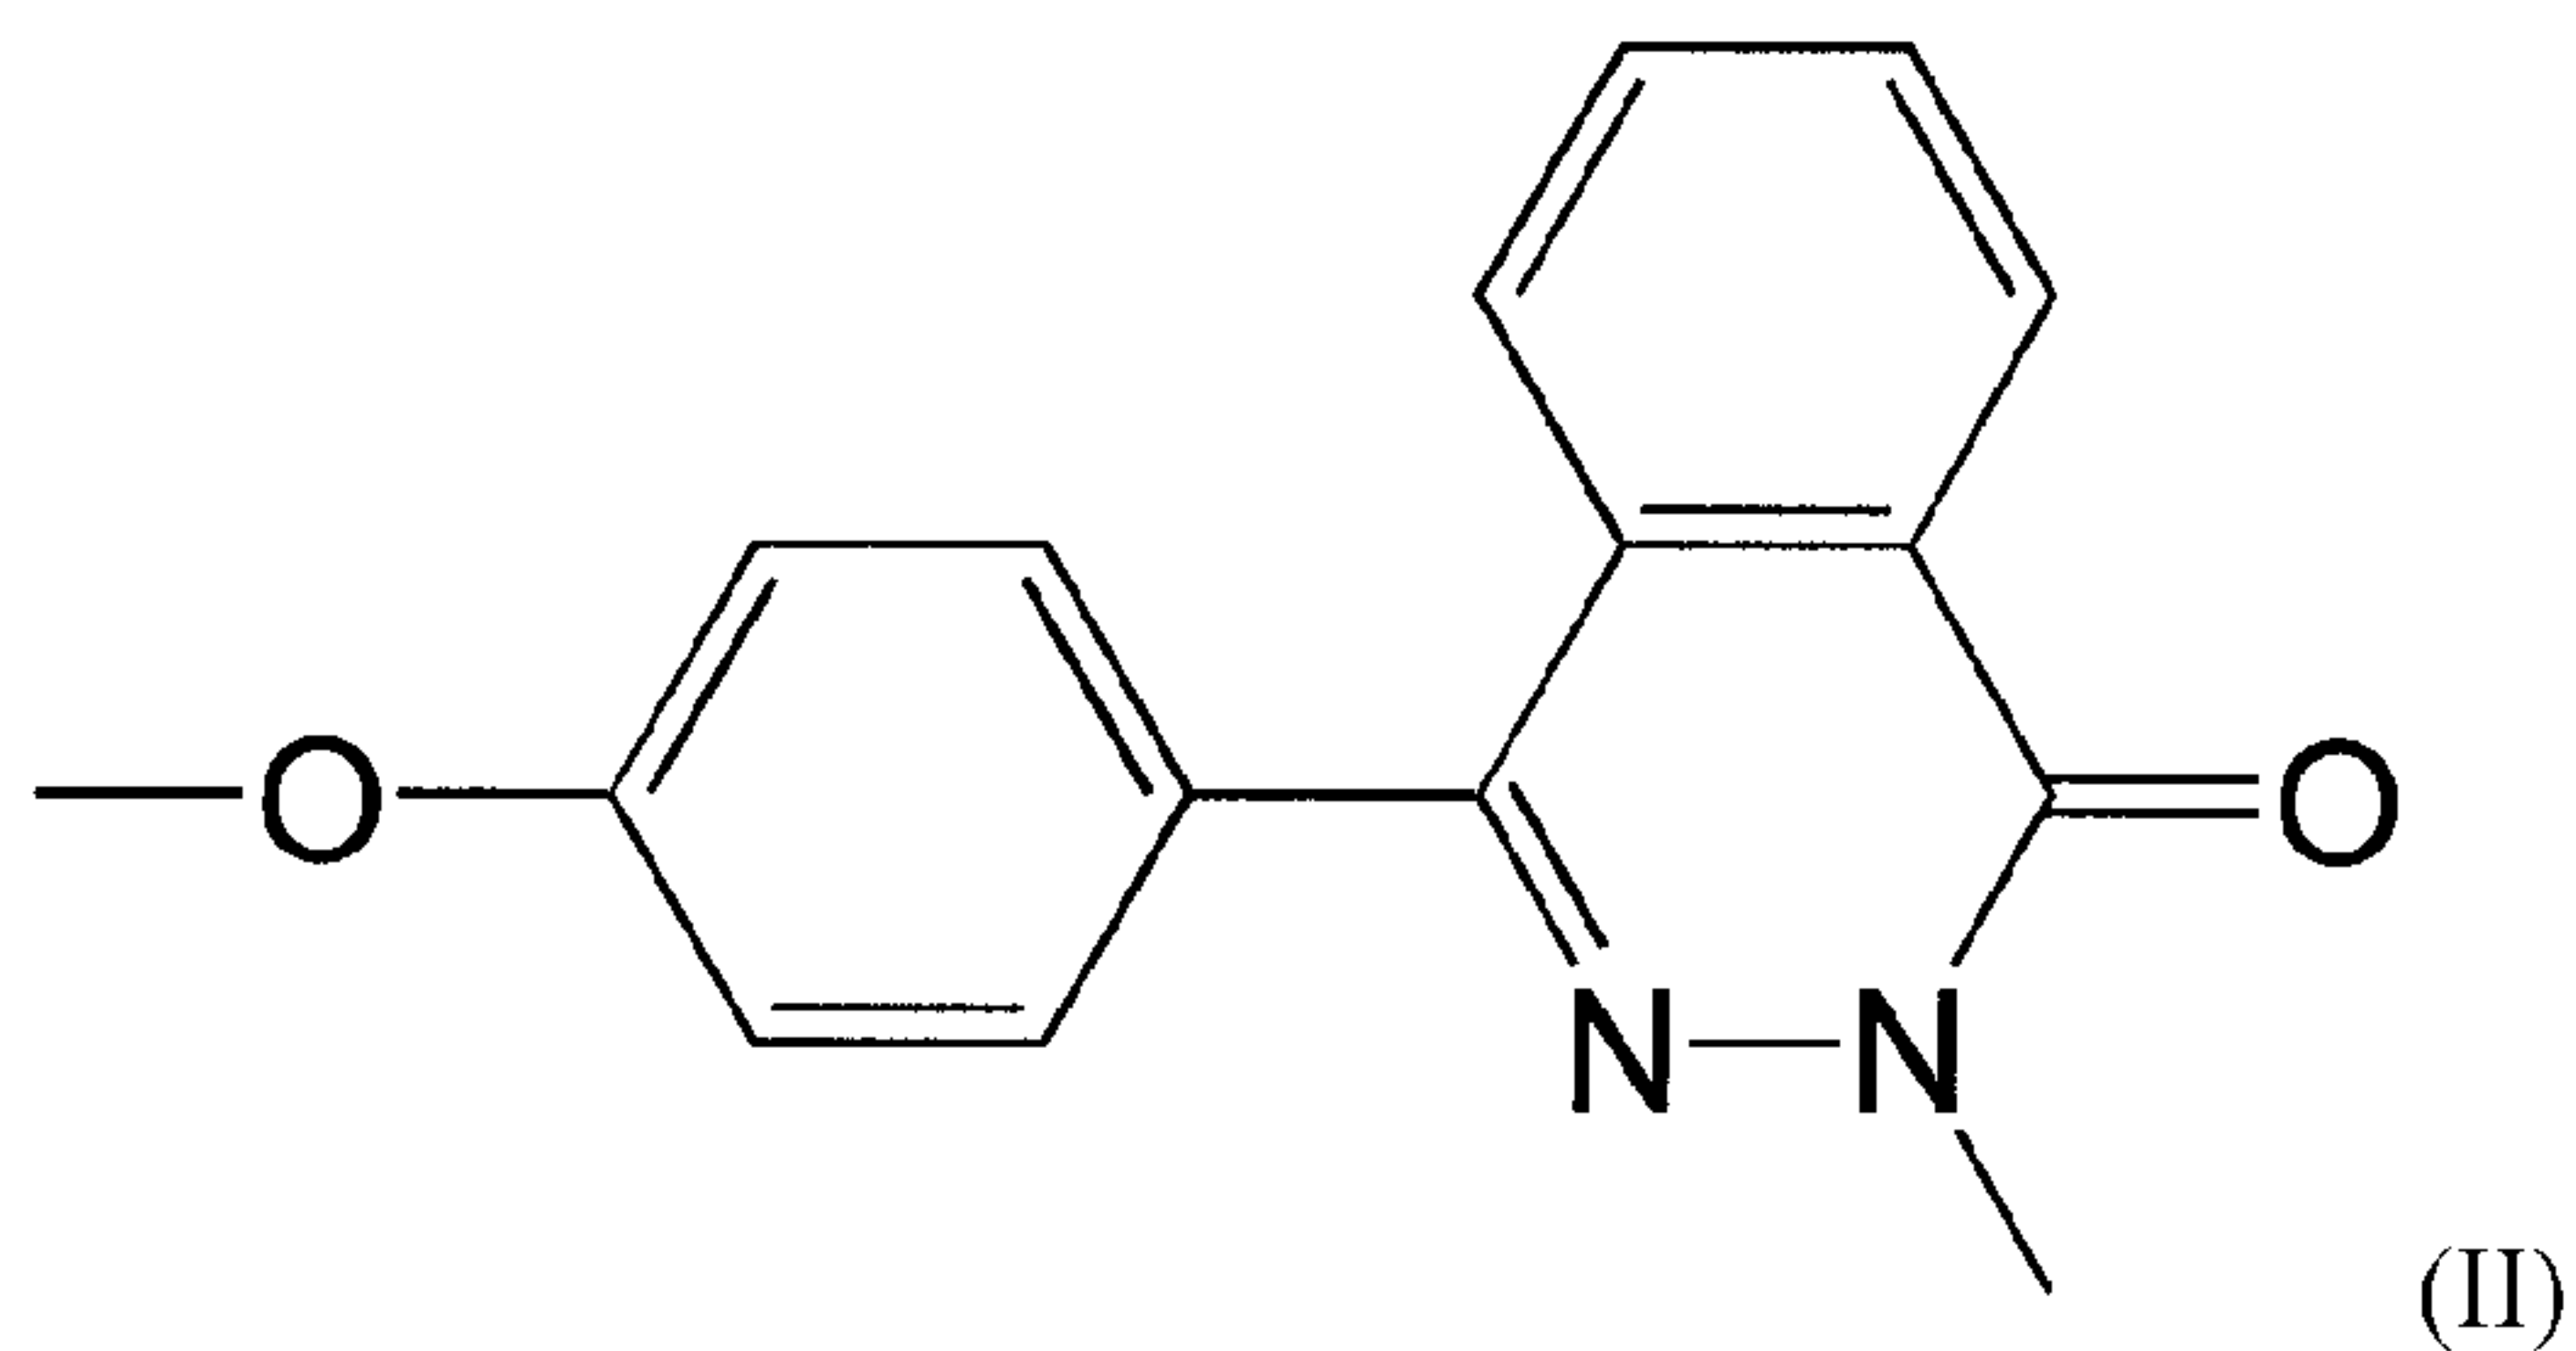


Q is a biphenol unit of formula (III);

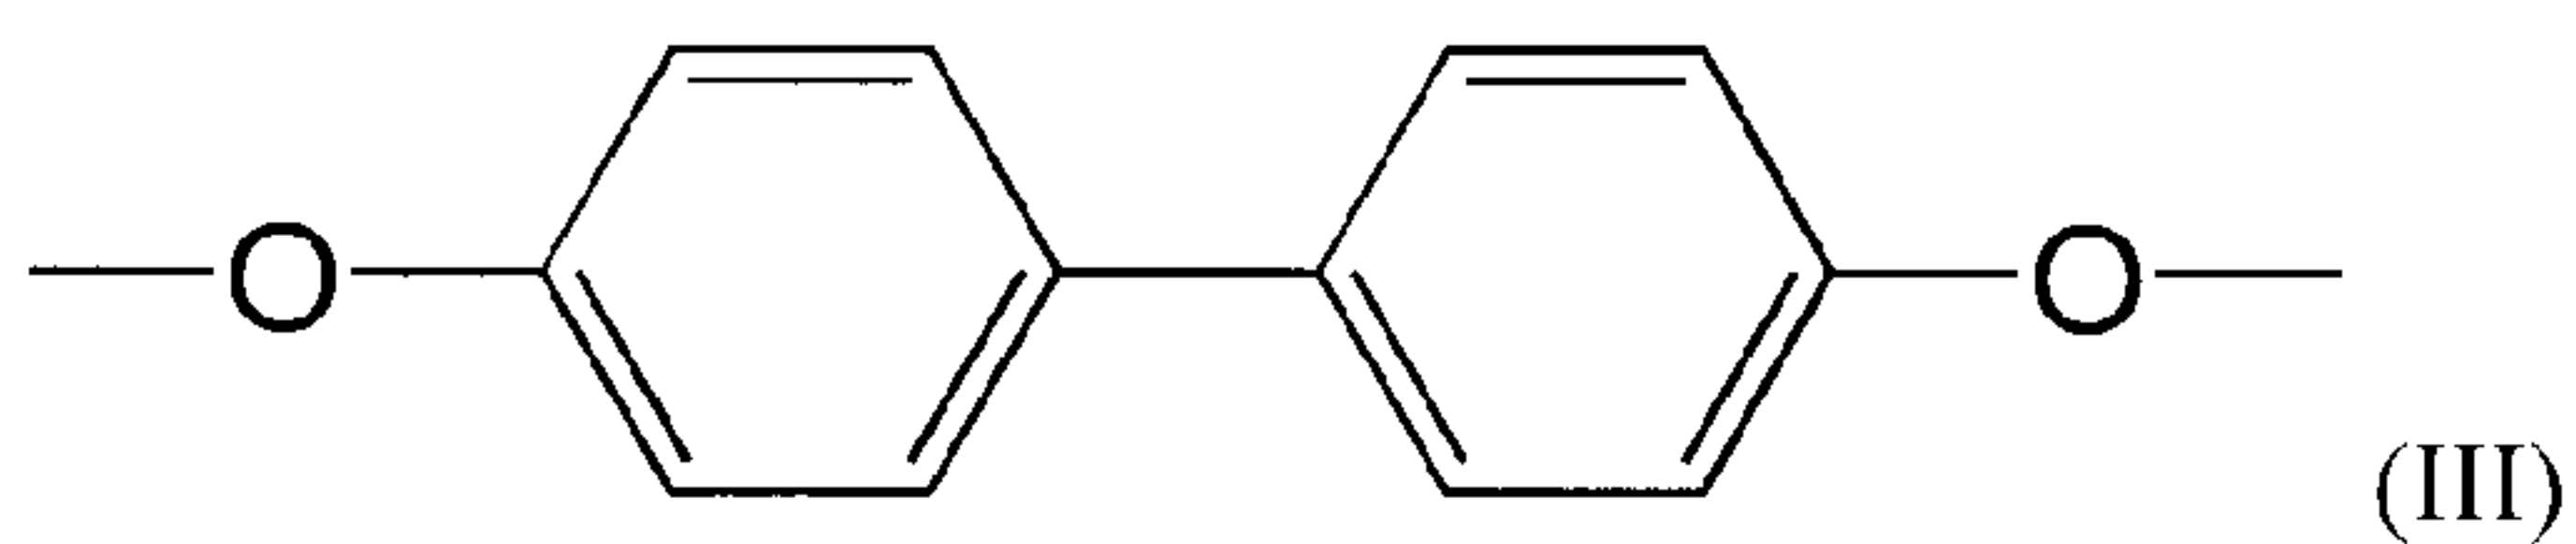

Z is an aromatic ketone unit of formula (IV) or (V);

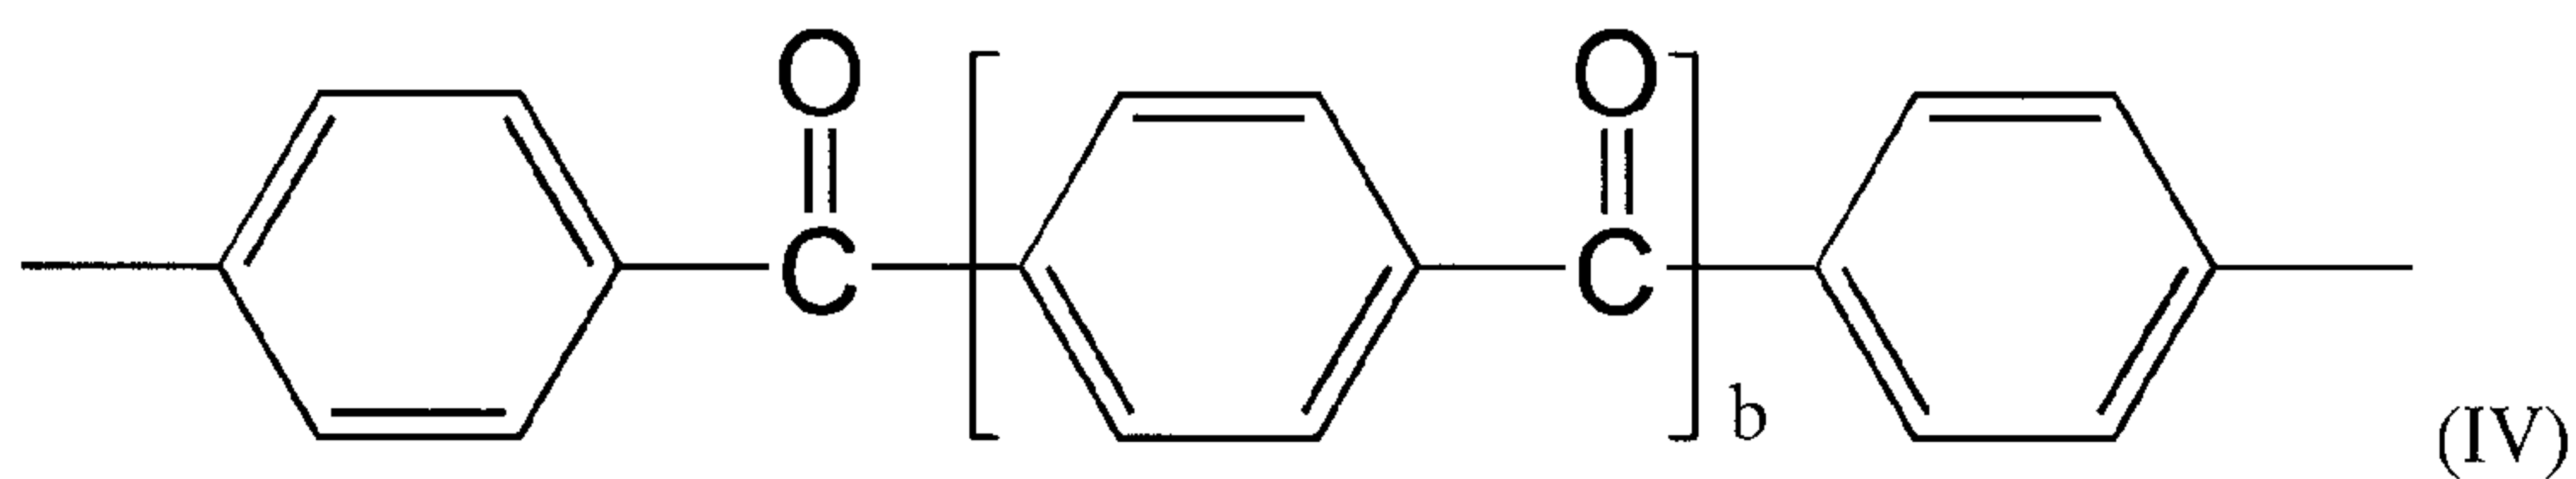

b is a value of 0 through 1

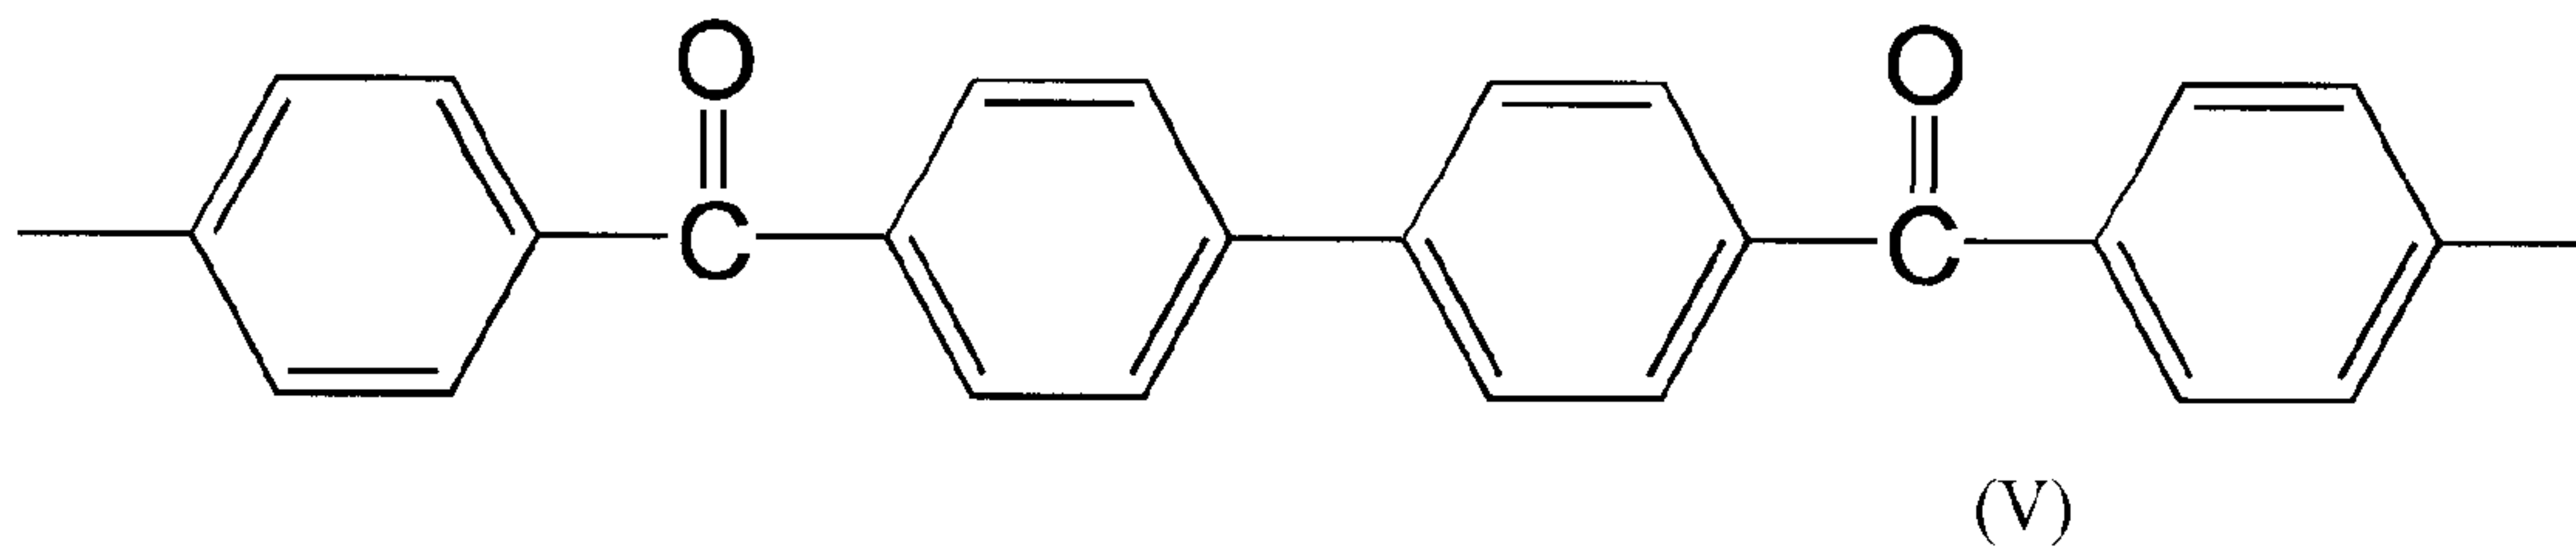


x is a value of at least 1; and

y is a value of at least 1,


wherein x and y are such that the molar ratio of Q to Cp is between about 30/70 and 90/10, and

wherein the melt processable semicrystalline aromatic polyetherketone polymer has an enthalpy of melting endotherm of between about 5.0 J/g and 26.0 J/g.

2. The composition according to claim 1, wherein Q is a biphenol unit of formula (III):

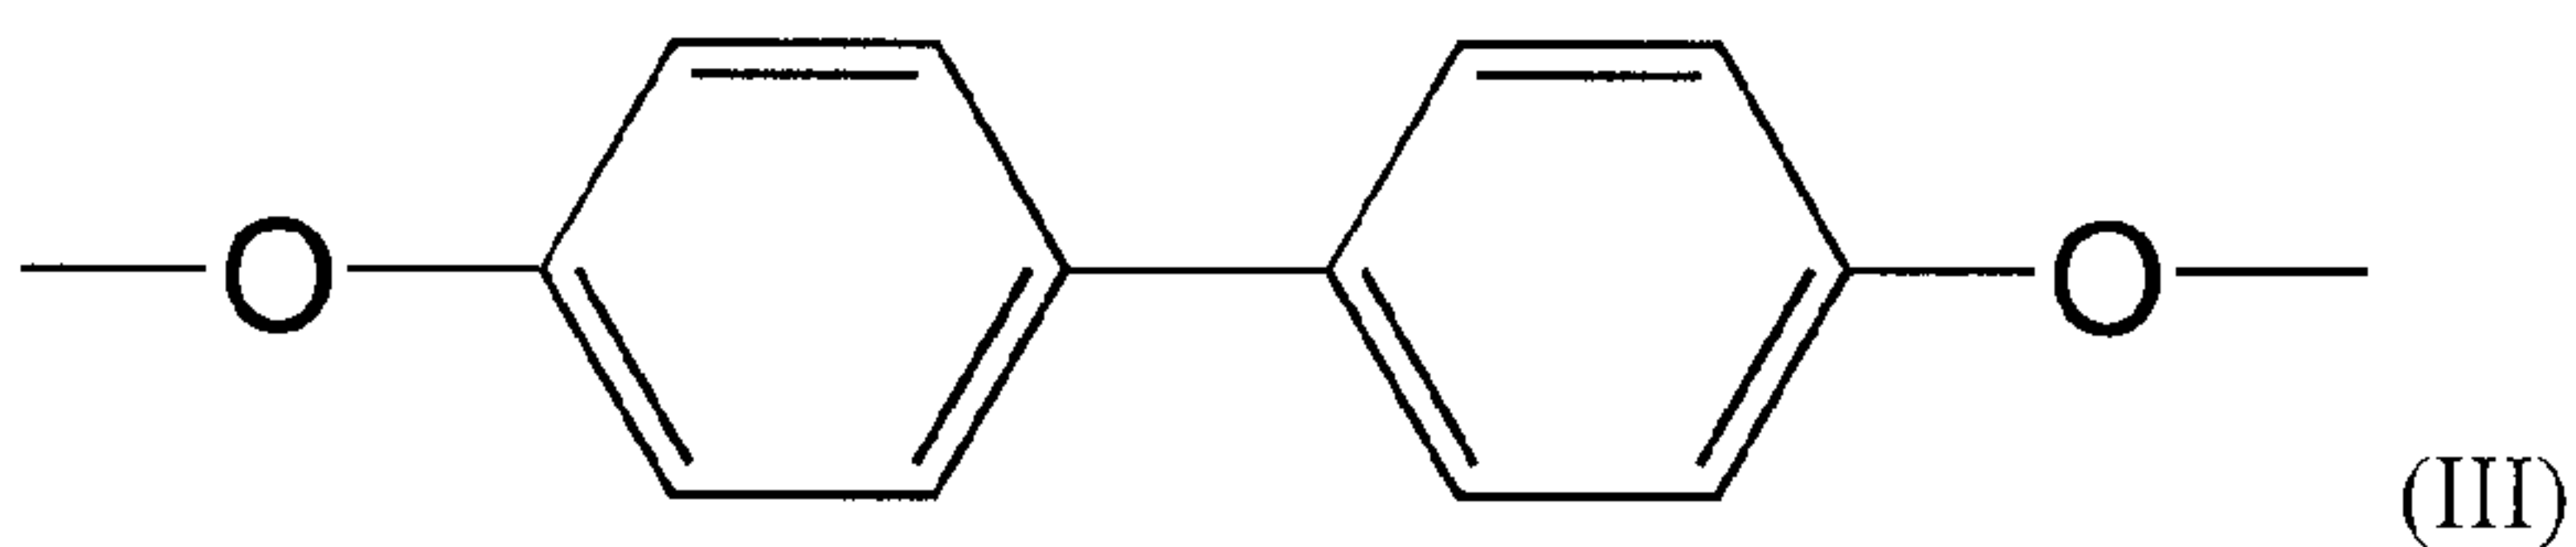

Z is an aromatic ketone unit of formula (VI)

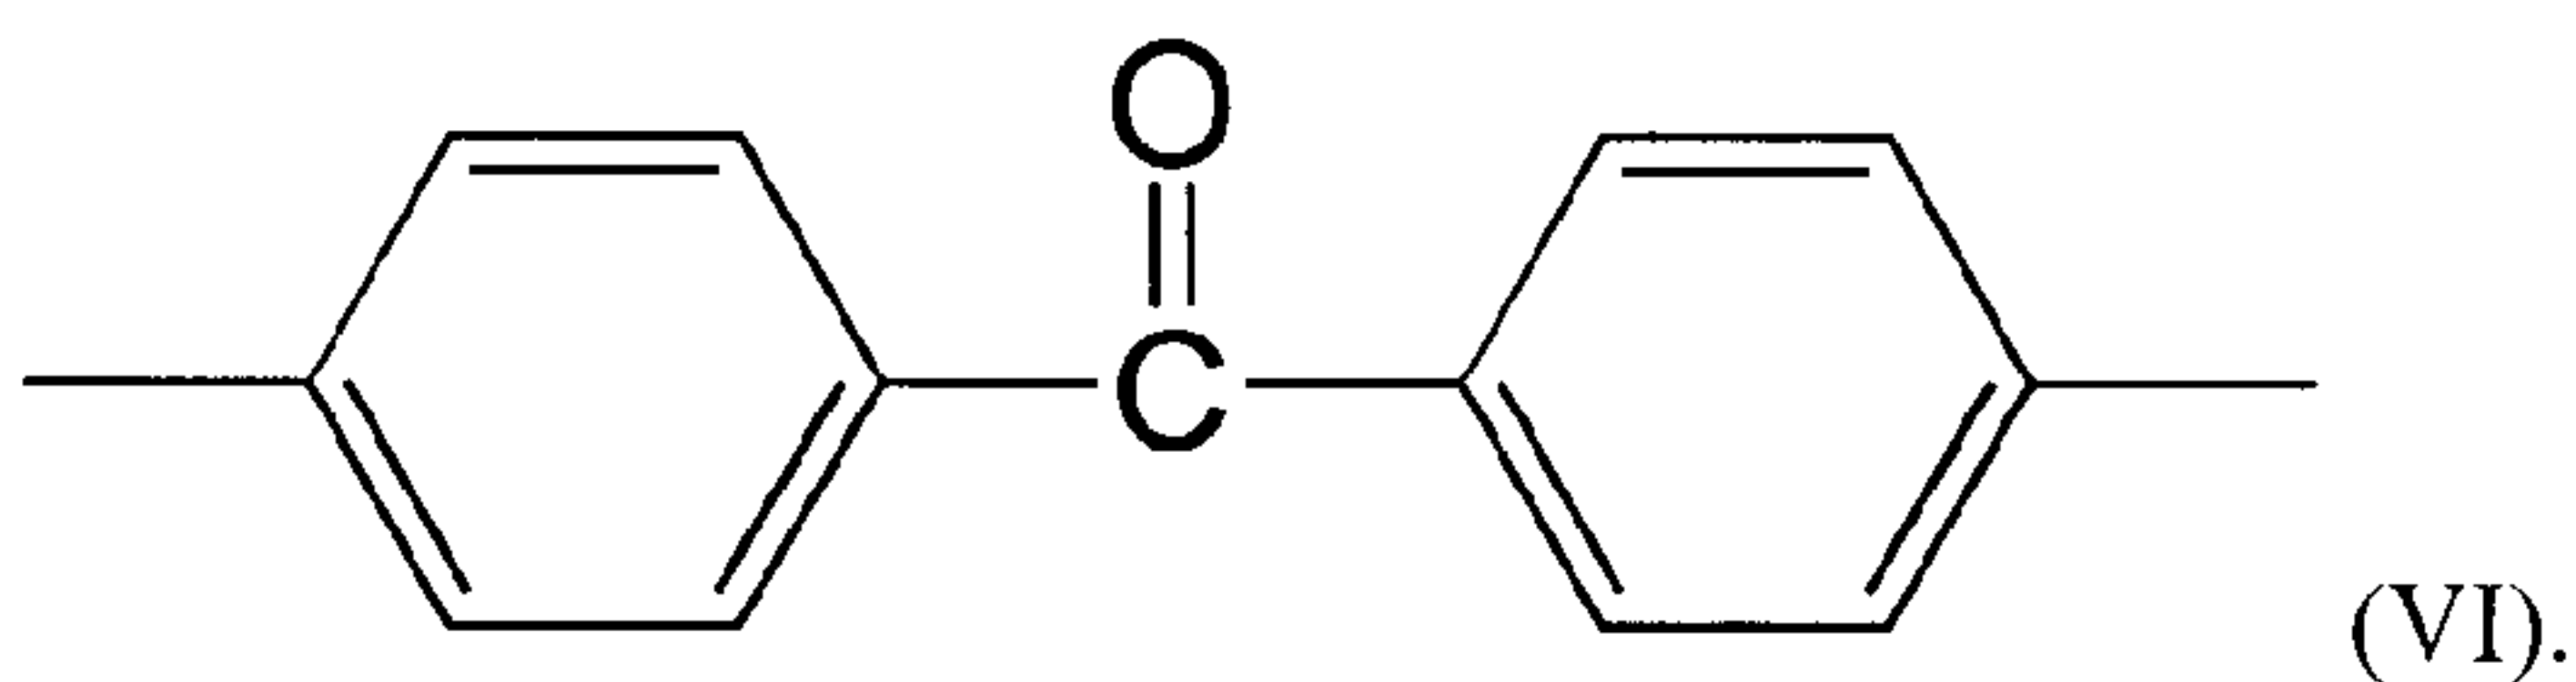

3. The composition according to claim 1 or 2, wherein $x + y = n$ where n is a value such that the polymer has an inherent viscosity of at least about 0.5 dL/g.

4. The composition according to claim 1 or 2, wherein the polymer has a glass transition temperature between about 180°C and 240°C.

5. The composition according to claim 1 or 2, wherein the polymer has a melt

temperature between about 310°C and 376°C.

6. The composition according to claim 1 or 2, wherein the polymer has an inherent viscosity of at least about 0.5 dL/g.

7. A shaped article formed by extrusion, injection molding, centrifuge molding, blow molding, rotational molding, transfer molding, thermoforming or compression molding, comprising the composition according to claim 1 or 2.

8. A composite structure, comprising the composition according to claim 1 and a fibrous substrate.

9. A composite structure, comprising the composition according to claim 1 and a particulate filler.


10. A composite structure, comprising:
the composition according to claim 1 comprising a particulate filler; and
a fibrous substrate.

11. A composite structure, comprising the composition according to claim 2 and a fibrous substrate.


12. A composite structure, comprising the composition according to claim 2 and a particulate filler.

13. A composite structure, comprising:
the composition according to claim 2 comprising a particulate filler; and
a fibrous substrate.


14. An article of manufacture, comprising a composition, comprising a melt processable semicrystalline aromatic polyetherketone polymer, according to formula (I):

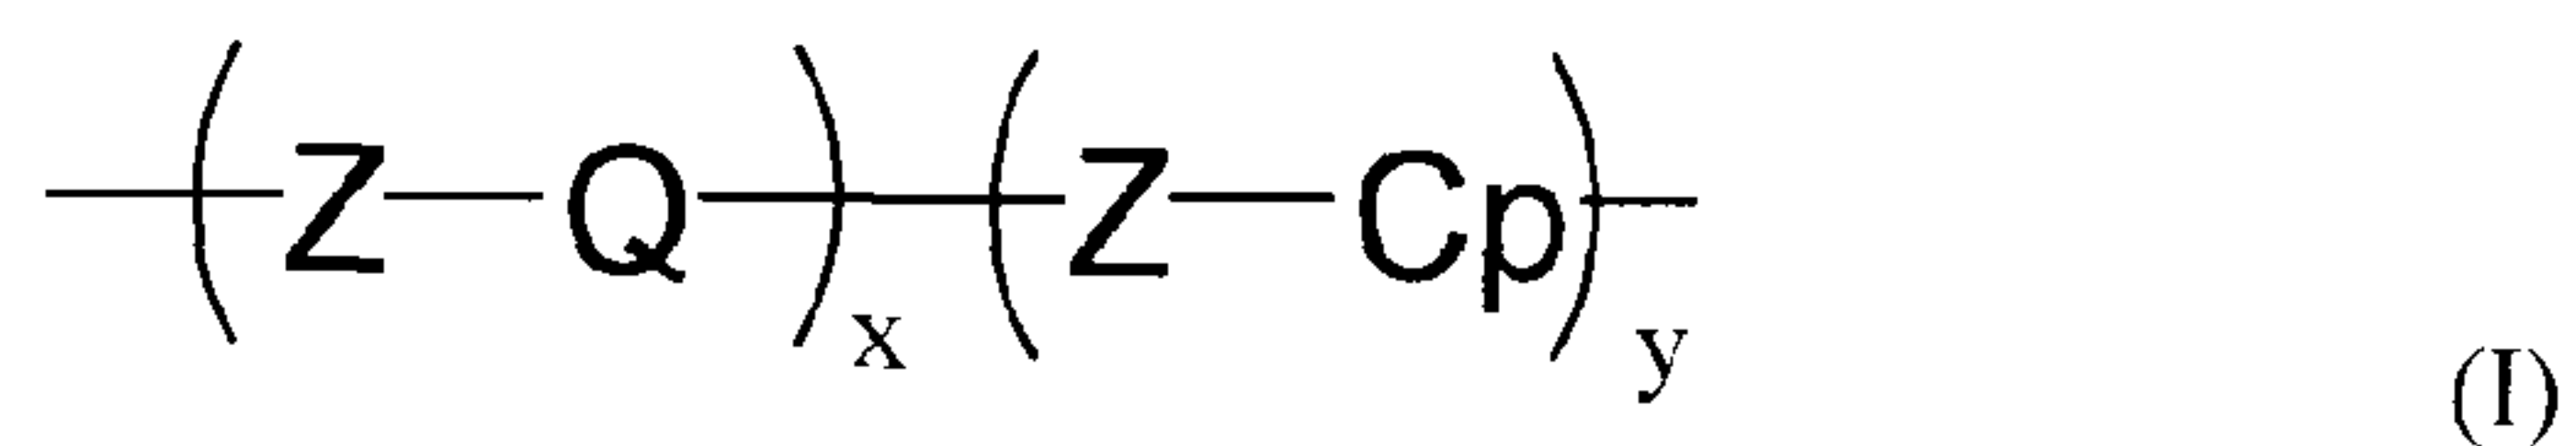


wherein Cp is a phthalazinone unit of formula (II);

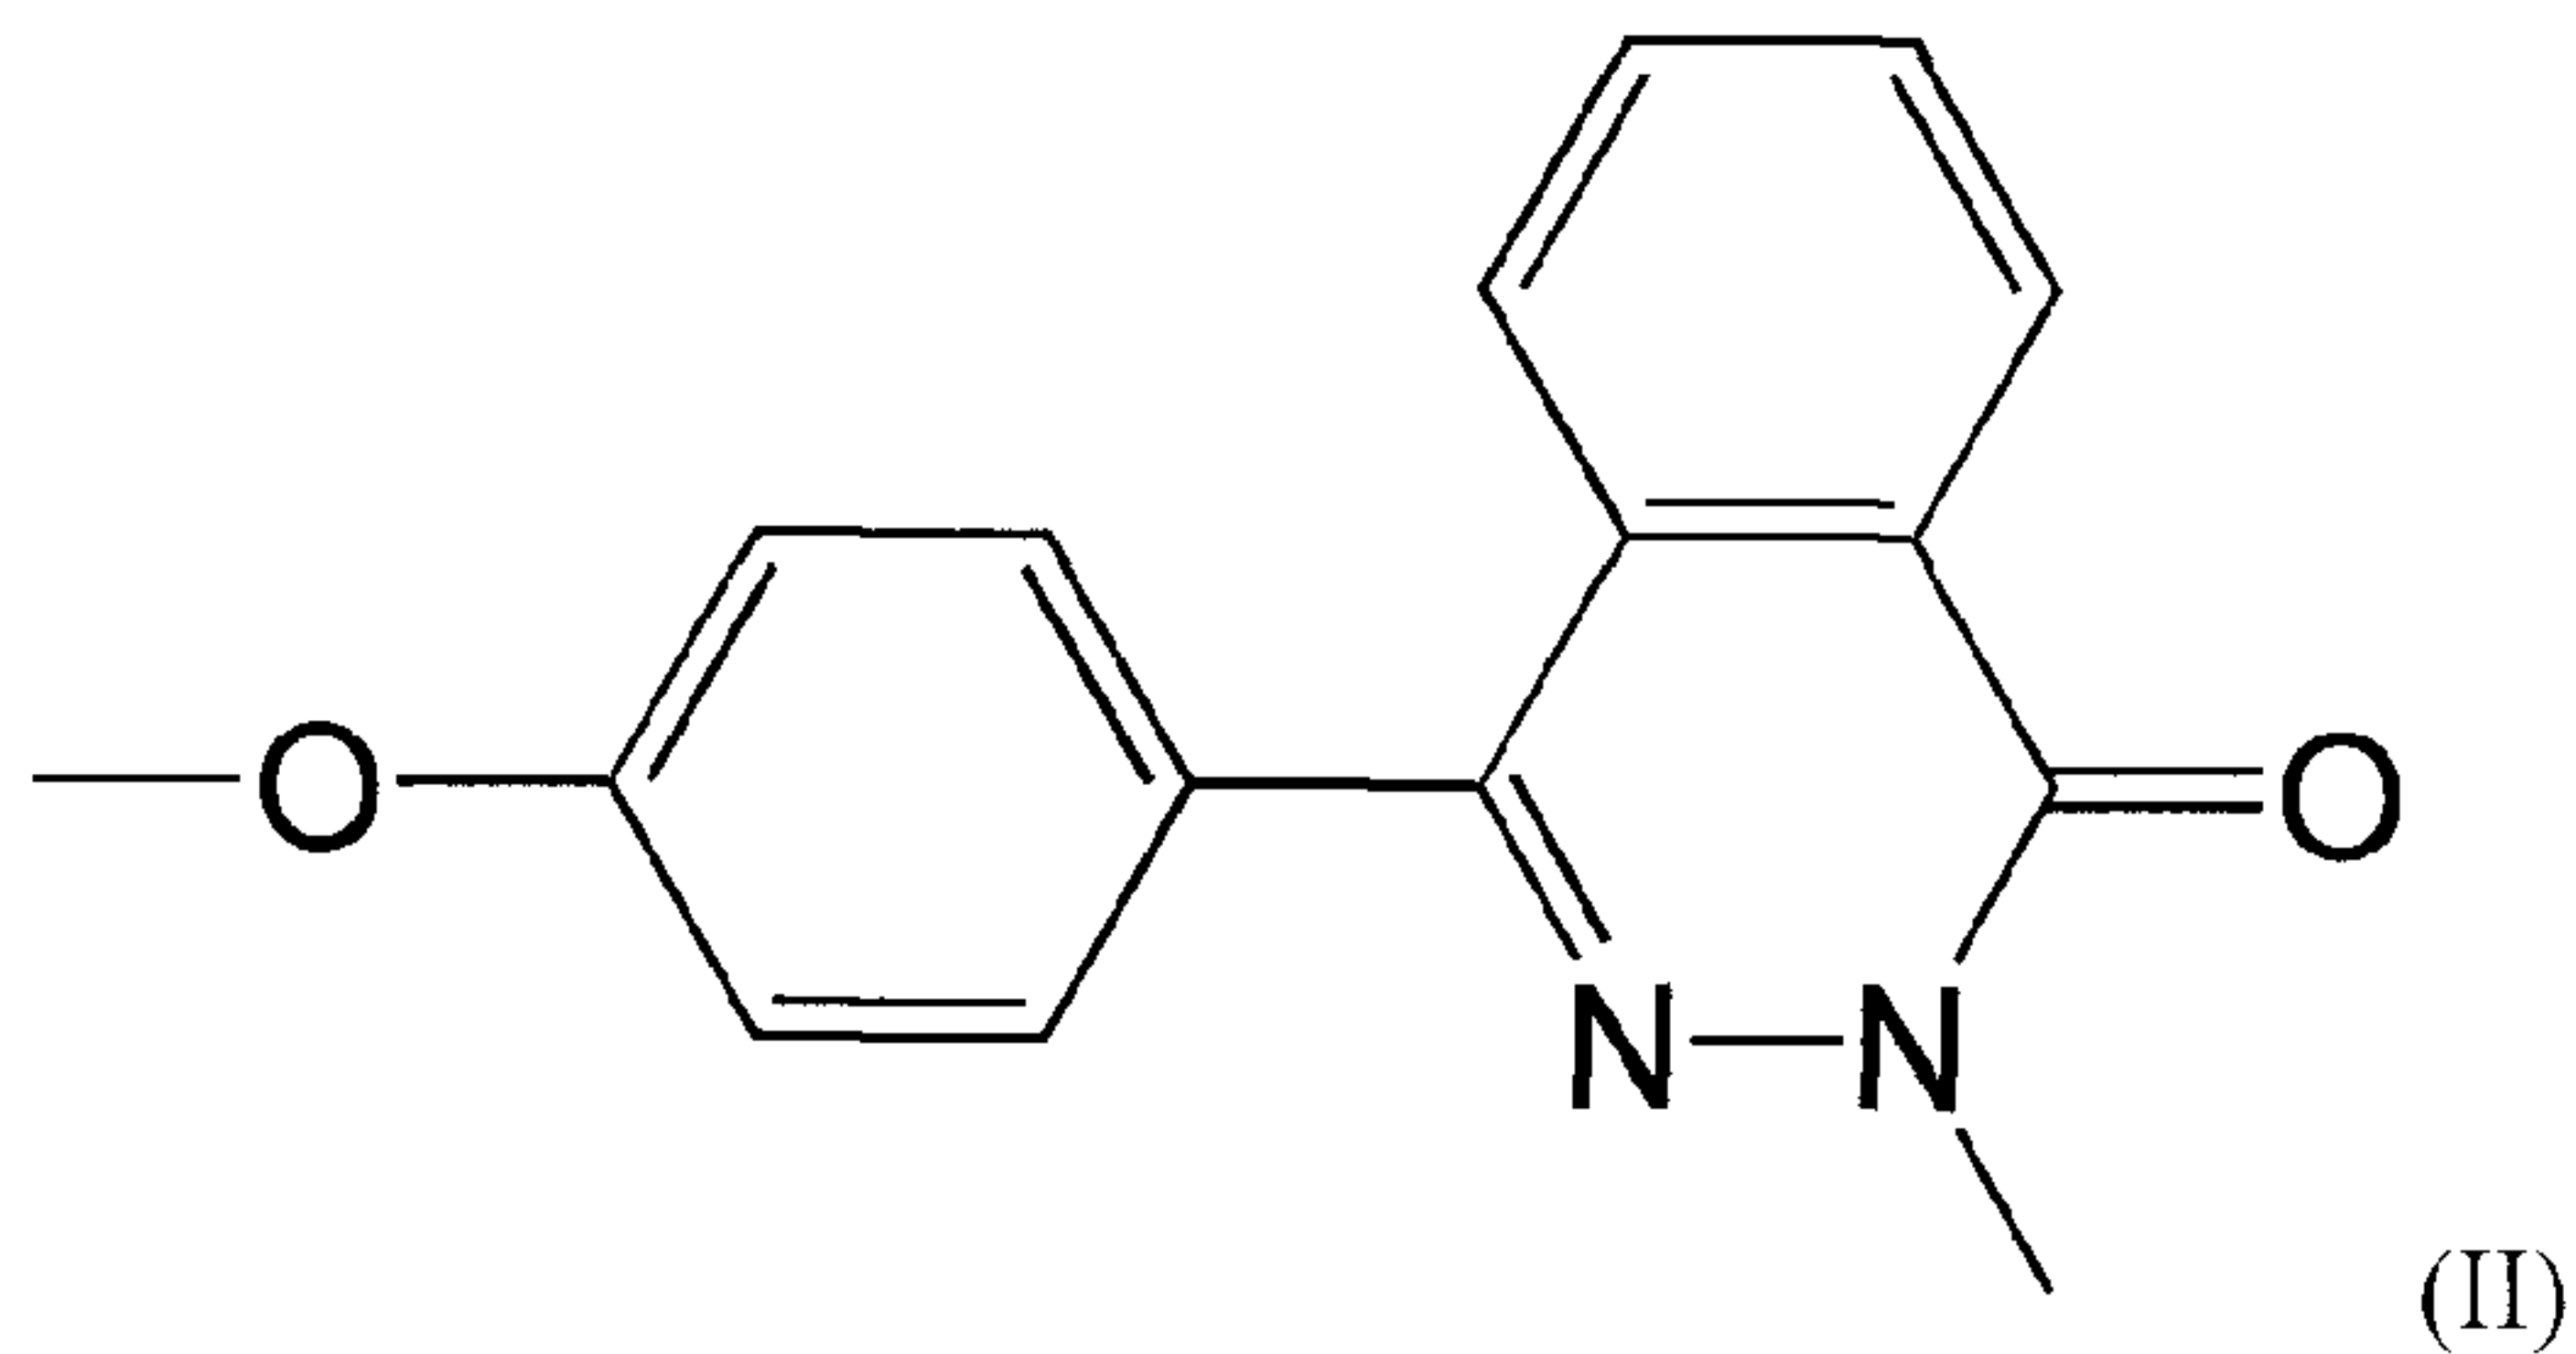


Q is a biphenol unit of formula (III);

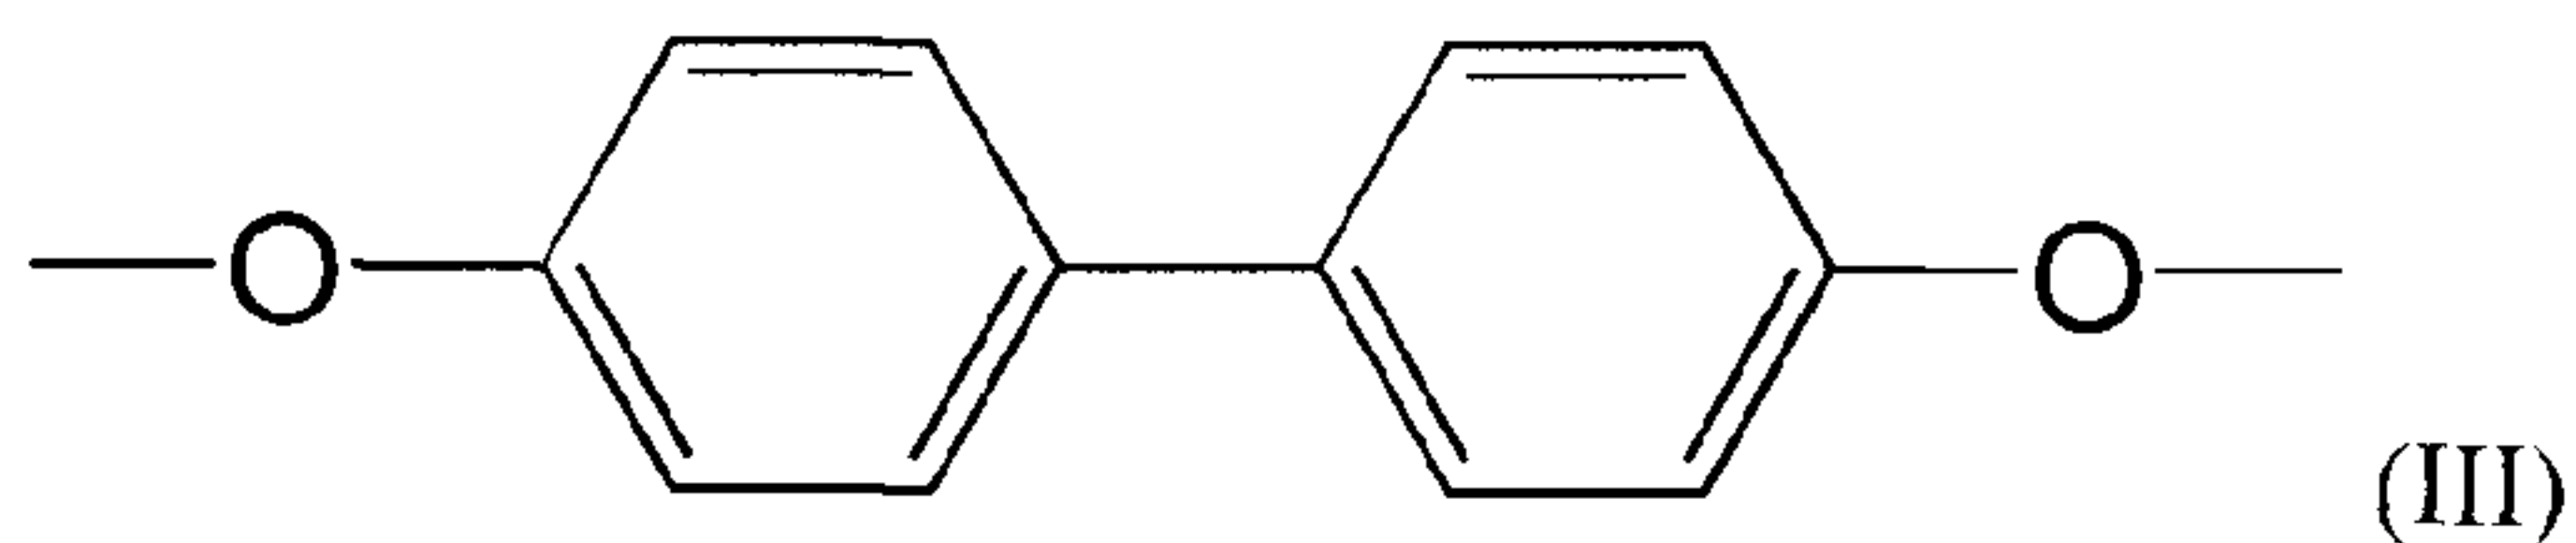

Z is an aromatic ketone unit of formula (IV) or (V);

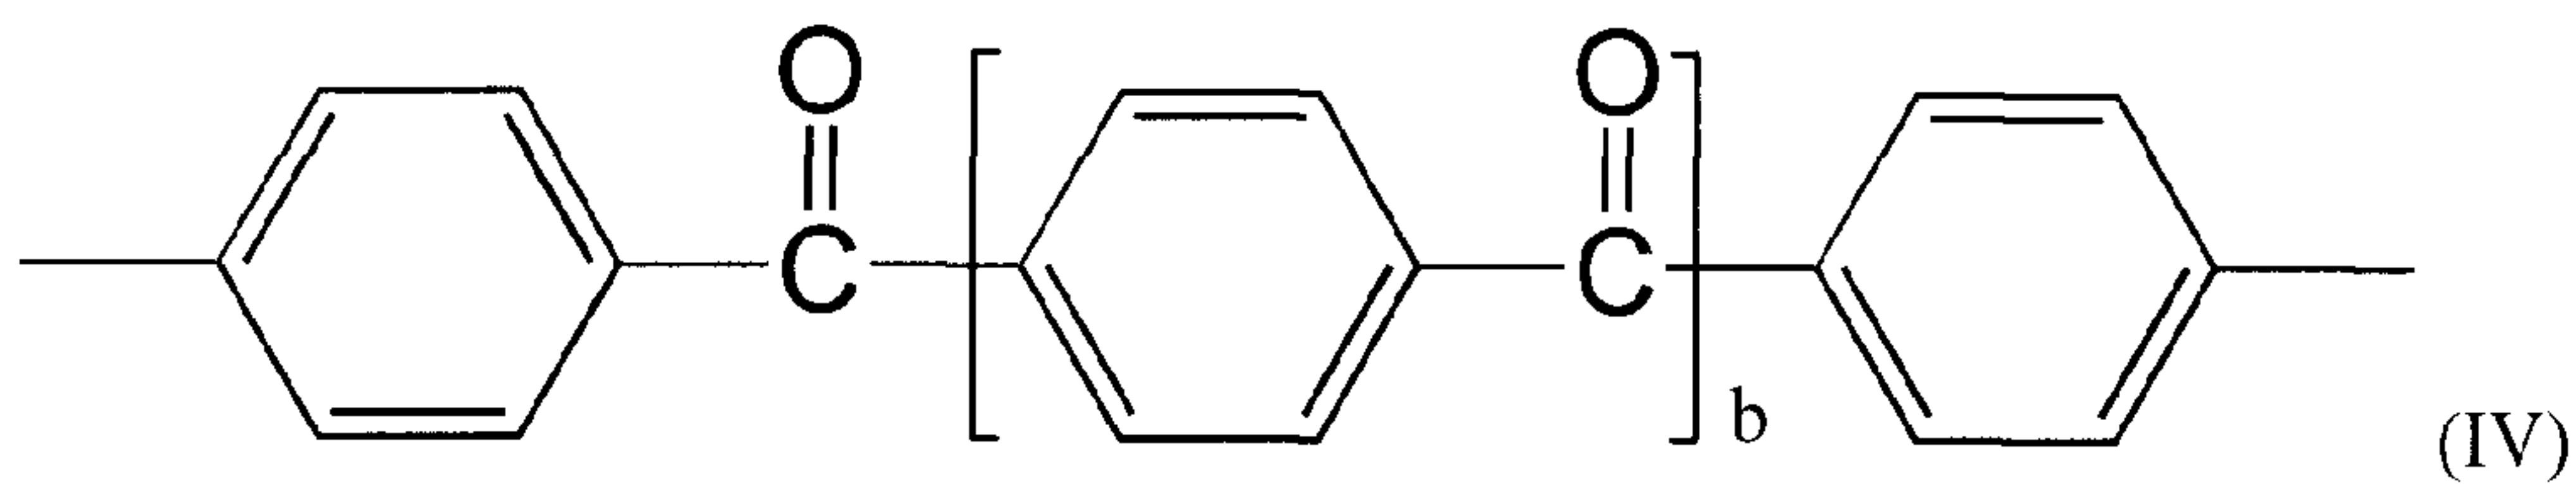

b is a value of 0 through 1

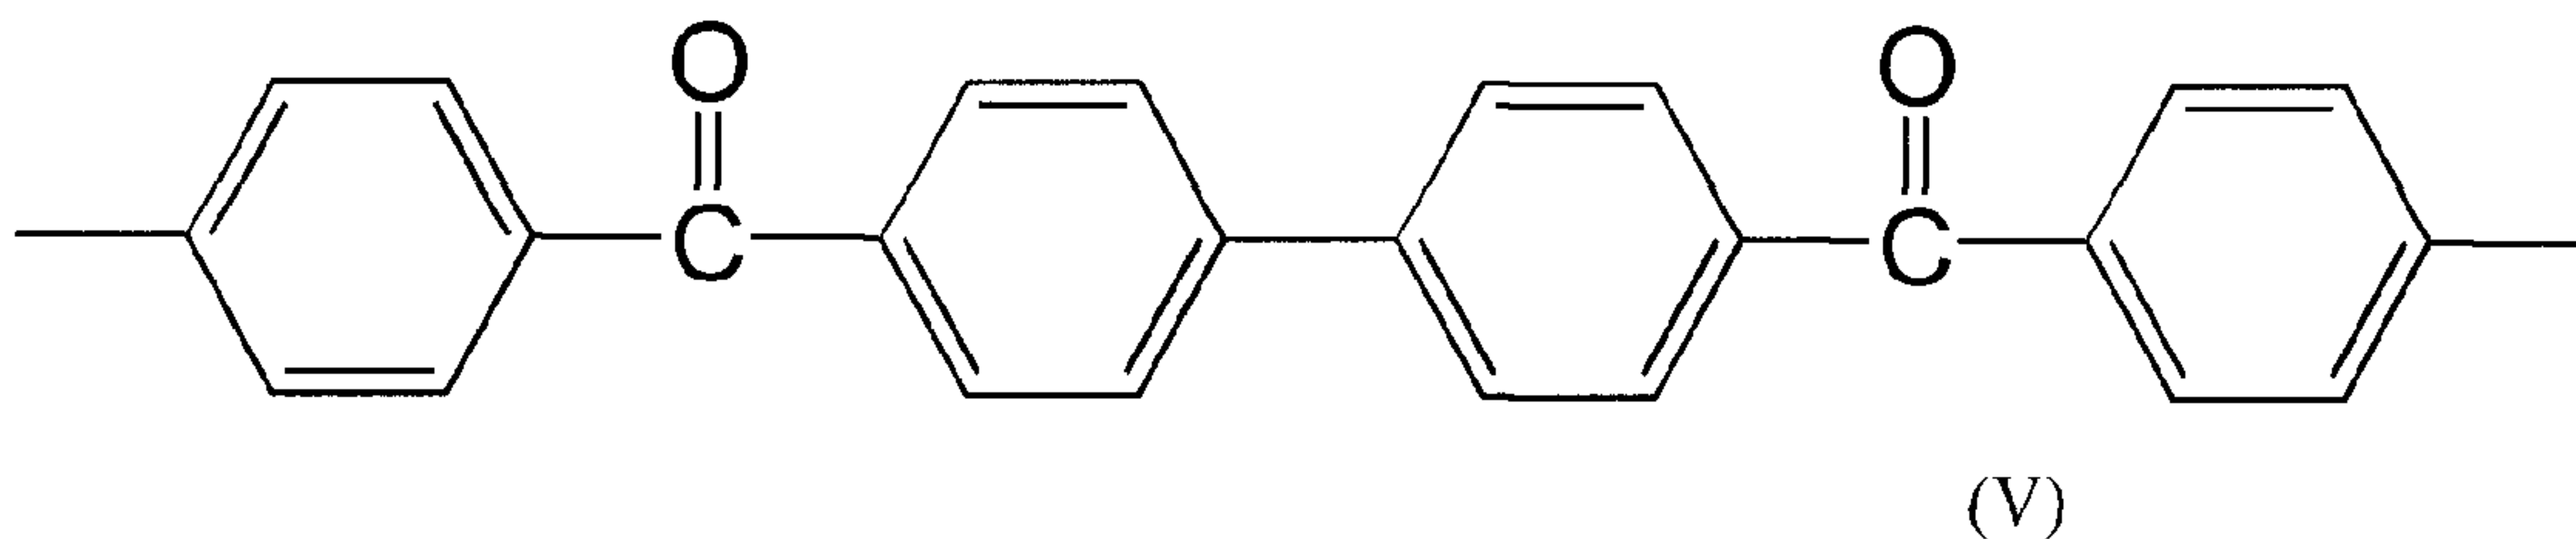

x is a value of at least 1; and


y is a value of at least 1,

wherein x and y are such that the molar ratio of Q to Cp is between about 30/70 and 90/10, and

wherein the melt processable semicrystalline aromatic polyetherketone polymer

has an enthalpy of melting endotherm of between about 5.0 J/g and 26.0 J/g.

15. The article of manufacture according to claim 14, wherein Z in the polymer is an aromatic ketone unit of formula (VI)

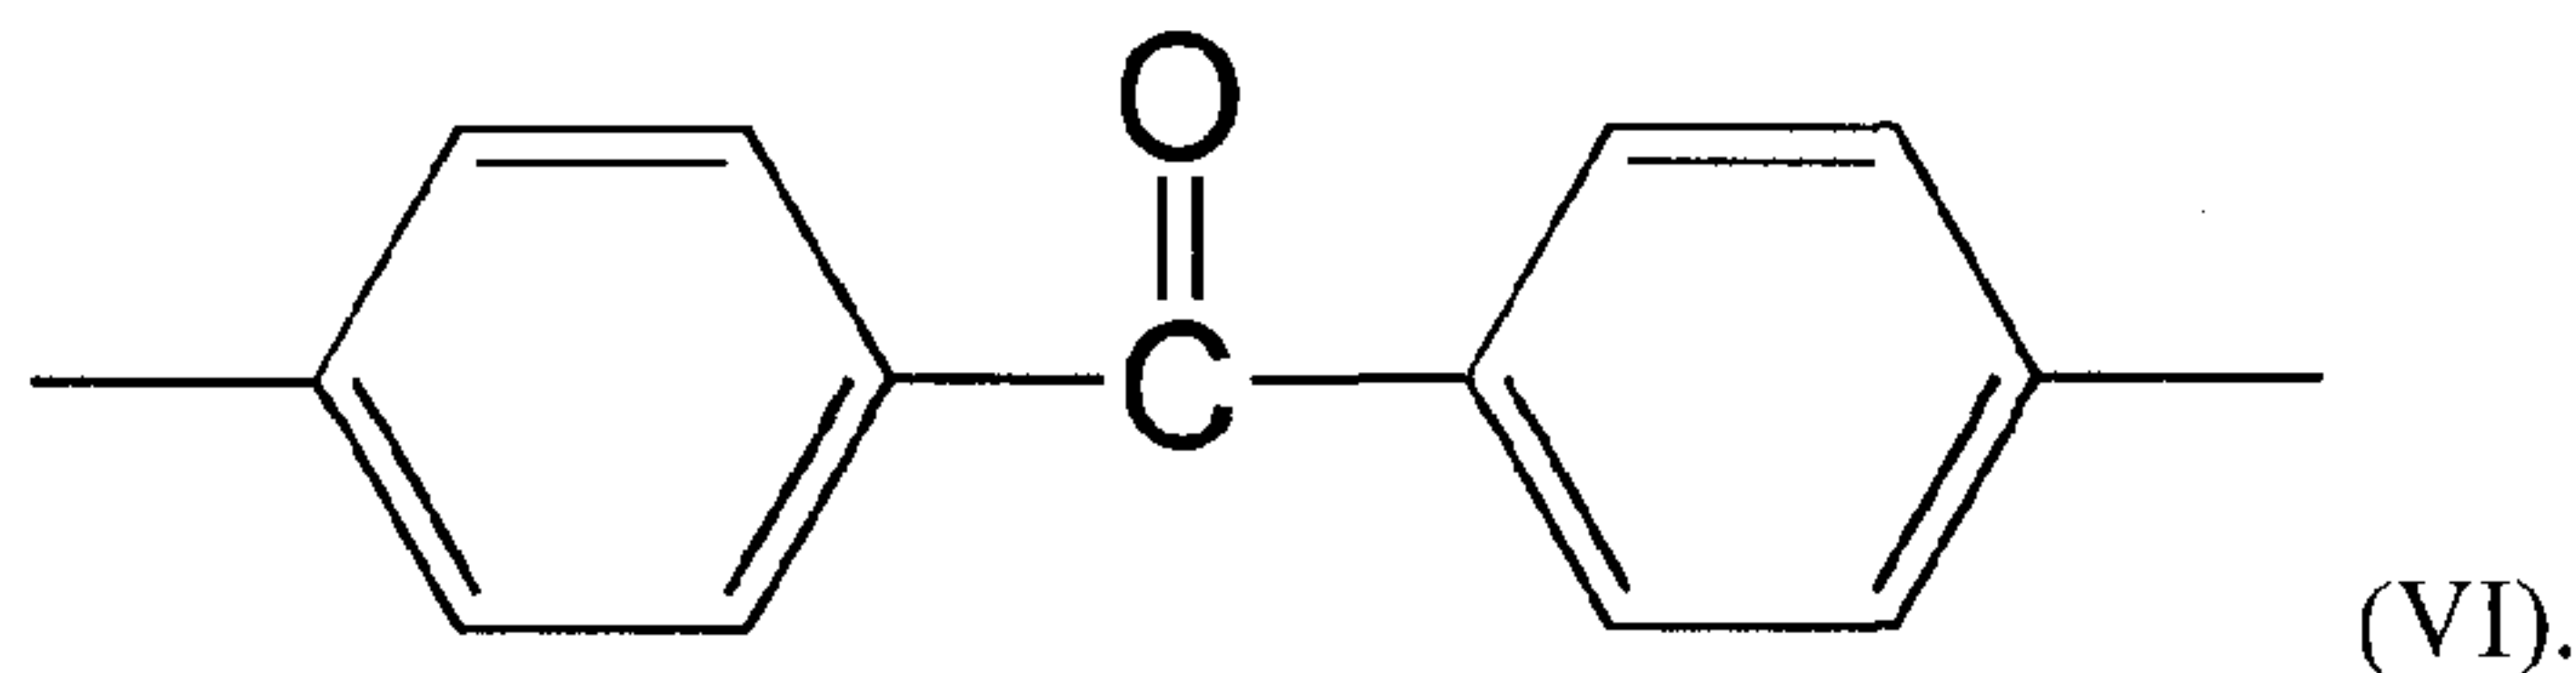

16. The article of manufacture according to claim 14 or 15, wherein the polymer has an inherent viscosity of at least about 0.5 dL/g.

17. The article of manufacture according to claim 14 or 15, wherein the polymer has a glass transition temperature between about 180°C and 240°C.

18. The article of manufacture according to claim 14 or 15, wherein the polymer has a melt temperature between about 310°C and 376°C.

19. The article of manufacture of claim 14 or 15, comprising a shaped article formed by extrusion, injection molding, centrifuge molding, blow molding, rotational molding, transfer molding, thermoforming or compression molding.

20. The article of manufacture of claim 14, comprising a fibrous substrate.

21. The article of manufacture of claim 14, wherein the composition comprises a particulate filler.

22. The article of manufacture of claim 14, comprising a fibrous substrate, wherein the composition comprises a particulate filler.

23. The article of manufacture of claim 15, comprising a fibrous substrate.

24. The article of manufacture of claim 15, wherein the composition comprises a particulate filler.

25. The article of manufacture of claim 15, comprising a fibrous substrate, wherein the composition comprises a particulate filler.

26. The composition of claim 1 or 2, comprising mineral fillers.

27. The composition of claim 26, wherein the mineral fillers are selected from the group consisting of mica, glass, quartz, and clay.

28. The composition of claim 1 or 2, comprising fibers.

29. The composition of claim 28, wherein the fibers are selected from the group consisting of glass fibers, carbon fibers, polyarylamide fibers, and ceramic fibers.

30. The composition of claim 1 or 2, comprising additives selected from the group consisting of colorants, pigments, thermal stabilizers, and ultra violet stabilizers.


31. The article of manufacture of claim 14 or 15, wherein the composition comprises mineral fillers.

32. The article of manufacture of claim 31, wherein the mineral fillers are selected from the group consisting of mica, glass, quartz, and clay.

33. The article of manufacture of claim 14 or 15, wherein the composition comprises fibers.


34. The article of manufacture of claim 33, wherein the fibers are selected from the group consisting of glass fibers, carbon fibers, polyarylamide fibers, and ceramic fibers.

35. The article of manufacture of claim 14 or 15, wherein the composition comprises additives selected from the group consisting of colorants, pigments, thermal stabilizers, and ultra violet stabilizers.

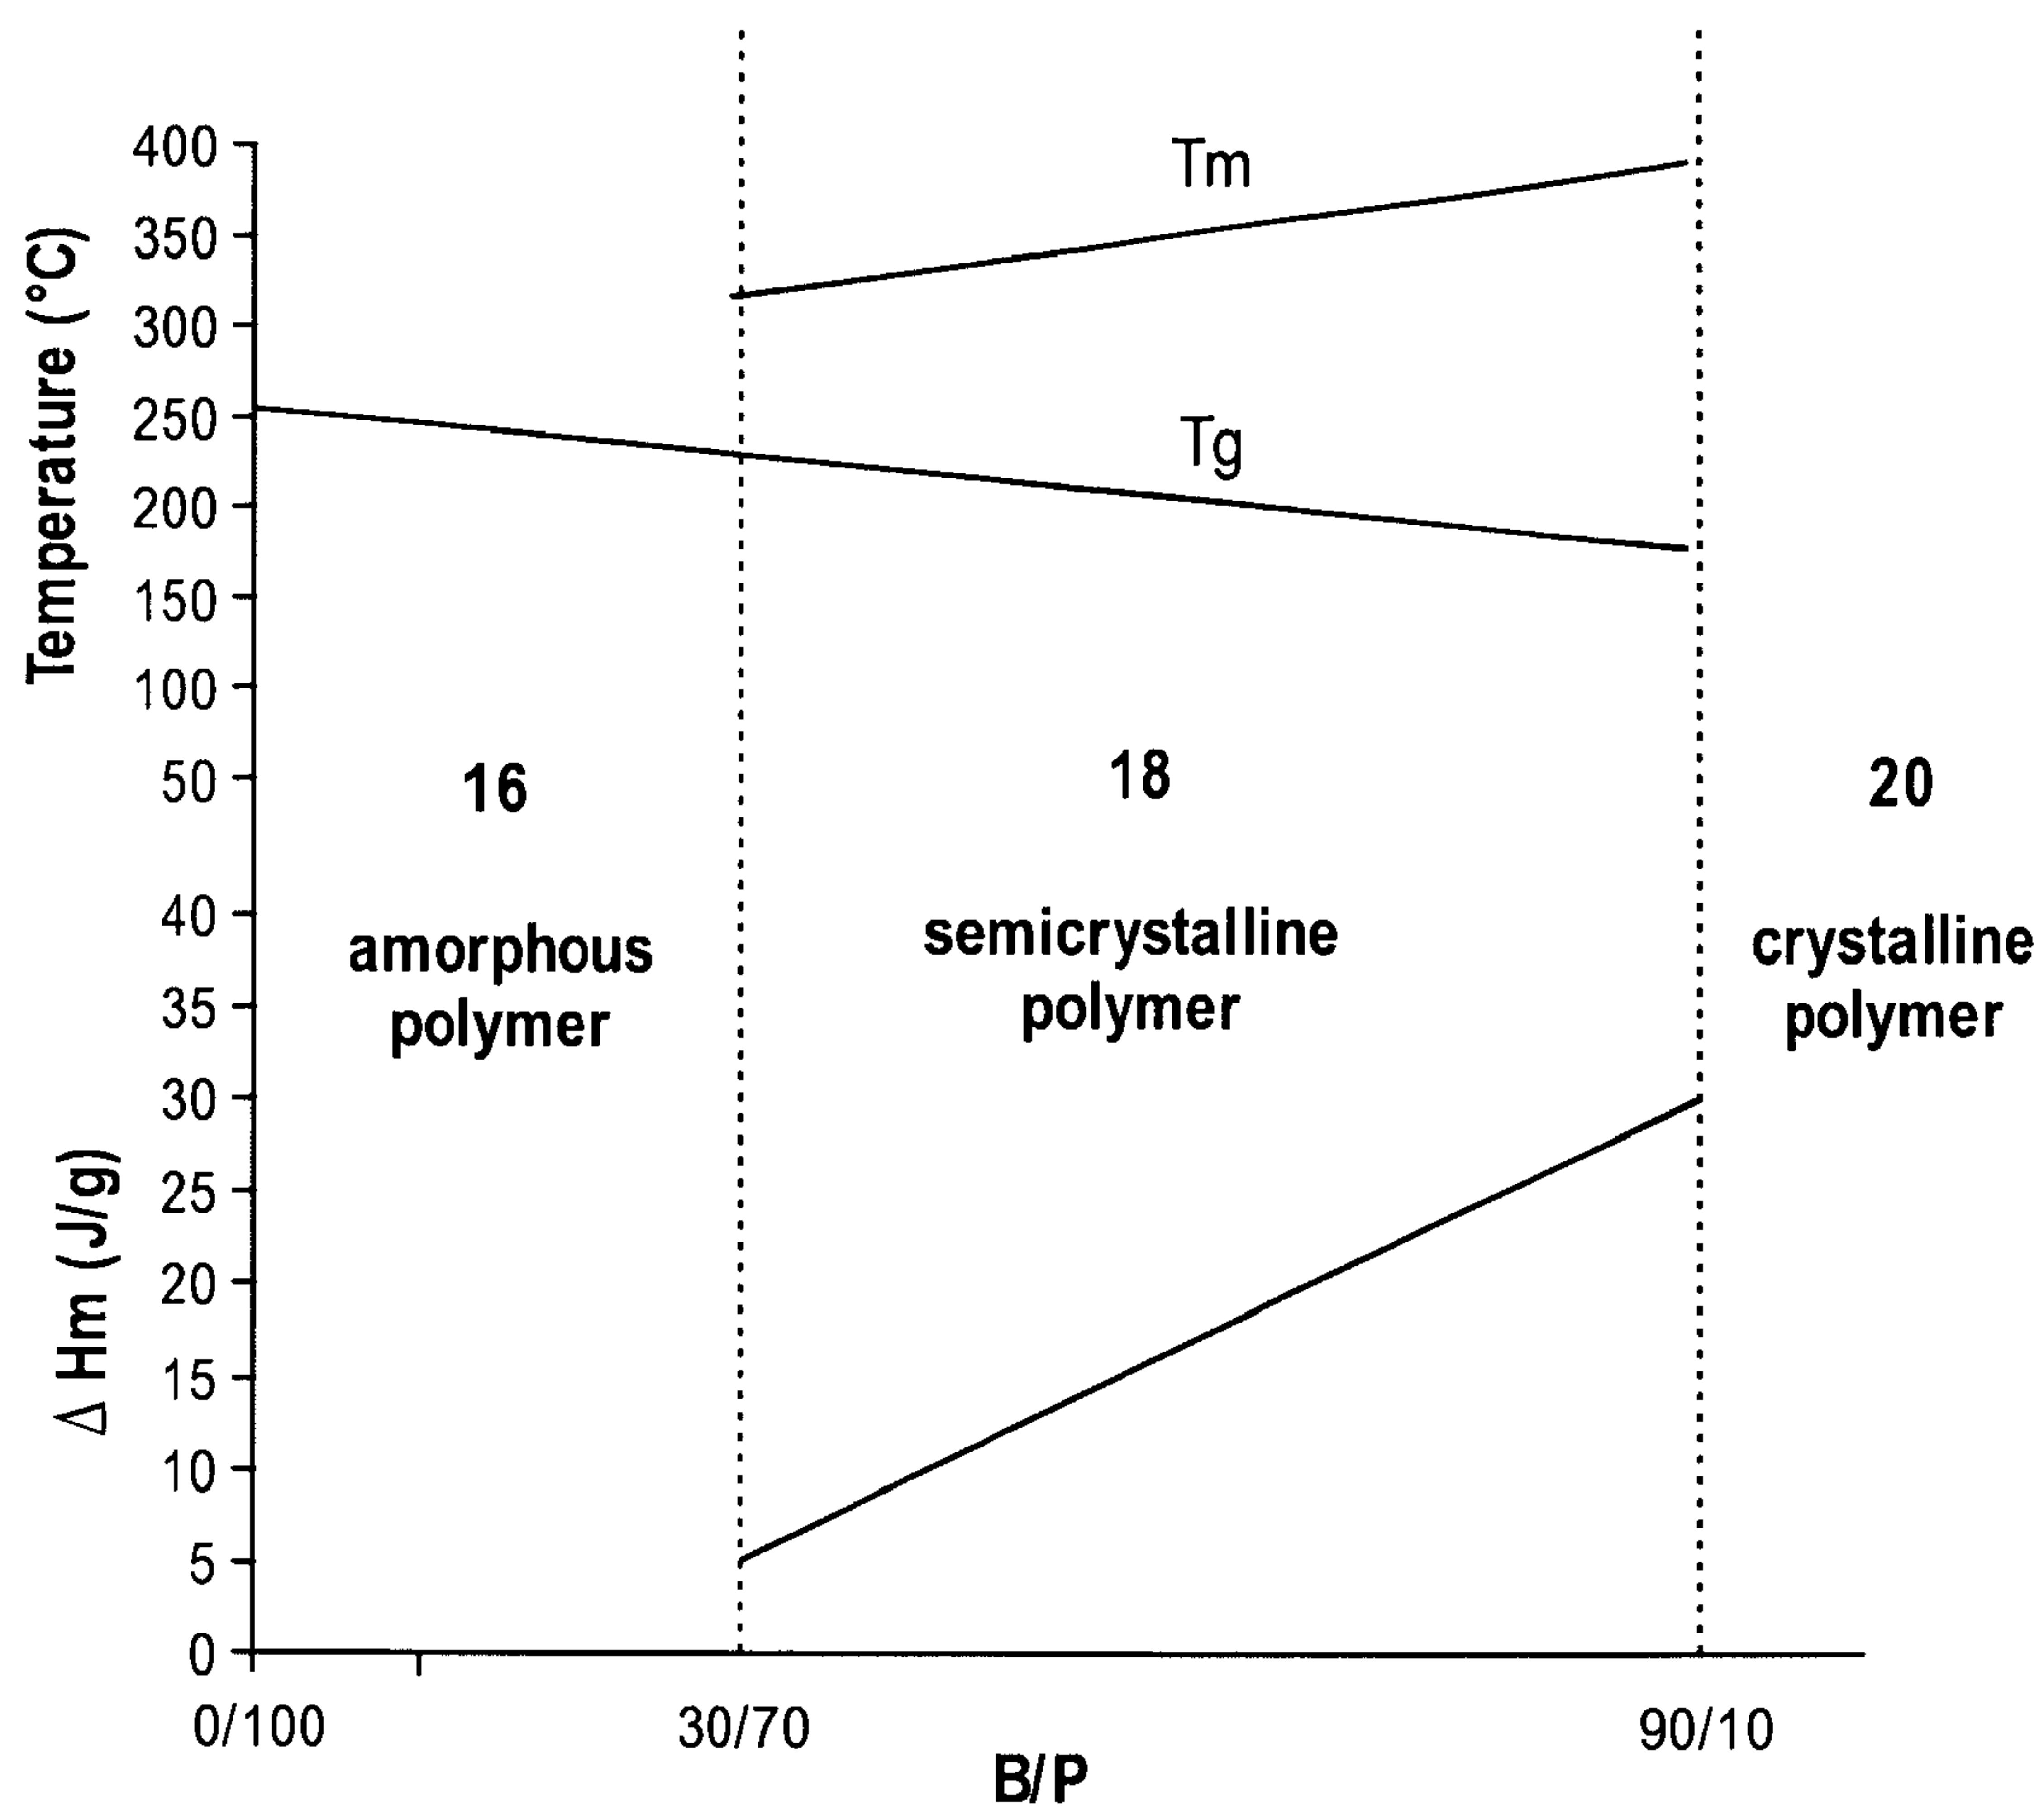

16: amorphous polymer
18: semicrystalline polymer
20: crystalline polymer

Fig. 1

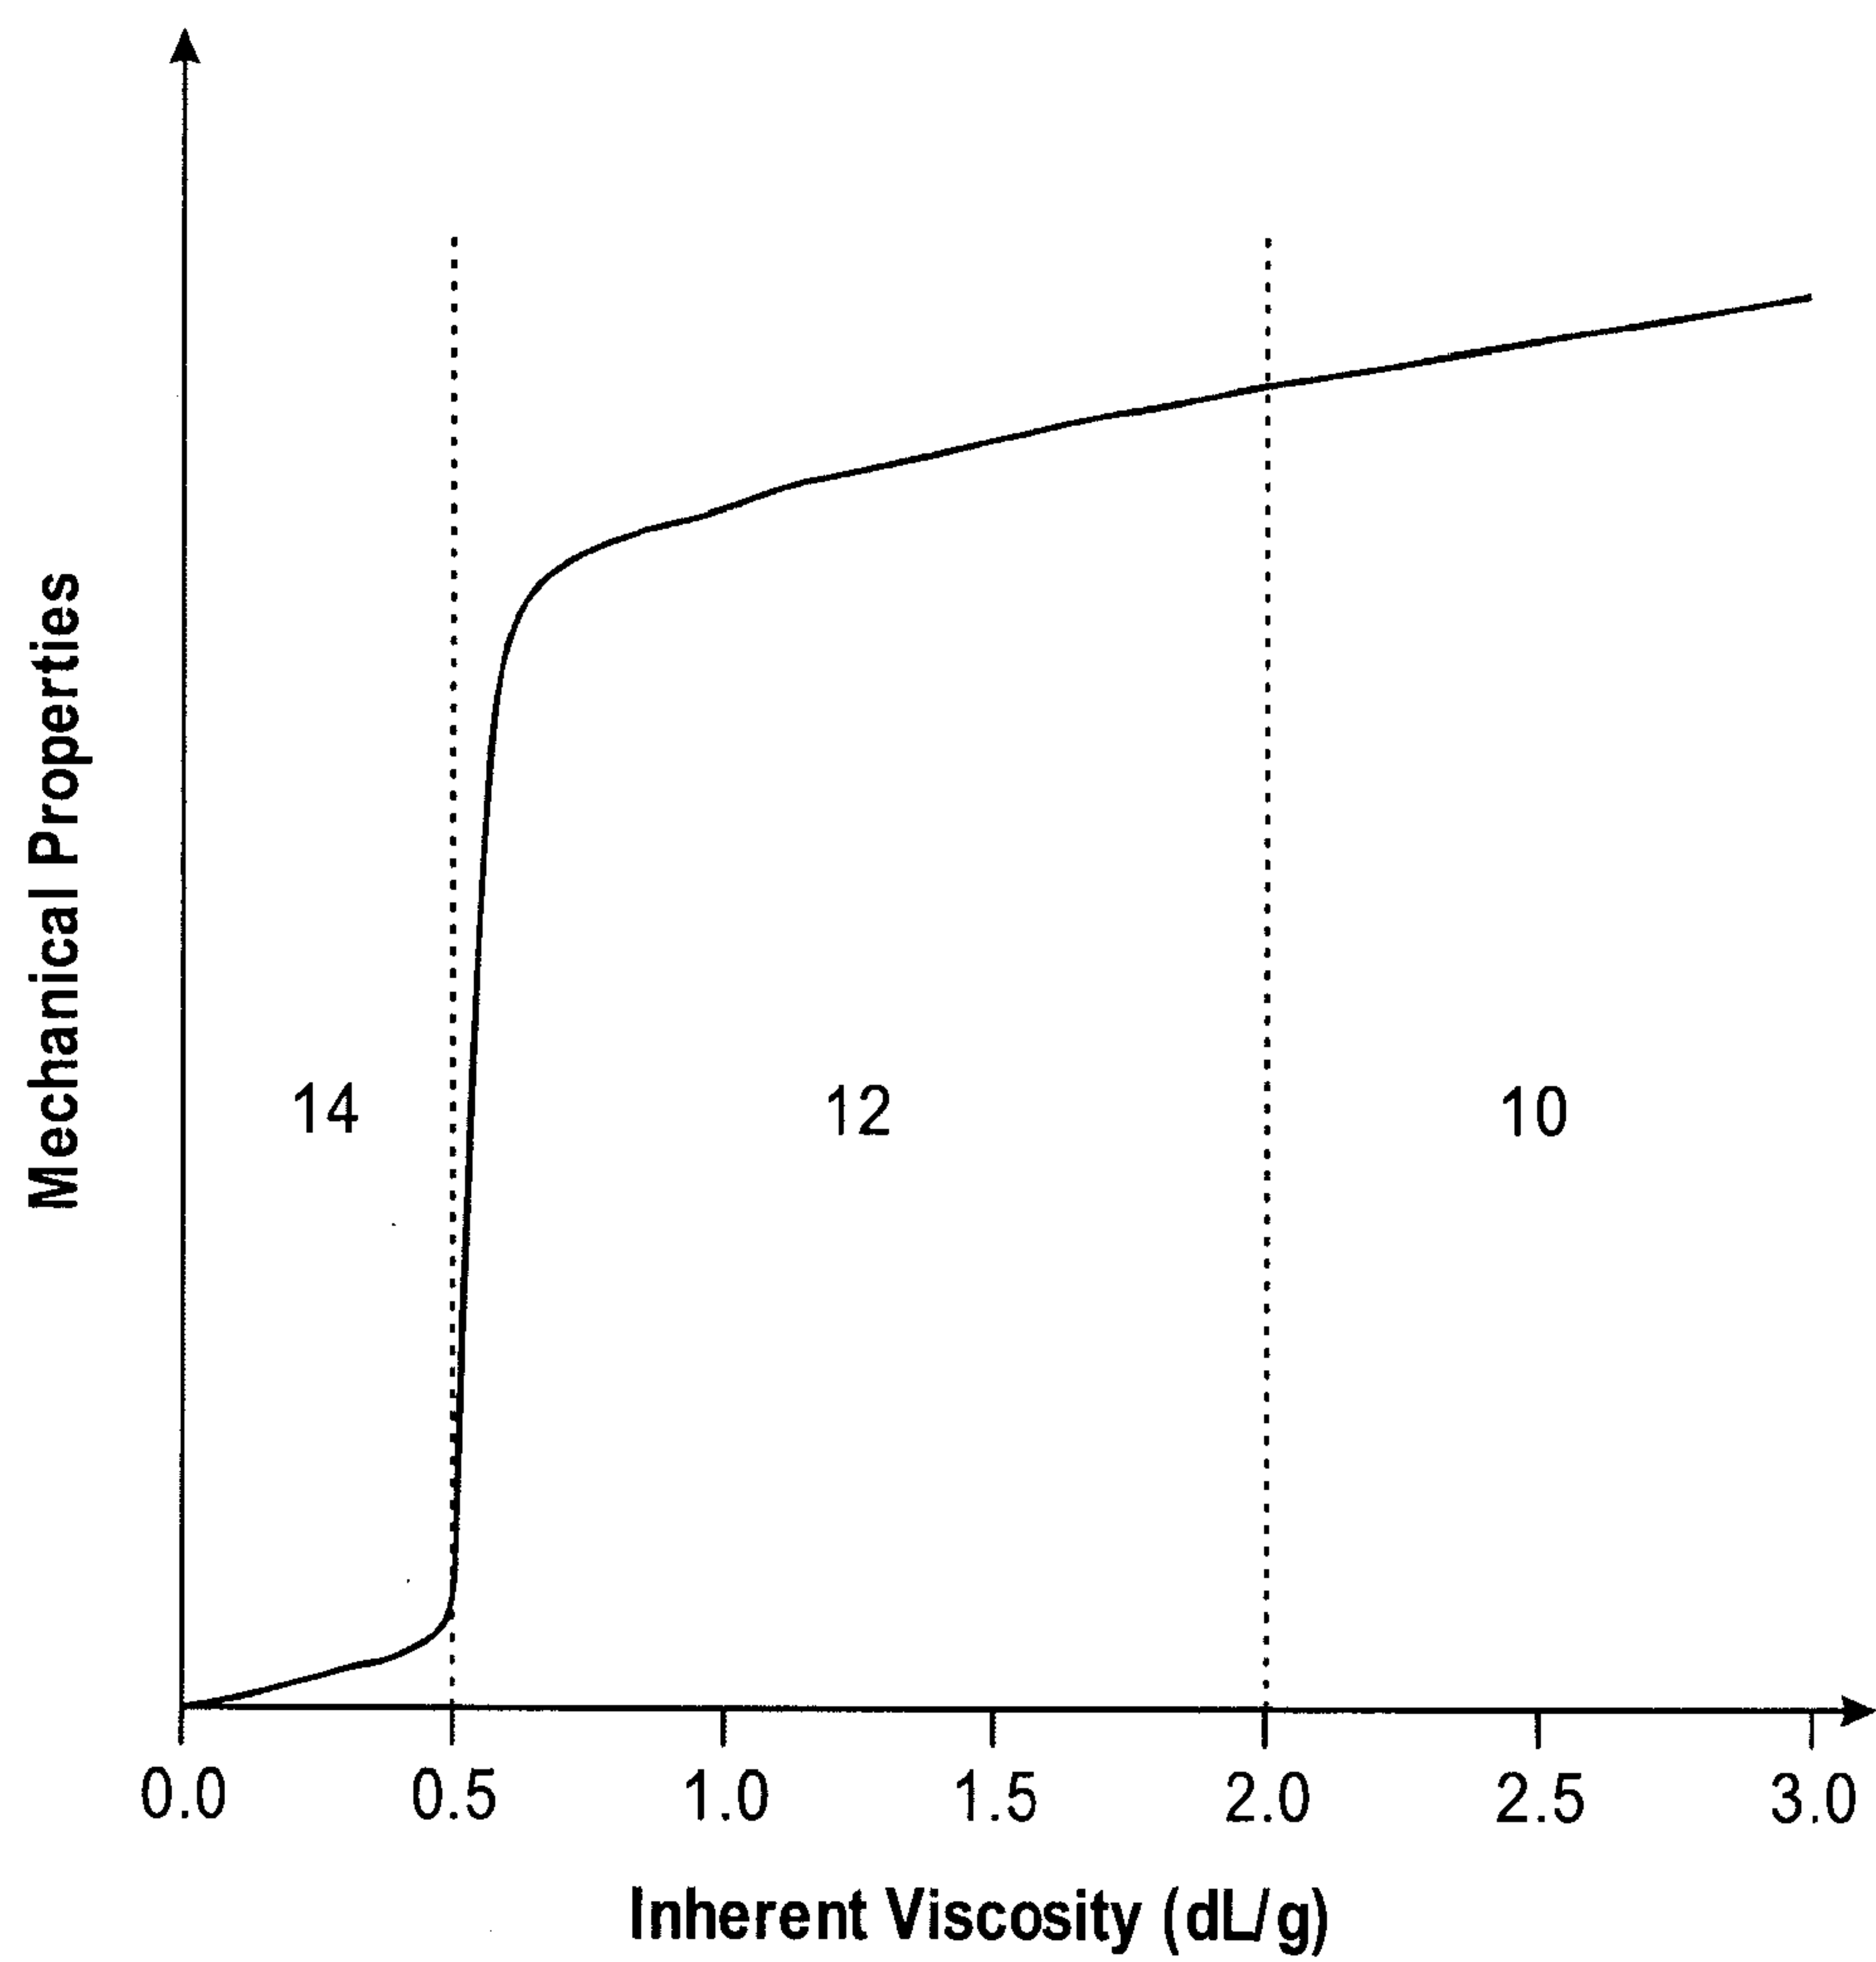

14: brittle oligomers

12: melt processable polymer with good ductility and mechanical properties

10: ultra-high molecular weight polymer not melt processable

Fig.2

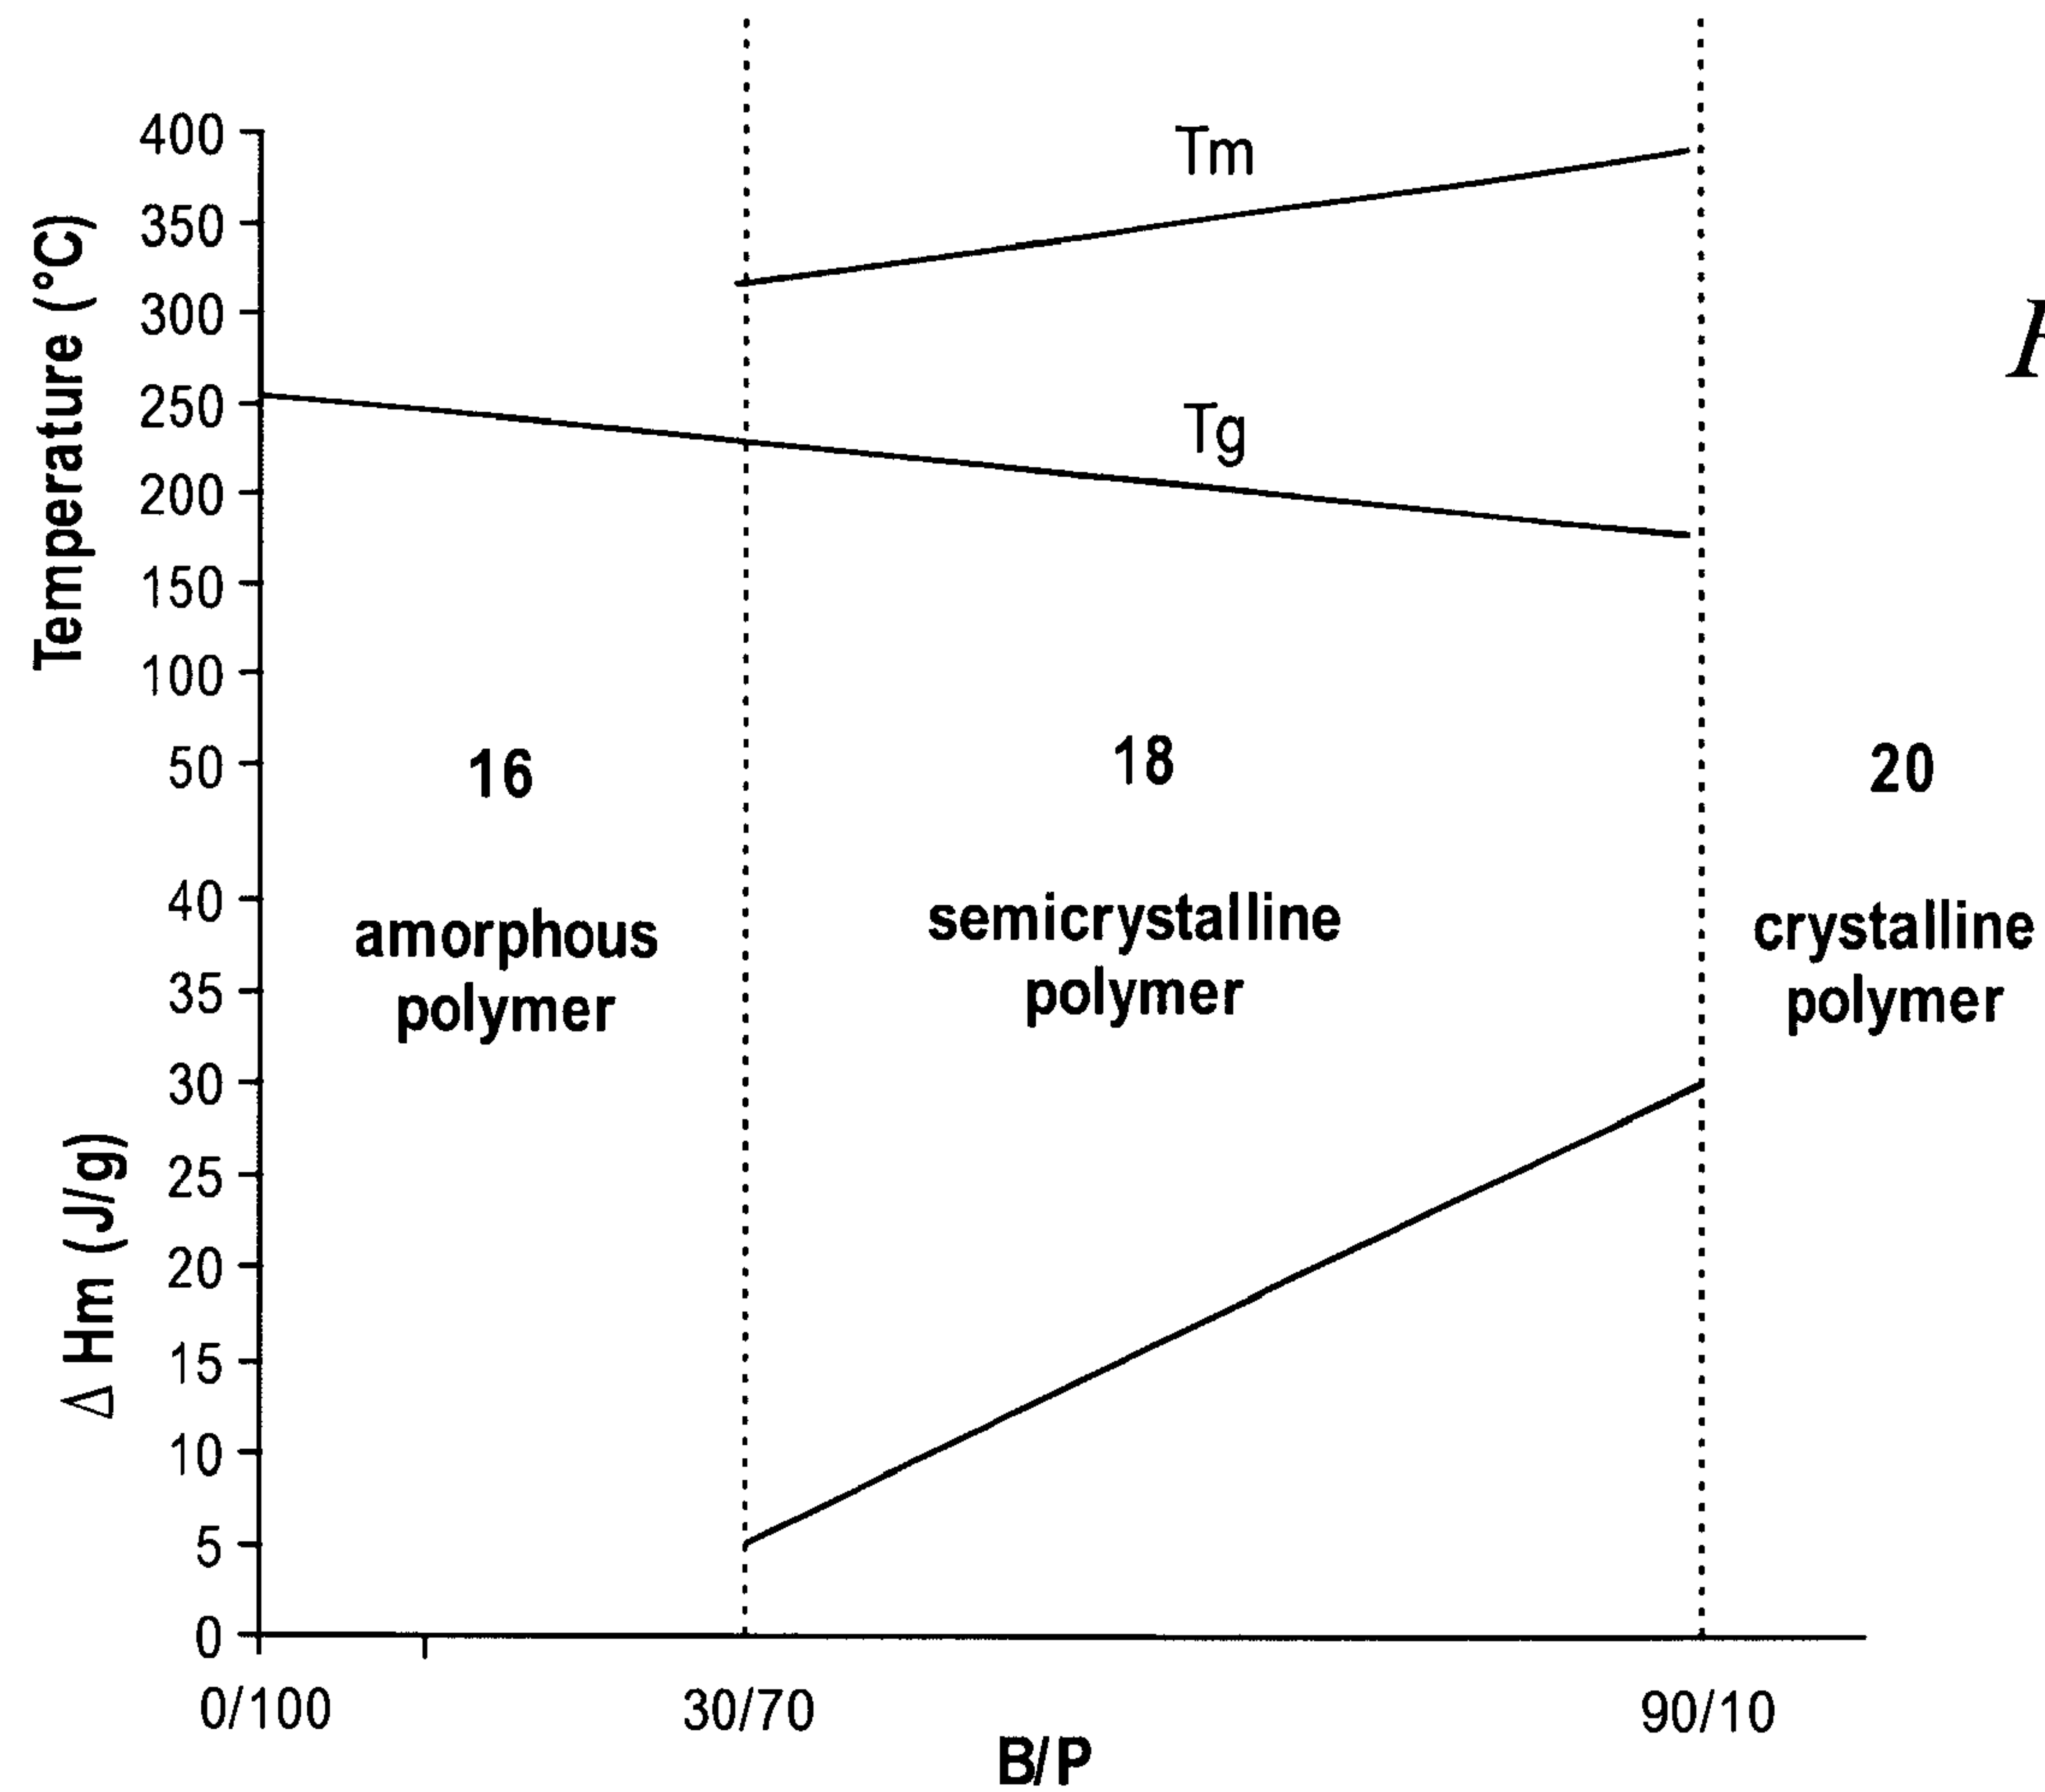


Fig. 1

16: amorphous polymer
18: semicrystalline polymer
20: crystalline polymer