



US 20050089662A1

(19) **United States**

(12) **Patent Application Publication**
Bayzelon et al.

(10) **Pub. No.: US 2005/0089662 A1**

(43) **Pub. Date: Apr. 28, 2005**

(54) **METHOD AND APPARATUS FOR
MANUFACTURING PRESSURE SENSITIVE
ADHESIVE LABEL STOCKS WITH
PRINTING UNDER ADHESIVE AND
PRODUCT PRODUCED THEREBY**

Related U.S. Application Data

(62) Division of application No. 10/210,212, filed on Aug. 1, 2002, now Pat. No. 6,852,191.

Publication Classification

(76) Inventors: **Francois Bayzelon**, Chambly (CA);
Frederic La Brie, Boucherville (CA);
Daniel Brochu, Montreal (CA)

(51) **Int. Cl.⁷ B32B 9/00; B32B 31/08**

(52) **U.S. Cl. 428/40.1; 156/289; 156/324;
156/390; 156/555**

Correspondence Address:
YOUNG & BASILE, P.C.
3001 WEST BIG BEAVER ROAD
SUITE 624
TROY, MI 48084 (US)

(57) **ABSTRACT**

A method and apparatus for making adhesive-backed labels. Glassine paper stock is unwound from a roll, coated with photo-cationic silicone and exposed to wavelength-controlled illumination to cure. Hot melt adhesive is applied over the silicone. Simultaneously, label stock is fed with the coated glassine paper to laminating rollers where the two are joined. Illumination is provided by a dichroic reflector.

(21) Appl. No.: **11/008,301**

(22) Filed: **Dec. 9, 2004**

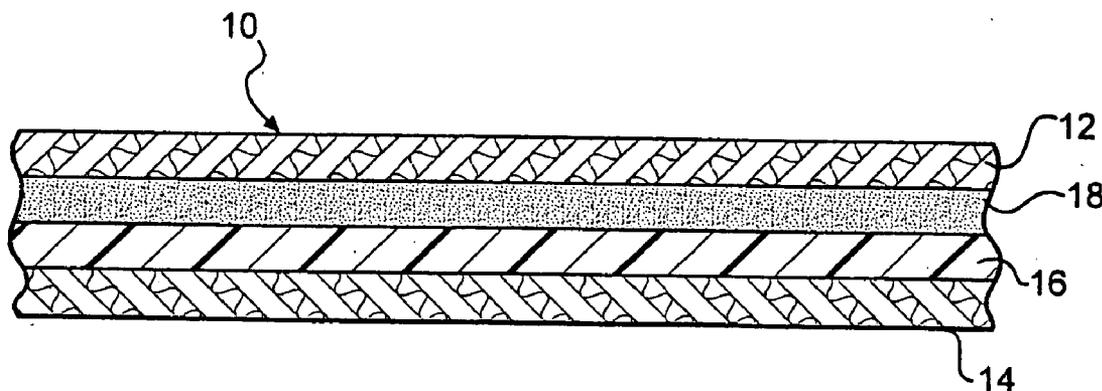


FIG -1

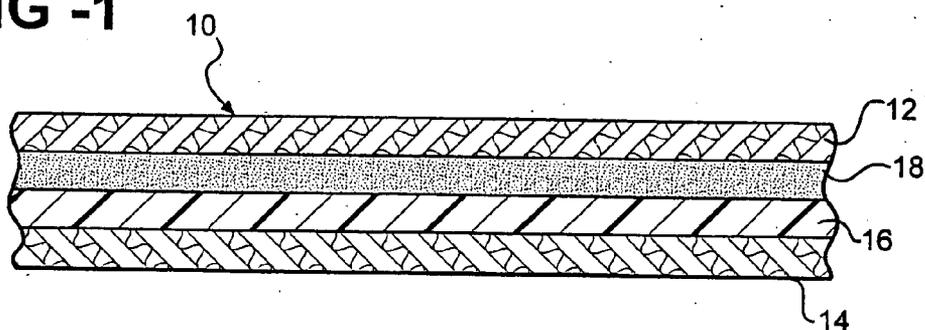


FIG -2

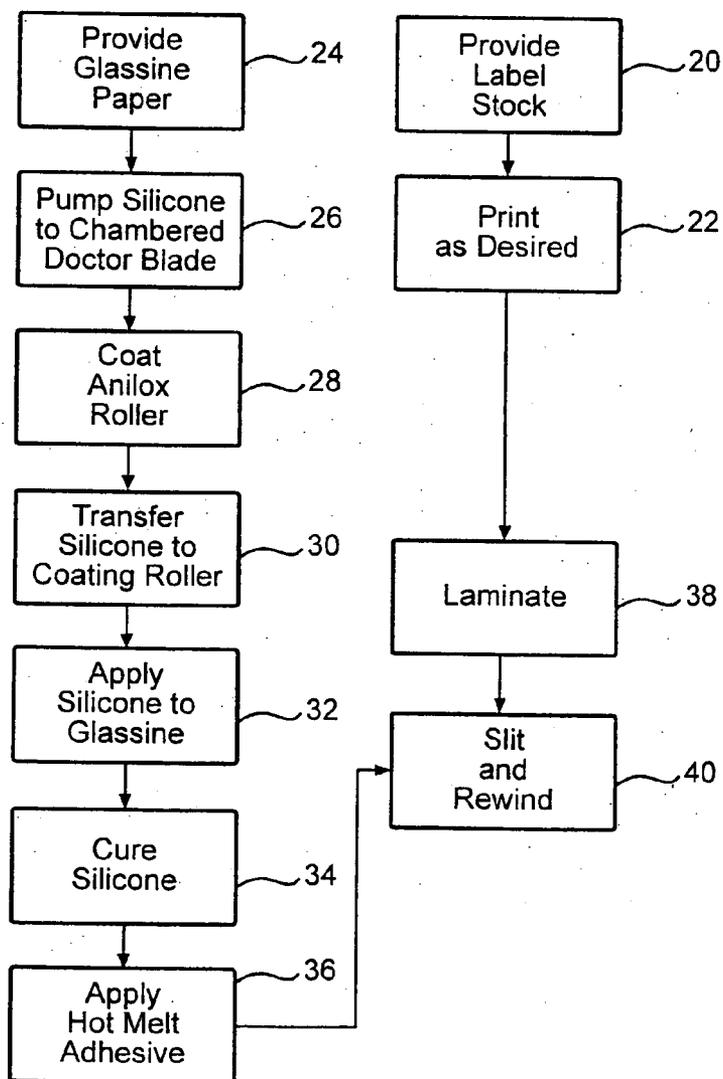
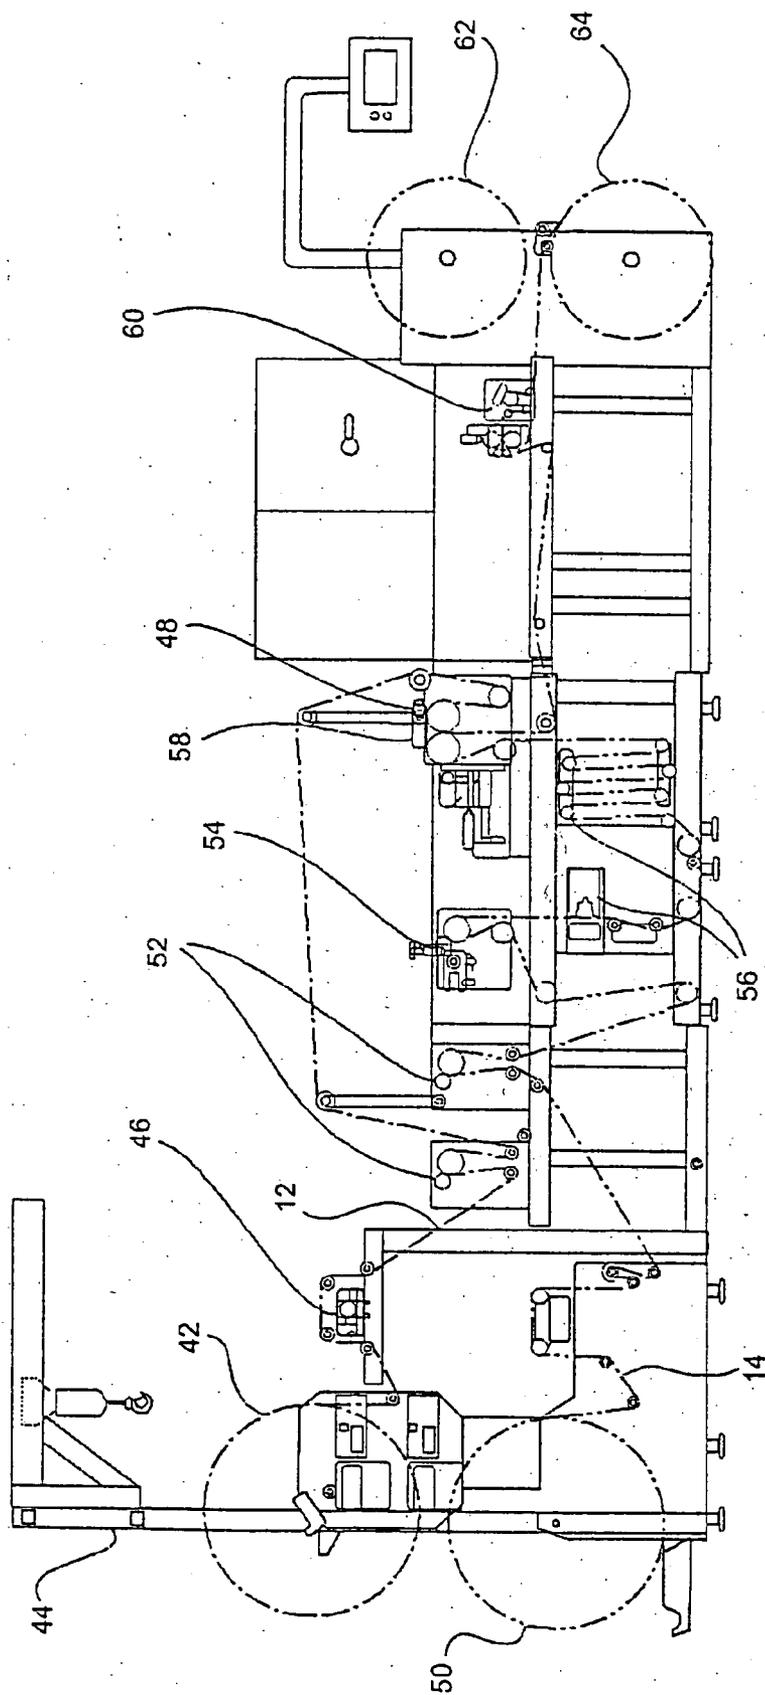
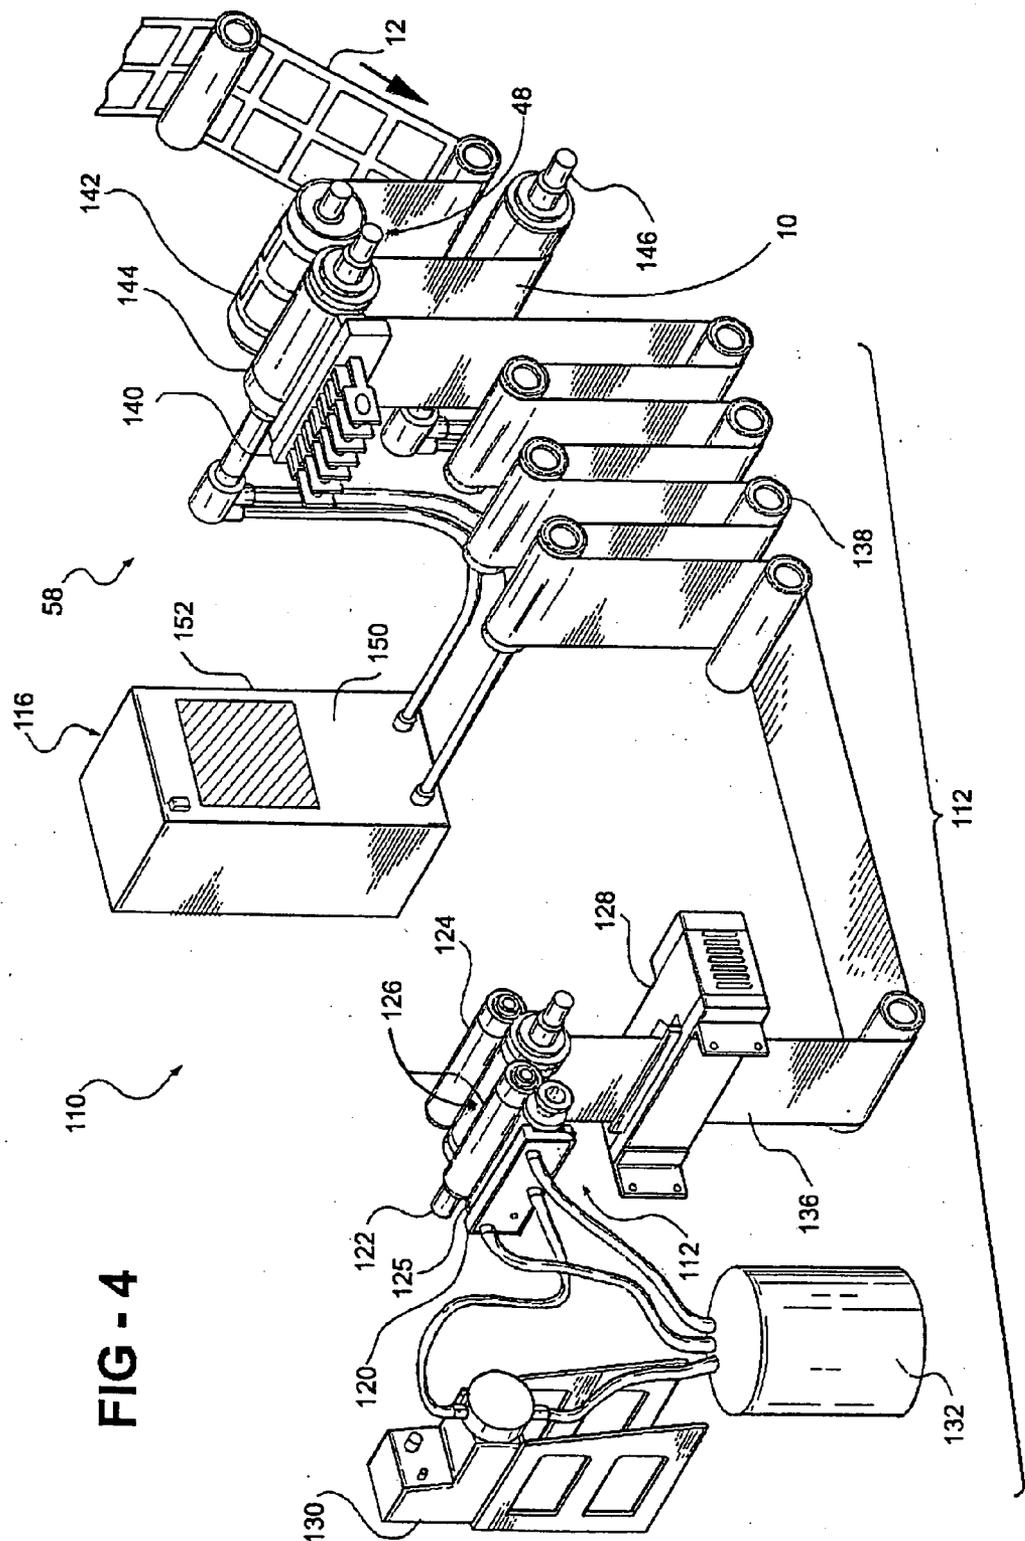
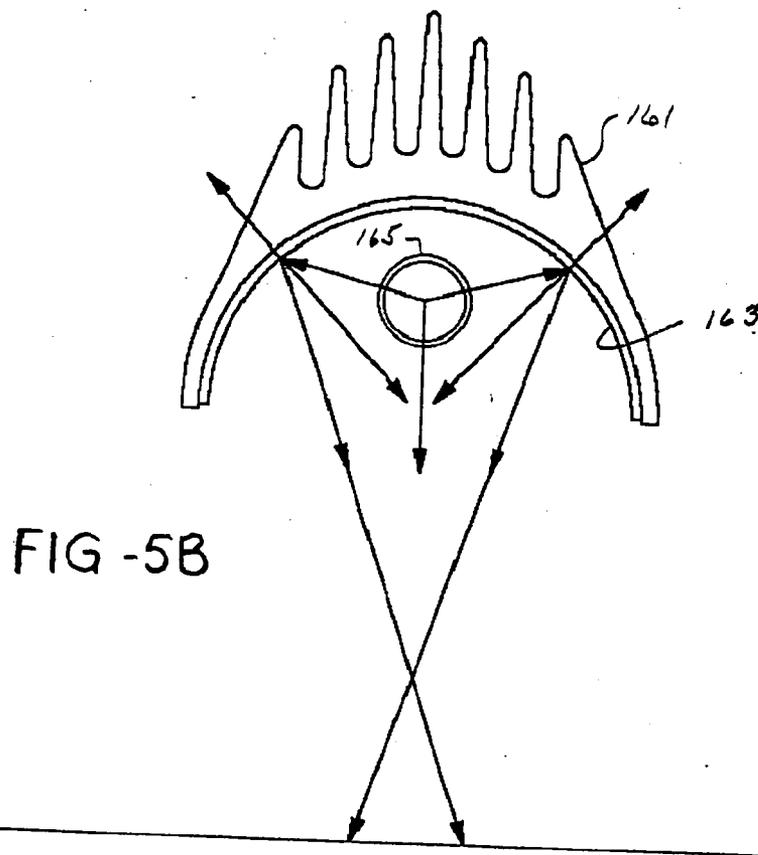
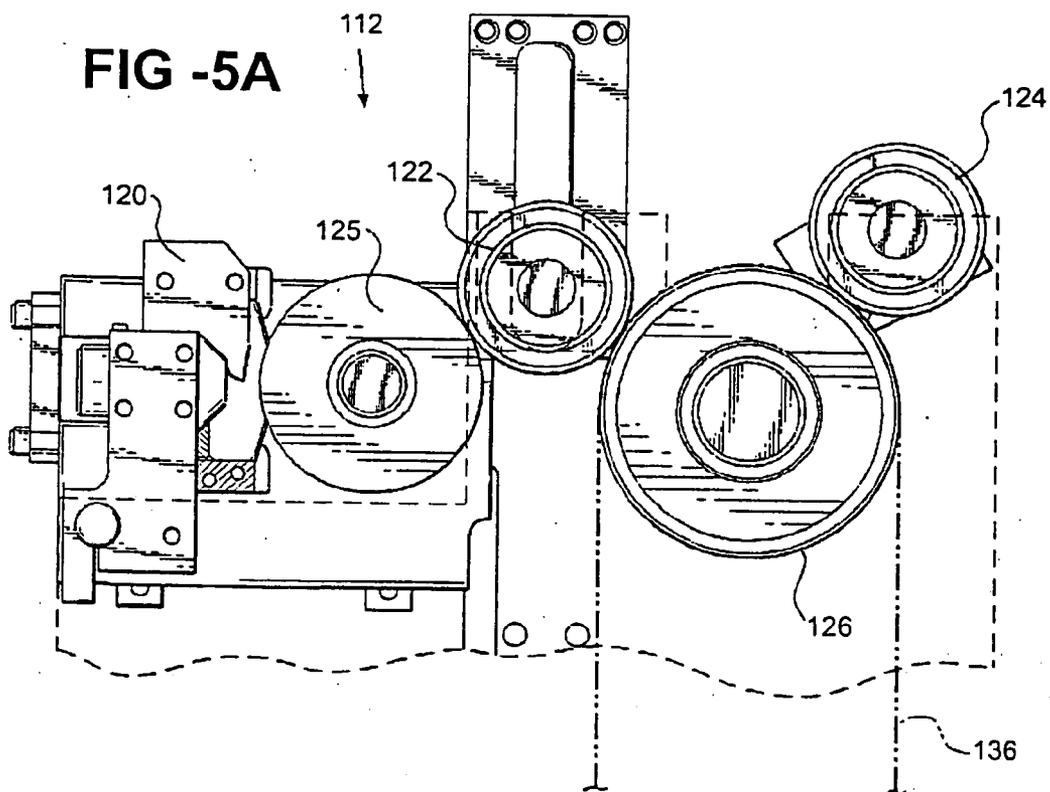
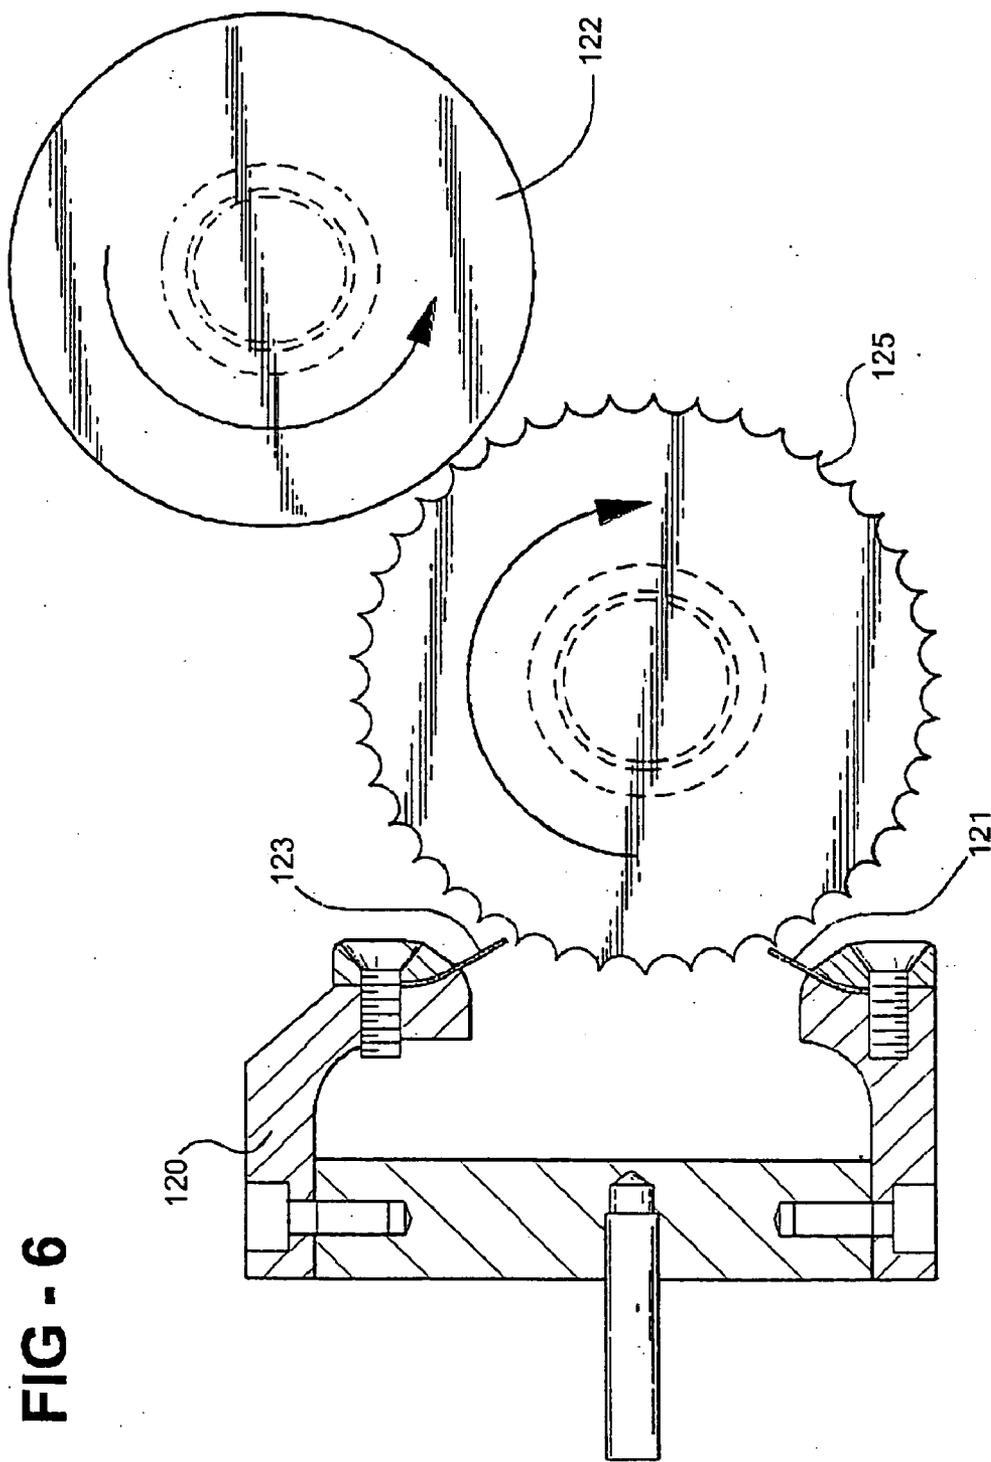


FIG -3









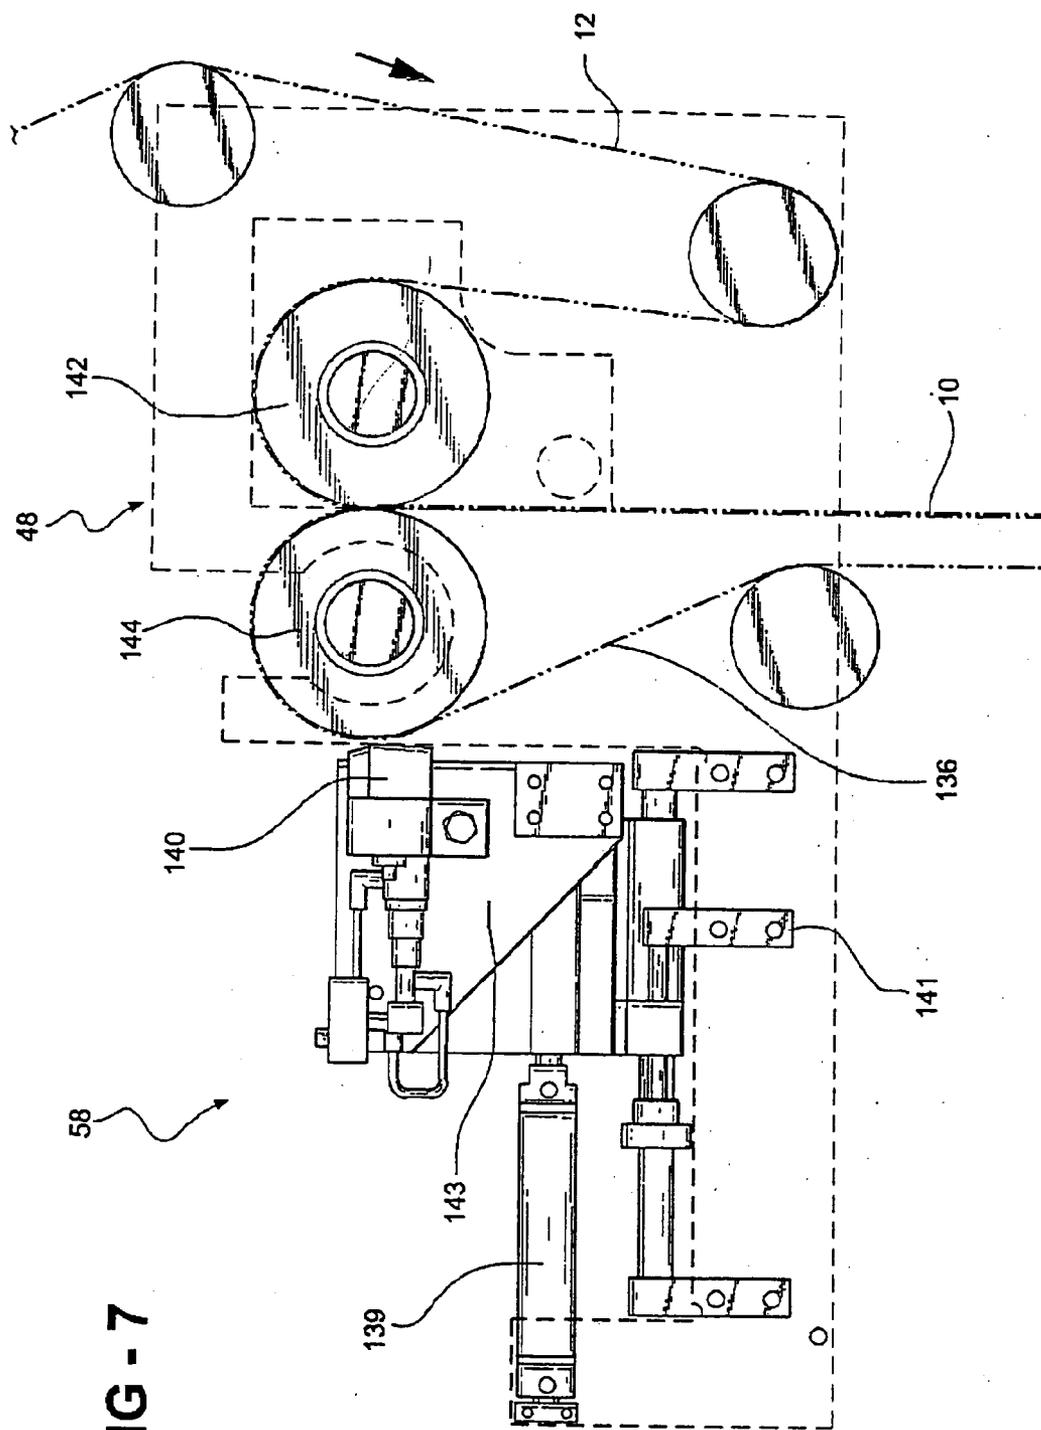


FIG - 7

**METHOD AND APPARATUS FOR
MANUFACTURING PRESSURE SENSITIVE
ADHESIVE LABEL STOCKS WITH PRINTING
UNDER ADHESIVE AND PRODUCT PRODUCED
THEREBY**

**FIELD OF THE INVENTION AND
CROSS-REFERENCE TO RELATED
APPLICATION**

[0001] This invention relates to self-adhesive labels and the like and, more particularly, to a method and apparatus for efficiently manufacturing pressure sensitive self-adhesive label stock in such a way as to allow printing on the adhesive side. This application is a divisional of U.S. Ser. No. 10/210,212, filed Aug. 1, 2002, and claims priority thereto.

BACKGROUND OF THE INVENTION

[0002] It is known in the art to apply printed adhesive-backed labels to containers for products such as liquid soap and detergent, shampoo, food products and vitamins to name only a few. Self-adhesive labels are generally made in such a way as to require the removal of a "release paper" from the adhesive side of the label before it is applied to the container. Removal of the release paper exposes the pressure sensitive adhesive, permitting the label to be applied to the container. Slight pressure is then applied to create the adhesive bond.

[0003] The term "pressure sensitive adhesive," as used herein, refers to an adhesive which bonds to an application surface as a result of applied pressure as opposed to the evaporation or absorption of a solvent to form a solid material bond.

[0004] Adhesive-backed labels and the like typically comprise the laminated combination of a printable face stock, a pressure sensitive adhesive on the back or reverse side of the face stock, a silicone layer and a backing paper to which the silicone layer is relatively strongly bonded. The face stock can be transparent or opaque. Opaque stock can be printed on both sides while transparent stock can typically only be printed on one side. Double-side printing is desirable where, for example, the printed label is applied to a transparent container such as a plastic bottle filled with a relatively transparent fluid such as liquid soap or detergent; i.e., the printing on the back or reverse side of the finished, applied label can be viewed through the container and the product to provide a pleasing effect or additional information about the product and/or its manufacturer.

[0005] The adhesive which constitutes a layer between the face stock and the silicone is typically water based and, therefore, requires relatively long air drying time. The backing paper is usually "glassine paper," a material which, like the face stock, is available in rolls and accepts the silicone layer which is necessary to produce the release effect. The laminated combination of glassine paper and cured silicone is referred to as a "release paper."

[0006] The prior art method of manufacturing pressure sensitive adhesive labels and/or face stock typically involves the step of coating a glassine paper with silicone and hanging the de-reeled, silicone coated paper on a suitable support to cure.

[0007] After this first step, the cured release paper is re-reeled and taken back to the entry point of a second

lamination process in which the adhesive is applied. Once again the de-reeled, adhesive coated release paper is hung out in the 200 ft. structure to cure. After curing it is re-wound and again subjected to a lamination step to add the printable label stock.

[0008] After this manufacturing process has been completed, the re-reeled laminated label stock is provided to a printer who again de-reels the stock to print on the indicia necessary to create a label.

[0009] The prior art manufacturing method described has a number of drawbacks. In the first place, the process described above requires a relatively large structure with a controlled atmosphere; i.e., adequate systems to control humidity and temperature within the curing structure. Secondly, the prior art method described above requires numerous de-reeling and re-reeling or re-winding steps and multiple lamination steps.

[0010] Thirdly, the prior art method described above makes it particularly difficult to print on the reverse side of the label stock; i.e., the side to which the adhesive is relatively strongly bonded. Where reverse-side printing is desired, the completed, pressure sensitive adhesively-backed label stock must be de-laminated and the printing must typically be applied over the adhesive. This gives rise to blurry, less definite printing and typically requires protection of the printed adhesive through the addition of, for example, UV varnish or UV glued film.

SUMMARY OF THE INVENTION

[0011] According to a first aspect of the present invention, a method for manufacturing pressure sensitive adhesive labels or label stock is provided, which method is simpler and more expeditious to carry out than the prior art manufacturing method described above. In particular, the method of the present invention eliminates the need for multiple lamination passes, long curing times and the associated de-reeling and re-reeling or re-winding steps described above.

[0012] In general the method of the present invention is achieved by providing a reel or roll of backing material such as glassine paper, applying a fast-curing silicone to the backing material as it is de-reeled, curing the silicone on-line, applying hot melt adhesive over the cured silicone, providing a reeled face stock in a size match for the backing paper, and laminating the face stock to the adhesive-coated release paper to form a fully laminated product in what is essentially a single pass. The laminated product can be made in multiple-label widths, in which case it may be slit into single label widths before being removed for shipment and/or further processing.

[0013] In the preferred form hereinafter described in detail, the silicone which is used to form the release paper is a photo-cationic silicone which cures rapidly when exposed to ultraviolet light. Accordingly the silicone can be rapidly cured before the adhesive is applied. Further according to the preferred style of carrying out the inventive method, the adhesive is a commercially available "hot melt" adhesive which is applied in a carefully controlled thickness and is quickly cooled by water-cooled rollers and partially re-solidified in or immediately prior to the final lamination step.

[0014] One of the numerous advantages which obtains from the inventive method is the ability to preprint on the reverse side of the face stock before the adhesive is applied thereby to eliminate the need for subsequently de-laminating the pressure sensitive adhesive label stock at a point downstream in the overall manufacturing process. Moreover the preprinted label stock is laminated with the adhesive after printing, thus eliminating the likelihood for blurred printing on the reverse side of the label stock.

[0015] According to a second aspect of the invention, an apparatus is provided for producing multiple-layer laminated pressure sensitive label stock in what is essentially a single pass operation and without the need for curing substantial lengths of partially laminated material in an atmosphere controlled structure. In general this is achieved by providing an apparatus which applies a thin layer of photo-cationic silicone to the interior surface of a backing-paper such as glassine paper, means for rapidly curing the silicone by exposure to a controlled illumination source, means for applying a controlled layer of hot-melt adhesive to the silicone, and means for laminating a face stock to the adhesive-coated release paper.

[0016] In the preferred form the subject apparatus includes a special wave length discriminating UV reflector, hereinafter called a "dichroic" reflector to control the wave length content of the illumination applied to the photo-cationic silicone. Similarly the apparatus comprises means for applying a carefully thickness-controlled layer of hot melt adhesive over the cured silicone. Finally the apparatus comprises a pair of rollers through which the release paper and face stock are simultaneously passed to form the end product.

[0017] Further and additional features and advantages of the method and apparatus inventions will be described in the following detailed specification which is to be read in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] FIG. 1 is a cross sectional drawing of a self adhesive label stock with a releasable backing manufactured in accordance with the method and apparatus aspects of the present invention;

[0019] FIG. 2 is a process diagram for a preferred form of the method invention;

[0020] FIG. 3 is a schematic diagram of an apparatus for carrying out the method of FIG. 2;

[0021] FIG. 4 shows an apparatus for manufacturing articles with pressure sensitive adhesive according to the present invention;

[0022] FIG. 5A shows a partial view of the silicone application workstation;

[0023] FIG. 5B shows a dichroic cavity reflector;

[0024] FIG. 6 shows an enlarged view of the doctor blade configuration; and

[0025] FIG. 7 shows a partial view of the adhesive and lamination workstations.

DETAILED DESCRIPTION OF THE ILLUSTRATIVE EMBODIMENT

[0026] FIG. 1 shows in cross section a self-adhesive, releasably backed label strip 10 comprising four distinct

laminated layers the thicknesses of which are not to scale and are exaggerated in FIG. 1 to assist in the understanding of the following description. The laminated structure 10 comprises a top most layer of double side face stock 12 suitable for receiving various types of printing compositions on either or both opposite surfaces thereof. The face stock 12 is, therefore, pre-printed with labeling indicia on one or both sides in accordance with the present invention.

[0027] The structure 10 further comprises a glassine paper layer 14 which constitutes a primary component of the releasable backing. The inside surface of the glassine paper 14 is first coated with a layer 16 of photo-cationic silicone to form the second component of what is typically referred to as a "release paper." A layer 18 of hot melt adhesive is disposed atop the silicone layer 16 and between the silicone layer and the label stock 12.

[0028] The adhesive 18 forms a strong bond with the inside surface of the stock 12 whether or not such inside surface is printed, and a relatively weak bond with the cured silicone layer 16. Accordingly, it is possible in use to separate the combination of the stock 12 and the adhesive 18 from the combination of glassine paper 14 and silicone layer 16. Thereafter the label stock, properly trimmed into individual labels, is ready to be applied to an application surface such as a plastic detergent bottle. Pressure is applied to the label to create the adhesive bond between the label and the application surface through the medium of the adhesive layer 18.

[0029] Referring now to FIG. 2, the basic steps of a preferred and illustrative process for making product 10 will be described. At step 20 a suitable face stock 12 is provided. As shown at 22, the stock 12 may be de-reeled and printed on one or both sides before being laminated to a release paper.

[0030] Step 24 is to provide the glassine paper 14 in a form suitable for automated processing in substantial quantities. This is typically carried out by providing a roll of glassine paper and mounting the roll on a de-reeling system for further processing as hereinafter described.

[0031] Step 26 is the first step in further treatment of the glassine backing paper 14. This step involves pumping photo-cationic silicone to a chambered doctor blade hereinafter described using a peristaltic pump to eliminate foaming. Thereafter step 28 is carried out to coat a porous ceramic roller such as an "ANILOX®" roller with a carefully controlled layer of the silicone material. In this step the layer of silicone material is smoothed to ensure that all of the pores of the ANILOX® ceramic roller are filled.

[0032] Step 30 is carried out to transfer the silicone material from the ANILOX® roller to a coating roller which is preferably a rubber cylinder running somewhat faster than the glassine paper and in the opposite direction to eliminate low spots in the applied silicone.

[0033] Step 32 involves the application of the silicone material by the rubber cylinder to the glassine paper 14 at a rate of approximately 1.6 grams per square meter to form layer 16. The applied coat is smoothed using a smoothing roller which runs approximately 4% slower than the paper.

[0034] Step 34 is carried out to immediately cure the applied silicone layer 16. As hereinafter described this step

is preferably carried out using a dichroic filter to apply a balance of ultraviolet and infrared rays to the silicone material on the glassine paper to cure it prior to the carrying out of the adhesive application steps hereinafter described.

[0035] Step 36 involves the application of a hot melt adhesive layer 18 over the cured silicone layer 16. This step is preferably carried out using a slot die to apply hot melt adhesive at a rate of approximately 15 grams per square inch.

[0036] At this point the stock 12 provided in step 20 as a first element and the three-layer release paper consisting of glassine paper 14, cured silicone layer 16 and hot melt adhesive layer 18 are fed to laminating rollers to carry out step 38 of joining the two elements into the four layer laminated product 10 shown in FIG. 1. Step 40, typical of commercial application of the present invention, involves slitting the four layer, laminated self-adhesive label stock with release paper into two strips or more or webs and re-winding them on suitable carriers for transportation to a printing facility or the end user as desired.

[0037] Referring now to FIG. 3, an apparatus for carrying out the process of FIG. 2 is schematically shown. The apparatus of FIG. 3 comprises a de-reeling or unwinding station 42 for the face stock material 12. The apparatus may include a hoist 44 for raising the roll 42 of label stock/face stock into the desired position. Thereafter the stock 12 is threaded to and through a web guiding system 46 and through a series of in-feed rollers 52 toward the lamination station 48, where the face stock material 12 is joined with the pre-treated backing paper as previously described.

[0038] The glassine paper 14 is provided on a double-wide roll 50 mounted on a de-reeling or un-winding apparatus below the face stock roll 42. The glassine paper 14 is threaded through a series of rollers as shown to the in-feed station 52 and thereafter to the silicone coating head 54 where the steps 26, 28, 30 and 32 are carried out. From the silicone coating head 54 the backing paper proceeds to the curing and post curing stations 56 where a combination of ultraviolet and infrared rays are directed to the photocationic silicone layer to cure it as described with reference to step 34 in FIG. 2. Thereafter the silicone coated glassine backing paper 14 moves to and through the adhesive coating station 58 where the hot melt adhesive is applied. The glassine paper 14 with the silicone and adhesive layers 16 and 18 is thereafter moved directly to the lamination rollers 48 where it is joined with the label stock 12 to carry out step 38 of FIG. 2. An out-feed station 60 and dual roll re-winding equipment 62, 64 carry out step 40 as described above.

[0039] With reference to FIG. 4, there is shown an apparatus 110 to manufacture laminated product 10 by processing glassine backing paper 14 and face stock 12 into the laminated product 10. A layer of silicone 16 is applied at a silicone workstation 112 onto a continuous roll of glassine backing paper 14 prior to curing the applied layer of silicone 16 to define the continuous web of release paper 136. The apparatus 110 manufactures a web release paper 136 in an upstream silicone workstation 112 and then feeds the continuous web of release paper 136 to a lamination workstation 48. The silicone workstation 112 includes a peristaltic pump 130 for pressurizing and pumping the silicone 16 from a receptacle 132 holding the silicone 16 to the glassine backing paper 14. The Silicone workstation 112 then smears

the silicone 16 evenly on the backing paper 14 after the silicone 16 has been spread with the close chambered doctor blade 120. A drive roller 126 contacts the backing paper 14 on the outside surface and the smearing rollers 122 and 124 contact the applied layer of silicone 16 on the inside surface while the web of release paper 136 is driven forward by the drive roller 126. The silicone is smeared with a silicone coating roller 122 having a faster surface speed than the surface speed of the drive roller 126 and a smoothing roller 124 having a slower surface speed than the surface speed of the drive roller 126 so that the applied layer of silicone is smeared evenly on the glassine backing paper 14. The silicone coating roller 122 and the smoothing roller 124 run at different speeds than the drive roller 126. Typically, the silicone coating roller 122 rotates between 3% to 5% inclusive faster than the speed of the web 136, and the smoothing roller 124 rotates between 3% to 5% inclusive slower than the speed of the web 136. Both the silicone coating roller 122 and the smoothing roller 124 can rotate in the opposite direction to that of the web 136. While this differential in rotating speeds has been found to provide satisfactory smearing of the applied layer of silicone 16 evenly onto the glassine backing paper 14, it should be recognized that other speeds can be used without departing from the disclosure of the present invention.

[0040] Referring now to FIG. 5A, there is shown a closeup of the silicone application workstation 112. The apparatus 110 uses a close chambered doctor blade 120 positioned at the silicone application workstation 112 for applying a layer of silicone 16 onto an ANILOX® roller 125. The close chambered doctor blade 120, best seen in FIG. 6, forms an enclosed chamber that eliminates the foam effect. The silicone enters through the lower part of the doctor blade and exits with the foam from the upper section of the doctor blade. A first reverse angle blade 121, on the doctor blade, coats the ANILOX® roller 125 with foamless silicone, then a second reverse angle blade 123 smooths the application to ensure that every pore of the ANILOX® roller 125 is properly filled with silicone. The ANILOX® roller 125 in this embodiment is a ceramic 440 line ANILOX® roller. After the ANILOX® roller is coated with silicone, the silicone is transferred to the silicone coating roller 122 which in a preferred embodiment is a rubber cylinder with a hardness of between 30 duros to 50 duros inclusive. The silicone coating roller 122 spins in the opposite direction and has a differentiated speed of approximately 3% to 5% inclusive faster than the speed of the web, and preferably a differential speed of 4% faster than the speed of the web 136. The preferred embodiment provides for an application of approximately 1.6 grams of silicone per square meter (1.6 g/m²). While this quantity of silicone has been found to be satisfactory, it should be recognized that other quantities of silicone can be used without departing from the disclosure of the present invention. The silicone is applied to the backing paper while in contact with the silicone coating roller 122. A smoothing roller 124, as shown in FIG. 5A, completes the silicone spreading process. The smoothing roller 124 has a differential speed of approximately 3% to 5% inclusive slower than the speed of the web 136, and preferably a differential speed of 4% slower than the web 136.

[0041] Referring back to FIG. 4, the silicone workstation 112 includes at least one source 128 of ultraviolet light (UV) spaced at a constant distance from the release paper 136 for curing the applied layer of silicone 16. The UV curing

system in the preferred embodiment is based on a commercially available curing management system with a dichroic cavity reflector, identified as model number CMS VTI DCR6, from VTI-Idealquarz Company of Milan, Italy. The commercially available curing management system is modified according to the present invention to provide a UV reflector specifically conceived for curing silicone during continuous processing applications. A dichroic cavity reflector **160**, as shown in **FIG. 5B**, has been modified from the production standard model CMS VTI DCR6 in order to allow the proper quantity of infrared rays to reach the substratum. The reflector comprises an aluminum reflector body **161** the parabolic interior surface of which is covered by a dichroic mirror **163** normally finished to reflect 98% of ultraviolet radiation and absorb 85% of infrared radiation from lamp **165**. We have found that conventional dichroic reflectors used to disburse infrared radiant heat are too cold to properly cure the silicone. On the other hand, more commonly used aluminum reflectors provide too much heat, i.e. too many infrared rays reach the layer of silicone for proper curing. In order to obtain a satisfactory combination, the parabola that supports the dichroic mirror **163** in the reflector body **161** is made of non-finished aluminum. The silver color is more reflective than the standard black or dark gray colors normally found in dichroic systems. This dichroic reflector allows infrared rays to pass through while an appropriate amount of UV rays are reflected. Between 5% and 15% of the total wavelengths of infrared radiation, in addition to direct radiation from the lamp, are reflected back toward the photo-cationic silicone. The parabola is, therefore, a break for infrared rays allowing the necessary amount of UV and infrared rays to reach the photo-cationic silicone for curing.

[0042] Following the curing step, the layer of silicone **16** is provided with a predetermined amount of dwell time prior to the application of the adhesive **18**. The dwell time can be provided by using a plurality of idler rollers **138**. The idler rollers **138** provide for a serpentine path of travel between the silicone workstation **112** and the adhesive workstation **58** where the adhesive **18** is applied. The dwell time can be modified based on the requirements of the applied layer of silicone **16** to cure sufficiently by modifying the number of idler rollers **138** placed in the path of the web of release paper **136**. For this particular application using hot melt adhesive, approximately 2.5 seconds of dwell time is preferred after the applied layer of silicone **16** goes through the curing process.

[0043] The lamination **48** and adhesive workstations **58** are shown in context of the entire apparatus in **FIG. 4** and shown in a close-up view in **FIG. 7**. The adhesive workstation includes a slot die **140** adjustably supported from a frame. An adhesive coating head kickoff **139** and a stopper **141** are used to adjust the slot die holder **143** to locate the slot die **140** in the proper angular, radial, and lateral position relative to a longitudinal axis of a cooling roller **144**. The release paper **136** and the face stock **12** are laminated together while passing between the cooling rubber roller **144** and the lamination roller **142**. The slot die **140** applies adhesive **18** to the release paper **136** at an adhesive workstation **58** prior to entering the lamination workstation **48**. A continuous strip of face stock **12** and the web of release paper **136** are laminated together with adhesive **18** at the lamination workstation **48**. The hot melt adhesive **18** is conducted to the slot die through a heating hose from the

adhesive distribution station where the adhesive is melted. From the slot die **140**, approximately fifteen grams of adhesive per square meter (15 g/m^2) are applied to the release paper **136**. While this quantity of adhesive has been found to be satisfactory, it should be recognized that other quantities of adhesive can be used without departing from the disclosure of the present invention. The adhesive coating head kickoff **139** allows the slot die to be moved forward and backward with respect to the release paper for adjustment of the desired thickness with suitable fasteners such as releasable screws, bolts, and nuts. The slot die holder and the adjustment system **143** allows the angle and the parallelism of the slot die to be adjusted relative to a first cooling roller **144** by releasing the appropriate fastener, repositioning the holder into the desired position, and reattaching the fastener to maintain the holder in the new desired position. Placing the slot die at a one degree (1°) angle has been found to give the smoothest coating result in the preferred embodiment. More precise micro-metric adjustments can be made to the slot die holder **143** with a stopper **141** held in place with suitable fasteners such as releasable screws, bolts, and nuts.

[0044] In order to apply hot melt adhesive to transparent film, a different slot die with a rotating cylindrical rod is typically used. The slot die provides a more even application as a result of the rotating rod. The face stock **12** in this embodiment can be preprinted on the inside surface, the outside surface, or both surfaces for application as pressure sensitive labels. Alternatively, or additionally, the face stock can be printed just prior to entering the lamination workstation.

[0045] The hot melt adhesive will transmit heat into the release paper **136** and into the laminated product **10**. The release paper **136** and subsequently the laminated product **10** can be cooled down at a cooling workstation **116**. The cooling workstation **116** cools the release paper **136** after the hot melt adhesive is applied, with the first cooling roller **144** and then cools the laminated product **10** with a second cooling roller **146**. The first roller **144** has an internal passage for receiving a continuous stream of coolant. The first roller **144** is located downstream of the adhesive workstation **58** for cooling the release paper **136**. The face stock and the release paper are laminated together as the two strips or webs are passed between the first cooling roller **144** and a lamination roller **142**. Both rollers have exactly the same diameter and width to avoid a curling effect. Lamination occurs immediately after the application of the hot melt adhesive since the release paper coated with adhesive cannot engage with other idler rollers uncovered and the desired temperature for lamination of the hot melt adhesive is a temperature achieved after being cooled by the rubber roller but while still warm enough for good lamination. Once both layers have been laminated together, the web engages a second cooling roller **146** to complete the lamination of the laminated product **10**. The second roller **146** also includes an internal passage for receiving a continuous stream of coolant. The second roller **146** is located downstream of the lamination workstation **48** for cooling the final laminated product **10**. The product can then be slit or cut into multiple separate webs to obtain material with a narrower width. After cutting into the desired widths, the final product is rewound into a roll.

[0046] The cooling workstation 116 includes a pump 150 for pumping the continuous stream of coolant through the first cooling roller 144 and the second cooling roller 146. A heat exchanger 152 removes heat from the coolant after passing through the cooling rollers. Following the cooling process, the laminated product 10 is wound on a final roll and is ready for processing or storage. The laminated product roll can be removed and cut to proper size so that the face stock 12 can be peeled from the release paper and will retain the adhesive on the inside surface for attaching to an end product. The apparatus can be equipped with an in-line rotary die-cutter to obtain final labels in one simple operation.

[0047] Using the present invention, the label manufacturers print the face stock and produce the laminated product with the apparatus described in the preferred embodiment instead of buying the prefabricated laminated product and subsequently printing on the face stock. An additional benefit is achieved with the present invention when the clear face stock is printed on the reverse surface prior to lamination because the print is then protected by the clear face stock. When the face stock is delaminated and applied to a container, the print is protected with the clear film, eliminating the requirement of protection with an additional pressure sensitive film, UV varnish, or UV glued film.

[0048] Savings on the raw material start at thirty percent and can go up to 90%. Furthermore, savings are generated by a reduction of waste due to the fact that only face stock is being processed through the printing press. There are no limitations on printing methods. The choice of printing methods can be digital, flexo-graphic, offset, letterpress, silk screen, etc. and can convert custom materials into a final label. Furthermore, speed limitations on presses are eliminated since the die cutting operation is transferred to the apparatus rather than on the presses as found in the prior art.

[0049] The present invention using the above-mentioned apparatus allows an operator to create standard applications, multiple layer applications, or complex applications. Standard applications include any kind of face stock: semigloss, thermal direct, Kromecote, PP, PE, PET, carton, metallized papers, etc. The standard application includes backing materials which can include glassine paper or film. The multiple layer applications include piggyback, back-to-back, dry peel piggyback and dry peel cards, coupon labels, and booklets and leaflets. The complex applications include film labels with reverse printing, no label look, no label touch, pressure sensitive shrink sleeves, electronic chips and spiral antennas insertion for RF/ID, labels with detachable parts, scratch off and reveal, embossed, Braille and tactile labels, and fragrance or scratch'n'sniff labels.

[0050] While the invention has been described in connection with what is presently considered to be the most practical and preferred embodiment, it is to be understood that the invention is not to be limited to the disclosed embodiments, but on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims, which scope is to be accorded the broadest interpretation so as to encompass all such modifications and equivalent structures as is permitted under the law.

What is claimed is:

1. A method for manufacturing a product comprising the steps of:

feeding a continuous web of release paper to a lamination workstation;

applying adhesive to the release paper at an adhesive application workstation prior to entering the lamination workstation;

laminating a continuous strip of face stock to the release paper with the applied adhesive in a continuous single pass cycle at the lamination workstation;

contacting the release paper downstream of the adhesive application step with a first cooling roller having an internal passage for receiving a continuous stream of coolant thereby to cool the release paper;

pressing the face stock and the release paper between the first cooling roller and a pressure roller to laminate the face stock and release paper together; and

contacting the lamination with a second cooling roller having an internal passage for receiving a continuous stream of coolant downstream of the lamination step for the purpose of cooling the face stock lamination wherein:

the release paper has a first surface and a second surface;

a hot melt adhesive layer is applied to the second surface of the release paper; and

the face stock has a first surface and a second surface, the first surface of the face stock being laminated to the second surface of the layer of hot melt adhesive.

2. The product of claim 1 further comprising:

a continuous strip of face stock preprinted directly on the first surface prior to coating with adhesive.

3. The product of claim 1, wherein the release paper further comprises:

a layer of photo-cationic silicone having a first surface and a second surface;

a backing sheet having a first surface and a second surface in contact with the second surface of the layer of silicone.

4. The product of claim 1 further comprising:

a layer of face stock preprinted on the first surface and/or on the second surface prior to final lamination.

5. A product comprising:

a layer of release paper having a first surface and a second surface;

a hot melt adhesive layer connected to the second of surface the release paper; and

a layer of face stock having a first surface and a second surface, the first surface of the face stock laminated to the second surface of the layer of hot melt adhesive.

6. The product of claim 5 further comprising:

the layer of face stock printed directly on the first surface and in contact with the coating of adhesive.

7. The product of claim 5, wherein the release paper further comprises:

- a layer of photo-cationic silicone having a first surface and a second surface; and
- a backing sheet having a first surface and a second surface in contact with the second surface of the layer of silicone.
- 8.** The product of claim 5 further comprising:
- the layer of face stock printed on the first surface and/or on the second surface, the first surface in contact with the coating of adhesive.
- 9.** An apparatus for manufacturing a product comprising:
- means for applying a layer of photo-cationic silicone at a silicone workstation onto a continuous roll of backing paper; and
- means for curing the layer of silicone on the backing paper to define a continuous web of release paper.
- 10.** The apparatus of claim 9, wherein the silicone applying means further comprises:
- a close chambered doctor blade positioned upstream of the silicone applying means for forming the applied layer of silicone into a constant thickness on the backing paper.
- 11.** The apparatus of claim 10, wherein the close chambered doctor blade further comprises:
- an enclosed chamber for eliminating a silicone foam effect;
- a first reverse angle blade for coating an ANILOX® roller with foamless silicone; and
- a second reverse angle blade for smoothing the silicone application to ensure every pore of the ANILOX® roller is properly filled with silicone.
- 12.** The apparatus of claim 11, wherein the enclosed chamber further comprises:
- a first section for allowing the silicone to enter there-through and a second section for allowing the silicone and foam to exit the enclosed chamber.
- 13.** The apparatus of claim 11, wherein the ANILOX® roller is a ceramic 440 lines ANILOX® roller.
- 14.** The apparatus of claim 11, wherein the silicone coated ANILOX® roller transfers the silicone to a silicone coating roller.
- 15.** The apparatus of claim 14, wherein the silicone coating roller is made of rubber, the coating roller having a hardness of 30 duros to 50 duros inclusive.
- 16.** The apparatus of claim 14, wherein the silicone coating roller spins in the opposite direction and at a faster speed relative to the speed of the web for spreading the silicone evenly on the backing paper, the silicone coating roller being positioned a constant distance from a drive roller for allowing the web of release paper to pass between the silicone coating roller and the drive roller.
- 17.** The apparatus of claim 16, wherein a smoothing roller completes the silicone spreading process by smearing the silicone coated backing paper, the smoothing roller being positioned a constant distance from the drive roller for allowing the web of release paper to pass between the smoothing roller and the drive roller, and the smoothing roller being located downstream of the drive roller.
- 18.** The apparatus of claim 17, wherein the smoothing roller rotates at a slower speed than the speed of the web driven by the drive roller.
- 19.** The apparatus of claim 9, wherein the silicone applying means further comprises:
- means for smearing the silicone evenly on the backing paper.
- 20.** The apparatus of claim 19, wherein the smearing means further comprises:
- a drive roller for contacting the backing paper for driving the web in steady continuous motion;
- a silicone coating roller contacting the backing paper with an applied layer of silicone, the silicone coating roller rotating faster and in the opposite direction to the web of release paper; and
- a smoothing roller contacting the applied layer of silicone after the silicone coating roller and rotating slower than the web of release paper for smearing the silicone evenly on the backing paper downstream of a close chambered doctor blade.
- 21.** The apparatus of claim 9, wherein the silicone workstation further comprises:
- at least one source of ultraviolet light spaced at a distance from the release paper for curing the applied layer of silicone.
- 22.** The apparatus of claim 21, wherein the source of ultraviolet light further comprises:
- a dichroic reflector having a cavity with a parabolic shape; and
- a plurality of mirrors made of non-finished aluminum and supported from the cavity of the reflector to allow a desired amount of infrared rays to pass through and to reflect a desired amount of ultraviolet rays onto the layer of silicone for curing.
- 23.** The apparatus of claim 9, wherein the silicone workstation further comprises:
- means for pressurizing the silicone for pumping the silicone to a close chambered doctor blade.
- 24.** The apparatus of claim 23, wherein the pressurizing means further comprises:
- a peristaltical pump for pumping silicone from a receptacle to a chamber for discharging the silicone onto the backing paper.
- 25.** The apparatus of claim 9, wherein the silicone workstation further comprises:
- means for increasing dwell time to allow the layer of silicone to cure prior to applying adhesive to the release paper.
- 26.** The apparatus of claim 25, wherein the dwell time increasing means further comprises:
- a plurality of idler rollers operably engaging the release paper to define a serpentine path of travel from the silicone workstation to provide adequate dwell time for curing.
- 27.** A method for manufacturing a product comprising the steps of:
- applying a layer of photo-cationic silicone onto a continuous roll of backing paper at a silicone workstation; and
- curing the layer of silicone on the backing paper to define the continuous web of release paper.

- 28.** The method of claim 27 further comprising the step of: pumping silicone with a peristaltical pump for application to a close chambered doctor blade.
- 29.** The method of claim 28 further comprising the steps of:
 discharging foamless silicone from the close chambered doctor blade onto an ANILOX® roller through a reverse angle blade; and
 transferring the silicone from the ANILOX® roller onto the backing paper.
- 30.** The method of claim 27 further comprising the step of: spreading the applied layer of silicone to a constant thickness with a silicone coating roller prior to curing.
- 31.** The method of claim 27 further comprising the step of: smearing the silicone on the backing paper evenly to a specified thickness with a smoothing roller prior to curing.
- 32.** The method of claim 27 further comprising the steps of:
 driving the web in steady continuous motion with a drive roller in contact with the backing paper; and
 spreading the applied layer of silicone with the silicone coating roller rotating slower than the drive roller.
- 33.** The method of claim 32 further comprising the step of: spreading the applied layer of silicone with the smoothing roller rotating faster than the drive roller.
- 34.** The method of claim 27, wherein the curing step further comprises the step of:
 exposing the applied layer of silicone to ultraviolet light spaced at a distance from the release paper.
- 35.** The method of claim 27 further comprising the step of: increasing dwell time to allow the applied layer of silicone to cure prior to applying adhesive to the cured layer of silicone.
- 36.** The method of claim 35, wherein the dwell time increasing step further comprises the step of:
 passing the release paper through a serpentine path of travel between the curing workstation and an adhesive application workstation.
- 37.** A product manufactured according to the method of claim 27 comprising:
 a layer of backing sheet having a first surface and a second surface; and
 a layer of photo-cationic silicone in contact with the second surface of the backing sheet.
- 38.** The product of claim 37, wherein the layer of photo-cationic silicone is a layer of ultraviolet light cured silicone.
- 39.** A product comprising:
 a backing sheet having a first surface and a second surface;
 a layer of photo-cationic silicone applied to the second surface of the backing sheet.
- 40.** The product of claim 39, wherein the layer of photo-cationic silicone is a layer of ultraviolet light cured silicone.

* * * * *