




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : F24F 5/00	A2	(11) International Publication Number: WO 00/06955 (43) International Publication Date: 10 February 2000 (10.02.00)
(21) International Application Number: PCT/US99/16882 (22) International Filing Date: 27 July 1999 (27.07.99) (30) Priority Data: 09/126,325 31 July 1998 (31.07.98) US (71) Applicant: THE TEXAS A & M UNIVERSITY SYSTEM [US/US]; 310 Wisenbaker, College Station, TX 77843-3122 (US). (72) Inventors: HOLTZAPPLE, Mark, T.; 1805 Southwood Drive, College Station, TX 77840 (US). DAVISON, Richard; 303 Crescent, Bryan, TX 77801 (US). RABROKER, G., Andrew; 213 Bucknell, College Station, TX 77840 (US). (74) Agents: REMENICK, James et al.; Baker & Botts, L.L.P., The Warner, 1299 Pennsylvania Avenue, N.W., Washington, DC 20004 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>Without international search report and to be republished upon receipt of that report.</i>

(54) Title: VAPOR-COMPRESSION EVAPORATIVE AIR CONDITIONING SYSTEM

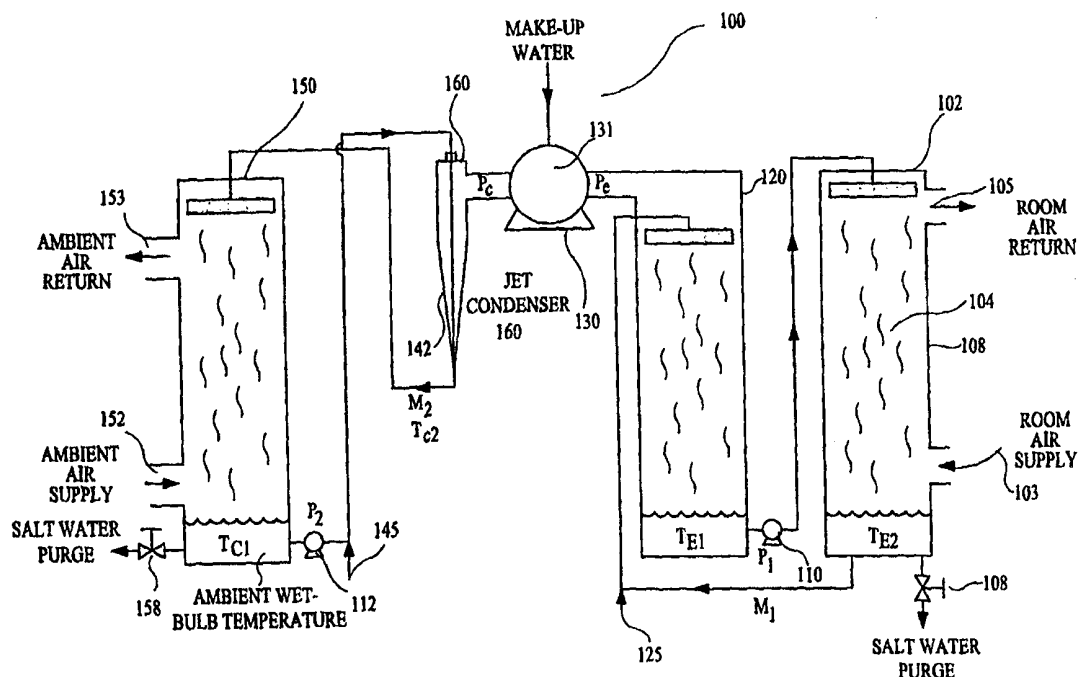

(57) Abstract

Novel vapor compression evaporative cooling systems (100) which use water as a refrigerant are provided, as are methods for using same. Also provided are novel compressors (131), compressor components, and means for removing noncondensibles useful in such cooling systems.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

VAPOR-COMPRESSION EVAPORATIVE AIR CONDITIONING SYSTEM

Background of the Invention

5 1. Field of the Invention

This invention relates to vapor-compression evaporative cooling systems that use water as a refrigerant in an open system, and in particular, to vapor-compression evaporative cooling systems capable of processing large volumetric flow rates of water vapor and removing noncondensibles from the system and to methods
10 using such systems. This invention also relates to low-friction, positive-displacement compressors useful in such cooling systems and to means for removing noncondensibles from such cooling systems.

2. Description of the Background

Conventional vapor-compression air conditioning systems employ a
15 working fluid such as chlorofluorocarbons (CFCs). Liquid CFC is introduced into a low-pressure heat exchanger where it absorbs heat at a low temperature and vaporizes. A compressor repressurizes the vapors that are introduced to a high-pressure heat exchanger where heat is rejected to the environment and the vapors condense. The condensate is reintroduced into the low-pressure heat exchanger, thus
20 completing the cycle.

The use of CFCs raises two important environmental concerns. First, CFCs are stable enough to enter the stratosphere where they decompose to chlorine free radicals that catalyze the destruction of ozone. This is unfortunate because ozone absorbs ultraviolet radiation which damages DNA in plants and animals.
25 Second, CFCs absorb infrared radiation which contributes to global warming.

Because CFCs cannot be released into the environment, they must be contained within the air conditioning system. The evaporator and condenser heat exchangers have a sizable temperature difference between the ambient environment and the working fluid (about 10 to 15°C) which greatly reduces the Carnot efficiency.
30 Further limiting the efficiency is the fact that the condenser rejects heat at the dry-bulb temperature. The wet-bulb temperature is generally about 5-30°C less than the

-2-

dry-bulb temperature. Thus, if heat were rejected at the wet-bulb temperature, the Carnot efficiency could be improved even more.

In addition, compressors used in conventional systems typically have compressing components that are in direct contact with each other. The close fit
5 between components has heretofore been necessary to prevent blow-by of high-pressure compressed vapors. However, the friction resulting from the close contact between components reduces efficiency, creates heat and causes wear on the components.

Although the use of water in place of CFCs as the air-conditioning
10 working fluid has been considered, proposed systems have been generally unworkable because the vapor density is very low requiring large volumes of water vapor to be compressed.

One study by the Thermal Storage Applications Research Center of the University of Wisconsin, *The Use of Water as a Refrigerant*, Report No. TSARC
15 92-1, March 1992, studied the use of water as a refrigerant. This study concluded that for water-based air conditioning, positive displacement compressors are not suitable for use in such systems. Rather, only dynamic compressors are suitable.

Although "swamp cooler" air conditioners are employed in arid regions of the United States that have low wet-bulb temperatures, they have limited usefulness.
20 In swamp coolers, ambient air is contacted with water which evaporates and cools the air. No external power is required other than for air-handling blowers. Unfortunately, these simple devices are restricted to regions of low humidity (*e.g.*, Arizona, New Mexico) and are not suitable for many regions of the world. Further, although the air is cooler, it has increased humidity which can make the air feel
25 "clammy."

Summary of the Invention

There is therefore a need for an environmentally friendly, efficient and economical means for air conditioning in all types of climates. The present invention overcomes the above noted deficiencies in the art by providing air conditioning
30 systems that use water as the working fluid rather than CFCs, thus eliminating

-3-

potential CFC emissions. These systems are not limited to regions of low humidity. The present invention is directed to cooling systems that are 1.7 to 3.9 times more efficient than conventional air conditioning systems and that have manufacturing costs less than, or competitive with, conventional air conditioning systems.

5 In addition, unlike the teachings of the literature, it has been discovered that high-volume, low-pressure positive displacement compressors can be utilized in cooling systems that use water as the working fluid. It has further been discovered that because of the relatively low pressures (*i.e.*, 0.2 - 0.7 psia) in the compressors of the cooling systems of the present invention, the gaps between the compressing
10 components can be comparatively large, and that such large gaps are not only acceptable, but actually can be beneficial from both an efficiency and wear standpoint. Because of the low friction, the novel compressors can be scaled up to the necessary size. For example, such a gap-containing, positive displacement compressor can process the 1400 ft³/min of low-pressure water vapor needed to
15 produce 3 tons of cooling.

 In addition, it has been discovered that water, with or without suitable wicking material, can be used to fill the gaps between the components, and thereby create an effective, but low-friction seal between the compressing components. Thus, the present invention is also directed to novel positive displacement
20 compressors which are useful in air conditioning systems using water as the working fluid. These compressors include novel compressors which are useful in the disclosed systems as well as in other applications. The present invention is also directed to novel pumps useful for removing noncondensibles from the disclosed cooling systems as well as in other applications. Finally, the present invention is directed to novel
25 seals and mounting apparatus useful in the disclosed compressors.

 In accordance with one embodiment of the present invention, a vapor-compression evaporative air conditioning system is provided that comprises: an evaporator; a room air contactor for directly exchanging heat between room air and a quantity of water from the evaporator; means for compressing a volume of water
30 vapor, thereby creating a vacuum on the water in the evaporator, the means for

-4-

compressing comprising a positive displacement compressor, the compressor comprising an inlet and an outlet, wherein low-pressure water vapors from the evaporator enter the inlet and compressed water vapors exit the outlet; a condenser for receiving the compressed water vapors; means for reducing a water content of the vapors exiting the condenser; means for removing noncondensibles from the condenser; and an ambient air contactor for directly exchanging heat between the ambient air and water from the condenser. The positive displacement compressor is preferably a low-friction compressor comprising at least two compressing components, which do not substantially contact one another. The advantages of this system include that it is an efficient low-friction system capable of functioning in humid environments.

The compressing components may comprise: an inner gerotor, an outer gerotor and a housing; an orbiting (or mobile) scroll, a stationary (or fixed) scroll and a housing; a housing and a piston; a housing, a rotor, and a flap; an inner drum, an outer drum and a swinging vane; or a housing, a rotor and a sliding vane. In a preferred embodiment there is a gap between at least two of the compressing components. Water or water and a wick may be used as a sealant in the gap.

In one embodiment of this system, the means for compressing water vapor comprises a gerotor compressor comprising an inner gerotor and an outer gerotor, the inner gerotor disposed within the outer gerotor, each gerotor comprising a plurality of teeth. The inner gerotor has one less tooth than the outer gerotor, thereby creating a void volume between the inner gerotor and the outer gerotor. An inlet port and a discharge port communicate with the void volume. The discharge port may have a variable port mechanism that changes the position of a leading edge of the discharge port. This variable port mechanism may be positioned using electrically actuated means controlled by a thermocouple signal.

The variable port mechanism may comprise an electrically controlled servo motor, the motor rotating a threaded rod, a bellows, and a non-rotating nut coupled to the bellows, the rod axially positioning the non-rotating nut. Alternatively, the variable port mechanism may comprise a plurality of plates disposed adjacent to the

-5-

discharge port and means for sequentially moving the plates to vary the leading edge of the discharge port. The variable port mechanism may be positioned using a bellows, actuated by a bulb containing a liquid, wherein the liquid in the bulb has a vapor pressure proportional to the condenser temperature which acts on the bellows.

5 The gerotor compressor may further comprise an electric motor for driving the gerotor compressor, a first pump for pumping cooled water from the evaporator to a packing in the room air contactor, a filter disposed between the room air contactor and the evaporator, wherein water from the room air contactor flows through the filter to the evaporator, a second pump for pumping water from the
10 condenser to a packing in the ambient air contactor, and a fan for driving ambient air countercurrently against the packing.

Because of the low friction between the compressing components of the compressors of the present invention, the compressors of the present invention use novel actuation means to actuate the gerotors.

15 For instance, one embodiment uses a low-friction gerotor compressor in which a first drive shaft drives the outer gerotor, and the actuation means comprises an internal gearbox containing a plurality of spur gears, the plurality being an odd number. One of the spur gears is coupled to the first drive shaft and another of the spur gears is coupled to a second drive shaft, the second drive shaft being offset from
20 the first drive shaft, thereby suspending the gearbox between the first drive shaft and the second drive shaft. The first drive shaft is coupled to the outer gerotor through a plate that comprises a plurality of prongs in contact with a plurality of holes in the outer gerotor. The second drive shaft is coupled to the inner gerotor.

 In another embodiment, a different novel actuated gerotor compressor is
25 used. In this compressor, a first shaft drives the outer gerotor and the actuation means comprises a spur gear set comprised of a large gear coupled to the outer gerotor, the large gear containing a plurality of teeth on an inside diameter, and a small gear coupled to the inner gerotor, the small gear containing a plurality of teeth on an outside diameter, the large gear meshing with the small gear, and further
30 comprised of a second shaft about which the inner gerotor spins, wherein the second

-6-

shaft contains a crook establishing an offset between the first shaft and the second shaft. Preferably, for cooling and lubrication purposes, the gears are immersed in liquid water. A gear set may be attached to a bottom portion of the inner gerotor allowing for power take off.

- 5 In an alternative embodiment using still another novel actuated gerotor compressor, the actuation means may comprise a plurality of rollers attached to the inner gerotor, wherein the rollers extend beyond a plurality of walls of the inner gerotor and are in contact with the outer gerotor, and wherein the outer gerotor drives the inner gerotor through the rollers. In this embodiment, the inner gerotor
10 may be mounted on a rotating shaft and the rotating shaft extends outside of the compressor housing.

- In still another embodiment using a novel actuated gerotor compressor, the actuation means comprises a large gear coupled to the outer gerotor, the large gear comprising a plurality of teeth on an inside diameter, a small gear coupled to the
15 inner gerotor, the small gear comprising a plurality of teeth on an outside diameter, the large gear meshing with the small gear, and a stationary central shaft, wherein the stationary central shaft contains two crooks that create an offset between an axis of the inner gerotor and an axis of the outer gerotor, and wherein the stationary shaft comprises a first end and a second end, the first end of the stationary shaft affixed to
20 a first perforated housing end plate through a pivotable mount that prevents rotation of the stationary shaft and the second end of the stationary shaft located in a rotating bearing cup coupled to the outer gerotor. In this embodiment, the gerotor compressor may further comprise a second perforated housing plate, a first perforated rotating plate and a second perforated rotating plate, such that both the
25 rotating plates are connected to the outer gerotor, and a first stationary plate and a second stationary plate adjacent to both gerotors, the first stationary plate containing an inlet port and the second stationary plate containing a discharge port.
- Alternatively, the inlet and outlet port can be placed in one of the plates. Preferably, the gears are immersed in liquid water to provide cooling and lubrication.

-7-

In the novel air conditioning system disclosed herein, the system may further comprise means for inhibiting microorganisms in the water in the room air contactor, such as an ozone generator or UV radiation. In addition, the means for removing noncondensibles may comprise an aspirator or a vacuum pump, such as the
5 novel pumps disclosed below.

In other embodiments of the disclosed system, the compressor means may comprise a novel low-friction scroll compressor.

In yet another embodiment of the disclosed system, the compressor means comprises a novel actuated flap compressor. This compressor comprises: a
10 compressor housing, the housing having an interior wall, an inlet, and an outlet; a rotor disposed in the housing; a flap, the flap having a first end and a second end, the first end being coupled to the rotor and the second end being propelled in an outward direction during rotation of the rotor; and means for preventing the second end of the flap from touching the interior wall of the housing.

15 In still another embodiment, the compressor means comprises a novel multi-vane actuated flap compressor. This compressor preferably comprises: an outer drum having an axis; an inner drum rotatably disposed in the outer drum; a plurality of vanes, each vane having a first end and a second end opposite the first end, the vanes pivotally attached to the inner drum at the first end and having a vane
20 tip at the second end, the vane tips being propelled radially outward during rotation of the inner drum; a connecting rod coupled to each vane tip, the rods maintaining a gap between the vane tips and the outer drum; and coupling means for causing the connecting rods to rotate about the axis of the outer drum.

Alternatively, the compressor means may be a novel low-friction
25 reciprocating compressor comprising: a compressor housing; an oscillating center shaft disposed partly within the housing, the shaft comprising a top end and a bottom end, the top end comprising a protrusion which rides in a sinusoidal groove in a rotating cam driven by a motor; and at least one plate disposed in the housing and attached to the shaft and oscillating therewith, the at least one plate having a groove
30 through which water flows to make a seal between the compressor housing and the

-8-

plates. In one embodiment of the reciprocating compressor, the cam contains a plurality of sinusoidal grooves.

In the novel air conditioning systems disclosed herein, the components may be disposed in three concentric chambers. In one such embodiment the ambient
5 air contactor is disposed in an outermost chamber of the concentric chambers, the compressor means and the evaporator are disposed in an innermost chamber of the concentric chambers, and the condenser is disposed in a middle concentric chamber. In another system, comprising two concentric chambers, the ambient air contactor is disposed in an outermost chamber of the concentric chambers, and the compressor
10 means, the evaporator and the condenser are disposed in an innermost concentric chamber.

The novel systems disclosed herein may further comprise means for providing make-up water to the evaporator and condenser, which is preferably accomplished using one or more float valves. In addition, the room air contactor may
15 comprise a spray tower to place water from the evaporator in direct contact with the room air. The room air contactor may comprise a packing, such that the water from the evaporator passes over the packing, and the room air passes through the packing. The packing preferably comprises corrugated chlorinated polyvinyl chloride. In the disclosed embodiments, the condenser may be a spray condenser, jet condenser, or
20 may comprise a packing.

The present invention is also directed to a novel method for cooling air comprising the steps of: compressing a large volume of low-pressure water vapor with a compressor, thereby creating a vacuum on a quantity of water in an evaporator and causing evaporation and the water to be cooled; pumping cooled water from the
25 evaporator and contacting the cooled water countercurrently with room air in a room air contactor, thereby cooling room air; routing water from the room air contactor to the evaporator, causing the water to flash and cool; sending compressed water vapors exiting the compressor to a condenser for condensation; countercurrently directly contacting the water vapors exiting the condenser with a stream of chilled water from
30 the evaporator to reduce the water content from air; removing noncondensibles from

-9-

the condenser; routing liquid water from the condenser to an ambient air contactor, where ambient air is contacted countercurrently with liquid water pumped from the condenser; providing make-up water to replace evaporated water; and draining salt water.

- 5 Preferably, the compressor is a positive displacement compressor. More preferably, the compressor is a low-friction positive displacement compressor comprising at least two compressing components, in which the compressing components do not substantially contact each other, *i.e.*, although some contact can occur without departing from the spirit and scope of the invention, generally there are
- 10 clearance gaps, which preferably may be a few thousandths of an inch, between components. The method may further comprise the step of spraying water into the compressor to prevent temperature increase during the compression stage.

- In one embodiment of the method, water from the room air contactor may flow countercurrently through a plurality of evaporators. Alternately, condensation
- 15 may occur in multiple stages. In still another embodiment of the invention, both evaporation and condensation take place in multiple stages. Noncondensibles may be removed by one or a plurality of compressors.

- The present invention is also directed to novel methods of cooling air using multistage systems. One such method comprises the steps of: compressing a
- 20 large volume of low-pressure water vapor in a plurality of compressor stages, thereby creating a vacuum on a quantity of water in a plurality of evaporators and causing the water to be cooled; pumping cooled water from the evaporators and contacting the cooled water countercurrently with room air in a room air contactor, thereby cooling room air; routing water from the room air contactor to the evaporators, causing the
- 25 water to flash and cool; sending compressed water vapors exiting the last compressor stage to a condenser for condensation; countercurrently directly contacting the water vapors exiting the condenser with a stream of chilled water from at least one of the evaporators to reduce the water content from air; removing noncondensibles from the condenser; routing liquid from the condenser to an ambient air contactor, wherein
- 30 ambient air is contacted countercurrently with liquid water pumped from the

-10-

condenser; providing make-up water to replace evaporated water; and draining salt water. Condensation may take place in a single stage or in multiple stages. The compressor stages preferably comprise one or more positive displacement compressors or one or more dynamic compressors. However, in the multistage
5 systems disclosed herein, the compressor stages may be either positive displacement compressors, or dynamic compressors, or a mixture of each.

The present invention is also directed to novel low-friction positive displacement compressors useful in the cooling systems of the present invention as well as in other applications. They have the advantage of low friction and high
10 efficiency. These compressors comprise at least two compressing components, such that the compressing components do not substantially contact one another. The compressing components may comprise: an inner gerotor, an outer gerotor and a housing; an orbiting scroll, a stationary scroll and a housing; a housing and a piston; a housing, a rotor and a sliding vane; a housing, a rotor and a flap; or an inner drum,
15 an outer drum and a swinging vane, and there is a gap between at least two of the compressing components. Water, or water and a wick may be used as a sealant in the gap.

One such novel compressor comprises a gerotor compressor comprising an inner gerotor and an outer gerotor, the inner gerotor disposed within the outer
20 gerotor, each gerotor comprising a plurality of teeth. The inner gerotor has one less tooth than the outer gerotor, thereby creating a void volume between the inner gerotor and the outer gerotor. In addition, there is a gap between the inner gerotor and outer gerotor. The gerotor compressor further comprises an inlet port and a discharge port; the ports communicate with the void volume.

25 The discharge port may have a variable port mechanism that changes the position of a leading edge of the discharge port. In one embodiment, the variable port mechanism comprises an electrically controlled servo motor, the motor rotating a threaded rod, a bellows, and a non-rotating nut coupled to the bellows, the rod axially positioning the non-rotating nut. The variable port mechanism may be
30 positioned using electrically actuated means. In another embodiment, it may be

-11-

positioned using a bellows, the bellows being actuated by a bulb containing a liquid, the liquid in the bulb having a vapor pressure proportional to the condenser temperature which acts on the bellows. In yet another embodiment, the variable port mechanism comprises a plurality of plates disposed adjacent to the discharge port and
5 means for sequentially moving the plates to vary the leading edge of the discharge port.

The present invention is also directed to novel low-friction gerotor compressors which use actuation means to actuate the gerotors allowing for reduced friction. In one such embodiment, a first drive shaft drives the outer gerotor and the
10 actuation means comprises an internal gearbox containing a plurality of spur gears, the plurality being an odd number, and wherein one of the spur gears is coupled to the first drive shaft and another of the spur gears is coupled to a second drive shaft, the second drive shaft being offset from the first drive shaft, thereby suspending the gearbox between the first drive shaft and the second drive shaft, and the first drive
15 shaft is coupled to the outer gerotor through a plate that comprises a plurality of prongs in contact with a plurality of holes in the outer gerotor. A second drive shaft is coupled to the inner gerotor.

In another novel actuated gerotor compressor, a first drive shaft drives the outer gerotor and the actuation means comprises a spur gear set comprised of a large
20 gear coupled to the outer gerotor, the large gear containing a plurality of teeth on an inside diameter, and a small gear coupled to the inner gerotor, the small gear containing a plurality of teeth on an outside diameter. In this embodiment the large gear meshes with the small gear, and there is a second shaft about which the inner gerotor spins. This second shaft contains a crook establishing an offset between the
25 first shaft and the second shaft.

In another embodiment of a novel actuated gerotor compressor, the actuation means comprises a plurality of rollers attached to the inner gerotor, wherein the rollers extend beyond a plurality of walls of the inner gerotor and are in contact with the outer gerotor, and the outer gerotor drives the inner gerotor through the
30 rollers.

-12-

In another embodiment, the inner gerotor and outer gerotor are disposed in a housing, a first drive shaft drives the outer gerotor, and the actuation means comprises a spur gear set comprised of a large gear, coupled to the outer gerotor, the large gear containing a plurality of teeth on an inside diameter, and a small gear
5 coupled to the inner gerotor, the small gear containing a plurality of teeth on an outside diameter. In this embodiment, the large gear meshes with the small gear, and there is a second shaft attached to the inner gerotor which spins on a bearing means, such as bearings affixed to the housing.

In still another embodiment, a first drive shaft drives the inner gerotor,
10 and the actuation means comprises a spur gear set comprised of a large gear coupled to the outer gerotor, the large gear containing a plurality of teeth on an inside diameter, and a small gear coupled to the inner gerotor, the small gear containing a plurality of teeth on an outside diameter, wherein the large gear meshes with the small gear, and further comprises a second nonrotating shaft about which the outer
15 gerotor spins, wherein the second shaft contains a crook establishing an offset between the first and the second shafts.

In still another embodiment, the actuation means comprises a large gear coupled to the outer gerotor, the large gear comprising a plurality of teeth on an inside diameter, a small gear coupled to the inner gerotor, the small gear comprising a
20 plurality of teeth on an outside diameter, the large gear meshing with the small gear, and a stationary central shaft, wherein the stationary central shaft contains two crooks that create an offset between an axis of the inner gerotor and an axis of the outer gerotor, and wherein the stationary shaft comprises a first end and a second end, the first end of the stationary shaft affixed to a first perforated housing end plate
25 through a pivotable mount that prevents rotation of the stationary shaft and the second end of the stationary shaft located in a rotating bearing cup coupled to the outer gerotor. Preferably, the pivotable mount prevents the stationary central shaft from rotating, but allows for angular and axial variation.

In this embodiment, the pivotable mount may comprise a ring, spokes and
30 a hub, which are coupled to the shaft. The ring has a spherical outer diameter which

-13-

is disposed within an inlet of the first perforated housing end plate. In addition, the gerotor compressor may further comprise a second perforated housing plate, a first perforated rotating plate and a second perforated rotating plate, wherein both the rotating plates are connected to the outer gerotor, and a first stationary plate and a second stationary plate which are adjacent to the inner and outer gerotors, the first stationary plate containing an inlet port and the second stationary plate containing a discharge port.

The present invention is also directed to novel low-friction scroll compressors. One such compressor comprises a stationary scroll having flutes and an orbiting scroll having flutes, the orbiting scroll orbiting around the stationary scroll. The flutes of the scrolls are separated by a gap.

The scroll compressor of the present invention may have novel means for creating orbiting motion. This compressor comprises a stationary scroll, an orbiting scroll, and means for causing the orbiting scroll to orbit around the stationary scroll, the means comprising a first gear affixed to the stationary scroll, an orbiting arm affixed to the first gear, a second intermediary gear attached to the orbiting arm, and a third gear attached to the orbiting scroll, wherein the second intermediary gear drives the third gear.

Still other embodiments of the invention are directed to novel sliding vane compressors which comprise a rotor, a sliding vane and a housing, and means for reducing friction between the vane, the rotor and the housing. In one such embodiment, the compressor comprises: a compressor housing, the housing having an interior wall, an inlet, and an outlet; a rotor disposed in the housing; a flap, the flap having a first end and a second end, the first end being coupled to the rotor and the second end being propelled in an outward direction during rotation of the rotor; and means for preventing the second end of the flap from touching the interior wall of the housing.

In still another embodiment, a novel multi-vane compressor comprises: an outer drum having an axis; an inner drum rotatably disposed in the outer drum; a plurality of vanes, each vane having a first end and a second end opposite the first

-14-

end, the vanes pivotably attached to the inner drum at the first end and having a vane tip at the second end, the vane tips being propelled radially outward during rotation of the inner drum; a connecting rod coupled to each vane tip, the rods maintaining a gap between the vane tips and the outer drum; and coupling means for causing the
5 connecting rods to rotate about the axis of the outer drum. In this embodiment, the inner drum is preferably rotatably driven by a first shaft, and the coupling means comprises an offset shaft to which the connecting rod is coupled, the offset shaft being coaxial with the axis of the outer drum; and a torque coupler for transmitting rotational force to the offset shaft. Preferably, water is used as a sealant in the gaps.

10 Still another embodiment is directed to a novel low-friction reciprocating compressor, comprising: a compressor housing; an oscillating center shaft disposed partly within the housing, the shaft comprising a top end and a bottom end; and at least one plate disposed in the housing and attached to the shaft and oscillating therewith, the at least one plate having a groove through which water flows to make
15 a seal between the compressor housing and the plates. In a preferred embodiment, the top end of the shaft has a protrusion which rides in a sinusoidal groove in a rotating cam driven by a motor. Alternately, the cam may contain a plurality of sinusoidal grooves.

The present invention is also directed to novel pumps useful in removing
20 noncondensibles. Possible methods for purging noncondensibles include: 1) periodically flooding the condenser with liquid water to push out accumulated noncondensibles,
2) employing an aspirator in which the vacuum at the throat of the venturi draws out noncondensibles, and 3) employing a mechanical vacuum pump. One such
25 embodiment comprises a vacuum pump which comprises a cylinder, a piston disposed in the cylinder, an inlet valve disposed in the cylinder, a sprayer that draws water into the cylinder, and a vent disposed in the cylinder for discharging noncondensibles and excess water. The vacuum pump is driven by a gear mounted on a main drive shaft, the gear connected to a plurality of reduction gears, wherein a first cam surface and a
30 second cam surface are mounted on one of the reduction gears, a first roller rides on

-15-

the first cam surface and a second roller rides on the second cam surface, and the first roller drives the piston and the second roller drives the inlet valve.

Another novel vacuum pump comprises a cylinder, piston disposed in the cylinder, a crank, a check valve disposed in the cylinder, and means for spraying
5 water into the cylinder of the vacuum pump, wherein the piston is driven by the crank in a first and a second direction opposite the first direction, the piston comprising a first end, a second end, a plurality of notches, a plurality of perforations extending from the first end to the second end, and a flexible flap attached to the second end of the piston and covering one or more of the perforations, wherein the flap opens when
10 the piston moves in the first direction and closes when the piston moves in the second direction.

Still another novel vacuum pump comprises: a first column and a second column, the columns being partially filled with liquid and having a vapor space; means for causing the liquid to oscillate in the columns; inlet means for allowing
15 uncompressed gas to enter each of the columns; outlet means for discharging compressed gas from each of the columns; and means for spraying a fine mist of liquid into the vapor space of the first and the second columns. Preferably, the means for causing oscillation comprises a chamber connecting the first and the second columns and a reciprocating piston disposed in the chamber. The outlet means for
20 each column preferably comprises a check valve. This oscillating pump has the ability to isothermally compress a mixture of noncondensable and condensable gases to a very high compression ratio.

Another novel vacuum pump is a gerotor vacuum pump comprising an outer gerotor and a center gerotor disposed within the outer gerotor, wherein the
25 center gerotor is mounted on a main drive shaft and the outer gerotor is positioned by a plurality of guide rollers. Alternatively, the center gerotor is mounted on a main drive shaft and the outer gerotor is mounted within a single ball bearing.

The volumetric load on the aspirator or vacuum pump can be greatly reduced by condensing most of the water and increasing the partial pressure of the
30 noncondensibles. The present invention employs a novel method for removing water

-16-

vapor from noncondensibles in a stream of air and water vapor comprising passing the stream through a packed column with chilled water flowing countercurrently. Preferably, the packed column comprises structured packing (e.g., corrugated polyvinyl chloride) or dumped packing (e.g., ceramic saddles).

5 Still another embodiment is directed to a novel pivotable mounting apparatus for mounting a stationary shaft to a housing, which prevents rotation of the shaft, but allows for angular and axial variation. This apparatus comprises a ring, spokes and hub, coupled to the shaft. The ring has a spherical outer diameter, which is disposed within a cylindrical shaped opening in the housing.

10 Still another embodiment is directed to a novel low-friction rotary shaft seal comprising: a journal for receiving a rotary shaft, the journal configured to create a gap between the shaft and the journal, the journal further comprising a journal face; means for supplying water to the gap; and a bellows seal, the seal resting on the journal face when the shaft is stationary and lifting off the face when the shaft rotates.

15 **Description of the Drawings**

Figure 1 Schematic of vapor compression evaporative cooler **100**.

Figure 2 Schematic of vapor compression evaporative cooler **101**.

Figure 3 Depiction of the coefficient of performance of cooler **101** under various conditions.

20 Figure 4 Depiction of the coefficient of performance of R-12 vapor compression refrigeration.

Figure 5 Schematic cross sectional view of compressor **230** incorporated into cooler **200**.

Figure 6 (a-f) Schematic top views of sliding vane compressor **3300** in different
25 stages of its rotational cycle.

Figure 7 Three dimensional schematic of sliding vane compressor **3300**.

Figure 8 Exploded side view of rotor **3302** of compressor **3300**.

Figure 9 Schematic cross sectional view of groove **3342** detail of rotor of compressor **3300**.

- Figure 10 (a) Top view of slip ring **3326** of rotor **3302** of compressor **3300**; (b) top view of counterweight **3328** of rotor **3302**; (c) top view of top cap **3320** of rotor **3302**; and (d) bottom view of bottom cap **3330** of rotor **3302**.
- Figure 11 (a) Side view of sliding vane **3351** of compressor **3300**; (b) cross sectional view of sliding vane **3351** taken along plane **A-A** of (a); and (c) cross sectional view of sliding vane **3351** taken along plane **B-B** of (a).
- Figure 12 Top view of compressor housing **3301** of compressor **3300**.
- Figure 13 Side view of compressor housing **3301** taken along plane **A-A** of **Fig. 12**.
- Figure 14 (a) Top view of top housing end plate **3303** of compressor **3300**; and (b) side view of top housing end plate **3303** taken along plane **A-A** of (a).
- Figure 15 (a) Top view of bottom housing end plate **3305** of compressor **3300**; and (b) side view of bottom housing end plate **3305** taken along plane **B-B** of (a).
- Figure 16 Schematic cross sectional view of compressor **3300** incorporated into cooler **3200**.
- Figure 17 (a-f) Schematic top views of sliding vane compressor **4300** in different stages of its rotational cycle.
- Figure 18 Three dimensional schematic view of compressor **4300**.
- Figure 19 Exploded side view of rotor **4302** of compressor **4300**.
- Figure 20 Perspective view of sidewall **4340** and sliding vane **4308** of compressor **4300**.
- Figure 21 Top view of compressor housing **4301** of compressor **4300**.
- Figure 22 Side view of compressor housing **4301** taken along plane **A-A** of **Fig. 21**.
- Figure 23 (a) Top view of top housing end plate **4303** of compressor **4300**; and (b) side view of top housing end plate **4303** taken along plane **A-A** of (a).
- Figure 24 (a) Top view of bottom housing end plate **4305** of compressor **4300**; and (b) side view of bottom housing end plate **4305** taken along plane **B-B** of (a).
- Figure 25 (a-f) Schematic top views of actuated sliding vane compressor **5300** in different stages of its rotational cycle.

Figure 26 Exploded side view of rotor **5302** of compressor **5300**.

Figure 27 (a) Top view of slip ring **5326** of rotor **5302**; (b) top view of top cap **5320** of rotor **5302**; and (c) bottom view of bottom cap **5330** of rotor **5302**.

Figure 28 Perspective view of sidewall **5340** and sliding vane **5308** of compressor **5300**.

Figure 29 (a) Side view of sliding vane **5308** of compressor **5300**; (b) cross sectional view of sliding vane **5308** taken along plane **A-A** of (a); and (c) cross sectional view of sliding vane **5308** taken along plane **B-B** of (a).

Figure 30 (a) Top view of top housing end plate **5303** of compressor **5300**; and (b) side view of top housing end plate **5303** taken along plane **A-A** of (a).

Figure 31 (a) Top view of bottom housing end plate **5305** of compressor **5300**; and (b) side view of bottom housing end plate **5305** taken along plane **B-B** of (a).

Figure 32 (a-f) Schematic top views of actuated flap compressor **6300** in different stages of its rotational cycle.

Figure 33 Three dimensional schematic view of actuated flap compressor **6300**.

Figure 34 Exploded side view of rotor **6302** of compressor **6300**.

Figure 35 (a) Top view of slip ring **6326** of rotor **6302**; (b) top view of top cap **6320** of rotor **6302**; and (c) bottom view of bottom cap **6330** of rotor **6302**.

Figure 36 Perspective view of sidewall **6340** and flap **6308** of rotor **6302** of compressor **6300**.

Figure 37 Side view of flap **6308**.

Figure 38 Top view of flap **6308**.

Figure 39 Top view of compressor housing **6301** of compressor **6300**.

Figure 40 Side view of compressor housing **6301** taken along plane **A-A** of Fig. 39.

Figure 41 (a) Top view of top housing end plate **6303** of compressor **6300**; and (b) side view of top housing end plate **6303** taken along plane **A-A** of (a).

Figure 42 (a) Top view of bottom housing end plate **6305** of compressor **6300**; and (b) side view of bottom housing end plate **6305** taken along plane **B-B** of (a).

- Figure 43 (a-j) Schematic top views of actuated flap compressor **7300** in different stages of its rotational cycle.
- Figure 44 Top view of inner drum **7302** and vane connecting rod **7370** of compressor **7300**.
- 5 Figure 45 Side view of shaft configuration to permit two axes of rotation of compressor **7300**.
- Figure 46 Perspective view of rod shroud **7390** of compressor **7300**.
- Figure 47 (a-p) Schematic views of orbiting scrolls of compressor **8000** in different stages of the orbiting cycle.
- 10 Figure 48 Schematic cross sectional view of scroll compressor **8000** incorporated into cooler **8800**.
- Figure 49 Schematic cross sectional view of scroll compressor **8400** incorporated into cooler **8801**.
- Figure 50 Schematic perspective view of a gear arrangement for creating orbiting motion.
- 15 Figure 51 Cutaway side view of the gear arrangement of **Fig. 50**.
- Figure 52 Schematic cross sectional view of compressor **8500** incorporated into cooler **8802**.
- Figure 53 (a-j) Schematic top views of gerotor compressor **9300** in different stages of its rotational cycle.
- 20 Figure 54 Top view of top inlet end plate **9303** of compressor **9300**.
- Figure 55 Top view of bottom outlet end plate **9305** of compressor **9300**.
- Figure 56 Schematic cross sectional view of gerotor compressor **9300** (with gear box).
- 25 Figure 57 Top view of outer gerotor **9308** and plate **9320**.
- Figure 58 Perspective view of variable port mechanism **9359**.
- Figure 59 Perspective view of variable port mechanism **9369**.
- Figure 60 Perspective view of variable port mechanism **9379**.
- Figure 61 Side view of another embodiment of a variable discharge mechanism.

-20-

- Figure 62 Top view of the variable discharge mechanism of **Fig. 61** being driven by a servo motor.
- Figure 63 Schematic cross sectional view of gerotor compressor **9400**.
- Figure 64 Top view of gears **9461** and **9460** and gerotors **9402** and **9408**.
- 5 Figure 65 Schematic cross sectional view of gerotor compressor **9500**.
- Figure 66 Top view of outer gerotor **9508** and coupling plate **9320**.
- Figure 67 Top view of inner gerotor **9502**.
- Figure 68 Schematic cross sectional view of gerotor compressor **10300**.
- Figure 69 Cross sectional view of vacuum pump **10060**.
- 10 Figure 70 Perspective view of piston **10610** of vacuum pump **10060**.
- Figure 71 Schematic cross sectional view of gerotor compressor **10300** incorporated into cooler **10000**.
- Figure 72 Schematic cross sectional view of gerotor compressor **10400**.
- Figure 73 Schematic cross sectional view of gerotor compressor **11400** incorporated
- 15 into cooler **11000**.
- Figure 74 (a) Schematic cross sectional view of pivotable mount **11490**; (b) top perspective view of top housing plate **11403** for use with pivotable mount **11490**; (c) top perspective view of rotating plate **11480** for use with pivotable mount **11490**; and (d) top perspective view of ring **11491**, hub
- 20 **11492** and spokes **11493** of mount **11490**.
- Figure 75 Cross sectional schematic view of a variable discharge port operated by a bellows.
- Figure 76 Top view of the port of **Fig. 75**.
- Figure 77 Cross sectional view of a discharge mechanism control employing a liquid-containing bulb.
- 25 Figure 78 Depiction of the removal of noncondensibles using packing and chilled water.
- Figure 79 Schematic cross sectional view of compressor **11400** and vacuum pump **12060** incorporated into cooler **12000**.

-21-

Figure 80 (a) Top view of gerotor vacuum pump **12060**; and (b) side view of gerotor vacuum pump **12060**.

Figure 81 (a) Schematic of vacuum pump **12402**; and (b) schematic of vacuum pump **12403**.

5 Figure 83 Schematic of a multistage vapor compression evaporative cooler **13000**.

Figure 84 Energy analysis of a multistage evaporative cooler without turbines.

Figure 85 Energy analysis of multistage evaporative cooler with turbines.

Figure 86 Generalized compressor chart.

Figure 87 Table depicting results of a centrifugal compressor analysis.

10 Figure 88 Schematic of vapor compression evaporative cooler **13100** which employs multistage evaporators.

Figure 89 Schematic of vapor compression evaporative cooler **13200** which employs multistage evaporators and condensers.

Description of the Invention

15 This invention is directed to highly efficient and economical vapor compression evaporative coolers that use water rather than CFCs as a coolant. Such coolers can assume various configurations such as the following novel cooling systems described herein:

1. The two cooling systems depicted in **Figs. 1** and **2** which use a
20 compressor to pressurize water vapors, followed by a jet condenser or spray condenser;
2. Cooling systems having three concentric chambers such as cooler **200** depicted in **Fig. 5** and cooler **3200** depicted in **Fig. 16**;
3. Cooling systems such as coolers **8800**, **8801** and **8802** depicted in
25 **Figs. 48, 49, and 52** with condenser on top and compressor discharge port at the top;
4. Cooling systems such as coolers **10000**, **11000**, and **12000** depicted in **Figs. 71, 73, and 79** with condenser on bottom and compressor discharge port on bottom; and
5. Multistage systems, such as the three systems **13000**, **13100**, and
30 **13200** depicted in **Figs. 83, 88 and 89**.

-22-

The invention is also directed to novel low-friction, positive displacement compressors that can be incorporated into one or more of the foregoing cooling systems, including systems having three concentric chambers, such as cooler **3200** or cooler **200**. These compressors include:

- 5 1. The piston compressor **230** depicted in **Fig. 5**;
2. Sliding vane compressor **3300** depicted in **Figs. 6-16**;
3. Sliding vane compressor **4300** depicted in **Figs. 17-24** ;
4. Actuated sliding vane compressor **5300** depicted in **Figs. 25-31**;
5. Actuated flap compressor **6300** depicted in **Figs. 32-42**; and
- 10 6. Activated flap compressor, multi-vane configuration **7300**, depicted in **Figs. 43-46**.

This invention is also directed to the use of novel low-friction, positive displacement compressors in one or more of the above-described cooling systems, including systems having two concentric chambers, such as cooler **8800** depicted in **Fig. 48**. These compressors include:

1. Scroll compressors such as the three embodiments depicted in **Figs. 48, 49, and 52 (8000, 8400, and 8500)**; and
2. Gerotor compressors such as the three embodiments depicted in **Figs. 56, 63, and 65 (9300, 9400, and 9500)**.

20 This invention is also directed to the use of novel low-friction, positive displacement compressors that can be used in one or more of the above-described cooling systems, such as coolers **10000, 11000, and 12000**. These compressors include gerotor compressors having novel means for actuating said compressors such as:

- 25 1. Gerotor compressor **10300**, depicted in **Figs. 68 and 71**;
2. Gerotor compressor **10400**, depicted in **Fig. 72**; and
3. Gerotor compressor **11400**, depicted in **Fig. 73**.

The present invention is also directed to novel means for removing noncondensibles from vapor compression evaporative coolers. These means include
30 the use of vacuum pumps such as:

-23-

1. Vacuum pump **10060** depicted in **Figs. 69** and **70**, which removes noncondensibles from the condenser;
2. Gerotor vacuum pump **12060** depicted in **Fig. 80a**;
3. The noncondensable vacuum pumps **12402** and **12403** depicted in
- 5 **Figs. 81** and **82**; and
4. Pump **8060** depicted in **Fig. 48**.

The embodiments of the present invention are illustrated in **Figs. 1-89**, wherein like numerals are used to denote like elements.

Fig. 1 depicts vapor-compression evaporative cooler **100** in accordance with a first embodiment of the present invention. This cooler can be used in any region of the country regardless of the humidity; however, its performance is enhanced in regions with particularly low humidity.

As depicted in **Fig. 1**, room air (about 25°C dry-bulb temperature, 55% relative humidity, 15°C dew point) enters room air contactor **102** through room air inlet **103**. Cold water **104** (about 13°C) is sprayed inside room air contactor **102**. Room air contactor **102** has a room air contactor return **105**. The room air becomes chilled due to the direct contact with cold water spray **104**. Further, the room air is also dehumidified because the cold water temperature is less than the air dew point. **Fig. 1** depicts room air contacting water in a spray tower **106**; however, contact could also be accomplished by blowing room air through a packed tower. In a preferred embodiment, structured packing is employed consisting of corrugated chlorinated polyvinyl chloride (CPVC) sheets that are arranged with open channels allowing chilled water to flow down and room air to flow up. CPVC is a preferred material because it is inexpensive, lightweight, and resists degradation by ozone, which may be introduced to kill potential microorganisms.

Alternatively, a fibrous mat may be employed with cold water trickling over the fibers, or using any other suitable means, such as random packing made of ceramic, metal, or plastic.

Evaporator **120** in **Fig. 1** is preferably held at a low pressure (preferably about 0.015 atm) using compressor **130**, or any positive displacement compressor.

-24-

Water from the room air contactor **102** is drawn into the evaporator **120** where it flashes and cools. This cold water is pumped out of evaporator **120** into room air contactor **102** using pump **110**.

Compressor **130** pressurizes the water vapors and discharges them to a
5 condenser, such as jet condenser **140**. When compressed, the water vapors superheat which increases the work requirement. This can be overcome by spraying liquid water **131** directly into compressor **130** as described in U.S. patent 5,097,677 assigned to Texas A&M University, and incorporated herein by reference. Because it takes time for the water to evaporate and cool the vapors, it is best to perform the
10 compression in a series of small steps, or to operate the compressor slowly, or to employ very fine water droplets. The compression is preferably done using a low-friction positive displacement compressor (piston, vane, flap, scroll, gerotor) such as those disclosed herein, or any suitable means. Because of the large volume of water vapors that must be compressed, the compressor is necessarily large. To achieve
15 high efficiency, it is essential that the compressor have low friction.

The compressed water vapors exiting compressor **130** are sent to jet condenser **140**. Jet condenser **140** operates like a venturi. High-pressure liquid water enters jet condenser **140**. The throat **141** of jet condenser **140** narrows causing the water velocity to increase. The kinetic energy needed to accelerate the water
20 comes at the expense of pressure energy, so a vacuum is produced. The high-velocity, low-pressure water is colder than the water vapors exiting compressor **130**. When these vapors contact the high-velocity water stream, they condense onto the water stream and are swept out with the water. The diameter of lower throat **142** of the pipe exiting jet condenser **140** increases so the water velocity decreases. This
25 converts the kinetic energy back into pressure energy so the water can exit at atmospheric pressure. Any noncondensibles are also swept out of the system.

The liquid exiting jet condenser **140** is sent to ambient air contactor **150**. Ambient air contactor **150** has an ambient air inlet **152** and an ambient air return **153**. In a preferred embodiment, it has a salt water purge **158**. As water evaporates into
30 the ambient air, it cools to approach the wet-bulb temperature. Because the wet-bulb

-25-

temperature is usually significantly less than the dry-bulb temperature, heat is rejected at a much lower temperature than with conventional vapor-compression air conditioners. In addition, because direct contact heat exchange is employed, the ΔT is much less. Cooled water is returned from the ambient air contactor to the
5 condenser via pump 112.

Because heat is ultimately rejected by water evaporation, make-up water is required. Make-up water 131, 145 and 125 may be added to compressor 130, jet condenser 140, and evaporator 120, respectively, as needed.

Some water will condense out of the room air, but this is insufficient to
10 meet the total water requirement. If ordinary city water is employed, salts will accumulate, therefore, salt water purge 108 is used. As indicated in Fig. 1, salt water purge 108 may be located at the bottom of the room air contactor 102. In addition, means for removing microorganisms from the water in the system, particularly the room air contactor may be used, such as an ozone generator, UV radiation source,
15 antimicrobial chemicals or other means known in the art.

Fig. 2 depicts an alternative embodiment of the present invention. Reference numerals in this embodiment refer to like elements or features in the embodiment of Fig. 1, so that a further description thereof is omitted. Vapor compression evaporative cooler 101 is identical to the cooler in Fig. 1, except that
20 spray condenser 160 is employed rather than a jet condenser. Make-up water 165 may be added to the spray condenser. Additionally, there is a small aspirator 170, which operates as a venturi; the reduced pressure at the venturi throat draws noncondensibles out of the condenser.

The embodiment shown in Fig. 2 is easier to analyze than that in Fig. 1
25 because actual performance data is needed for the jet condenser. Therefore, the following analysis is for Fig. 2.

The coefficient of performance, COP, is defined as the heat removed in the evaporator divided by the total work required to operate the system

-26-

$$\text{COP} = \frac{Q_{\text{evap}}}{W_{\text{comp}} + W_{P1} + W_{P2}} \quad (1)$$

5 where

Q_{evap} = heat removed in the evaporator

W_{comp} = compressor work

W_{P1} = work of pump 1

W_{P2} = work of pump 2.

10 This expression can be inverted as

$$\frac{1}{\text{COP}} = \frac{W_{\text{comp}}}{Q_{\text{evap}}} + \frac{W_{P1}}{Q_{\text{evap}}} + \frac{W_{P2}}{Q_{\text{evap}}} = \frac{1}{\text{COP}_{\text{comp}}} + \frac{1}{\text{COP}_{P1}} + \frac{1}{\text{COP}_{P2}} \quad (2)$$

15

The compressor COP_{comp} is

$$\text{COP}_{\text{comp}} = \frac{Q_{\text{evap}}}{W_{\text{comp}}} = \eta_{\text{ref}} \eta_{\text{compressor}} \eta_{\text{motor}} \text{COP}_C \quad (3)$$

20

where

η_{ref} = refrigeration efficiency relative to Carnot efficiency (Fig. 21, *Reducing*

Energy Costs in Vapor-Compression Refrigeration and Air Conditioning Using

25 *Liquid Recycle - Part II: Performance*, Mark Holtzapple, ASHRAE Transactions,

Vol. 95, Part 1, 187-198 (1989)

$\eta_{\text{compressor}}$ = compressor efficiency (60-70% according to **Fig. 86**)

η_{motor} = motor efficiency (80%, although higher is possible)

$$\text{COP}_C = \frac{T_{E1}}{T_{C2} - T_{E1}} = \text{Carnot coefficient of performance} \quad (4)$$

30

T_{E1} = water temperature exiting evaporator (absolute temperature)

T_{C2} = water temperature exiting spray condenser (absolute temperature)

-27-

The pump coefficient of performance, COP_{p1} is given by

$$COP_{p1} = \frac{Q_{evap}}{W_{p1}} \quad (5)$$

5

The pump work is

$$W_{p1} = \frac{m_1 \Delta P_1}{\eta_{pump} \rho} \quad (6)$$

10

where

m_1 = mass flow of water through pump 1

ΔP_1 = pressure increase from pump 1

ρ = water density

15

η_{pump} = pump efficiency (assumed to be 50% with motor losses included)

The mass flow of water is determined by performing an energy balance

$$m_1 C_p (T_{E2} - T_{E1}) = Q_{evap} \quad (7)$$

20

$$m_1 = \frac{Q_{evap}}{C_p (T_{E2} - T_{E1})} \quad (8)$$

where

25

C_p = heat capacity of liquid water

T_{E2} = water temperature exiting room air contactor

Equation 8 can be substituted into Equation 6 which in turn is substituted into

Equation 5 to give the pump coefficient of performance

30

$$COP_{p1} = \frac{\eta_{pump} C_p (T_{E2} - T_{E1}) \rho}{\Delta P_1} \quad (9)$$

A similar expression can be derived for the coefficient of performance for pump 2

35

$$COP_{p2} = \frac{\eta_{pump} C_p (T_{C2} - T_{C1}) \rho}{\Delta P_2} \quad (10)$$

-28-

where

T_{C1} = water temperature exiting ambient air contactor

Equations 3, 9 and 10 may be substituted into Equation 2 to determine the coefficient of performance of the entire system

$$\text{COP} = \left[\frac{T_{C2} - T_{E1}}{\eta_{ref} \eta_{compressor} \eta_{motor} T_{E1}} + \frac{\Delta P_1}{\eta_{pump} C_p (T_{E2} - T_{E1}) \rho} + \frac{\Delta P_2}{\eta_{pump} C_p (T_{C2} - T_{C1}) \rho} \right]^{-1} \quad (11)$$

5 The room air is assumed to have the following properties:

dry bulb temperature = 25°C

relative humidity = 55%

dew point = 15°C

The following parameters were used to determine the COP according to

10 Equation 11:

$\eta_{ref} =$ 0.97 (from Fig. 21, *Reducing Energy Costs in Vapor-Compression Refrigeration and Air Conditioning Using Liquid Recycle - Part II: Performance*, Mark Holtzapple, ASHRAE Transactions, Vol. 95, Part 1, 187-198 (1989))

15

$\eta_{comp} = 0.7$ (from **Fig. 86**)

$\eta_{motor} = 0.8$

$\eta_{pump} = 0.5$

$C_p = 4188 \text{ J/(kg} \cdot \text{°C)}$

20

$\rho = 1000 \text{ kg/m}^3$

$\Delta P_1 = 1 \text{ bar} = 10^5 \text{ N/m}^2$

$\Delta P_2 = 1 \text{ bar} = 10^5 \text{ N/m}^2$

$T_{E1} = 13^\circ\text{C} = 286.15 \text{ K}$

$T_{E2} - T_{E1} = \Delta T$ (for simplicity)

-29-

$$T_{C2} - T_{C1} = \Delta T' \text{ (for simplicity)}$$

$$T_{C2} = T_{C1} + \Delta T'$$

Fig. 3 shows the COP under a variety of environmental conditions. The X axis is the ambient wet-bulb temperature ($^{\circ}\text{C}$). The Y axis is the coefficient of performance calculated using Equation 11. The $\Delta T'$ that results in the greatest system efficiency is 4 $^{\circ}\text{C}$.

The coefficient of performance for a conventional R-12 air conditioning system is

$$\text{COP} = \eta_{ref} \eta_{comp} \eta_{motor} \frac{T_E}{T_C - T_E} \quad (12)$$

where η_{comp} is the

compressor efficiency (assumed to be 0.7), η_{motor} is the motor efficiency (assumed to be 0.8), T_E is the evaporator temperature, T_C is the condenser temperature, and η_{ref} is given by Fig. 2 in the paper *Reducing Energy Costs in Vapor-compression*

15 *Refrigeration and Air Conditioning Using Liquid Recycle - Part I: Comparison of Ammonia and R-12*, Mark Holtzapple ASHRAE Transactions, Vol. 95, Part 1, 179-186 (1989).

The evaporator temperature is assumed to be 10 $^{\circ}\text{C}$, which is 5 $^{\circ}\text{C}$ cooler than the room air dew point and 15 $^{\circ}\text{C}$ cooler than the room air dry-bulb temperature.

20 **Fig. 4** shows the COP for R-12 vapor compression refrigeration using a variety of dry-bulb temperatures and condenser $\Delta T'$. The X axis is the ambient dry-bulb temperature ($^{\circ}\text{C}$). The Y axis is the coefficient of performance calculated by Equation 12.

Table 1 compares the expected performance of the vapor-compression evaporative cooler and the conventional R-12 vapor compression system in a variety of cities in the United States. The dry bulb and wet bulb temperatures are the "2.5 values," meaning only 2.5% of the hours between June and September exceed these values. From this analysis, it is expected that the vapor-compression evaporative

cooler is 1.7 to 3.9 times more energy efficient than conventional vapor-compression air conditioning. This energy comparison does not include energy for the ambient air fan or the room air blower.

5	Table 1. Comparison of Conventional Air Conditioning to Vapor-Compression Evaporative Cooler					
		R-12 Vapor Compression†		Vapor-Compression Evaporative Cooler		
	City	Dry Bulb Temp (°C)	COP ₁	Wet Bulb Temp (°C)	COP ₂	$\frac{COP_2}{COP_1}$
10	Albuquerque, New Mexico	33	4.4	16	15.0	3.4
	Atlanta, Georgia	33	4.4	23	8.8	2.0
	Dallas, Texas	36	3.9	24	8.2	2.1
	El Paso, Texas	37	3.8	18	12.4	3.3
	Houston, Texas	34	4.2	25	7.8	1.9
15	Las Vegas, Nevada	41	3.2	18	12.4	3.9
	Los Angeles, California	32	4.5	21	10.0	2.2
	Miami, Florida	32	4.5	25	7.8	1.7
	Minneapolis, Minnesota	37	3.8	23	8.6	2.3
	New Orleans, Louisiana	33	4.4	26	7.3	1.7
20	New York, New York	32	4.5	23	8.8	2.0
	Phoenix, Arizona	42	3.2	22	9.4	2.9
	Sacramento, California	37	3.8	21	10.0	2.6
	Salt Lake City, Utah	35	4.1	17	13.2	3.2
	Spokane, Washington	32	4.6	17	13.2	2.9
25	Washington, D.C.	33	4.4	23	8.6	2.0

†Calculations assume the condenser temperature difference is 10°C.

Another embodiment of the invention is directed to vapor-compression evaporative coolers having three concentric chambers. One such cooler is cooler 200

-31-

depicted in **Fig. 5**. The innermost chamber **210** of vapor-compression evaporative cooler **200** is at the lowest pressure, the middle chamber **211** is slightly higher, and the outermost chamber **212** is at atmospheric pressure. The outer diameter of the outermost chamber is preferably two to three feet for a 3-ton home air conditioning unit and preferably stands about three to four feet high. At the top of the outermost and middle chambers and below compressors **230** in the innermost chamber **210** are circular pipes **214** (inner), **216** (middle), and **218** (outer) through which water drips. If desired, packing **220** and **221** can be placed in the middle and outer chambers to increase the water hold up.

One or more compressors **230** are preferably disposed in innermost chamber **210** creating a vacuum in the chamber. As a result, water in the innermost chamber **210** evaporates and becomes chilled. This chilled water **224** is pumped into room air contactor **1000** located in the house or the space to be cooled where it countercurrently contacts warm air such that the air then becomes cooled. The chilled water is sufficiently low in temperature that humidity in the house air will actually condense; thus, not only is the house air cooled, but it is also dehumidified. A further benefit is that the house air is literally washed which removes dust and allergens.

Because water is evaporating in the innermost chamber, it must be replaced. This is preferably accomplished by float **226** which opens a valve **227** allowing tap water to be introduced to replenish the evaporated water. Because tap water contains salts, a purge stream **228** is be used to remove salt as it becomes concentrated. This may be accomplished by opening valve **229** when the salt concentration exceeds a given level. The valve can be opened based on a timer, a water conductivity meter, purging a continuous flow rate known to be suitable for the tap water salt concentration, or other suitable means known in the art. Alternatively, distilled water or rain water could be used as the system water and as make-up water such that purging would become unnecessary. However, in such a system, the water must be completely salt free.

-32-

The pressure in the innermost chamber is kept low using one or more compressors **230**. Although **Fig. 5** depicts two reciprocating compressors operating in parallel, it should be understood that any suitable compressor may be used. Particularly suitable are low-friction positive displacement compressors such as the disclosed reciprocating compressor (**Fig. 5**), sliding vane compressors (**Figs. 6-14, 16** and **25-31**) and actuated flap compressors (**Figs. 32-42** and **43-46**).

In the embodiment depicted in **Fig. 5**, reciprocating compressor **230** is used. Because the vapor density is very low, the compressor feature may consist of many stages. For example, in **Fig. 5**, two are shown operated in parallel.

10 Alternatively, multiple compressors may be operated in series, as shown in **Figs. 83, 88, and 89**. In **Fig. 5**, the compressor center shaft **232** oscillates vertically. The top of the shaft has a protrusion **234** which rides in a sinusoidal groove **237** in rotating cam **236**. A single sinusoid in groove **237** causes the center shaft to cycle once per motor rotation. By placing a groove with two sinusoids in cam **236**, the center shaft

15 will oscillate twice per motor rotation. Thus, very rapid center-shaft oscillations are possible using a conventional low-speed motor **238**.

The top end of bellows **240** is affixed to the oscillating shaft **232** and the other end is affixed to housing **242**, thus maintaining a vacuum-tight seal. The center shaft **232** has plates **244** attached to it that also oscillate vertically within compressor

20 housing **290**.

It has been discovered that because of the lower pressures involved in the cooling systems of the present invention, it is not necessary for close contact between the compressor components such as the plates **244** and housing **290**. Thus, in the present embodiment, plates **244** preferably have a sizable gap **245** (a few thousandths of an inch) with the housing **290** so they do not touch the housing giving negligible friction. Instead, water is used to make a seal. Specifically, the edges of the plates contain a groove **246** through which tap water flows. Because the tap water is at a higher pressure than the compressor, liquid water flows into the compressor housing **290** rather than vapors leaking out. This water not only provides a seal, but it also

25

30 cools the compressed vapors. If this water is insufficient to cool the compressed

-33-

vapors, additional water spray nozzles **248** may be placed on the face of the plates **244**. The source of the tap water is through the center shaft **232** which is hollow and has a flexible hose **233** at the bottom. The compressor has an outlet **249** to the middle chamber, regulated by outlet valve **250**. The compressor also has an inlet **251**
5 regulated by inlet valve **252**. Because the pressures are so low, it is not feasible to open valves **250** and **252** using pressure differences between the compressor interior and exterior. Instead, the inlet valve **252** and outlet valve **250** are active, *i.e.*, actuated by electric solenoids or hydraulic pistons. The compressor housing **290** preferably has a slightly conical bottom **243** so that excess liquid collects at the outlet
10 valve **250** to be discharged when the valve opens. The outlet **249** of the compressor is directed to the middle chamber **211**.

In the middle chamber **211**, the vapors condense directly onto the water spray **217** from circular pipe **216**. If too much liquid collects at the bottom of the middle chamber, an electrical switch **256** is activated by a float **254** which turns on
15 pump **258** to remove liquid. If the water level drops too low, the float **254** turns the switch **256** off. Because noncondensable gases will collect in the middle chamber **211**, they may be purged by aspirator **270**.

The liquid that is pumped out of the middle chamber **211** goes to the outer chamber **212** where it contacts ambient air and is cooled to approach the wet-bulb
20 temperature. The air is blown by fan **272** located at the top of the unit. The fan **272** and compressor **230** are preferably both powered by the same motor **238** which reduces costs and increases efficiency. Further, the fan **272** acts as a flywheel. Float **274** operates a valve **275** which introduces make-up water to the outer chamber **212** as required. To purge concentrated salts, valve **276** opens periodically to purge some
25 of the liquid out of the outer chamber **212**. An ozone generator or other means known in the art may be used to inhibit microorganism growth in the system.

In a preferred embodiment, the following parameters may be used:

1. motor speed = 1725 rpm
2. cam causes one center-shaft oscillation per motor rotation
- 30 3. the compressor has an 80% volumetric efficiency

-34-

4. three stages operating in parallel
5. 3-in stroke
6. a 3-ton unit must compress 1400 ft³/min of low-pressure vapors.

In the embodiment depicted in **Fig. 5**, the diameter of plate **244** would be
5 1.3 ft. Smaller diameters are possible by using a higher speed motor, altering the cam
to allow more center-shaft oscillations per motor rotation, increasing the stroke, or
increasing the number of stages.

Regulation of the system may be accomplished by on-off control as is
done with conventional air conditioners. Alternatively, a variable-speed motor may
10 be used to operate the compressor more efficiently; when the load is low, it runs
more slowly and when the load is high, it runs more quickly.

Because the pressure differences across all walls are very low (15 psi at
most), almost all of the components may be constructed of plastic thus reducing cost.
However, any suitable material may be used to make the individual components.
15 Because none of the chambers is completely filled with liquid water, if the water were
to freeze in winter, the 10% volume increase of the ice can be accommodated by the
vapor space. If desired, the unit could be drained of water to winterize it.

This embodiment may also be adapted to below-freezing applications by
adding a nonvolatile antifreeze (*e.g.*, salt, glycerol) to the water. This will lower the
20 vapor pressure of the water thus requiring a larger compressor. In addition, if
antifreeze is added to the water, then all make-up water should be distilled water so
that no salts must be purged. Alternatively, the complexity and cost associated with
adding distilled water may be eliminated if tap-water salts are used as the antifreeze.
This could be accomplished simply by operating the system with a very low purge
25 rate.

The present invention is also directed to other types of positive
displacement compressors that may be used in vapor-compression evaporative
coolers, including coolers having three concentric chambers. Rotary compressors are
one type of compressor which can be used in such coolers. One embodiment of a
30 rotary compressor useful in vapor compression evaporative coolers, rotary sliding

-35-

vane compressor **3300**, is depicted in **Figs. 6-14**. In **Figs. 6-14**, like reference numerals refer to like elements. The novel rotary compressors of this and later disclosed embodiments employ a sizable gap to reduce friction between the compressing components and use water both as a sealant and a coolant.

5 **Figs. 6a-f** are a schematic of rotary sliding vane compressor **3300** in various stages of the cycle. As the rotor **3302** rotates, it sweeps in vapors from the low-pressure side **3314** during the first rotation and then compresses them during the second rotation. To cool the vapors during the compression and to make seals, liquid water **3306** is sprayed into the compressor during the compression. As shown in
10 **Figs. 6a-f**, sliding vane **3308** contacts the rotor **3302** and separates the low-pressure **3314** and high-pressure **3315** sides of the compressor. Alternatively, to reduce friction, the sliding vane **3308** could contact the rotor **3302** through a roller located at the tip of the sliding vane **3308**, or the sliding vane **3308** could be actuated by an external mechanism so the rotor **3302** and sliding vane do not touch.

15 **Fig. 7** is a three dimensional schematic of sliding vane rotary compressor **3300**. The low-pressure vapors enter inlet hole or port **3310** in the side of compressor housing **3301**. No inlet check valve is required. The high-pressure vapors exit through outlet or discharge port **3312**. Outlet check valves **3313** (**Fig. 13**) are provided at the outlet.

20 **Fig. 8** is a side view of rotor **3302**. As depicted in **Fig. 8**, rotor **3302** consists of a top cap **3320**, bottom cap **3330** and sidewall **3340** which is preferably cylindrical. Top sealing groove **3322** and bottom sealing groove **3332** located on the top and bottom caps are filled with liquid water to create a rotating seal against the housing end plates **3303** (**Fig. 14a**) and **3305** (**Fig. 15A**). A vertical groove **3342** on
25 the sidewall seals the rotor **3302** against the compressor housing **3301**. The grooves may be entirely open, or they may contain a wick **3324** along the open end as depicted in **Fig. 9**, a drawing of the groove detail with a wick. Grooves **3322**, **3332** and **3342** may be actively supplied with low-pressure water **3327** through a slip ring **3326**. Distribution channels **3329** ensure that water is distributed to sealing grooves.
30 Alternatively, the water source may be from the water spray **3306** used to cool the

-36-

compressor. The water spray will wet the interior walls of the compressor housing and be wicked into the grooves **3322**, **3332**, and **3342**, provided wick **3324** is used.

Because the rotor is eccentrically mounted on the shaft, a counterweight **3328** is needed to balance the rotation. **Fig. 8** shows the counterweight **3328** may be
5 located inside the sidewall **3340** to save space. Alternatively, the counterbalance or counterweight **3328** may be located on the shaft outside the compressor housing.

Figs. 8-10 show details of the components of rotor **3302**. Top and bottom end caps **3320** and **3330** each have a large hole **3321** (top) and **3331** (bottom) to reduce the mass that must be counterbalanced. The large holes also
10 provide a means to drain the water from the rotor interior.

Figs. 11a-c show the details of sliding vane **3351**. It has pins **3352** located on the interior which ride on linear bearings **3354**. The sliding vane **3351** is forced against the rotor using springs **3356**. Felt wiper **3358** becomes water soaked from the cooling water spray **3306**, so it seals against the rotor. A novel feature of
15 this embodiment is the means used to create the gap between the felt wiper **3358** and the rotor. Specifically, roller bearings **3360**, which protrude farther than the felt wiper, ride on the rotor. The clearance between the felt wiper and the rotor is determined by the amount the roller bearings **3360** protrude from the wiper **3358**. As
20 can be seen from the foregoing, there is low friction between the compressing components of the disclosed embodiment -- the rotor, housing and sliding vane.

Figs. 12-13 show the compressor housing **3301**. It contains a section **3361** for sliding vane **3351**; sealing grooves **3362** on the side provide a seal. Inlet port **3310** is entirely open, but discharge port **3312** is lined with check valves **3313**. Because the pressure generated by the compressor is not sufficient to actuate the
25 check valves, they are preferably activated by solenoids, hydraulic pistons, or other means. Excess water will collect in the water sump **3363** which discharges through sump check valve **3364**.

The housing end plates **3303** and **3305** are depicted in **Figs. 14-15**. Top end plate **3303** and bottom end plate **3305** have top bearing cup **3307** and bottom
30 bearing cup **3309**. Bottom end plate **3305** also has a drainage hole **3311**.

-37-

Fig. 16 depicts sliding vane rotary compressor **3300** integrated into vapor-compression evaporative cooler **3200**. Like cooler **200**, it has three concentric chambers. Drive motor **3238** may be located inside or outside of the evaporator. In a preferred embodiment, it is outside. Locating the drive motor outside the evaporator has the following advantages: 1) waste heat will not put a load on the compressor, 2) a standard motor can be employed rather than one specially designed for use in a low-pressure, water-vapor environment, and 3) easy servicing. Drive motor **3238** is coupled to rotor **3302** by rotary shaft **3232**.

A rotary shaft seal **3233** is required. The present invention is also directed to a novel rotary shaft seal useful in compressor **3300** as well as other applications. Specifically, as depicted in **Fig. 16**, a seal is provided by supplying journal **3240** with water. Water will be drawn into the evaporator **3341** because it is at a low pressure. Provided excess water is supplied to journal **3240**, no air will leak into the evaporator **3341**. The clearance between shaft **3232** and journal **3240** may be relatively large so there is low friction. To prevent air from leaking into evaporator **3341** when motor **3238** is off, a bellows seal **3339** is employed. Due to centrifugal force, the bellows seal **3339** lifts off the journal face **3241** when shaft **3232** rotates, but seats on the journal face **3241** once the shaft rotation stops. Using this arrangement, there is very little friction due to the shaft seal. Although seal **3233** is described in connection with compressor **3300**, as will be clear to those of skill in the art, it may be also used in other applications.

The sliding vane compressor **3300** pulls a vacuum on the evaporator **3341** causing the liquid water to evaporate. Nucleation sites (*e.g.*, "boiling chips") **3337** are preferably provided to increase the evaporation efficiency. As water **3224** evaporates, it becomes chilled. This chilled water is pumped out of the evaporator **3341** and into a room air contactor **3102** via pump **3502**. House air directly contacts the chilled water which cools it and removes humidity.

The vapors discharged from the compressor **3300** enter the condenser **3211** which has water trickling over condenser packing **3220**. The inlet water is near the wet-bulb temperature of the ambient air, which is cooler than the compressor

-38-

discharge temperature, so the vapors condense onto the packing **3220**. The packing may be a structured packing consisting of corrugated plastic or metal sheet, or a random packing such as ceramic saddles. A pump **3503** removes the warmed water from the condenser and directs it to the ambient air contactor **3212**. Moisture
5 evaporates from the cooling of the water so it can be reintroduced into the condenser **3211**. To facilitate contact between the ambient air and the warm water, the ambient air contactor **3212** may have a structured or random packing **3214**.

Tap water which may be used to cool the compressor **3300** passes through a heat exchanger **3221** in contact with the water in the ambient air contactor. This
10 step is necessary only if the tap water temperature is generally above the wet-bulb temperature.

As an option, a pump **3500** can be added which pumps water out of the ambient air contactor **3212** and sends it to the home refrigerator condensing coil (not shown.) This will increase the refrigerator efficiency because: 1) water has better
15 heat transfer properties than air, and 2) the water temperature will generally be lower than room temperature. Water returning from the refrigerator may be directed back to the ambient air contactor. Pump **3400** is used to flow water through aspirator **3270** in order to remove noncondensibles from condenser **3211**.

To regulate the water levels in the various tanks, float valves **3227** (inner),
20 **3275a** (outer), **3275b** (outer) and **3256** (middle) may be employed. Most of the float valves introduce water into the tank if the water level drops too low. An exception is the left float valve **3275a** in ambient air contactor **3212**. Because water is constantly being added to the ambient air contactor, it will tend to fill up. The left float valve **3275a** is designed to open when the water level gets too high allowing water to be
25 sucked into condenser **3211**. The right float valve **3275b** in the ambient air contactor **3212** is necessary only if water is sent to the refrigerator. During the winter, the various water make-up systems would not be used because the air conditioner is not required. However, due to the refrigeration load, water will evaporate from the ambient air contactor thus dropping the liquid level. When the water level drops, the
30 right float **3274b** opens a valve **3275b** allowing make-up water to be introduced.

-39-

Because noncondensable gases will accumulate in condenser **3211**, an aspirator **3270** is used to pump out the gases. The motive force for aspirator **3270** is provided by circulating pump **3400**. Alternatively, a mechanical vacuum pump could be employed. For instance, vacuum pumps **12060**, **12402**, **12403** and **10060**,
5 discussed below, could be employed.

Because the evaporator **3341** and condenser **3211** are operated at very low pressures, pumps **3502** (evaporator) and **3503** (condenser) are provided to remove liquid from these vessels. However, liquid that enters these vessels requires no pump because they are at low pressure. Potentially, turbines may be used to
10 capture the energy of the water as it flows into the low-pressure vessels.

Water evaporates from both the evaporator **3341** and ambient air contactor **3212**, which will increase the salt concentration in the water. Water is purged from the room air contactor **3102** and may be added to the condenser **3211** or dumped to the sewer. Additionally, water is purged from the condenser **3211** and
15 may be sent to the sewer. The rate that water is purged from the system can be regulated by a pre-set valve, a timer-controlled valve, a salinity meter, or other means known in the art.

Because the evaporator is cold relative to the ambient environment, insulation **3405** is preferably used to maintain system efficiency.

20 Except for the oscillating mass of the sliding vane, rotary compressor **3300** will be virtually vibration free. In contrast, a reciprocating compressor produces much vibration. In addition, reciprocating compressors require an inlet check valve which adds expense and lowers efficiency because of flow losses through the valve.

25 A centrifugal or axial compressor must operate at very high speeds requiring either expensive high-speed motors or gear boxes. Sliding vane compressor **3300** can operate using conventional motors. Also, high-speed centrifugal and axial compressors may not tolerate liquid droplets needed to cool the compressor. A centrifugal or axial compressor will be more expensive because it has many precision
30 components and it must be well balanced.

-40-

Still another embodiment of the invention is directed to another low-friction sliding vane compressor useful in a vapor-compression evaporative cooler such as cooler 3200. This compressor is depicted in **Figs. 17-24**. Like sliding vane compressor 3300, this compressor uses water both as a sealant and a coolant.

5 **Figs. 17a-f** show a schematic of sliding vane compressor 4300 in various stages of the cycle. As rotor 4302 rotates, it sweeps in vapors from the low-pressure side 4314 during the first rotation and then compresses them during the second rotation. To cool the vapors during the compression and to make seals, liquid water 4306 is sprayed into the compressor 4300 during compression. Sliding vane 4308
10 nearly contacts the compressor housing 4301 and separates the low-pressure side 4314 and high-pressure side 4315 of the compressor.

Fig. 18 is a three dimensional schematic of sliding vane compressor 4300. The low-pressure vapors enter inlet hole or port 4310 in the side of the compressor housing 4301. No inlet check valve is required. The high-pressure vapors exit
15 through outlet or discharge port 4312. Outlet check valves 4313 (**Fig. 22**) are provided at the outlet.

Fig. 19 is a side view of rotor 4302. As depicted in **Fig. 19**, rotor 4302 consists of a top cap 4320, bottom cap 4330, and sidewall 4340 which is preferably cylindrical. Top cap 4320 has a drainage hole 4323, and bottom cap 4330 has
20 drainage hole 4333. Top sealing groove 4322 and bottom sealing groove 4332 located on the top and bottom caps are filled with liquid water to create a rotating seal against the housing end plates 4303 and 4305 which are depicted in **Figs. 23-24**. Also, as shown in **Fig. 20**, sidewall 4340 has a vertical gap 4366 with a groove 4368 that seals against the sliding vane. Connectors 4361 are inserted into vertical slot
25 4366 to seal against the upper and lower surfaces of sliding vanes 4308. The grooves 4322 and 4332 shown in **Fig. 19** may be entirely open, or they may contain a wick 4324 along the open end similar to that depicted in **Fig. 9**. The grooves may be actively supplied with low-pressure water 4327 through a slip ring 4326. Distribution channels 4329 ensure that water is distributed to sealing grooves.
30 Alternatively, the water source may be from the water spray 4306 used to cool the

-41-

compressor. The water spray will wet the interior walls of the compressor housing and be wicked into grooves **4322** and **4332**, provided wick **4324** is used.

The rotor components, particularly the sliding vane, have pins **4352**, linear bearings **4354**, springs **4356**, a felt wiper **4358**, and roller bearings **4360** similar in
5 structure and operation to those elements **3352**, **3354**, **3356**, **3358**, and **3360** depicted in **Figs. 11a-c**, so a further description thereof is omitted.

Figs. 21-22 show the compressor housing **4301**. Inlet port **4310** is entirely open, but discharge port **4312** is lined with check valves **4313**. Excess water will collect in the water sump **4363**, which discharges through sump check valve
10 **4364**. Sealing groove **4319** on housing **4301** seals against the rotating sidewall **4340**. The groove may be entirely open, or it may contain a wick **4324** along the open end similar to that depicted in **Fig. 9**.

The housing end plates **4303** and **4305** are depicted in **Figs. 23-24**. Top housing end plate **4303** and bottom housing end plate **4305** have top bearing cup
15 **4307** and bottom bearing cup **4309**. Bottom end plate **4305** also has drainage holes **4311**.

Sliding vane compressor **4300** may be integrated into vapor-compression evaporative cooler **3200** in place of compressor **3300** depicted in **Fig. 16**. Except for the oscillating mass of the sliding vane, sliding vane compressor **4300** will be virtually
20 vibration free. In addition, sliding vane compressor **4300** is more compact than compressor **3300**.

Still another embodiment of the invention is directed to an actuated sliding vane compressor for use in a vapor-compression evaporative cooler, such as cooler **3200**. This compressor is depicted in **Figs. 25-31**. Like the previous embodiments,
25 this compressor design minimizes friction and uses water both as a sealant and a coolant.

Figs. 25a-f show a schematic of actuated sliding vane compressor **5300** in various stages of the cycle. As rotor **5302** spins, sliding vane **5308** is positioned near the housing **5301** by roller bearings **5360** which ride in grooves **5316**.

-42-

Referring now to **Figs. 25-31**, actuated sliding vane compressor **5300** comprises rotor **5302**, which is disposed inside and rotates in compressor housing **5301** in a similar fashion to rotor **4302** and compressor housing **4301**, depicted in **Figs. 17-18**.

5 **Figs. 25-29** depict the details of the rotor components of actuated sliding vane compressor **5300**. Rotor **5302** consists of a top cap **5320**, a bottom cap **5330** and sidewall **5340** which is preferably cylindrical. The rotor caps have grooves **5322** and **5332**. As depicted in **Fig. 28**, sidewall **5340** has vertical grooves **5368** and vertical gap **5366**, similar in structure and function to grooves **4368** and gap **4366** in
10 the previous embodiment. Connectors **5361** are inserted into vertical slot **5366** to seal against the upper and lower surfaces of sliding vane **5308**. Water **5327** may be supplied to the grooves via slip ring **5326**. Distribution channels **5329** ensure that water is distributed to sealing grooves. As shown in **Fig. 27**, slot **5321** in top cap **5320** and slot **5331** in bottom cap **5330** allow roller bearings **5360** on sliding vane
15 **5308** to protrude from end caps **5320** and **5330**. **Figs. 29a-c** depict some of the components of sliding vane **5308**, including pins **5352** located on the interior which ride on linear bearings **5354**. As depicted in **Figs. 29-31**, roller bearings **5360** of sliding vane **5308** ride in grooves **5316** located on the housing end plates **5303** and **5305**. The springs **5356** shown in **Fig. 29a** may be in compression so the roller
20 bearings **5360** of sliding vane **5308** ride on the outside edge of grooves **5316**. Grooves **5316** may have a circular cross-section or may be non-circular and function as a cam to carefully regulate the position of the sliding vane. Housing end plates **5303** and **5305** have bearing cups **5307** and **5309**, respectively, to support shaft **5370**. Bottom housing end plate **5305** has a port **5318** to drain excess water. A
25 sintered metal or, alternatively, felt wiper **5358** becomes water soaked from the cooling water spray, so it seals against the housing **5301**.

The compressor housing of the present embodiment is similar in structure to housing **4301** depicted in **Figs. 21-22** of the previous embodiment, such that a further description thereof is omitted. As in the previous embodiment, the inlet port

-43-

is entirely open, but the discharge port is lined with check valves. Excess water will collect in a water sump which discharges through a check valve.

Actuated sliding vane compressor **5300** may be integrated into vapor-compression evaporative cooler **3200** depicted in **Fig. 16** in place of rotary
5 compressor **3300** or **4300**.

To reduce the cost associated with purchasing individual motors for each pump, and to increase the efficiency (one large motor is more efficient than multiple small motors), the pumps (and turbines, if used) may be mounted on the same shaft that drives the compressor **5300**. The pumps need not have tight seals because water
10 will leak into the evaporator with no major adverse consequences. The loose seals will reduce friction and increase pump efficiency.

Actuated sliding vane compressor **5300** has an advantage over sliding vane compressor **4300** in that the roller bearings **5360** for sliding vane **5308** will actually rotate relatively slowly. In contrast, roller bearing **4360** must rotate very
15 fast, which may require the use of expensive, high-speed roller bearings.

Still another embodiment of the invention is directed to an actuated flap compressor which may be used in a vapor-compression evaporative cooler, such as cooler **3200**. This compressor is depicted in **Figs. 32-42**. Like the previous embodiments, this compressor has low friction and uses water both as a sealant and a
20 coolant.

Figs. 32a-f show a schematic of actuated flap compressor **6300** in various stages of the cycle. As rotor **6302** rotates, it sweeps in vapors from low-pressure side **6314** during the first rotation and then compresses them during the second rotation. To cool vapors during the compression and to make seals, liquid water
25 **6306** is sprayed into the compressor **6300** during the compression. An actuated flap **6308** nearly contacts the interior of compressor housing **6301** and separates the low-pressure side **6314** and high pressure side **6315** of the compressor.

Fig. 33 is a three dimensional schematic of actuated flap compressor **6300**. The low-pressure vapors enter inlet hole or port **6310** in the side of the
30 housing **6301**. No inlet check valve is required. The high-pressure vapors exit

-44-

through outlet or discharge port **6312**. Outlet check valves **6313** (**Fig. 40**) are provided at the outlet.

Fig. 34 is a side view of rotor **6302**. As depicted in **Fig. 34**, rotor **6302** consists of a top cap **6320**, bottom cap **6330**, and sidewall **6340**, which is preferably cylindrical. Slots **6321** and **6331** allow the roller bearings **6360** (**Fig. 36**) to protrude from end caps **6320** and **6330**. Top sealing groove **6322** and bottom sealing groove **6332** located on the top and bottom caps are filled with liquid water to create a rotating seal against the housing end plates **6303** and **6305** (**Figs. 41 and 42**). The grooves may be entirely open, or they may contain a wick along the open end as described in previous embodiments. The grooves may be actively supplied with low-pressure water **6327** through slip ring **6326**. Distribution channels **6329** ensure that water is distributed to sealing grooves. Alternatively, the water source may be from the water spray used to cool the compressor. The water spray will wet the interior walls of the compressor housing and be wicked into grooves **6322** and **6332**, provided wick **6324** is used.

Figs. 35-38 show further details of the rotor components. Referring to **Figs. 35-38**, actuated flap **6308** has hinge pins **6352** which fit into hinge holes **6354** and **6356** in rotor top end cap **6320** and bottom end cap **6330**. Flap **6308** is forced outward by centrifugal force. As depicted in **Figs. 37-38** and **41-42**, roller bearings **6360** ride in top guide track **6362** of top end plate **6303** and bottom guide track **6364** in bottom end plate **6305** of the compressor housing **6301** which prevents the flap from touching the compressor housing **6301**, thus maintaining a slight gap of a few thousandths of an inch. The outer surface **6304** of flap **6308** may be covered with cloth or felt so that water is wicked between the flap and the compressor housing, thus forming a seal. Guideposts **6359** fit through guide hole **6358** so that flap **6308** is actuated when roller bearings **6360** mounted on axle **6366** ride in guide tracks **6362** and **6364**. Rotor **6302** nearly contacts housing **6301** at sealing groove **6365** which may be open, or have a wick such as that depicted in **Fig. 9**. As can be seen from the foregoing, the present embodiment has minimal friction between the compressor components -- the rotor, flap and housing.

-45-

Figs. 39-42 show the compressor housing **6301**. Inlet port **6310** is entirely open, but the discharge port **6312** is lined with check valves **6313**. Excess water will collect in the water sump **6363** which discharges through sump check valve **6364**. The housing end plates **6303** and **6305** are shown in **Figs. 41-42**. Top
5 end plate **6303** has a top bearing cup **6307** and a guide track **6362**. Bottom end plate **6305** has a bottom bearing cup **6309** and a guide track **6364**.

Because the final compression pressure is not great enough to open the check valves, they are actively opened preferably with a solenoid or hydraulic pistons. The timing of the opening/closing may be based upon measurements of the
10 evaporator and condenser temperature. A "look-up" table on a computer chip may be used to open the valves at the optimal rotation angle. The optimal rotation angle may be determined experimentally by varying the opening angle and measuring the ones giving the maximum coefficient of performance under a variety of evaporator/condenser temperatures.

15 As with the previously disclosed compressors **3300**, **4300** and **5300**, actuated flap compressor **6300** may be integrated into vapor-compression evaporative cooler **3200** depicted in **Fig. 16**.

The present embodiment enjoys several advantages over other compressors. Except for the oscillating mass of the flap, compressor **6300** will be
20 virtually vibration free. In contrast, a reciprocating compressor will have much vibration. In addition, a reciprocating compressor requires an inlet check valve which adds expense and lowers efficiency because of flow losses through the valve. Actuated flap compressor **6300** is also more compact than rotary compressor **3300**.

Further, a dynamic compressor (centrifugal or axial) must operate at very
25 high speeds requiring either expensive high-speed motors or gear boxes. Actuated flap compressor **6300** can operate using conventional motors. Also, high-speed centrifugal and axial compressors may not tolerate liquid droplets needed to cool the compressor. A centrifugal or axial compressor may also be more expensive because they have many precision components and must be well balanced.

-46-

Another embodiment of the invention is directed to a simple, valveless, cost-effective water vapor compressor with a variable compression ratio, which can be used in vapor-compression evaporative cooling systems, such as cooler **3200**. This low-friction compressor, depicted in **Figs. 43-46**, uses multiple swinging vanes.

5 As depicted in **Figs. 43-46**, actuated flap compressor **7300** comprises a swinging vane **7308**, a rigid connecting rod **7370** for vane angle control, a multiple vane configuration which eliminates the need for a discharge valve, and an adjustable discharge port opening **7312** for compression ratio variation.

In this embodiment, multiple vanes **7308** are actuated in a radial fashion
10 from an inner drum **7302**, such that the vane tips **7372** seal against an outer drum **7301** forming a cavity of decreasing volume upon rotation. The high pressure side of the vane can be curved with an arc with the same radius as the outer drum, to insure complete discharge by minimizing dead volume. Actuation means eliminates the frictional losses suffered due to contact between the vane tips **7372** and the outer
15 drum **7301**.

Figs. 43a-j show the progression of an arbitrarily chosen cavity through the compression and discharge stages. Note that the vanes **7308** do not quite touch the outer drum **7301**. For clarity, the means of achieving this actuation are not shown in this figure. The compression occurs by collapsing the encapsulated volume
20 **7374** (hatched area in **Figs. 43a-j**) between two successive vanes **7308** beginning immediately after the trailing vane passes the final intake port **7310**. Compression ends and discharge begins as the leading vane passes the opening of the discharge port **7312**, allowing the compressed vapor to be expelled by continued volume collapse without further compression. Although only one cavity has been described,
25 all cavities perform the same function; therefore, four of the processes described above occur per revolution. Variable compression ratio is achieved by adjusting the leading edge location of the discharge port **7312** circumferentially on the outer drum **7301** (which determines port opening time and thus compression ratio). As noted, in this embodiment, the ports can be valveless.

-47-

Fig. 44 shows the configuration of the vane connecting rod **7370**. As the square inner drum **7302** rotates about its axis **7378**, a very small clearance or gap **7380** between the vane tip **7372** and the outer drum **7301** can be maintained by rotating the vane connecting rod **7370** about the outer drum axis **7382**.

5 **Fig. 45** shows the method by which the two axes of rotation can be provided. The torque coupler **7384** is driven by a power source (such as an electric motor) and transmits the torque to the inner drum **7302**. It also provides adequate translational constraints to the offset shaft **7386** which is coaxial with the outer drum **7301**. All degrees of freedom are constrained in the offset shaft **7386** by proper shaft
10 shouldering and rotation constraint at the base **7388**. One end of the vane connecting rod **7370** is fixed to the portion of the offset shaft **7386** which is coaxial with the outer drum **7301**.

The center of the inner drum **7302** is not part of the encapsulated compression volume, so the penetration of the vane connecting rods **7370** through
15 the wall of the inner drum **7302** should not permit flow of the compressed water vapor. A barrier is provided by a shroud **7390** as shown in **Fig. 46**. This shroud **7390** mounts on the inside of the swinging vane **7308** and moves in and out of the inner drum wall **7392** as dictated by the angle between the vane **7308** and the inner drum **7302**.

20 Actuation of the swinging vane **7308** is simple and can be achieved without dry friction losses caused by contact between vane **7308** and the outer drum **7301**. Conventional sliding vane compressors are very small, making these frictional losses acceptable. The application of vapor compression for an air conditioning system requires very large flow rates and thus a compressor with large geometry,
25 making dynamic contact between the vanes and the outer drum unacceptably inefficient. In the swinging vane compressor, a very thin gap **7380** can be maintained between the vane tips and the outer drum by a simple connecting rod as described above, thus eliminating contact frictional losses. Further, no check valves are required which greatly simplifies the design.

-48-

Still another embodiment of the present invention is directed to cooling systems having two concentric chambers. The outer chamber contains an ambient air contactor. The inner chamber is subdivided into a compression and condenser chamber with the compressor in between. In one embodiment, the condenser chamber is disposed on the top and the evaporator chamber is on the bottom. The present invention is also directed to positive displacement, low-friction compressors useful in such coolers. These include scroll compressors and rotary compressors such as gerotor compressors. One such scroll compressor is depicted in **Figs. 47-48**. This embodiment is incorporated into a cooler that can process the very large volumetric flow rate of water vapor and in addition, novel means are provided to remove noncondensibles from the system. In addition, the scroll compressor of the embodiment described herein requires no valves which greatly simplifies the design.

Scroll compressor **8000** is depicted in **Figs. 47-48**. **Figs. 47a-p** show a sequence of images indicating changes in the volume of gas as mobile scroll **8004** orbits around stationary scroll **8003**. During the first few stages, gas is taken in at a low pressure. Once it is sealed off, the volume reduces and the pressure rises. The high-pressure gas is released through a hole **8011** in the stationary scroll **8003**.

Fig. 48 depicts a schematic cross section of scroll compressor **8000** integrated into vapor-compression evaporative cooler **8800**. Cooler **8800** uses scroll compressor **8000** to pressurize water vapor. Electric motor **8001** drives scroll compressor **8000** through flexible coupling **8002**. The scroll compressor **8000** has two stages connected in series: first stage **8000a** and second stage **8000b**. As depicted in **Fig. 48**, the stationary scroll **8003** of the second stage compressor **8000b** has a drive shaft **8007** located on the center axis with crank **8009** which drives mobile scroll **8004** in an orbital motion. Webbing **8010** provides stiffness to the stationary scroll **8003**. There is a sloppy fit between the crank **8009** and the mobile scroll **8004**. Precision positioning of the mobile scroll **8004** relative to the stationary scroll **8003** is obtained through rotors **8008**. Although **Fig. 48** shows two rotors **8008** per scroll, preferably three would be employed. The three rotors **8008** confine

-49-

the mobile scroll **8004** to an orbiting motion. The rotors can be counterbalanced such that there is no vibration in the orbiting scrolls.

Referring again to **Fig. 48**, first-stage compressor **8000a** has a stationary scroll **8005** and a mobile scroll **8006** that orbit in a similar fashion to scrolls **8003** and **8004**. First-stage compressor **8000a** pulls a vacuum on water **8015** in first-stage evaporator **8041** causing it to evaporate and cool. The compressed vapors exiting stage one are de-superheated in packing **8020** which has water dripping over it. The vapors entering the second-stage compressor **8000b** from second-stage evaporator **8038** are compressed and enter condenser chamber **8025** where they condense onto packing **8030**.

Using pump **8031**, the chilled water **8015** is pumped to packing **8035** which is in countercurrent contact with house air, thus cooling the air. The warmed water **8036** is sucked through filter **8039** into the second-stage evaporator **8038** where some of it flashes thus cooling the water. The flow rate is regulated by float valve **8037**. Float valve **8040** regulates the addition of water into the first-stage evaporator **8041** where some additional water flashes, thus cooling the water further. This chilled water **8015** is removed by pump **8031** and contacts house air, thus completing the cycle.

Water **8045** from condenser **8025** is removed by pump **8032** and directed to drip over cooling tower packing **8050** which has ambient air flowing countercurrently driven by fan **8054**. As depicted in **Fig. 48**, the fan is preferably driven by magnetic coupling **8055**. Alternatively, it may be driven by an independent electric motor. As the water flows through the packing **8050**, it is cooled approaching the wet-bulb temperature of the ambient air. The cooled water **8051** is sucked through filter **8052** and is drawn into condenser **8025**. The water flow rate is regulated by float valve **8053** which directs the incoming water to drip over packing **8030**.

Because both chilled water **8015** and condenser water **8045** directly contact air, dissolved gases will be released in the vacuum of the evaporators **8038** and **8041** and condenser **8025**. The noncondensable gases will accumulate in

-50-

condenser **8025**; therefore, a vacuum pump or aspirator is needed. Accordingly, novel vacuum pump **8060** is provided. Specifically, as depicted in **Fig. 48**, novel vacuum pump **8060** is driven by gear **8065** located on the main drive shaft **8007**. Two reduction gears **8066** and **8067** slow the rotation rate substantially. Two cammed surfaces **8073a** and **8073b** are located on the slowest gear **8067**. Roller **8070** rides on cam **8073b** and drives piston **8071**. Roller **8072** rides on cam **8073a** and drives inlet valve **8075**. Water **8051** is drawn into the cylinder of **8062** of vacuum pump **8060** through sprayer **8077**. As piston **8071** moves upward, it compresses the trapped vapors causing the water vapor to condense. The compressed noncondensable gas and excess water sprayed into the vacuum pump exit through vent **8080**. To ensure better contact of water vapor with liquid water, packing **8078** may be placed in the head space of vacuum pump **8060**. Pump **8060** operates flooded with liquid which cools the compressor and allows water vapor to condense. Also, the water seals and lubricates the piston. Further, the water can fill dead volume allowing this pump to have an exceptional compression ratio of approximately 400:1. Although this embodiment depicts one form of vacuum pump, it is clear to one of skill in the art that one could substitute the vacuum pumps depicted in other embodiments disclosed herein, including, but not limited to, pumps **10060** (**Figs. 69-70**), **12060** (**Figs. 80a-b**), **12402** (**Fig. 81**), and **12403** (**Fig. 82**).

Because water evaporates in evaporators **8041** and **8038** and cooling tower packing **8050**, make-up tap water **8012** and **8013** is added to the ambient air contactor (**8012**) and room air contactor (**8013**). To purge salts that would accumulate in the system, overflow weirs **8085** and **8086** are provided.

The use of multiple-stage compressors as depicted in **Fig. 48** provides the following benefits:

- multi-stage compression is more energy efficient than single-stage compression;
- an individual compressor stage is smaller than if the entire compression were done in a single compressor; and

-51-

- the energy efficiency is not lowered as much by mismatches between the fixed compression ratio of the scroll compressor and the compression ratio required by the evaporating and condensing temperatures, which varies with the ambient temperature. By using two stages, poorly timed vapor discharge results in less extra work compared to a single-stage compressor.

One advantage of this embodiment is that it has no valves. Because the pressures are so low, it is not possible to use traditional check valves that are opened by a slight over pressure. Instead, actuated valves would be required which creates additional mechanisms and a control problem. The scroll compressor eliminates the complexities associated with compressor valves. Multiple staging reduces the energy penalties associated with compression ratio mismatches.

Still another embodiment of a scroll compressor is depicted in **Fig. 49** which shows a two-stage scroll compressor **8400** incorporated into cooler **8801** in which the two compressors are driven by the same crank **8409**. The advantage of this arrangement is that fewer bearings are required.

Reference numerals in **Fig. 49** correspond to like elements previously described components in **Fig. 48**, so a further description is omitted. In **Fig. 49**, most of the components are analogous to those in **Fig. 48**; however, they are arranged slightly differently. The first-stage evaporator **8441** is concentric with the second-stage evaporator **8438**. Pipes **8100** emanate radially from the second-stage evaporator **8438** and connect to duct **8110** which directs the low-pressure vapors to the inlet of the second-stage compressor. Sliding seal **8105** separates the inlets of the two compressors.

Figs. 50-51 show an alternate and novel means of moving the mobile scroll **8004** in an orbital motion. Stationary scroll **8003** has an attached gear **8200**. (For illustration purposes, the flutes of all scrolls are removed to reveal the internal mechanism. Also, the gear teeth are removed to simplify the drawing.) Orbiting arm **8205** has an intermediary gear **8210** which drives gear **8220** which is attached to mobile scroll **8004**.

-52-

Fig. 52 shows yet another embodiment of the present invention: a single-stage, back-to-back scroll compressor **8500** incorporated into cooler **8802**. The advantage of this compressor is that the scroll diameter can be smaller to achieve the same flow. Because of the pressure difference, the stationary scrolls must support a load. To make them rigid requires reinforcing. Smaller diameters require less reinforcing because there is less load, and because there is less span. Another advantage of the back-to-back scrolls is that the flutes of each scroll can be rotated 180° with respect to each other so that the torque is more uniform across the entire rotation.

Reference numerals on **Fig. 52** correspond to previously described components so that further description is omitted. First stationary scroll **8301** and second stationary scroll **8303** are joined by spacer **8300** which provides axial, radial and angular alignment. Mobile scroll **8305** has holes **8306** so that the compressed vapors in the lower chamber can escape. For simplicity, **Fig. 52** shows only a single stage; however, multiple stages may be employed as well.

To reduce friction, all the scroll compressors **8000a** and **8000b** (**Fig. 48**), **8400** (**Fig. 49**), and **8500** (**Fig. 52**) have a gap of a few thousandths of an inch between the overlapping faces of the flutes. For instance, as depicted in **Fig. 52**, gaps **8550** separate the flutes. If desired, a fine mist of liquid water can be sprayed into the compressor inlet to wet the surfaces and provide sealing as well as cooling.

Additional embodiments of the invention are directed to novel low-friction gerotor compressors **9300**, **9400** and **9500**, as depicted in **Figs. 53-67**, useful in vapor-compression evaporative coolers as well as other applications. Unlike conventional gerotors, in which one gerotor directly drives the other through the gerotor teeth, these low-friction gerotors have gaps between the gerotors, and incorporate novel means to support and drive the gerotors. These compressors can be incorporated into systems such as cooler **8800** depicted in **Fig. 48**, or in other embodiments such as cooler **10000** depicted in **Fig. 71**. These gerotor compressors require no valves which greatly simplifies their design. In addition, all motion is purely rotary which is simpler to achieve than the orbital motion required in scroll

-53-

compressors. In addition, the relative motion of the two gerotors is very slow, thus minimizing any friction in the wetted interior of the components. Unlike scroll compressors, the compression ratio of the gerotor compressor, while operating, can be matched to the changing compression needs of the air conditioning system, thus
5 eliminating energy waste associated with under compressing, or over compressing, the high-pressure vapors.

One embodiment of a novel gerotor compressor having actuation means is depicted in **Figs. 53-57**. **Figs. 53a-j** depict a sequence of images as the components of gerotor compressor **9300** rotate about their respective axes. The inner gerotor
10 **9302** has one less tooth than the outer gerotor **9308** causing a void volume to appear between the two gerotors. The rightmost volume expands drawing low-pressure vapors into the gerotor and the leftmost volume contracts, thus expelling high-pressure vapors. Top inlet end plate **9303** and bottom outlet end plate **9305** of gerotor housing **9301** have inlet port **9312** and outlet port **9310**, respectively, that
15 allow low-pressure vapors to enter from the top and high-pressure vapors to exit from the bottom.

Fig. 56 shows a schematic cross section of gerotor compressor **9300**. Because the gerotor compressor must be large to compress the large volumes of water vapor, friction losses and wear resulting from touching gerotor teeth will be
20 unacceptable; therefore it is necessary to actuate the gerotors. The present embodiment uses novel means to actuate and support the gerotors. Specifically, as shown in **Fig. 56**, the actuation is provided by an internal gearbox **9350** that has the appropriate gear ratio (*i.e.*, in **Figs. 53-57**, a 5:4 gear ratio is used). The gearbox **9350** is suspended between two shafts, input shaft **9351** and output shaft **9352**.
25 Because the two shafts do not have a common center, the housing of gearbox **9350** will not rotate as the shafts rotate. The input shaft **9351** and output shaft **9352** of the gearbox **9350** rotate in the same direction because there are an odd number of spur gears; an idler gear **9353** connects the input gear **9354** and output gear **9355**.

As depicted in **Fig. 57**, the plate **9320** that couples the upper shaft **9351** to
30 the outer gerotor **9308** preferably has five prongs **9321** that are recessed into the

-54-

outer gerotor **9308**. Because the prongs **9321** are recessed, this allows both gerotors to be flush with the upper plate **9303** of the housing **9301** which eliminates potential dead volume associated with the inlet port **9412**.

As depicted in **Fig. 56**, the housing outlet port **9310** may have a fixed opening, thus fixing the compression ratio of the gerotor compressor. Alternatively, the outlet port **9310** may have a variable port mechanism. In a preferred embodiment, the discharge port has one of the variable port mechanisms depicted in **Figs. 58-60**, which show three possible and novel variable port mechanisms.

Fig. 58 depicts a variable port mechanism **9359** which has plates **9360** guided by pins **9631**. Springs **9632** force plates **9360** in the closed (downward) position. When actuator **9363** is slid to the right, ramp **9364** forces guides **9365** to lift plates **9630** one by one, thus giving outlet port **9312** a variable opening. Alternatively, rather than using actuator **9363** to open plates **9360**, each plate **9360** could be opened individually by a solenoid, or a hydraulic or pneumatic actuator.

Fig. 59 shows a variable port mechanism **9369** employing a plurality of rigid plates **9370** that have guide loops **9371** attached to the top. Each guide loop **9371** has a center pin **9372** and two links **9373** and **9774**. This arrangement allows rigid plates **9730** to be connected together in a manner analogous to a bicycle chain. As slider **9375** moves leftward, it closes outlet port **9312** and when it moves rightward, it opens outlet port **9312**. Spring **9376** stretches the linked plates **9370** tightly against slider **9375**.

Fig. 60 shows a variable port mechanism **9379** employing an elastomer pad **9380** that has a plurality of slits **9381** that divides the pad into plates **9382**. As slider **9385** moves leftward, it closes outlet port **9312** and when it moves rightward, it opens outlet port **9312**. Spring **9386** stretches the pad **9380** tightly against slider **9385**. Roller **9383** reduces friction of pad **9380** against slider **9385**. These mechanisms (**9359**, **9369** and **9379**) can be flush with end plate **9305**. Also, when incorporated into later disclosed embodiments such as compressor **10300** depicted in **Fig. 68**, which has actuating spur gears **10360** and **10361**, grooves may be added to plates **9360**, **9370** and **9382** to accommodate the actuating gears.

-55-

Alternatively, the outlet port **9310** may have a variable port mechanism such as sliding mechanism **9313** depicted in **Figs. 61-62**, that changes the position of the leading edge of the discharge port, thus allowing the compression ratio to be controlled. Sliding mechanism **9313** has a sliding cover **9314**, a thin metal plate **9315** and a variable port **9316**. The sliding mechanism may be activated by servo motor **9317**.

In still other embodiments, the variable port mechanism can be controlled by the other various mechanisms disclosed herein.

Gerotor compressor **9300** may be incorporated into many types of coolers, such as cooler **8800** depicted in **Fig. 48**, in place of scroll compressor **8000**. In addition, this novel gerotor compressor could be used in a number of applications, such as an air compressor, a compressor of industrial gases, a compressor for an engine (*e.g.*, Brayton cycle), or operated in reverse as an expander or air motor.

A primary advantage of gerotor compressor **9300** is that it has no valves. Because the pressures are so low, it is not possible to use traditional check valves that are opened by a slight over pressure. Instead, actuated valves would be required which requires additional mechanisms to instantaneously open and close the valve at the precise time in the compressor cycle, which presents a formidable control problem. Gerotor compressor **9300** eliminates the complexities associated with instantaneously actuated compressor valves. The variable port mechanisms shown in **Figs. 58-60** or sliding mechanism or valve **9313** shown in **Figs. 61-62** can be adjusted to change the compression ratio of the gerotor compressor, but this valve does not require instantaneous actuation; rather, it can be moved slowly (during a few seconds) to the desired location. The position of this valve may be controlled by thermocouples that determine the evaporator and condenser temperatures. This temperature information would be fed to a computer that determines the required compression ratio, and electrically actuates the sliding valve using a servo motor **9317**, a stepper motor or other means known in the art.

Figs. 63-64 depict gerotor **9400**, which is an alternate embodiment of a novel actuated low-friction gerotor compressor. In this embodiment, the relative

-56-

rotation of the two gerotors is produced by two spur gears, rather than contact of the gerotor teeth. The smaller gear **9460** has teeth on the outside diameter and the larger spur gear **9461** has teeth on the inner diameter. The gear ratio of these two spur gears is the same as the ratio of the number of teeth on the gerotor (in this case, 5:4).

5 The gear set can be located at the top of the gerotors, as depicted in **Fig. 63**, or at the bottom. In addition to being useful in the cooling systems disclosed herein, novel gerotor **9400** can also be used in other applications, such as an air compressor, a compressor of industrial gases, a compressor for an engine (*e.g.*, Brayton cycle), or operated in reverse as an expander or air motor.

10 As depicted in **Fig. 63**, the upper shaft **9462** rotates and drives the hub **9463** connected to the outer gerotor **9408**. As the outer gerotor spins, the larger gear **9461** drives the smaller inner gear **9460** causing the inner gerotor **9402** to rotate. The inner gerotor spins about a fixed, nonrotating central shaft **9464**. The central shaft has a crook **9465** that establishes the required offset of the axes of
15 rotation for the two gerotors. If desired, a gear set **9466** can be attached to the bottom of the inner gerotor allowing power to be taken off for ancillary equipment, such as the pumps.

The top stationary discharge plate **9467** with the discharge port **9468** is located directly against the two gerotors. The discharged high-pressure vapors also
20 must pass through perforations **9469** in the upper part of the outer gerotor and perforations **9412** in the upper plate **9403** of the housing. There is an inlet port **9410** in the bottom of the housing **9401**.

Figs. 65-67 depict yet another low-friction embodiment, gerotor compressor **9500**, in which the outer gerotor **9508** is driven by the upper shaft **9562**.
25 The inner gerotor **9502** has rollers **9561** at the corners **9563** that extend just slightly beyond the walls **9504** of the inner gerotor; thus, the rollers **9561** contact the outer gerotor **9508**, but the walls **9504** of the inner gerotor **9502** do not. The clearance between the walls of the inner and outer gerotors is determined by the amount the rollers **9561** extend beyond the inner gerotor wall (perhaps 0.005 inches). The outer
30 gerotor **9508** drives the inner gerotor **9502** through the roller contacts. The inner

-57-

gerotor **9502** is mounted on a rotary shaft **9564** that extends out of the housing allowing auxiliaries (*e.g.*, pumps) to be driven from the rotating shaft. Because the relative speed of the inner and outer gerotors is relatively small (for example 300 rpm), the roller rotation speed is not excessive (for example 2000 - 3000 rpm).

5 As noted, the present invention is directed to cooling systems having two concentric chambers. The ambient air contactor is disposed in the outer chamber. The inner chamber is divided into two chambers, containing the condenser and the evaporator with the compressor in between. In a preferred embodiment of this cooler, the condenser is on the bottom and the evaporator is on the top. This
10 embodiment preferably utilizes low-friction gerotor compressor **10300** and vacuum pump **10060** incorporated into vapor-compression evaporative cooler **10000** as depicted in **Figs. 68-71**. Compared to previously described coolers, the cooler described in this embodiment allows for water spray to drain from the compressor by locating the evaporator above the condenser. Water is sprayed into the compressor
15 inlet to remove superheat during compression and provide sealing.

 In addition, the novel vacuum pump **10060** disclosed herein can operate at a higher frequency because liquid water is not oscillating. The higher frequency allows for a more compact size, and also reduces forces in the drive train.

Fig. 68 depicts gerotor compressor **10300**, and **Fig. 71** shows a schematic
20 cross section of gerotor compressor **10300** incorporated into cooler **10000**. Because the gerotor compressor must be large to compress the large volumes of water vapor, friction losses and wear resulting from touching gerotor teeth will be unacceptable; therefore it is necessary to actuate the gerotors. Gerotor compressor **10300** is actuated in a novel fashion, similar to the embodiment depicted in **Fig. 63-64**, using a
25 large gear **10361** with internal teeth and with a small gear **10360** with external teeth except that the gears are located on the bottom of the compressor.

 Like the gerotor compressor depicted in **Figs. 56-57**, the plate **10320** that couples the upper shaft **10351** to the outer gerotor **10308** has five prongs **10321** that are recessed into the outer gerotor **10308**. Because the prongs **10321** are recessed,
30 this allows inner gerotor **10302** to be flush with plate **10320** and outer gerotor **10308**

-58-

to be flush with housing **10301** which eliminates potential dead volume. Ball bearings **10370** allow shafts **10351** and **10375** to rotate within the housing **10301**.

The discharge port **10310** located at the bottom of the housing may have a fixed opening, thus fixing the compression ratio of the gerotor compressor.

5 Alternatively, the discharge port **10310** may have a variable port mechanism that changes the position of the leading edge of the discharge port, thus allowing the compression ratio to be controlled. The variable port mechanism may be in any of the forms disclosed herein, such as the ones depicted in **Figs. 58-62**, or the port may be controlled using any other means known to one skilled in the art. In **Fig. 68**,
10 servo motor **9317** is shown to indicate the possible use of the variable port mechanisms previously described. Although gerotor compressor **10300** has been described in connection with the cooling systems disclosed herein, it may be used in other applications, such as an air compressor, a compressor of industrial gases, a compressor for an engine (*e.g.*, Brayton cycle), or operated in reverse as an expander
15 or air motor.

Figs. 69- 70 depict a novel vacuum pump **10060** which removes noncondensibles from the condenser. The piston **10610** is driven by a crank **10601**. The piston **10610** has numerous perforations **10611** in the top that allow vapor to flow into the cylinder **10615**. A flexible flap **10612** is located at the bottom of the
20 piston **10610** which opens when the piston **10610** moves upward and closes when the piston **10610** moves downward. The opening and closing of the flap **10612** is driven both by inertia, and pressure differences across the flap **10612**. During the entire operation of the vacuum pump, water **10602** is sprayed into the chamber which condenses water vapor as the volume reduces. Notches **10613** in the piston **10610**
25 allow liquid and compressed noncondensibles to access the check valve **10614** and exit the system. Although described in connection with this particular embodiment, vacuum pump **10060** may be incorporated in place of the vacuum pumps or aspirators of the other cooler embodiments described herein.

Fig. 71 is a schematic representation of gerotor **10300** incorporated into a
30 vapor-compression evaporative cooler **10000**. Electric motor **10001** drives the

-59-

gerotor compressor **10300** through flexible coupling **10002**. The gerotor compressor pulls a vacuum on water **10015** causing it to evaporate and cool. Using pump **10031**, the chilled water **10015** is pumped to packing **10035** which is in countercurrent contact with house air, thus cooling the air. The warmed water **10036** is sucked
5 through filter **10039** into the evaporator **10038** where some of it flashes on packing **10100**, thus cooling the water; the flow rate is regulated by float valve **10037**.

Cooler **10000** operates similarly to previous embodiments. Water **10045** from condenser **10025** is removed by pump **10032** and directed to drip over cooling tower packing **10050** which has ambient air flowing countercurrently driven by fan
10 **10054**. As the water flows through the packing, it is cooled approaching the wet-bulb temperature of the ambient air. The cooled water **10051** is sucked through filter **10052** and is drawn into condenser **10025**. The water flow rate is regulated by float valve **10053** which directs the incoming water to drip over packing **10030**.

Because both chilled water **10015** and condenser water **10045** directly
15 contact air, dissolved gases will be released in the vacuum of evaporator **10038** and condenser **10025**. The noncondensable gases will accumulate in condenser **10025**; therefore, a means for removing them, such as vacuum pump **10060**, is provided. Vacuum pump **10060** is driven by gear **10065** located on the main drive shaft **10007**. Using sprayers **10602**, water **10051** is drawn into the vacuum pump **10060** by the
20 vacuum. Further, as piston **10610** is driven upward by crank **10601**, elastomer flap **10612** opens due to its inertia. The open flap allows noncondensibles and water vapor to enter through perforations **10611**. As piston **10610** is driven downward by crank **10601**, elastomer flap **10612** closes due to inertia, sealing the water vapor and noncondensibles inside. As the piston **10610** compresses further, the water vapor
25 condenses onto liquid water spray leaving noncondensable gases and condensed water to exit through check valve **10614**, into cooling tower **10050**. Grooves or notches **10613** ensure the check valve **10614** is not blocked when piston **10610** is fully downward.

-60-

Because water evaporates in evaporator **10038** and cooling tower packing **10050**, make-up water **10012** and **10013**, such as tap water, is added. To purge salts that would accumulate in the system, overflow weirs **10085** and **10086** are provided.

Like the previous gerotor embodiments, a primary advantage of gerotor compressor **10300** is that it has no valves. In this embodiment, liquid water will be sprayed into the compressor to eliminate superheat. The gerotor compressor in this disclosure has low-pressure vapors entering the top and high-pressure vapors exiting the bottom. This arrangement allows liquid water to drain from the compressor.

Fig. 72 shows an alternative novel gerotor compressor embodiment that can also be used in cooler **10000** as well as the previously described applications. This compressor **10400** has gerotors in which the relative rotation of the two gerotors also is produced by two spur gears, the smaller one **10460** with teeth on the outside diameter and the larger one **10461** with teeth on the inner diameter. The gear ratio of these two spur gears is the same as the ratio of the number of teeth on the gerotor (in this case, 5:4).

As depicted in **Fig. 72**, lower shaft **10462** rotates and drives the hub **10463** connected to the inner gerotor **10402**. As the inner gerotor **10402** spins, the small gear **10460** drives the large gear **10461** causing the outer gerotor **10408** to rotate. The outer gerotor spins about a fixed, nonrotating central shaft **10464**. The central shaft has a "crook" **10465** that establishes the required offset of the axes of rotation for the two gerotors.

The top stationary inlet plate **10467** with the inlet port **10468** is located directly against the two gerotors. The inlet low-pressure vapors also must pass through perforations **10469** in the connecting plate **10475** to the outer gerotor **10408**, and perforations **10470** in upper plate **10403** of the housing. High-pressure vapors exit through discharge port **10480**. The discharge port **10480** can be fixed or have a variable opening employing the mechanisms previously described. Servo motor **9317** is shown to represent an actuation means to adjust the port opening. Shaft support **10481** contains ball bearings **10482** that support rotating shaft **10483**.

-61-

Another embodiment of the present invention is directed to a low-friction gerotor compressor without cantilevers; instead, both gerotors are supported at two points at opposite ends of the gerotor. This gerotor can incorporate a novel means for mounting a stationary shaft (**Figs. 74a-d**) which allows for angular and axial variation. As depicted in **Fig. 73**, gerotor compressor **11400** may be integrated into cooling systems such as cooler **11000**, which is similar to cooler **10000** depicted in **Fig. 71**.

The outer gerotor **11408** and inner gerotor **11402** of compressor **11400** rotate, compress vapors, as in the previous embodiments, such as that depicted in **Figs. 53a-j**, so that a further description is omitted. As indicated in **Fig. 73**, the gerotor is actuated by meshing a large internal gear **11461** and a small external gear **11460** with the same gear ratio as the gerotors (in this case 4:5). As further depicted in **Fig. 73**, gerotor compressor **11400** has a stationary central shaft **11464** with two crooks **11465** and **11466**. One end of the stationary shaft **11464** is fixed in a pivotable mount **11470** that prevents the shaft **11464** from rotating, but allows for angular variation. The pivotable mount could consist simply of a fixed rubber block **11470** (**Fig. 73**) with a hole in the center to which the stationary shaft connects.

Referring again to compressor **11400** depicted in **Fig. 73**, the other end of stationary shaft **11464** is located in rotating bearing cup **11472**. At the top of the compressor, there is a stationary inlet plate **11467** with an inlet hole **11468**. At the bottom of the compressor there is a stationary outlet plate **11477** with an outlet hole **11478** as shown in **Fig. 73**. On either side of stationary plates **11467** and **11477** are rotating perforated plates **11480** and **11482** that couple to the outer gerotor **11408**. Upper rotating perforated plate **11480** has an inlet **11484**. Bottom rotating perforated plate **11482** has an outlet **11486**. On either side of the rotating perforated plates **11480** and **11482** are perforated housing plates **11403** and **11405** that allow vapors to flow in and out through top inlet **11487** and bottom outlet **11410**.

In an alternate embodiment, the housing sidewall **11430** and perforated housing plate **11405** can be eliminated by mounting motor **10001** on a separate

-62-

frame. Further, the rubber block **11470** can be replaced by the mechanism shown in **Figs. 74a-d**.

Figs. 74a-d show novel pivotable mount **11490** which consists of a ring **11491** with center hub **11492** connected by spokes **11493**. The outer surface of ring **11491** is a section of a sphere which allows the ring to angularly rotate within inlet port **11487a** of upper housing plate **11403**. Stationary shaft **11464** is rigidly attached to center hub **11492**. To prevent rotation of stationary shaft **11464**, pin **11494** is inserted into slot **11495** in upper housing plate **11403**. Referring again to **Fig. 73**, a fine mist of tap water may be provided through housing inlet port **11487** to cool the compressor and seal rotating components. Pressure relief valves **11488** are preferably provided in ports **11489** of housing plate **11403** to relieve excess pressure differences between the evaporator **10038** and condenser **10025**. Excess pressure differences could occur during start up if the evaporator **10038** had a large quantity of noncondensibles (i.e., air). This unique mount allows for variations in both axial and angular alignment while preventing shaft **11464** from rotating. Although described in connection with the present embodiment, this mount could be used in other applications. For example, the impellor of a centrifugal pump could be located on a shaft that is mounted to the housing using the devices illustrated in **Figs. 74a-d**.

The discharge port **11478** located on the stationary bottom plate **11477** can have a fixed opening, thus fixing the compression ratio of the gerotor compressor. Alternatively, the discharge port **11478** can have a variable port mechanism such as those shown in **Figs. 58-62**, that changes the position of the leading edge of the discharge port, thus allowing the compression ratio to be controlled. The position of the leading edge may be set using the mechanism depicted in **Figs. 73** and **75-76**. To save space, the servo motor **11310** that sets the position of the sliding mechanism **11313** may be located outside the compressor. The servo motor rotates a threaded rod **11318** that axially positions a nonrotating nut **11319** that is coupled to a bellows **11321**. The bellows **11321** is filled with a noncompressible fluid (e.g., hydraulic oil). As the bellows **11321** is compressed by the servo motor **11310**, the noncompressible fluid flows down the hollow center of

-63-

the stationary shaft **11464** and extends the bellows **11320** located inside the compressor. As this bellows **11320** extends, it actuates the sliding cover **9314** or **11314** (Figs. **61-62** and **75-76**), actuator **9363** (Fig. **58**), slider **9375** (Fig. **59**) or slider **9385** (Fig. **60**).

5 Alternatively, as depicted in Fig. **77**, a temperature sensor can be constructed from liquid-containing bulb **11322**. At higher temperatures, the vapor pressure of the liquid increases, causing bellows **11320** to extend and actuate the sliding discharge port cover **9314** or **11314** (Figs. **61-62** and **75-76**), actuator **9363** (Fig. **58**), slider **9375** (Fig. **59**) or slider **9385** (Fig. **60**). The movement is resisted
10 by spring **11324**, which determines the functional relationship between temperature and slide position.

Fig. **73** shows a schematic representation of gerotor compressor **11400** incorporated into vapor-compression evaporative cooler **11000**. Reference numerals for elements in Fig. **73** refer to corresponding elements in Fig. **71** so that a further
15 description thereof is omitted. Cooler **11000** operates in a similar fashion to cooler **10000** depicted in Fig. **71**, except that electric motor **10001** directly drives the gerotor compressor. No flexible coupling is required because the pivotable mount **11470** or **11490** adjusts for slight misalignments. This design has the advantage that both gerotors are supported at each end, unlike the other designs in which one or
20 more gerotors was cantilevered. Further, the most precise components (e.g., crooks **11465** and **11466**) are small, so the precision is fairly easy to achieve. In contrast, many of the other designs require precise housings, which may be expensive given their large size. The design shown in Fig. **73** is tolerant of imprecision because of the shaft mounts **11470** or **11490** which allow for misalignment.

25 Like previous embodiments, another primary advantage of gerotor compressor **11400** is that it has no valves and liquid water may be sprayed into the compressor to eliminate superheat. The gerotor compressor of this embodiment has low-pressure vapors entering the top and high-pressure vapors exiting the bottom. This arrangement allows liquid water to drain from the compressor.

-64-

Still other embodiments of the invention are directed to integrated systems using novel means to remove water vapor from the noncondensibles. In these embodiments, direct contact with chilled liquid water removes much of the water vapor from the noncondensibles stream, thus increasing the partial pressure of the noncondensibles without using a compressor. This innovation may be employed in a single-stage unit suitable for the home market or it may be used in multistage units for large buildings.

The use of chilled water to condense water vapor from the noncondensibles was suggested in one study by the Thermal Storage Applications Research Center of the University of Wisconsin, *The Use of Water as a Refrigerant*, Report No. TSARC 92-1, March 1992. However, in this case, the author suggested the use of a metal heat exchanger with chilled water on one side and condensing water vapor on the other. This approach has a severe disadvantage because of temperature differences needed to transfer heat. As a consequence, much of the water vapor does not condense because the temperature is not cold enough. In contrast, the embodiment illustrated in **Fig. 78** directly contacts the water vapor with chilled water allowing for very low temperature gradients and much greater water removal from the noncondensibles.

As shown in **Fig. 78**, removal of noncondensibles can be accomplished by passing condenser vapor through a stripper or a packed column with chilled water flowing countercurrently. In a preferred embodiment, the column contains structured packing consisting of thin sheets of PVC, such as CPVC, folded in a corrugated pattern. Alternatively, random packing may be employed, such as ceramic saddles.

The chilled water condenses water vapor which raises the partial pressure of the noncondensibles. For example, as shown in **Fig. 78**, assume that at the bottom of the column, the noncondensable partial pressure is 0.04 psia and the water vapor pressure in the condenser is 0.616 psia (86°F). Further, at the top of the column, assume that the chilled water from the evaporator has a vapor pressure of 0.178 psia (50°F). Assuming negligible pressure drop through the column, the total pressure is 0.656 psia at both the top and bottom of the column. Therefore, the partial pressure

-65-

of noncondensibles at the top of the column is 0.478 psia. At the bottom of the packed column, the ratio of partial pressures is

$$\frac{P_{\text{water}}}{P_{\text{noncond}}} = \frac{0.616 \text{ psia}}{0.040 \text{ psia}} = 15.4 = \frac{15.4 \text{ lbmol water}}{\text{lbmol noncondensibles}} \quad (13)$$

At the top of the packed column, the ratio of partial pressures is

$$\frac{P_{\text{water}}}{P_{\text{noncond}}} = \frac{0.178 \text{ psia}}{0.478 \text{ psia}} = 0.372 = \frac{0.372 \text{ lbmol water}}{\text{lbmol noncondensibles}} \quad (14)$$

Thus, using this very simple device, the noncondensable pressure ratio
 5 increases by a factor of twelve while simultaneously removing almost 98% of the water vapor. Assuming the packing is able to operate near equilibrium, the required amount of chilled water is

$$\begin{aligned} \hat{m} &= \left(\frac{15.4 \text{ lbmol water}}{\text{lbmol noncondensibles}} - \frac{0.372 \text{ lbmol water}}{\text{lbmol noncondensibles}} \right) \times \frac{\text{lbmol noncondensibles}}{29 \text{ lb}} \\ &\times \frac{18 \text{ lb water}}{\text{lbmol water}} \times \frac{1000 \text{ Btu}}{\text{lb water}} \times \frac{\text{lb chilled water} \cdot ^\circ\text{F}}{1 \text{ Btu}} \times \frac{1}{(86-50)^\circ\text{F}} \\ &= \frac{259 \text{ lb chilled water}}{\text{lb noncondensibles}} \end{aligned} \quad (15)$$

10 Based upon the solubility of air in both the chilled water and condenser water, the mass flow rate of noncondensibles is about 0.051 lb/h for a 1-ton (12,000 Btu/h) air conditioner. Therefore, the chilled water flow rate for the water stripper in a 1-ton air conditioner is

$$\begin{aligned} \dot{m}_{\text{stripper}} &= 259 \frac{\text{lb chilled water}}{\text{lb noncondensibles}} \times \frac{0.051 \text{ lb noncondensibles}}{\text{h}} \\ &= 13.2 \frac{\text{lb chilled water}}{\text{h}} \end{aligned} \quad (16)$$

15 Optimization studies (see **Fig. 3**) show that the best temperature change for the chilled water that circulates through the house is 4°C (7°F); therefore, the required water flow rate for a 1-ton air conditioner is

-66-

$$\begin{aligned}
 \dot{m}_{house} &= 12,000 \frac{\text{Btu}}{\text{h}} \times \frac{\text{lb chilled water} \cdot ^\circ\text{F}}{1 \text{ Btu}} \times \frac{1}{7^\circ\text{F}} \\
 &= 1714 \frac{\text{lb chilled water}}{\text{h}}
 \end{aligned}
 \tag{17}$$

Thus, the chilled water flowing to the stripper is only about 0.8% of the chilled water circulating through the house, which has almost a negligible effect on the compressor power requirements.

A variety of coolers may use chilled water to remove noncondensibles including the system depicted in **Fig. 73**. For instance, **Fig. 79** depicts a single-stage evaporator cooling system **12000** that uses a gerotor compressor such as gerotor compressor **11400** depicted in **Fig. 73**. Cooling system **12000** is similar to cooling system **11000** in **Fig. 73**, except that a gerotor vacuum pump **12060** is used in place of vacuum pump **10060** to remove noncondensibles.

Figs. 79-81 show a gerotor vacuum pump **12060** which operates similarly to the main compressor; however, it is much smaller. For example, the main compressor of a 1-ton air conditioner has a volumetric flow of about 470 ft³/min whereas the vacuum pump must process only 0.24 ft³/min for an identical air conditioner. The center gerotor **12003** is mounted on the lower portion of the main drive shaft **12004** whereas the outer gerotor **12005** is positioned by guide rollers **12006**. Alternatively, the outer gerotor may be mounted within a single large ball bearing. A gear on the center gerotor **12003** can drive a gear on the outer gerotor **12005** -- as with the main compressor -- or the inner gerotor can drive the outer gerotor directly without an intervening gear. Because the compression ratio is quite high (about 22:1), the temperature rise of the exhaust gas could be quite dramatic; therefore, it is beneficial to introduce liquid water **12220** into the vacuum pump. The optimal location is to introduce the liquid water immediately after the intake portion of the cycle. Enough liquid water can be introduced to fill void volumes in the gerotor thus allowing very high compression ratios to be achieved. Both atmospheric-pressure air and liquid water will be discharged from the air conditioner. A check valve **12230** is preferably located in the discharge line to prevent leakage of

-67-

atmospheric air into the air conditioner. Optionally, an accumulator can be placed between the gerotor vacuum pump and the check valve so the check valve does not have to cycle rapidly.

Fig. 79 depicts a schematic of the gerotor compressor **11400** and gerotor vacuum pump **12060** incorporated into a single-stage vapor-compression evaporative cooler **12000**. Electric motor **12001** directly drives gerotor compressor **11400**. No flexible coupling is required because the pivotable mount **11470** adjusts for slight misalignment. The gerotor compressor **11400** pulls a vacuum on water **12015** causing it to evaporate and cool. Using pump **12031**, the chilled water **12015** is pumped to packing **12035** which is in countercurrent direct contact with house air, thus cooling the air. The warmed water **12036** is sucked through filter **12039** into the evaporator **12038** where some of it flashes on packing **12100** thus cooling the water; the flow rate is regulated by float valve **12037**.

As shown in **Fig. 79**, bellows **12300** actuates a variable discharge port **12011**. In a preferred embodiment, motor **12310**, which is preferably a servo motor, drives a nonrotating nut **12320** which actuates bellows **12331** which, in turn, actuates bellows **12300** which adjusts variable discharge port **12011**. Alternatively, the liquid-containing bulb system shown in **Fig. 77** could actuate bellows **12300**.

Water **12045** from condenser **12025** is removed by pump **12032** and directed to drip over ambient air contactor packing **12050** which has ambient air flowing countercurrently driven by fan **12054**. As the water flows through the packing, it is cooled approaching the wet-bulb temperature of the ambient air. The cooled water **12051** is sucked through filter **12052** and is drawn into condenser **12025**. The water flow rate is regulated by float valve **12053** which directs the incoming water to drip over packing **12030**.

Because both chilled water **12015** and condenser water **12045** directly contact air, dissolved gases will be released in the vacuum of evaporator **12038** and condenser **12025**. The noncondensable gases will accumulate in condenser **12025**; therefore, a vacuum pump or aspirator is provided. As indicated in the embodiment shown in **Fig. 79**, gerotor vacuum pump **12060** is preferably used. Chilled water

-68-

12210 flows over packing **12200** to remove noncondensibles. In a preferred embodiment this is a structured packing consisting of corrugated PVC sheet. Alternatively, it could be a random packing of ceramic saddles. Some water **12220** may be sprayed into gerotor vacuum pump **12060** for cooling and sealing purposes.

- 5 Additionally, the volume of water will be sufficiently large to fill voids in the gerotor allowing very high compression ratios to be achieved. Discharge from the gerotor vacuum pump **12060** is directed through check valve **12230** and ultimately is sent to the ambient air contactor **12050**.

- Because water evaporates in evaporator **12038** and ambient air contactor
10 **12050**, make-up water, such as tap water **12012** and **12013**, is added. To purge salts that would accumulate in the system, overflow weirs **12085** and **12086** are provided.

- Liquid water is preferably sprayed into the compressor **11400** to eliminate superheat. The gerotor compressor in this disclosure has low-pressure vapors entering the top and high-pressure vapors exiting the bottom. This arrangement
15 allows liquid water to drain from the compressor. The gerotor in this embodiment has no cantilevers allowing for more reliable operation.

- The method used to purge noncondensibles from the system allows for the use of an aspirator, or a small vacuum pump, such as pump **12060** and the others disclosed herein, because the water vapor has been largely removed. Also, because it
20 is not necessary to condense water vapors inside the vacuum pump, it can be operated at high speed which eliminates the need for gear reduction, a potential maintenance problem.

- In addition to vacuum pump **12060**, this invention is also directed to other simple, efficient and novel vacuum pumps that can remove noncondensibles from a
25 vapor-compression evaporative cooler or be used in other applications requiring a vacuum pump. These novel vacuum pumps have the unusual ability to isothermally compress a mixture of noncondensable and condensable gases to a very high compression ratio.

- Fig. 81** is a schematic depicting a preferred embodiment of this vacuum
30 pump. As depicted in **Fig. 81**, vacuum pump **12402** consists of two columns

-69-

12404a and **12404b** which are partially filled with liquid and are joined by lower connecting chamber **12405**. The two columns have check valves **12414a** and **12414b** and inlet valves **12415a** and **12415b** at their upper ends. The liquid in each column is driven to oscillate by piston **12406** located in lower connecting chamber **12405**,
5 between the bottom of columns **12404a** and **12404b**. In **Fig. 81**, piston **12406** is magnetic and is driven by a magnetic field induced by electric coil **12408**. Springs **12410a** and **12410b** at each end **12407a** and **12407b** of lower connecting chamber **12405** act as stops. When applied to the vapor-compression evaporative cooler, the preferred liquid is water. However, for other vacuum pump applications, nonvolatile
10 liquids (*e.g.*, vacuum pump oil) could be employed to achieve high vacuums.

The gas and vapor mixture is introduced into center connecting inlet duct **12412**. A solenoid **12413** opens one inlet valve **12415a** and closes the other inlet valve **12415b** so the gas/vapor is directed to the column, *i.e.*, **12404a**, in which the liquid is moving downward. Water is constantly sprayed by sprayers **12417a** and
15 **12417b** into each water column, creating water sprays **12419a** and **12419b**. In the water column that is rising (in this example, column **12404b**), the water vapors condense on the water spray **12419b** and the noncondensable gas becomes compressed. When the water gets to the top of the column, the respective check valve, **12414b**, opens and releases the excess water and compressed noncondensable
20 gas.

Another embodiment of a novel vacuum pump useful in removing noncondensibles or in other applications is depicted in **Fig. 82**. In this embodiment, like reference numerals refer to similar elements described in the previous embodiment so that a further description thereof is omitted. As indicated in **Fig. 82**,
25 vacuum pump **12403** is similar in configuration and operation to the previous compressor **12402** with the exception of the piston and the lower connecting chamber. Piston **12422** is disposed in lower connecting chamber **12423** and is connected to piston solenoid **12420** by a rod **12424**. In compressor **12403**, piston solenoid **12420** is in a fixed position and drives piston **12422** back and forth.
30 Alternatively, piston **12422** could be coupled to a reversing motor by a threaded rod.

-70-

In this third and also novel embodiment, piston **12422** is driven back and forth as the motor reverses direction.

The coolers described above are relatively simple and suitable for home use. To reduce high utility bills, large air conditioning installations can use even more
5 complex systems to achieve greater energy efficiency. Accordingly, this invention is also directed to highly efficient multistage coolers that employ the novel feature of multistage condensation, in addition to multistage evaporation. Although multistage throttling is known with conventional air conditioning systems, multistage evaporators are rarely used. Compressors useful in multistage coolers include both
10 the novel positive displacement, low-friction compressors previously described as well as conventional dynamic compressors. These coolers also utilize novel means to remove noncondensibles.

Fig. 83 depicts one such energy-efficient system which employs multiple evaporator stages. Compared to a single-stage system in which all of the water is
15 evaporated at the lowest pressure, the multistage evaporator in vapor-compression evaporative cooler **13000** allows some of the water to be evaporated at higher pressures which reduces compression energy.

Referring to **Fig. 83**, in vapor compression evaporative cooler **13000**, chilled water countercurrently directly contacts air from the building in room air
20 contactor **13110**. Because the water is cold, it both cools the air and condenses moisture out of the air. The warmed water from the room-air contactor **13110** flows countercurrently through a series of evaporators **13120**. Water vaporizes in each evaporator making the liquid colder in each successive stage. Once the water is fully chilled, it is returned to the room air contactor **13110** via a cold pump **13121**.

25 Multiple compressors **13130** are used so that vapors can be drawn off of each evaporator. To reduce the superheating of the water, liquid may be injected directly into the compressors **13130** as described in earlier embodiments. Centrifugal or axial compressors generally are not tolerant of liquid droplets, so intercooling can be accomplished by spraying liquid **13125** into the vapor space of the evaporator
30 **13120**. In this case, the evaporator chamber serves two purposes: it is an evaporator

-71-

and a de-superheater. The source of the liquid may be tap water or cooling tower water, whichever is colder.

The vapor discharge from the last compressor **13130** is directed to a condenser **13160** where it contacts water that is near the wet-bulb temperature of the ambient environment. As the vapors condense on the water, the temperature rises. This hot water is pumped out of the condenser via pump **13161** into ambient-air contactor **13150** (cooling tower).

Because water is evaporating both in the evaporators and ambient-air contactor, make-up water **13154** and **13155** is provided. Ordinary tap water is envisioned as the make-up water. Treated water should not be necessary because there are no heat exchange surfaces. Salts will build up due to the evaporation, so salt water purges **13116** and **13117** are provided.

Noncondensable gases are dissolved into the water in both the room-air contactor **13110** and ambient-air contactor **13150**. These gases are released in the low-pressure evaporators **13120** and condenser **13160**, respectively. A small compressor train **13170** will draw vapors from the condenser **13160** to remove the noncondensable gases. Intercooling is provided by spraying water **13140** from the ambient-air contactor **13150** between the compressor stages to condense the water vapors. The noncondensable partial pressure rises in each stage until it reaches 1 atm and can be discharged directly to the ambient air.

The following analysis describes the energy efficiency of the system depending upon the number of stages employed.

One Stage

The compressor work W_{comp} per unit of heat absorbed in the evaporator Q_{evap} is the inverse of the coefficient of performance (COP)

$$\frac{W_{comp}}{Q_{evap}} = \frac{1}{COP} = \frac{T_4 - T_1}{T_1} \frac{1}{\eta_{motor}} \frac{1}{\eta_{comp}} \frac{1}{\eta_{cycle}} = \frac{(T_5 + \Delta T_{hot}) - T_1}{T_1} \frac{1}{\eta_{motor}} \frac{1}{\eta_{comp}} \frac{1}{\eta_{cycle}} \quad (18)$$

where temperatures are defined in Fig. 83 and

-72-

W_{comp} = compressor work

Q_{evap} = total heat absorbed in evaporator

COP = coefficient of performance

T_4 = water temperature exiting condenser

5 T_1 = water temperature exiting coldest evaporator

η_{motor} = motor efficiency

η_{comp} = compressor efficiency

η_{cycle} = thermodynamic efficiency of the cycle relative to Carnot

$\Delta T_{hot} = T_4 - T_5$ = temperature differences between water exiting the condenser

10 and water exiting the ambient air contactor

The work for the cold pump is

$$W_{cold} = V \Delta P \frac{1}{\eta_{pump}} = \frac{Q_{evap}}{\rho C_p \Delta T_{cold}} \Delta P \frac{1}{\eta_{pump}} \quad (19)$$

15

$$\frac{W_{cold}}{Q_{evap}} = \frac{\Delta P}{\rho C_p \Delta T_{cold}} \frac{1}{\eta_{pump}} \quad (20)$$

where

20

W_{cold} = work for the cold-water pump

V = volumetric flow rate of water through the cold pump

ΔP = pressure differences generated by the pump

η_{pump} = pump efficiency

25

ρ = water density

C_p = water heat capacity

$\Delta T_{cold} = T_6 - T_1$ = temperature difference between water exiting the room-air contactor and the water exiting the coldest evaporator

30 If a turbine is employed to reduce the pumping energy requirements, the work for the cold pump is

$$\frac{W_{cold}}{Q_{evap}} = \frac{\Delta P}{\rho C_p \Delta T_{cold}} \left(\frac{1}{\eta_{pump}} - \eta_{turbine} \right) \quad (21)$$

-73-

where

$\eta_{turbine}$ = turbine efficiency

5

The work for the hot pump is

$$\frac{W_{hot}}{Q_{evap}} = \frac{\Delta P}{\rho C_p \Delta T_{hot}} \left(1 + \frac{1}{COP} \right) \frac{1}{\eta_{pump}} \quad (22)$$

10

where $\frac{1}{COP}$ is from Equation 18. If a turbine is employed to reduce the pumping energy requirements, the work for the hot pump is

$$\frac{W_{hot}}{Q_{evap}} = \frac{\Delta P}{\rho C_p \Delta T_{hot}} \left(1 + \frac{1}{COP} \right) \left(\frac{1}{\eta_{pump}} - \eta_{turbine} \right) \quad (23)$$

15

The total work is

$$\frac{W_{tot}}{Q_{evap}} = \frac{W_{comp}}{Q_{evap}} + \frac{W_{cold}}{Q_{evap}} + \frac{W_{hot}}{Q_{evap}} \quad (24)$$

20

Two Stage

In the case of a two-stage compressor, assuming half the load is taken by each stage, the compression work is

25

$$W_{comp} = \frac{1}{2} Q_{evap} \left(\frac{1}{COP_1} \right) + \frac{1}{2} Q_{evap} \left(\frac{1}{COP_2} \right)$$

30

$$\frac{W_{comp}}{Q_{evap}} = \frac{1}{2} \left(\frac{1}{COP_1} + \frac{1}{COP_2} \right) \quad (25)$$

35

$$\frac{W_{comp}}{Q_{comp}} = \frac{1}{COP} = \frac{1}{2} \left[\frac{(T_5 + \Delta T_{hot}) - T_1}{T_1} + \frac{(T_5 + \Delta T_{hot}) - (T_1 + \frac{1}{2} \Delta T_{cold})}{(T_1 + \frac{1}{2} \Delta T_{cold})} \right] \frac{1}{\eta_{motor}} \frac{1}{\eta_{comp}} \frac{1}{\eta_{cycle}} \quad (26)$$

40

-74-

When determining the total work using Equation 24, Equation 26 is used to calculate the compressor work. The cold pump Equation 21 will be the same. The hot pump Equation 23 is the same, except that Equation 26 is used for $\frac{1}{COP}$.

Three Stage

- 5 In the case of a three-stage compressor (as illustrated in Fig. 83), the compressor work is

$$\frac{W_{comp}}{Q_{evap}} = \frac{1}{COP} = \frac{1}{\eta_{motor}} \frac{1}{\eta_{comp}} \frac{1}{\eta_{cycle}} \frac{1}{3}$$

$$10 \left[\frac{(T_5 + \Delta T_{hot}) \cdot T_1}{T_1} + \frac{(T_5 + \Delta T_{hot}) \cdot (T_1 + \frac{1}{3}\Delta T_{cold})}{(T_1 + \frac{1}{3}\Delta T_{cold})} + \frac{(T_5 + \Delta T_{hot}) \cdot (T_1 + \frac{2}{3}\Delta T_{cold})}{(T_1 + \frac{2}{3}\Delta T_{cold})} \right] \quad (27)$$

All other equations and procedures are the same.

n Stage

One can generalize to an n-stage compressor as follows

$$15 \frac{W_{comp}}{Q_{evap}} = \frac{1}{COP} = \frac{1}{\eta_{motor}} \frac{1}{\eta_{comp}} \frac{1}{\eta_{cycle}} \frac{1}{n} \sum_{i=0}^{n-1} \left[\frac{(T_5 + \Delta T_{hot}) - (T_1 + \frac{i}{3}\Delta T_{cold})}{(T_1 + \frac{i}{3}\Delta T_{cold})} \right] \quad (28)$$

20 Analysis

This system was analyzed using the following assumptions

$$\eta_{motor} = 0.9 \text{ (high efficiency due to large scale)}$$

$$\eta_{comp} = 0.8 \text{ (high efficiency due to large scale)}$$

$$\eta_{cycle} = 0.97 \text{ (from Fig. 21, Reducing Energy Costs in Vapor-Compression}$$

25 *Refrigeration and Air Conditioning Using Liquid Recycle - Part II:*

Performance, Mark Holtzapple, ASHRAE Transactions, Vol. 95, Part 1, 187-198 (1989))

$$\eta_{pump} = \eta_{turbine} = 0.5$$

-75-

$$T_1 = 285.4 \text{ K} = 12^\circ\text{C} = 54^\circ\text{F}$$

$$\Delta T'_{cold} = 11 \text{ K} = 20 \text{ F}^\circ$$

$$\Delta T'_{hot} = 4 \text{ K} = 7 \text{ F}^\circ$$

$$\rho = 1000 \text{ kg/m}^3$$

$$5 \quad C_p = 4189 \text{ J/(kg}\cdot\text{K)}$$

$$\Delta P = 101,330 \text{ Pa} = 1 \text{ atm}$$

Fig. 84 shows the results of the analysis with no turbines and **Fig. 85** shows the results with turbines. For comparison purposes, a state-of-the-art water chiller is available from Trane (CFCs: Today There Are Answers, Fig. 18, CFC-ARTICLE-1, The Trane Company, 3600 Pammel Creek Rd., La Crosse, WI, 54601-7599) that requires 0.50 kW/ton at standard ARI conditions (cold side = 44°F leaving evaporator, 54°F entering evaporator; hot side = 85°F entering condenser (our T_5), 95°F leaving condenser; cooling tower = 7 F° approach temperature, 78°F wet bulb temperature). According to **Fig. 84** (no turbines, three stages), the disclosed system with $T_5 = 85^\circ\text{F}$ (29.4°C) requires only 0.37 kW/ton. According to **Fig. 85** (with turbines, three stages), the disclosed system with $T_5 = 85^\circ\text{F}$ (29.4°C) requires only 0.35 kW/ton. Thus, the energy requirement of the multistage vapor-compression evaporative cooler is approximately 70% of the current state-of-the-art system.

An important consideration is the effect of noncondensibles on the system. A 1-ton unit has a noncondensable load of about 0.0023 lbmole/h. If its partial pressure in the condenser is 0.05 psia, then the theoretical work requirement (assuming isothermal compression) is

$$25 \quad \frac{W_{purge}}{Q_{evap}} = nRT \ln \frac{P_2}{P_1} = \left(\frac{0.0023 \text{ lbmole}}{\text{ton}\cdot\text{h}} \right) \left(\frac{1.986 \text{ Btu}}{\text{lbmole}\cdot^\circ\text{R}} \right) \left(\frac{\text{kW}\cdot\text{h}}{3413 \text{ Btu}} \right)$$

$$30 \quad (460 + 85)^\circ\text{R} \ln \frac{14.7 \text{ psia}}{0.05 \text{ psia}} = 0.00414 \frac{\text{kW}}{\text{ton}} = 4.14 \frac{\text{W}}{\text{ton}} \quad (29)$$

where

-76-

W_{purge} = compressor work required to purge noncondensibles

n = moles of noncondensibles to be purged

R = universal gas constant

P_2 = final discharge pressure (ambient pressure)

5 P_1 = intake partial pressure of noncondensable gas

If the partial pressure of noncondensibles in the condenser is reduced to 0.01 psia, then the work requirement increases to 5.32 W/ton. Assuming the compressor is 50% efficient, then the work requirement for purging noncondensibles is only about 10 W/ton, which falls within the "noise."

10 For a very large chiller (300 to 2500 ton), the compressor is likely to be centrifugal. To get a sense of the scale, the low-pressure compressor will be designed assuming a 3-compressor 500-ton unit. The low-pressure compressor may actually have a number of stages within it. The required head per stage is

$$15 \quad H = \frac{1,545}{M_w} \frac{k}{k-1} T_1 [r^{(k-1)/k} - 1] \quad (30)$$

where

H = head, ft lb_f/lb_m

20 M_w = molecular weight = 18 lb_m/lbmole

r = compression ratio, dimensionless

k = 1.323 for water

T_1 = inlet temperature = 54°F = 514°R

25 The compression ratio of each stage in the low-pressure compressor can be calculated from

$$r = \left(\frac{P_2}{P_1} \right)^{1/n}$$

30 (31)

-77-

where

P_2 = discharge pressure of low-pressure compressor = 0.311 psia (assumed)

P_1 = inlet pressure of low-pressure compressor = 0.202 psia (assumed)

n = number of stages within the low-pressure compressor

5

The discharge pressure, P_2 , was calculated as

$$P_2 = 0.202 \text{ psia} \left(\frac{0.744 \text{ psia}}{0.202 \text{ psia}} \right)^{1/3} = 0.311 \text{ psia} \quad (32)$$

10 where 0.744 psia is the pressure of a 92°F condenser.

Fig. 86 shows a generalized compressor chart indicating regions where piston, centrifugal, axial, and drag compressors are appropriate. The generalized correlation for a single stage within the low-pressure compressor is made in terms of specific speed, N_s , and specific diameter, D_s , defined as follows

15

$$N_s = \frac{N\sqrt{Q}}{H^{3/4}}$$

(33)

20

$$D_s = \frac{DH^{1/4}}{\sqrt{Q}}$$

(34)

where

N = rotational speed, rpm

Q = inlet volumetric flow rate, ft³/s

25

H = head, ft·lb_f/lb_m

D = diameter, ft

The volumetric flow at the inlet to the low-pressure compressor for a three-compressor, 500-ton system is

$$30 \quad Q = \frac{1}{3} \times 500 \text{ ton} \times \frac{12,000 \text{ Btu}}{\text{ton} \cdot \text{h}} \times \frac{\text{lb}_m \text{ water}}{1065 \text{ Btu}} \times \frac{\text{h}}{3600 \text{ s}} \times \frac{1517 \text{ ft}^3}{\text{lb}_m \text{ water}} = 791 \text{ ft}^3/\text{s} \quad (35)$$

-78-

The factor 1/3 results because the low-pressure compressor takes only a third of the load.

Fig. 86 shows that a centrifugal compressor with $N_s = 60$ and $D_s = 2$ is about 80% efficient. Using Equations 33 and 34, the corresponding speed and diameter can be calculated.

$$N = \frac{N_s H^{3/4}}{\sqrt{Q}} \quad (36)$$

$$D = \frac{D_s \sqrt{Q}}{H^{1/4}} \quad (37)$$

The tip speed, v , is

$$v = \frac{\pi D N}{60} \quad (38)$$

where v is in ft/s.

Fig. 87 shows the results of the compressor analysis. The tip speed for a single stage is acceptable as is the rotational speed, so a single stage should be sufficient for the low-pressure compressor.

Advantages of this system include efficiency. In addition, water chemistry is not so important because there are no heat exchange surfaces.

Fig. 88 depicts a schematic of another multistage cooler, multistage evaporative cooler **13100**. This cooler is similar to cooler **13000** except that packed columns **13180** are used to eliminate superheat. Reference numerals in **Fig. 88** refer to corresponding elements in **Fig. 83**, so that a further description thereof is omitted.

Referring now to **Fig. 88**, in order to eliminate superheat after each compression stage, the vapors exiting the compressors **13130** are passed countercurrently through a packed column **13190** with liquid passing downward. Although centrifugal compressors may be employed in these large-scale systems, it is

-79-

also possible to use large gerotor compressors. The noncondensibles that accumulate in the condenser are passed countercurrently through the packed column **13180** with chilled water flowing downward in direct contact with the water vapor, which condenses most of the water vapor, as described before. In a preferred embodiment, structured packing of corrugated PVC sheets as described earlier is used. The noncondensibles are then removed by a vacuum pump, shown here as a multistage compressor train **13170**.

An even more efficient air conditioning system, vapor compression evaporative cooler **13200** is shown in **Fig. 89**. Reference numerals in **Fig. 89** refer to corresponding elements in **Fig. 83**, so that a further description is omitted. In cooler **13200**, both multistage evaporators **13120** and multistage condensers **13160** are used. In addition, multiple packed columns **13180** are used. The cooling water in the condensers **13160** flows countercurrently to the water in the evaporators **13120**. This minimizes the pressure difference between the evaporators and the condensers, thus promoting the greatest energy efficiency. To prevent superheating in each compressor and to promote energy efficiency, liquid water **13135** may be sprayed directly into the compressor **13130**. Because high-speed centrifugal compressors can be damaged by liquid water, it is preferred to employ gerotor compressors.

The preferred embodiments disclosed herein include a number of novel cooling systems that use water as the working fluid, a number of novel positive displacement and low-friction compressors that are useful in the disclosed coolers and other applications, and a number of novel means for removing noncondensibles; however, the specific embodiments and features disclosed herein are provided by way of example only and are not intended as limitations on the scope of the invention. As will be clear to one of skill in the art, each of the various compressors may be adapted for use in the different disclosed cooling systems as well as other applications, and are in no way limited to the specific cooling system in which they are depicted. In addition, as is clear to one of skill in the art, the variable port mechanisms, seals, mounting systems and other novel components of the different

-80-

compressors disclosed herein can be easily interchanged by one of skill in the art, as can the different novel vacuum pumps and compressors useful in removing noncondensibles. In addition, means for inhibiting microorganisms, such as an ozone generator, can be incorporated into any of the disclosed systems. It will be easily
5 understood by those of ordinary skill in the art that variations and modifications of each of the disclosed embodiments can be easily made within the scope of this invention as defined by the following claims.

We claim:

1. A vapor-compression evaporative air conditioning system comprising:
an evaporator;
a room air contactor for directly exchanging heat between room air and a
5 quantity of water from said evaporator;
means for compressing a volume of water vapor, thereby creating a vacuum
on said water in said evaporator, said means for compressing comprising a positive
displacement compressor, said compressor comprising an inlet and an outlet, wherein
low-pressure water vapors from said evaporator enter said inlet and compressed
10 water vapors exit said outlet;
a condenser for receiving said compressed water vapors;
means for reducing a water content of said vapors exiting the condenser;
means for removing noncondensibles from said condenser; and
an ambient air contactor for directly exchanging heat between the ambient air
15 and water from said condenser.
2. The system of claim 1, wherein said positive displacement compressor is a
low-friction compressor comprising at least two compressing components, and
wherein said compressing components do not substantially contact one another.
3. The system of claim 2, wherein said compressing components comprise: an
20 inner gerotor, an outer gerotor and a housing; an orbiting scroll, a stationary scroll
and a housing; a housing and a piston; a housing, a rotor, and a flap; an inner drum,
an outer drum and a swinging vane; or a housing, a rotor and a sliding vane, and
wherein there is a gap between at least two of said compressing components.
4. The system of claim 3, wherein water is used as a sealant in said gap.
- 25 5. The system of claim 3, wherein water and a wick are used as a sealant in said
gap.
6. The system of claim 1, wherein said means for compressing water vapor
comprises a gerotor compressor, said compressor comprising an inner gerotor and an
outer gerotor, said inner gerotor disposed within said outer gerotor, each gerotor
30 comprising a plurality of teeth, and wherein said inner gerotor has one less tooth than

said outer gerotor, thereby creating a void volume between said inner gerotor and said outer gerotor.

7. The system of claim 6, wherein said gerotor compressor further comprises an inlet port and a discharge port, said ports communicating with said void volume.

5 8. The system of claim 7, wherein said discharge port has a variable port mechanism that changes the position of a leading edge of the discharge port.

9. The system of claim 8, wherein said variable port mechanism is positioned using electrically actuated means.

10 10. The system of claim 9, wherein said electrically actuated means is controlled by a thermocouple signal.

11. The system of claim 7, wherein said variable port mechanism comprises an electrically controlled servo motor, said motor rotating a threaded rod, a bellows, and a non-rotating nut coupled to said bellows, said rod axially positioning said non-rotating nut.

15 12. The system of claim 7, wherein said variable port mechanism comprises a plurality of plates disposed adjacent to said discharge port and means for sequentially moving the plates to vary said leading edge of said discharge port.

13. The system of claim 7, wherein said variable port mechanism is positioned using a bellows, said bellows being actuated by a bulb containing a liquid, said liquid
20 in said bulb having a vapor pressure which acts on said bellows.

14. The system of claim 6, wherein liquid water is sprayed into said gerotor compressor.

15. The system of claim 6, further comprising an electric motor for driving said gerotor compressor, a first pump for pumping cooled water from said evaporator to a
25 packing in said room air contactor, a filter disposed between said room air contactor and said evaporator, wherein water from said room air contactor flows through said filter to said evaporator, a second pump for pumping water from said condenser to a packing in said ambient air contactor, and a fan for driving ambient air countercurrently against said packing.

16. The system of claim 6, wherein said gerotor compressor has actuation means to reduce friction.
17. The system of claim 16, wherein a first drive shaft drives said outer gerotor and wherein said actuation means comprises an internal gearbox containing a plurality
5 of spur gears, said plurality being an odd number, and wherein one of said spur gears is coupled to said first drive shaft and another of said spur gears is coupled to a second drive shaft, said second drive shaft being offset from said first drive shaft, thereby suspending said gearbox between said first drive shaft and said second drive shaft, and wherein said first drive shaft is coupled to said outer gerotor through a
10 plate that comprises a plurality of prongs in contact with a plurality of holes in said outer gerotor, and wherein said second drive shaft is coupled to said inner gerotor.
18. The system of claim 16, wherein a first drive shaft drives said outer gerotor and wherein said actuation means comprises a spur gear set comprised of a large gear coupled to said outer gerotor, said large gear containing a plurality of teeth on an
15 inside diameter, and a small gear coupled to said inner gerotor, said small gear containing a plurality of teeth on an outside diameter, wherein said large gear meshes with said small gear, and further comprised of a second shaft about which said inner gerotor spins, wherein said second shaft contains a crook establishing an offset between said first shaft and said second shaft.
- 20 19. The system of claim 18, wherein said gears are immersed in liquid water.
20. The system of claim 18, further comprising a gear set attached to a bottom portion of said inner gerotor allowing for power take off.
21. The system of claim 16, wherein said actuation means comprises a plurality of rollers attached to said inner gerotor, wherein said rollers extend beyond a plurality
25 of walls of said inner gerotor and are in contact with said outer gerotor, and wherein said outer gerotor drives said inner gerotor through said rollers.
22. The system of claim 21, wherein said inner gerotor is mounted on a rotating shaft and said rotating shaft extends outside of said compressor housing.
23. The system of claim 16, wherein said actuation means comprises a large gear
30 coupled to said outer gerotor, said large gear comprising a plurality of teeth on an

- inside diameter, a small gear coupled to said inner gerotor, said small gear comprising a plurality of teeth on an outside diameter, said large gear meshing with said small gear, and a stationary central shaft, wherein said stationary central shaft contains two crooks that create an offset between an axis of the inner gerotor and an axis of the
- 5 outer gerotor, and wherein said stationary shaft comprises a first end and a second end, said first end of said stationary shaft affixed to a first perforated housing end plate through a pivotable mount that prevents rotation of said stationary shaft and said second end of said stationary shaft located in a rotating bearing cup coupled to said outer gerotor.
- 10 24. The system of claim 23, said gerotor compressor further comprising a second perforated housing plate, a first perforated rotating plate and a second perforated rotating plate, wherein both said rotating plates are connected to said outer gerotor, and a first stationary plate and a second stationary plate adjacent to both said outer and inner gerotors, said first stationary plate containing an inlet port and said second
- 15 stationary plate containing a discharge port.
25. The system of claim 23, wherein said gears are immersed in liquid water.
26. The system of claim 1, further comprising means for inhibiting microorganisms in the water in the room air contactor.
27. The system of claim 26, wherein said means for inhibiting comprises an ozone
- 20 generator or UV radiation.
28. The system of claim 1, wherein said means for removing noncondensibles comprises an aspirator.
29. The system of claim 1, wherein said means for removing noncondensibles comprises a vacuum pump.
- 25 30. The system of claim 29, wherein said vacuum pump comprises a cylinder, a piston disposed in said cylinder, an inlet valve disposed in said cylinder, a sprayer that draws water into said cylinder of said vacuum pump, and a vent disposed in said cylinder for discharging noncondensibles and excess water, and wherein said vacuum pump is driven by a gear mounted on a main drive shaft, said gear connected to a
- 30 plurality of reduction gears, wherein a first cam surface and a second cam surface are

mounted on one of said reduction gears, a first roller rides on said first cam surface and a second roller rides on said second cam surface, and said first roller drives said piston and said second roller drives said inlet valve.

31. The system of claim 29, wherein said vacuum pump comprises a cylinder, a
5 piston disposed in said cylinder, a crank, a check valve disposed in said cylinder, and means for spraying water into said cylinder of said vacuum pump, wherein said piston is driven by said crank in a first and a second direction, said piston comprising a first end, a second end, a plurality of notches, a plurality of perforations extending from
10 said first end to said second end, and a flexible flap attached to said second end of said piston and covering one or more of said perforations, wherein said flap opens when said piston moves in said first direction and closes when said piston moves in said second direction.

32. The system of claim 29, wherein said vacuum pump is a gerotor vacuum
pump comprising an outer gerotor and a center gerotor disposed within said outer
15 gerotor, wherein said center gerotor is mounted on a main drive shaft and said outer gerotor is positioned by a plurality of guide rollers.

33. The system of claim 29, wherein said vacuum pump is a gerotor vacuum
pump comprising an outer gerotor and a center gerotor disposed within said outer
gerotor, wherein said center gerotor is mounted on a main drive shaft and said outer
20 gerotor is mounted within a single ball bearing.

34. The system of claim 29, wherein said vacuum pump comprises:

a first column and a second column, said columns being partially filled with
liquid and having a vapor space;

means for causing said liquid to oscillate in said columns;

25 inlet means for allowing uncompressed gas to enter each of said columns;

outlet means for discharging compressed gas from each of said columns; and

means for spraying a fine mist of liquid into said vapor space of said first and
said second columns.

35. The system of claim 3, wherein said compressor means comprises a scroll
30 compressor.

36. The system of claim 3, wherein said compressor means comprises:
an outer drum having an axis;
an inner drum rotatably disposed in said outer drum;
a plurality of vanes, each vane having a first end and a second end opposite
5 said first end, said vanes pivotally attached to said inner drum at said first end and
having a vane tip at said second end, said vane tips being propelled radially outward
during rotation of the inner drum;
a connecting rod coupled to each said vane tip, said rods maintaining a gap
between said vane tips and said outer drum; and
10 coupling means for causing said connecting rods to rotate about the axis of
the outer drum.
37. The system of claim 2, wherein said compressor means comprises:
a compressor housing, said housing having an interior wall, an inlet, and an
outlet;
15 a rotor disposed in said housing;
a flap, said flap having a first end and a second end, said first end being
coupled to said rotor and said second end being propelled in an outward direction
during rotation of said rotor; and
means for preventing the second end of said flap from touching the interior
20 wall of the housing.
38. The system of claim 2, wherein said compressor means is a reciprocating
compressor, said reciprocating compressor comprising:
a compressor housing;
an oscillating center shaft disposed partly within said housing, said shaft
25 comprising a top end and a bottom end, said top end comprising a protrusion which
rides in a sinusoidal groove in a rotating cam driven by a motor; and
at least one plate disposed in said housing and attached to said shaft and
oscillating therewith, said at least one plate having a groove through which water
flows to make a seal between said compressor housing and said plates.

39. The system of claim 38, wherein said cam contains a plurality of sinusoidal grooves.

40. The system of claim 1, comprising three concentric chambers, where said ambient air contactor is disposed in an outermost chamber of said concentric
5 chambers, said compressor means and said evaporator are disposed in an innermost chamber of said concentric chambers, and said condenser is disposed in a middle concentric chamber.

41. The system of claim 1 comprising two concentric chambers, wherein said ambient air contactor is disposed in an outermost chamber of said concentric
10 chambers, and said compressor means, said evaporator and said condenser are disposed in an innermost concentric chamber.

42. The system of claim 1, further comprising a means for providing make-up water to said evaporator and condenser.

43. The system of claim 42, wherein said means for providing make-up water
15 comprises one or more float valves.

44. The system of claim 1, wherein said room air contactor comprises a spray tower to place water from the evaporator in contact with said room air.

45. The system of claim 1, wherein said room air contactor comprises a packing, said water from the evaporator passing over said packing, and said room air passing
20 through said packing.

46. The system of claim 45, wherein said packing comprises corrugated chlorinated polyvinyl chloride.

47. The system of claim 1, wherein said condenser is a spray condenser.

48. The system of claim 1, wherein said condenser is a jet condenser.

25 49. A method for cooling air comprising the steps of:
compressing a large volume of low-pressure water vapor with a compressor, thereby creating a vacuum on a quantity of water in an evaporator and causing evaporation and said water to be cooled;
pumping cooled water from said evaporator and contacting said cooled water
30 countercurrently with room air in a room air contactor, thereby cooling room air;

routing water from said room air contactor to said evaporator, causing said water to flash and cool;

sending compressed water vapors exiting the compressor to a condenser for condensation;

- 5 countercurrently directly contacting said water vapors exiting the condenser with a stream of chilled water from said evaporator to reduce the water content from air;

removing noncondensibles from said condenser;

- routing liquid water from the condenser to an ambient-air contactor, where
10 ambient air is contacted countercurrently with liquid water pumped from the condenser;

providing make-up water to replace evaporated water; and

draining salt water.

50. The method of claim 49, wherein said compressor is a positive displacement
15 compressor.

51. The method of claim 50, wherein the positive displacement compressor is a low-friction compressor comprising at least two compressing components, and wherein said compressing components do not substantially contact each other.

52. The method of claim 49, further comprising the step of spraying water into
20 the compressor to prevent temperature increase during the compression stage.

53. The method of claim 49, wherein the condensation occurs in multiple stages.

54. The method of claim 49, wherein water from the room air contactor flows countercurrently through a plurality of evaporators.

55. The method of claim 49, wherein both evaporation and condensation occur in
25 multiple stages.

56. The method of claim 49, wherein noncondensibles are removed by a plurality of compressors.

57. A method for cooling air comprising the steps of:

compressing a large volume of low-pressure water vapor in a plurality of compressor stages, thereby creating a vacuum on a quantity of water in a plurality of evaporators and causing said water to be cooled;

pumping cooled water from said evaporators and contacting said cooled
5 water countercurrently with room air in a room air contactor, thereby cooling room air;

routing water from said room air contactor to said evaporators, causing said water to flash and cool;

sending compressed water vapors exiting the last compressor stage to a
10 condenser for condensation;

countercurrently directly contacting said water vapors exiting the condenser with a stream of chilled water from at least one said evaporators to reduce the water content from air;

removing noncondensibles from said condenser;

15 routing liquid from the condenser to an ambient air contactor, where ambient air is contacted countercurrently with liquid water pumped from the condenser;

providing make-up water to replace evaporated water; and
draining salt water.

58. The method of claim 57, wherein the condensation takes place in multiple
20 stages.

59. The method of claim 57, wherein said compressor stages comprise a positive displacement compressor or a dynamic compressor.

60. A low-friction positive displacement compressor comprising at least two
compressing components, wherein said compressing components do not substantially
25 contact one another.

61. The compressor of claim 60, wherein said compressing components comprise:
an inner gerotor, an outer gerotor and a housing; an orbiting scroll, a stationary scroll
and a housing; a housing and a piston; a housing, a rotor and a sliding vane; a
housing, a rotor and a flap; or an inner drum, an outer drum and a swinging vane, and
30 wherein there is a gap between at least two of said compressing components.

62. The compressor of claim 61, wherein water is used as a sealant in said gap.
63. The compressor of claim 61, wherein water and a wick are used as a sealant in said gap.
64. The compressor of claim 60, wherein said compressor comprises a gerotor
5 compressor comprising an inner gerotor and an outer gerotor, said inner gerotor disposed within said outer gerotor, each gerotor comprising a plurality of teeth, and wherein said inner gerotor has one less tooth than said outer gerotor, thereby creating a void volume between said inner gerotor and said outer gerotor, and wherein there is a gap between said inner gerotor and outer gerotor.
- 10 65. The compressor of claim 64, wherein said gerotor compressor further comprises an inlet port and a discharge port, said ports communicating with said void volume.
66. The compressor of claim 65, wherein said discharge port has a variable port mechanism that changes the position of a leading edge of the discharge port.
- 15 67. The compressor of claim 66, wherein said variable port mechanism comprises an electrically controlled servo motor, said motor rotating a threaded rod, a bellows, and a non-rotating nut coupled to said bellows, said rod axially positioning said non-rotating nut.
68. The compressor of claim 66, wherein said variable port mechanism is
20 positioned using electrically actuated means.
69. The compressor of claim 66, wherein said variable port mechanism is positioned using a bellows, said bellows being actuated by a bulb containing a liquid, said liquid in said bulb having a vapor pressure which acts on said bellows.
70. The compressor of claim 66, wherein said variable port mechanism comprises
25 a plurality of plates disposed adjacent to said discharge port and means for sequentially moving the plates to vary said leading edge of said discharge port.
71. The compressor of claim 64, wherein said gerotor compressor has actuation means to reduce friction.
72. The compressor of claim 71, wherein a first drive shaft drives said outer
30 gerotor and wherein said actuation means comprises an internal gearbox containing a

plurality of spur gears, said plurality being an odd number, and wherein one of said spur gears is coupled to said first drive shaft and another of said spur gears is coupled to a second drive shaft, said second drive shaft being offset from said first drive shaft, thereby suspending said gearbox between said first drive shaft and said second drive shaft, and wherein said first drive shaft is coupled to said outer gerotor through a plate that comprises a plurality of prongs in contact with a plurality of holes in said outer gerotor, and wherein said second drive shaft is coupled to said inner gerotor.

73. The compressor of claim 71, wherein a first drive shaft drives said outer gerotor and wherein said actuation means comprises a spur gear set comprised of a large gear coupled to said outer gerotor, said large gear containing a plurality of teeth on an inside diameter, and a small gear coupled to said inner gerotor, said small gear containing a plurality of teeth on an outside diameter, wherein said large gear meshes with said small gear, and further comprised of a second shaft about which said inner gerotor spins, wherein said second shaft contains a crook establishing an offset between said first shaft and said second shaft.

74. The compressor of claim 71, wherein said actuation means comprises a plurality of rollers attached to said inner gerotor, wherein said rollers extend beyond a plurality of walls of said inner gerotor and are in contact with said outer gerotor, and wherein said outer gerotor drives said inner gerotor through said rollers.

75. The compressor of claim 71, wherein said inner gerotor and outer gerotor are disposed in a housing, a first drive shaft drives said outer gerotor, and said actuation means comprises a spur gear set comprised of a large gear, coupled to said outer gerotor, said large gear containing a plurality of teeth on an inside diameter, and a small gear coupled to said inner gerotor, said small gear containing a plurality of teeth on an outside diameter, wherein said large gear meshes with said small gear, and further comprised of a second shaft about which said inner gerotor spins, wherein said second shaft is attached to said inner gerotor which spins on a bearing means affixed to said housing.

76. The gerotor compressor of claim 71, wherein a first drive shaft drives said inner gerotor, and wherein said actuation means comprises a spur gear set comprised

of a large gear coupled to said outer gerotor, said large gear containing a plurality of teeth on an inside diameter, and a small gear coupled to said inner gerotor, said small gear containing a plurality of teeth on an outside diameter, wherein said large gear meshes with said small gear, and further comprising a second nonrotating shaft about
5 which said outer gerotor spins, wherein said second shaft contains a crook establishing an offset between said first and said second shafts.

77. The compressor of claim 71, wherein said actuation means comprises a large gear coupled to said outer gerotor, said large gear comprising a plurality of teeth on an inside diameter, a small gear coupled to said inner gerotor, said small gear
10 comprising a plurality of teeth on an outside diameter, said large gear meshing with said small gear, and a stationary central shaft, wherein said stationary central shaft contains two crooks that create an offset between an axis of the inner gerotor and an axis of the outer gerotor, and wherein said stationary shaft comprises a first end and a second end, said first end of said stationary shaft affixed to a first perforated housing
15 end plate through a pivotable mount that prevents rotation of said stationary shaft and said second end of said stationary shaft located in a rotating bearing cup coupled to said outer gerotor.

78. The compressor of claim 77, wherein said pivotable mount prevents said stationary central shaft from rotating but allows for angular and axial variation.

20 79. The compressor of claim 78, wherein said pivotable mount comprises a ring coupled to the shaft having a spherical outer diameter disposed within an inlet of said first perforated housing end plate.

80. The compressor of claim 77, wherein said gerotor compressor further comprises a second perforated housing plate, a first perforated rotating plate and a
25 second perforated rotating plate, wherein both said rotating plates are connected to said outer gerotor, and a first stationary plate and a second stationary plates adjacent to said inner and said outer gerotor, said first stationary plate containing an inlet port and said second stationary plate containing a discharge port.

81. The compressor of claim 60, wherein said compressor comprises a scroll
30 compressor, said scroll compressor comprising a stationary scroll having flutes and

an orbiting scroll having flutes, said orbiting scroll orbiting around said stationary scroll, and wherein said flutes of said scrolls are separated by a gap.

82. The compressor of claim 60, wherein said compressor comprises a scroll compressor, said scroll compressor comprising a stationary scroll, an orbiting scroll,
5 and means for causing said orbiting scroll to orbit around said stationary scroll, said means comprising a first gear affixed to said stationary scroll, an orbiting arm affixed to said first gear, a second intermediary gear attached to said orbiting arm, and a third gear attached to said orbiting scroll, wherein said second intermediary gear drives said third gear.

10 83. The compressor of claim 60, wherein said compressor comprises a rotor, a sliding vane and a housing, and means for reducing friction between said vane, said rotor and said housing.

84. The compressor of claim 60, wherein said compressor comprises:
a compressor housing, said housing having an interior wall, an inlet, and an
15 outlet;

a rotor disposed in said housing;

a flap, said flap having a first end and a second end, said first end being coupled to said rotor and said second end being propelled in an outward direction during rotation of said rotor; and

20 means for preventing the second end of said flap from touching the interior wall of the housing.

85. The compressor of claim 60, said compressor comprising:

an outer drum having an axis;

an inner drum rotatably disposed in said outer drum;

25 a plurality of vanes, each vane having a first end and a second end opposite said first end, said vanes pivotally attached to said inner drum at said first end and having a vane tip at said second end, said vane tips being propelled radially outward during rotation of the inner drum;

a connecting rod coupled to each said vane tip, said rods maintaining a gap
30 between said vane tips and said outer drum; and

coupling means for causing said connecting rods to rotate about the axis of the outer drum.

86. The compressor of claim 85, said inner drum being rotatably driven by a first shaft, and wherein said coupling means comprises an offset shaft to which the
5 connecting rod is coupled, said offset shaft being coaxial with the axis of the outer drum; and a torque coupler for transmitting rotational force to the offset shaft.

87. The compressor of claim 86, wherein water is used as a sealant in said gaps.

88. The compressor of claim 60, wherein said compressor means is a reciprocating compressor, said reciprocating compressor comprising:

10 a compressor housing;
an oscillating center shaft disposed partly within said housing; and
at least one plate disposed in said housing and attached to said shaft and oscillating therewith, said at least one plate having a groove through which water flows to make a seal between said compressor housing and said plates.

15 89. The compressor of claim 88, wherein said oscillating center shaft comprises a top end and a bottom end, said top end comprising a protrusion which rides in a sinusoidal groove in a rotating cam driven by a motor.

90. The compressor of claim 89, wherein said cam contains a plurality of sinusoidal grooves.

20 91. A vacuum pump comprising a cylinder, a piston disposed in said cylinder, an inlet valve disposed in said cylinder, a sprayer that draws water into said cylinder, and a vent disposed in said cylinder for discharging noncondensibles and excess water, and wherein said vacuum pump is driven by a gear mounted on a main drive shaft, said gear connected to a plurality of reduction gears, wherein a first cam surface and
25 a second cam surface are mounted on one of said reduction gears, a first roller rides on said first cam surface and a second roller rides on said second cam surface, and said first roller drives said piston and said second roller drives said inlet valve.

92. A vacuum pump comprising a cylinder, a piston disposed in said cylinder, a crank, a check valve disposed in said cylinder, and means for spraying water into said
30 cylinder of said vacuum pump, wherein said piston is driven by said crank in a first

and a second direction, said piston comprising a first end, a second end, a plurality of notches, a plurality of perforations extending from said first end to said second end, and a flexible flap attached to said second end of said piston and covering one or more of said perforations, wherein said flap opens when said piston moves in said
5 first direction and closes when said piston moves in said second direction.

93. A vacuum pump comprising:

a first column and a second column, said columns being partially filled with liquid and having a vapor space;

means for causing said liquid to oscillate in said columns;

10 inlet means for allowing uncompressed gas to enter each of said columns;

outlet means for discharging compressed gas from each of said columns; and

means for spraying a fine mist of liquid into said vapor space of said first and said second columns.

94. The pump of claim 93, wherein said means for causing oscillation comprises a
15 chamber connecting said first and said second columns and a reciprocating piston disposed in said chamber.

95. The pump of claim 93, wherein said outlet means comprises a check valve.

96. A gerotor vacuum pump comprising an outer gerotor and a center gerotor disposed within said outer gerotor, wherein said center gerotor is mounted on a main
20 drive shaft and said outer gerotor is positioned by a plurality of guide rollers.

97. A gerotor vacuum pump comprising an outer gerotor and a center gerotor disposed within said outer gerotor, wherein said center gerotor is mounted on a main drive shaft and said outer gerotor is mounted within a single ball bearing.

98. A pivotable mounting apparatus for mounting a stationary shaft to a
25 housing, which prevents rotation of said shaft, but allows for angular and axial variation, comprising a ring coupled to said shaft having a spherical outer diameter disposed within a cylindrical shaped opening in said housing.

99. A low-friction rotary shaft seal comprising:

a journal for receiving a rotary shaft, said journal configured to create a gap
30 between said shaft and said journal, said journal further comprising a journal face;

means for supplying water to said gap; and

a bellows seal, said seal resting on said journal face when said shaft is stationary and lifting off said face when said shaft rotates.

100. A method for removing water vapor from noncondensibles in a stream of air
5 and water vapor comprising passing the stream through a packed column with chilled water flowing concurrently, wherein the packed column comprises corrugated polyvinyl chloride.

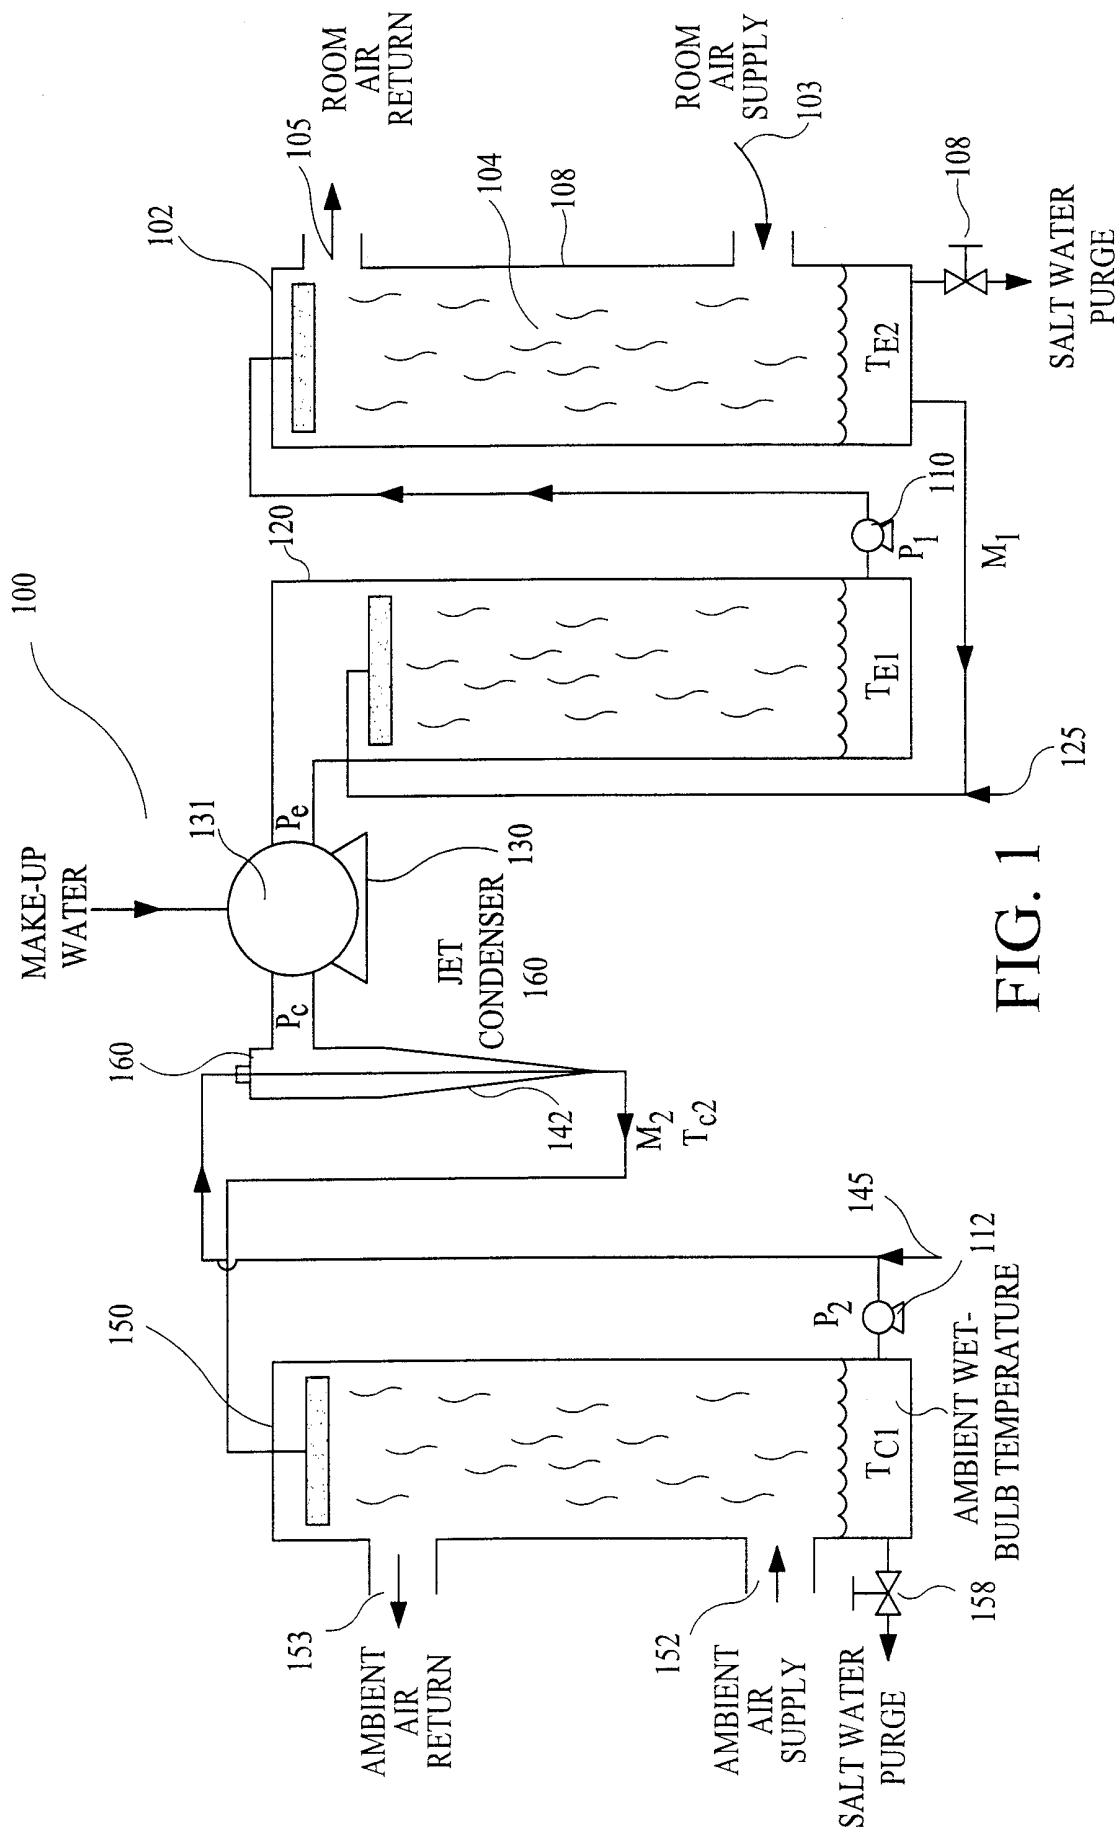


FIG. 1

2/83

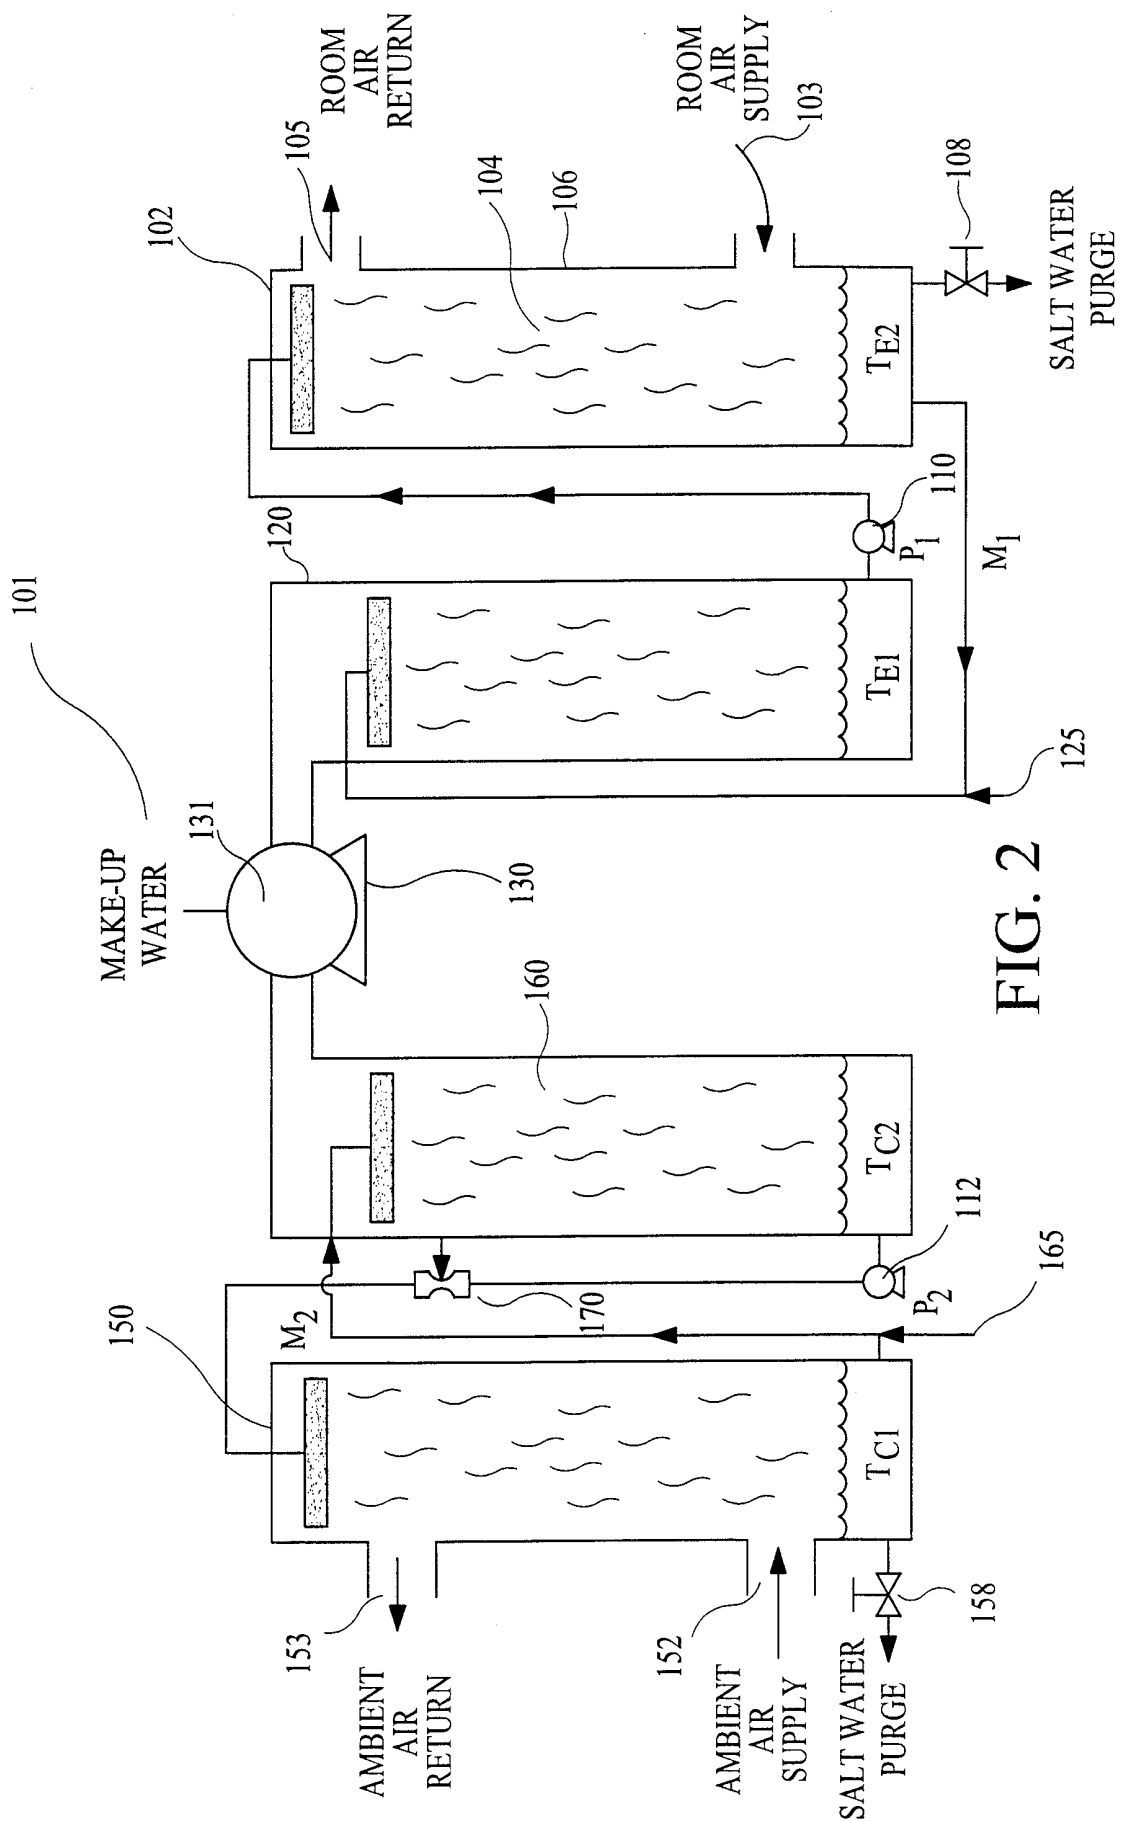


FIG. 2

3/83

VAPOR COMPRESSION EVAPORATIVE COOLER

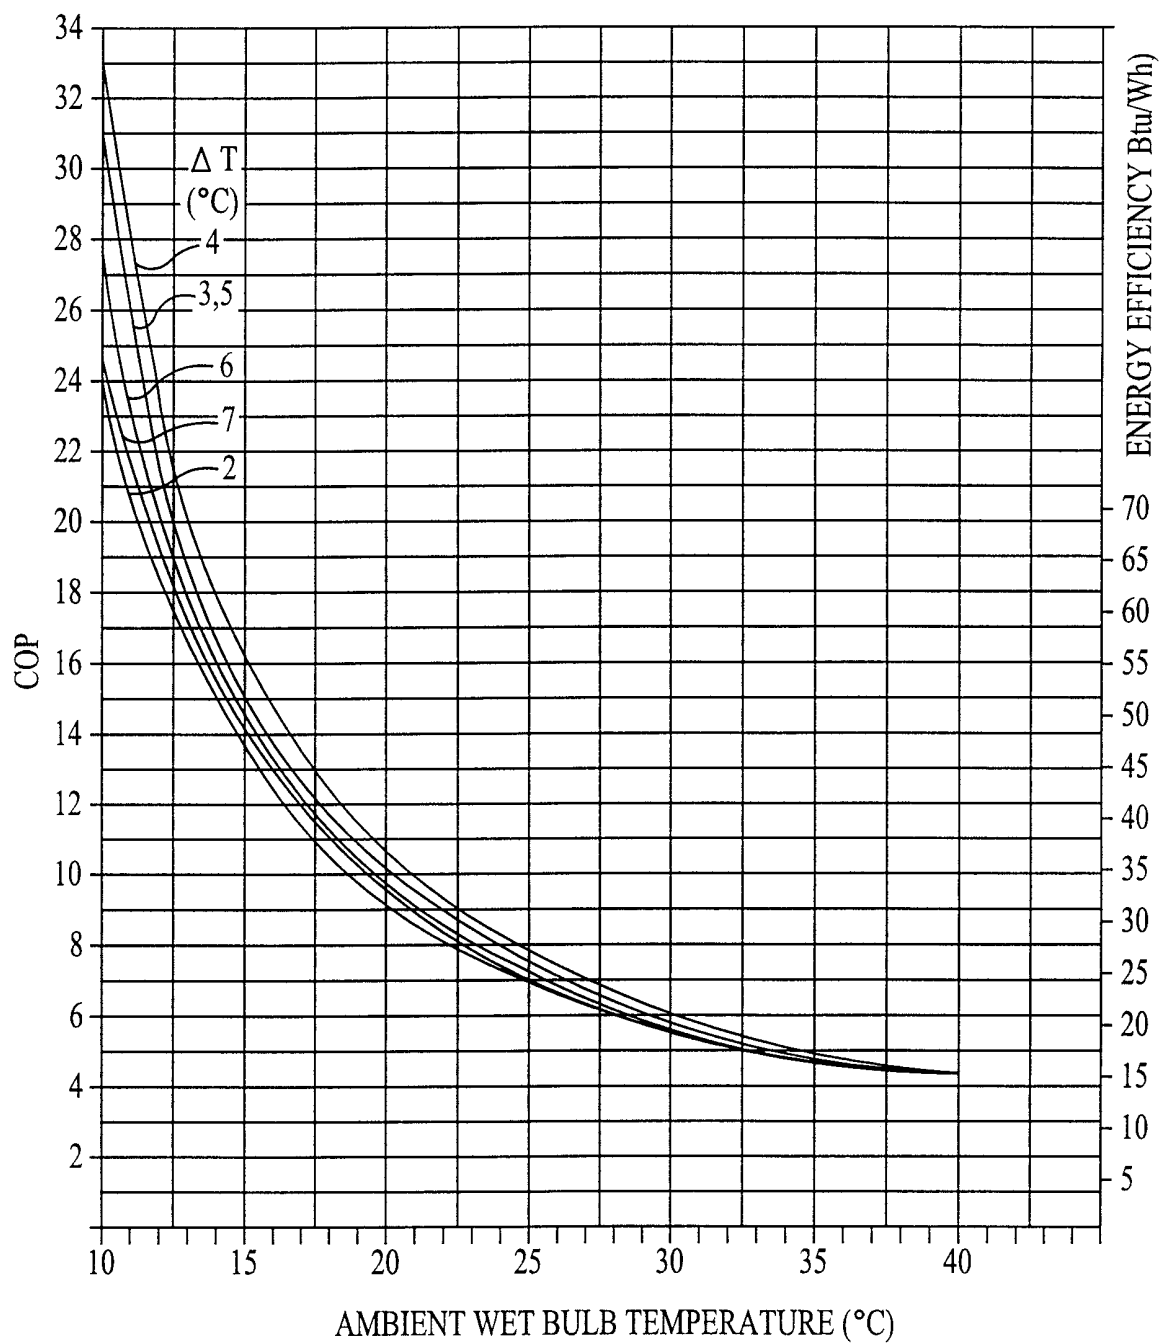


FIG. 3

4/83

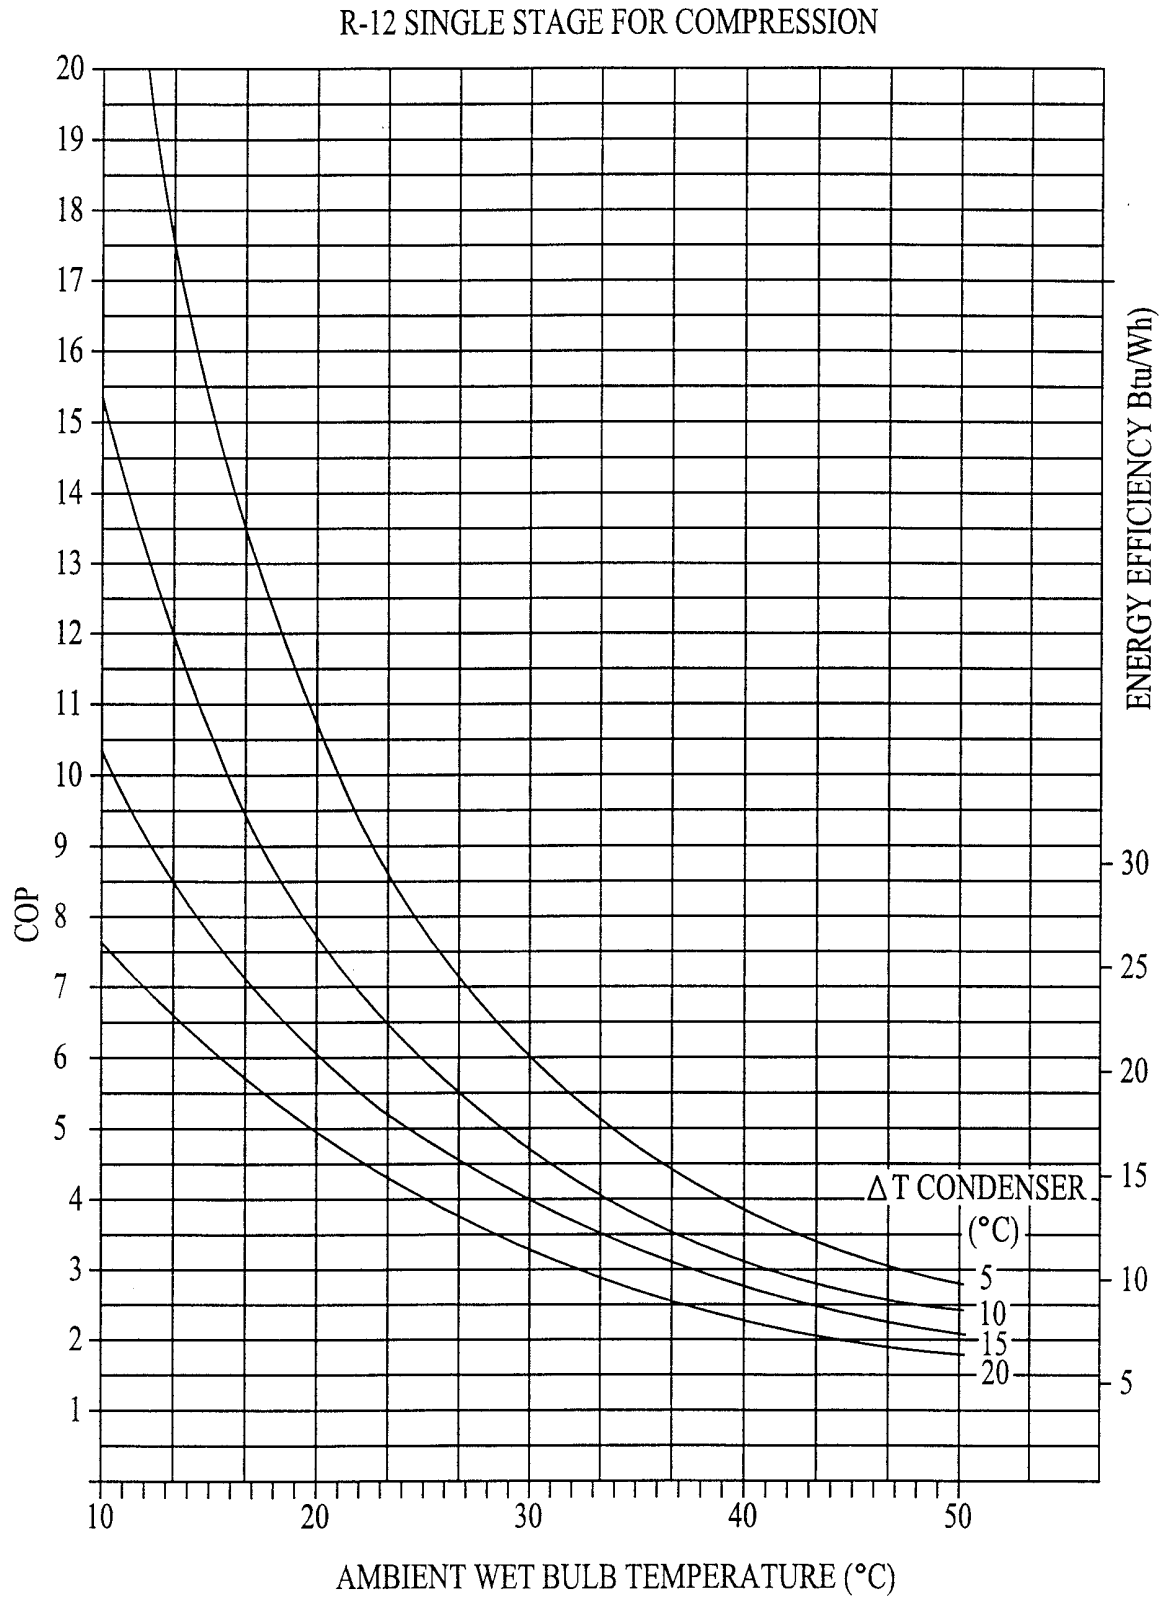


FIG. 4

5/83


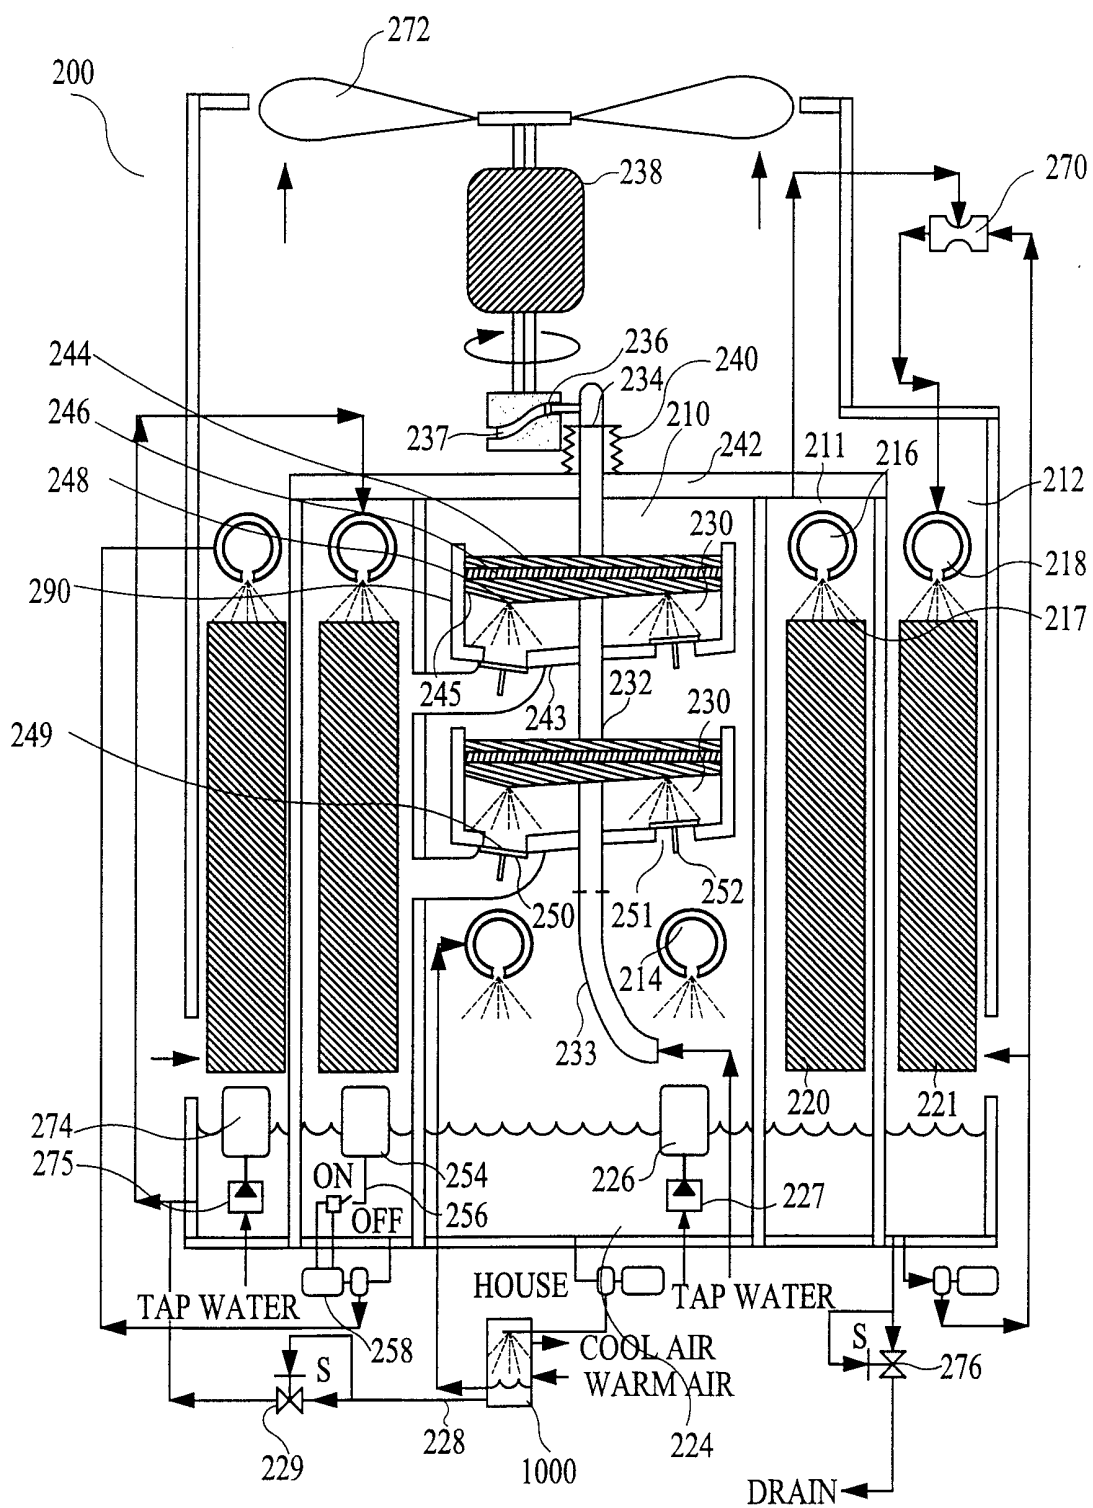


FIG. 5

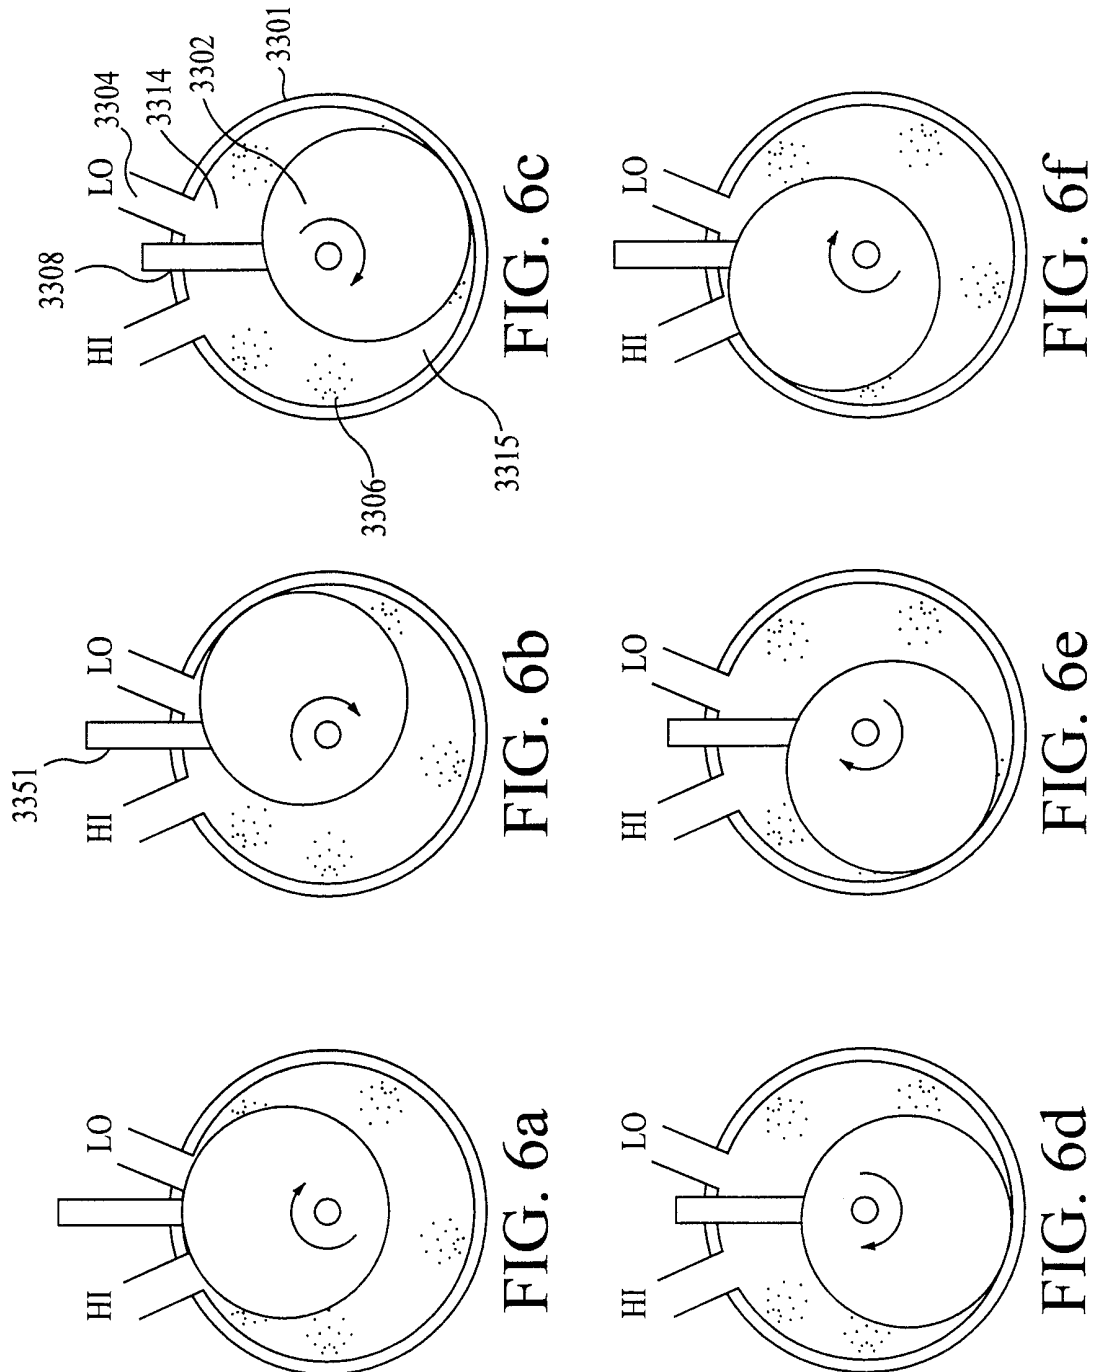

7/83

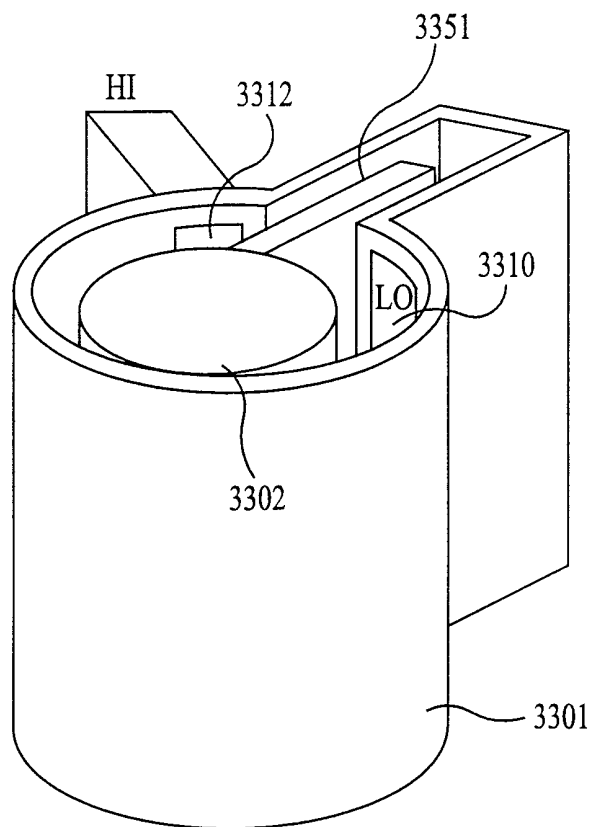


FIG. 7

8/83


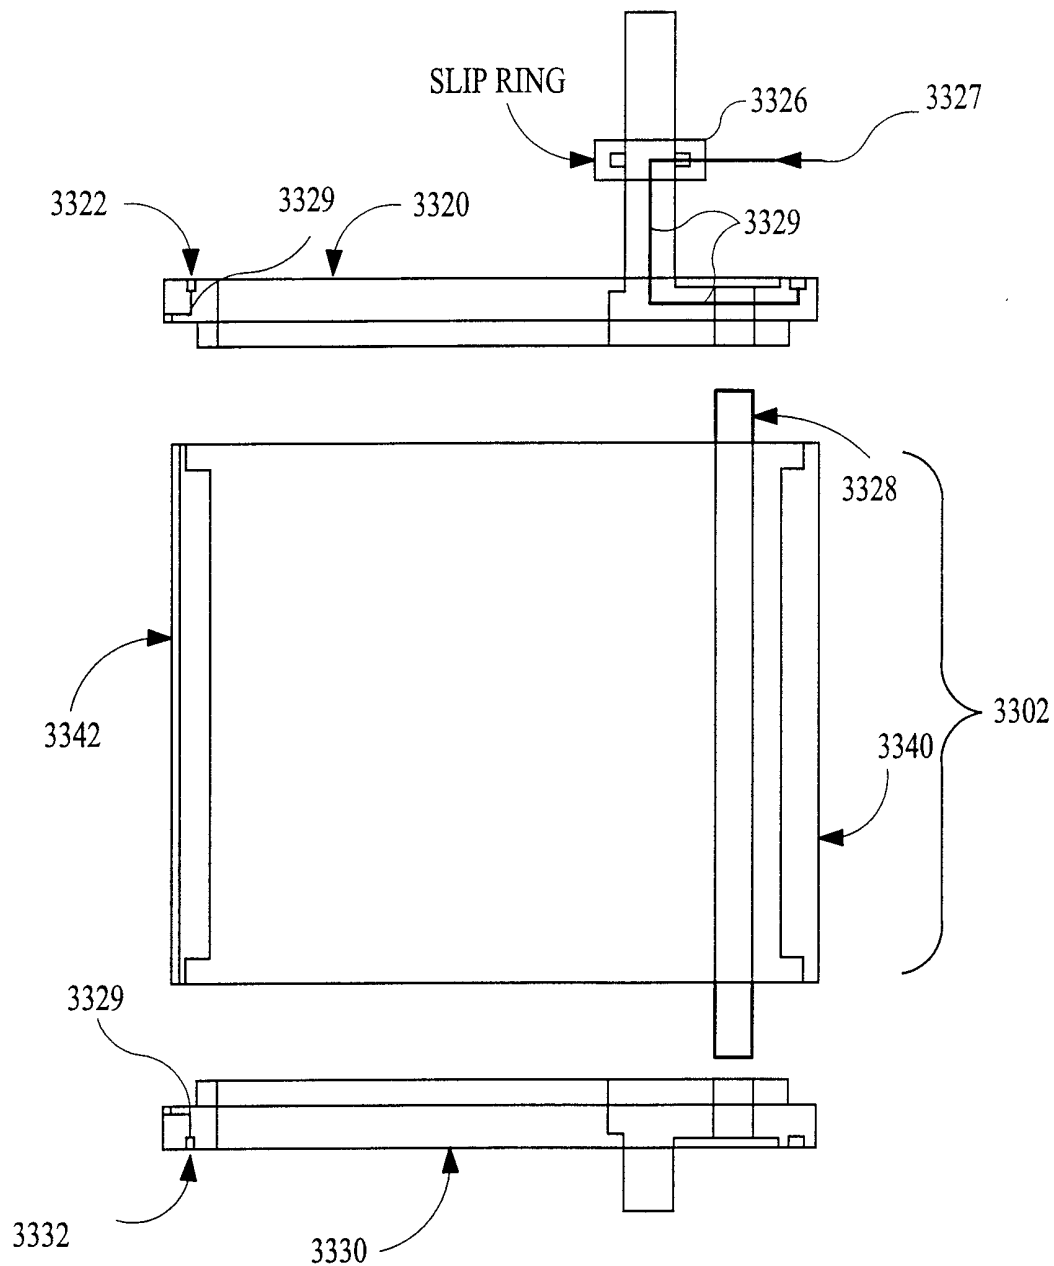





FIG. 8

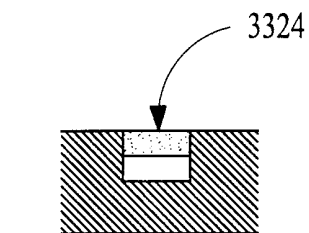

GROOVE DETAIL
WITH WICK

FIG. 9

9/83

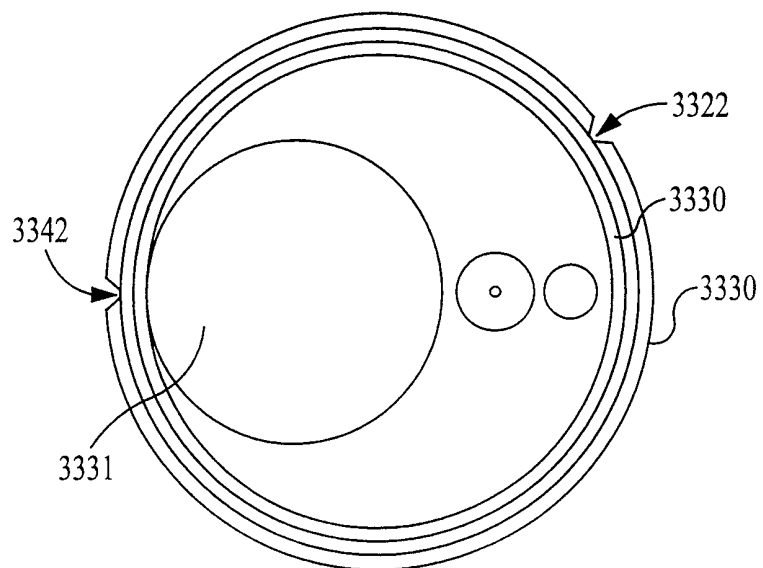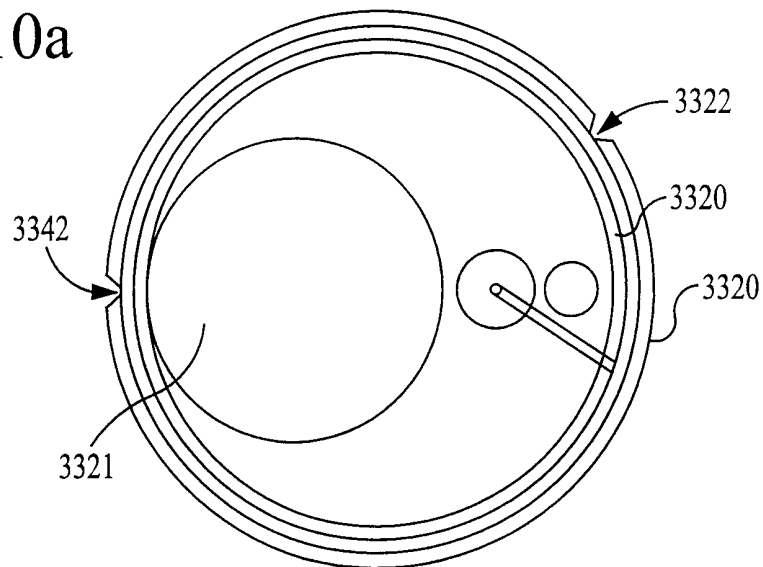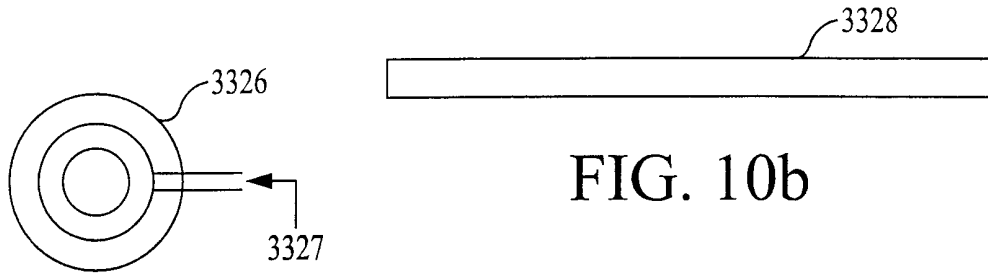

10/83

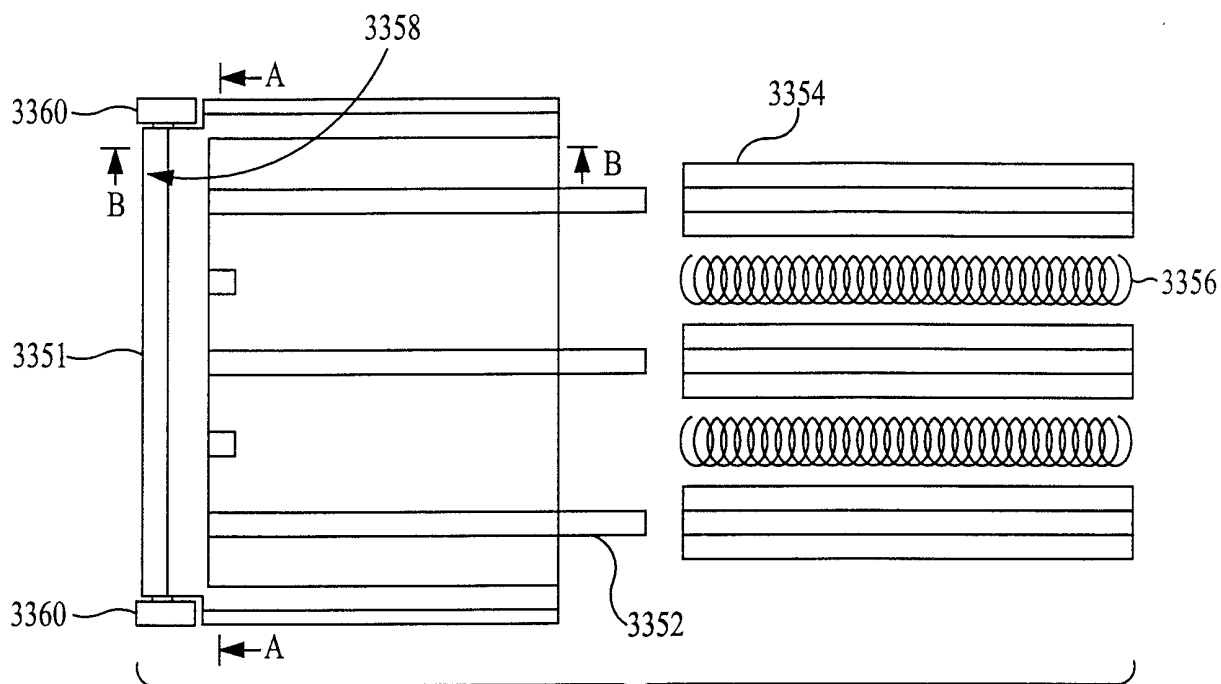


FIG. 11a




FIG. 11b




FIG. 11c

11/83

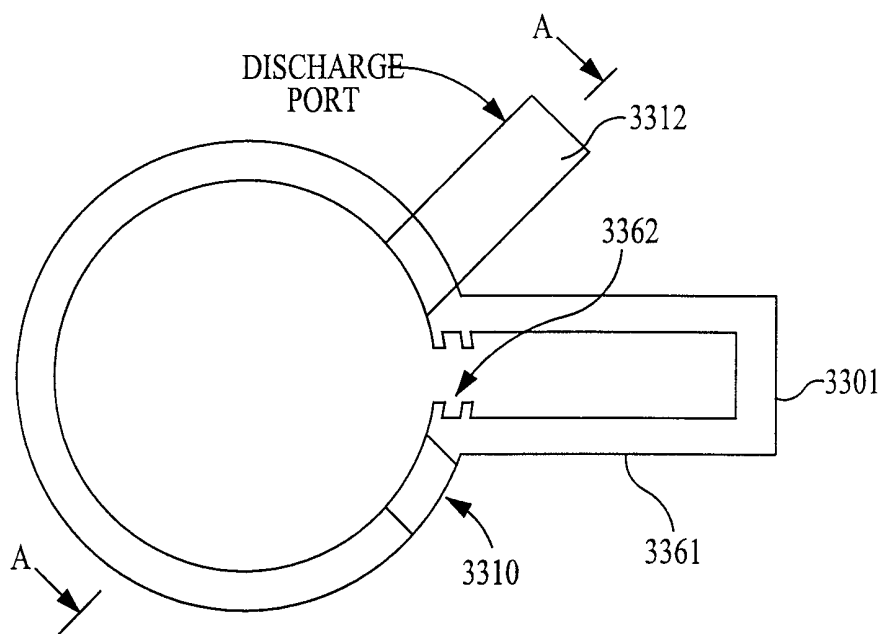


FIG. 12

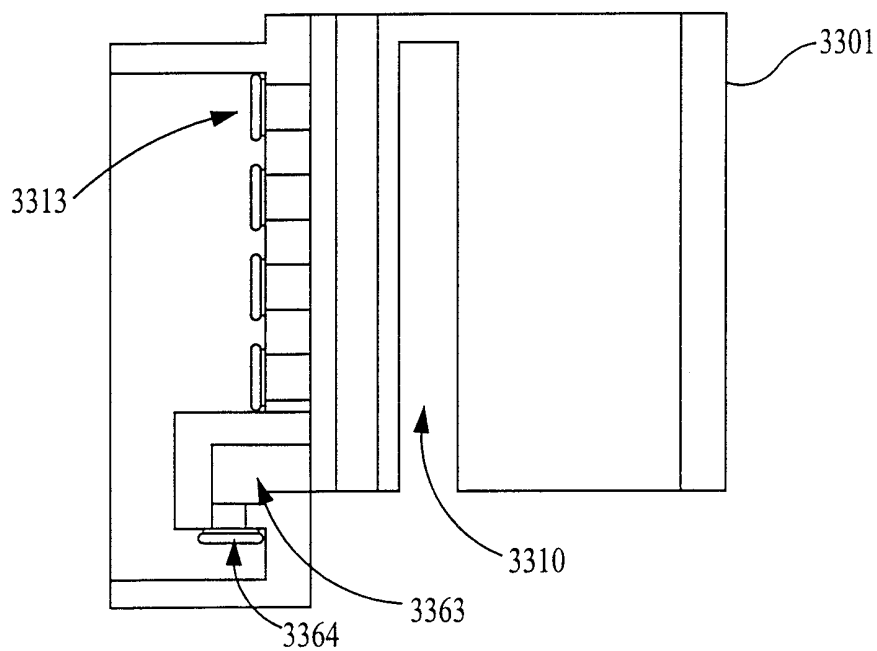


FIG. 13

12/83

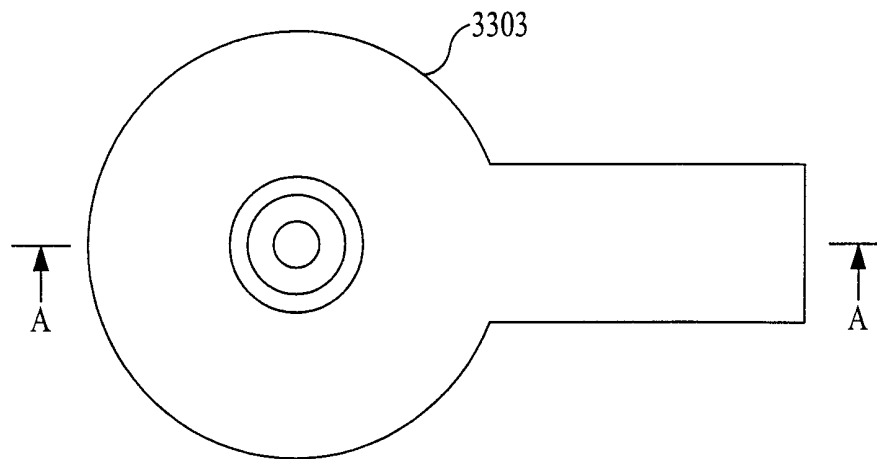


FIG. 14a

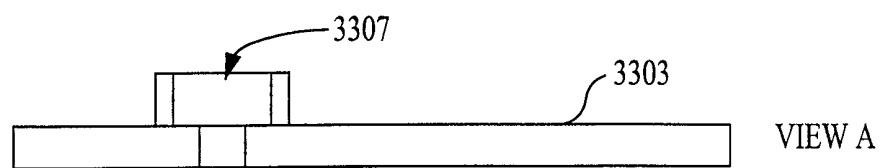


FIG. 14b

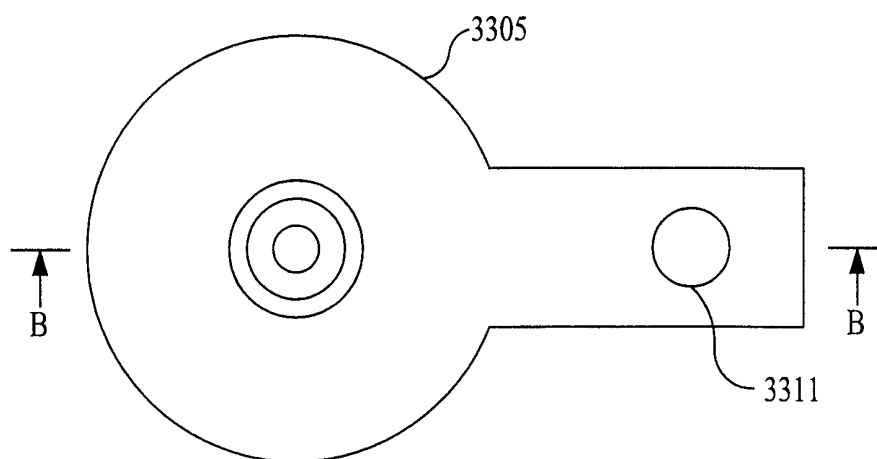


FIG. 15a








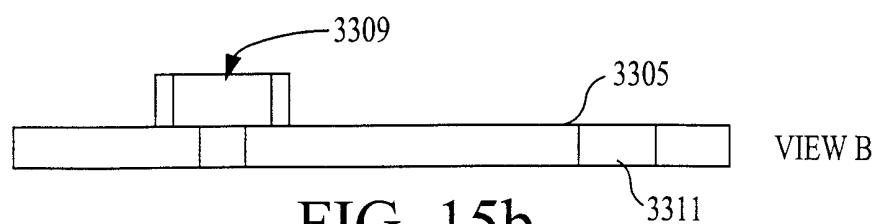


FIG. 15b

13/83

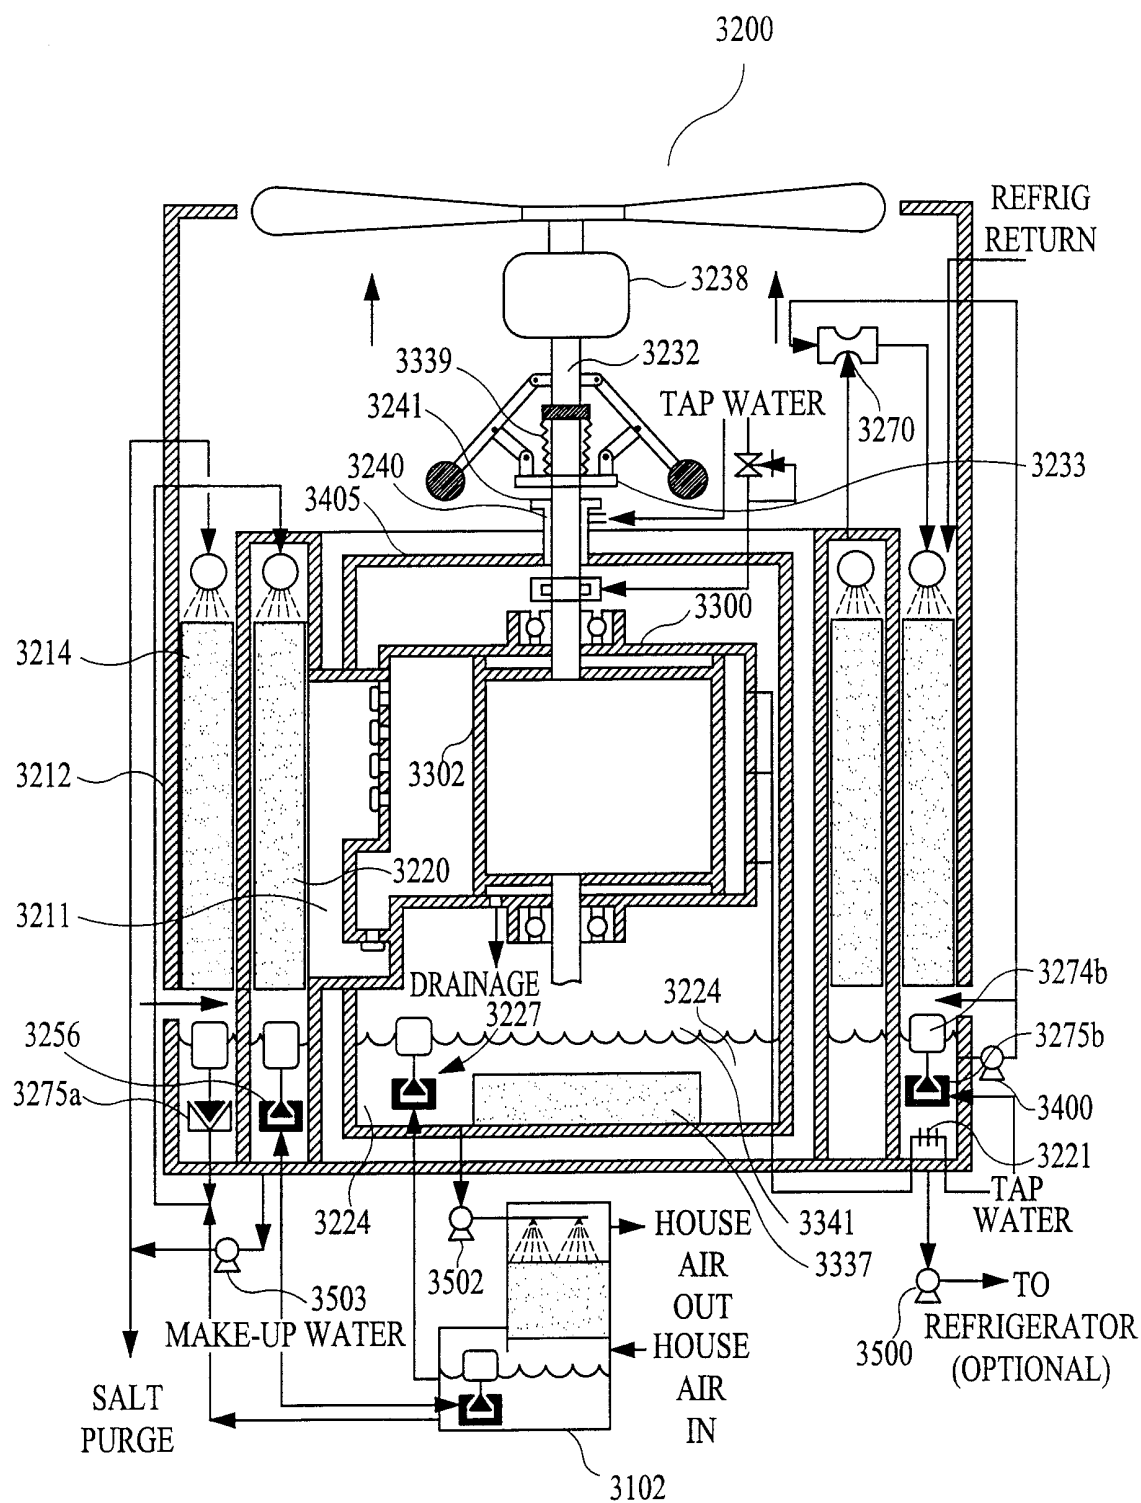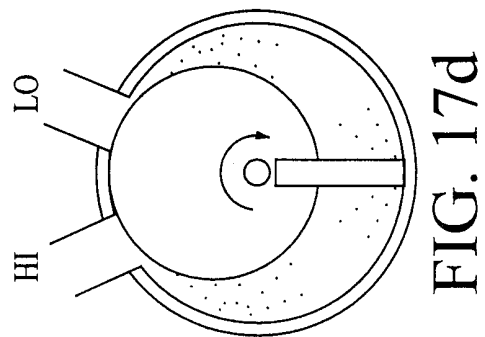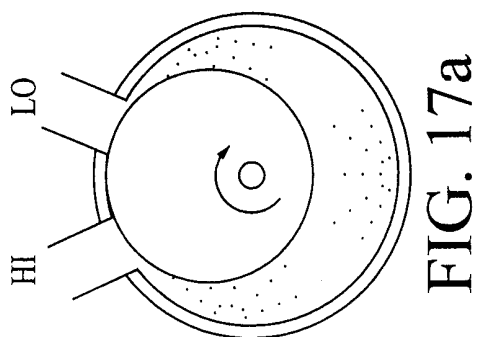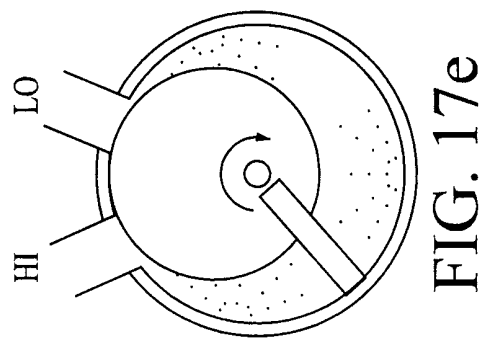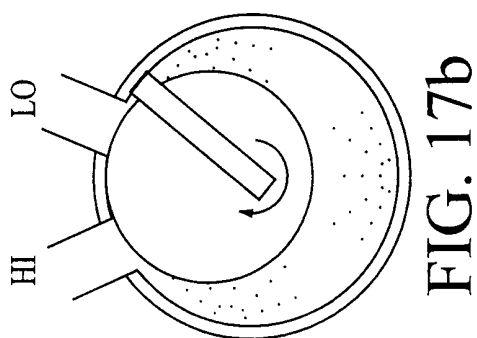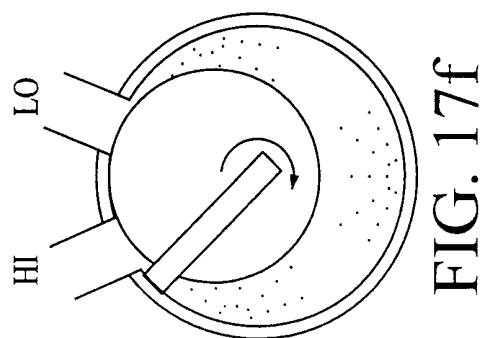

14/83

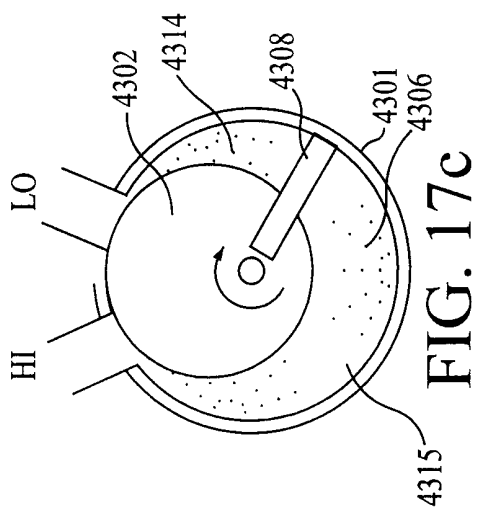

15/83

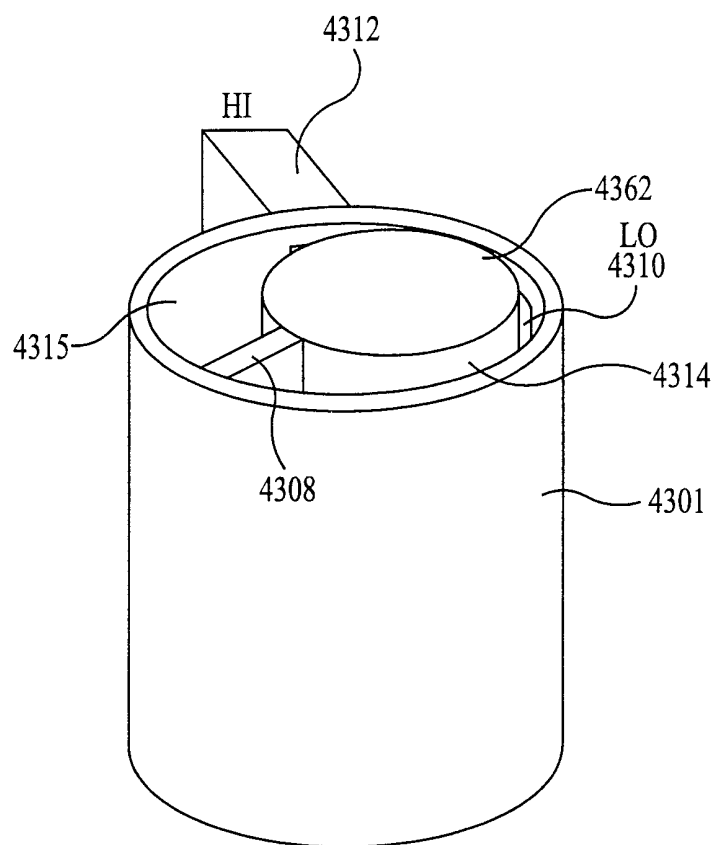


FIG. 18

16/83

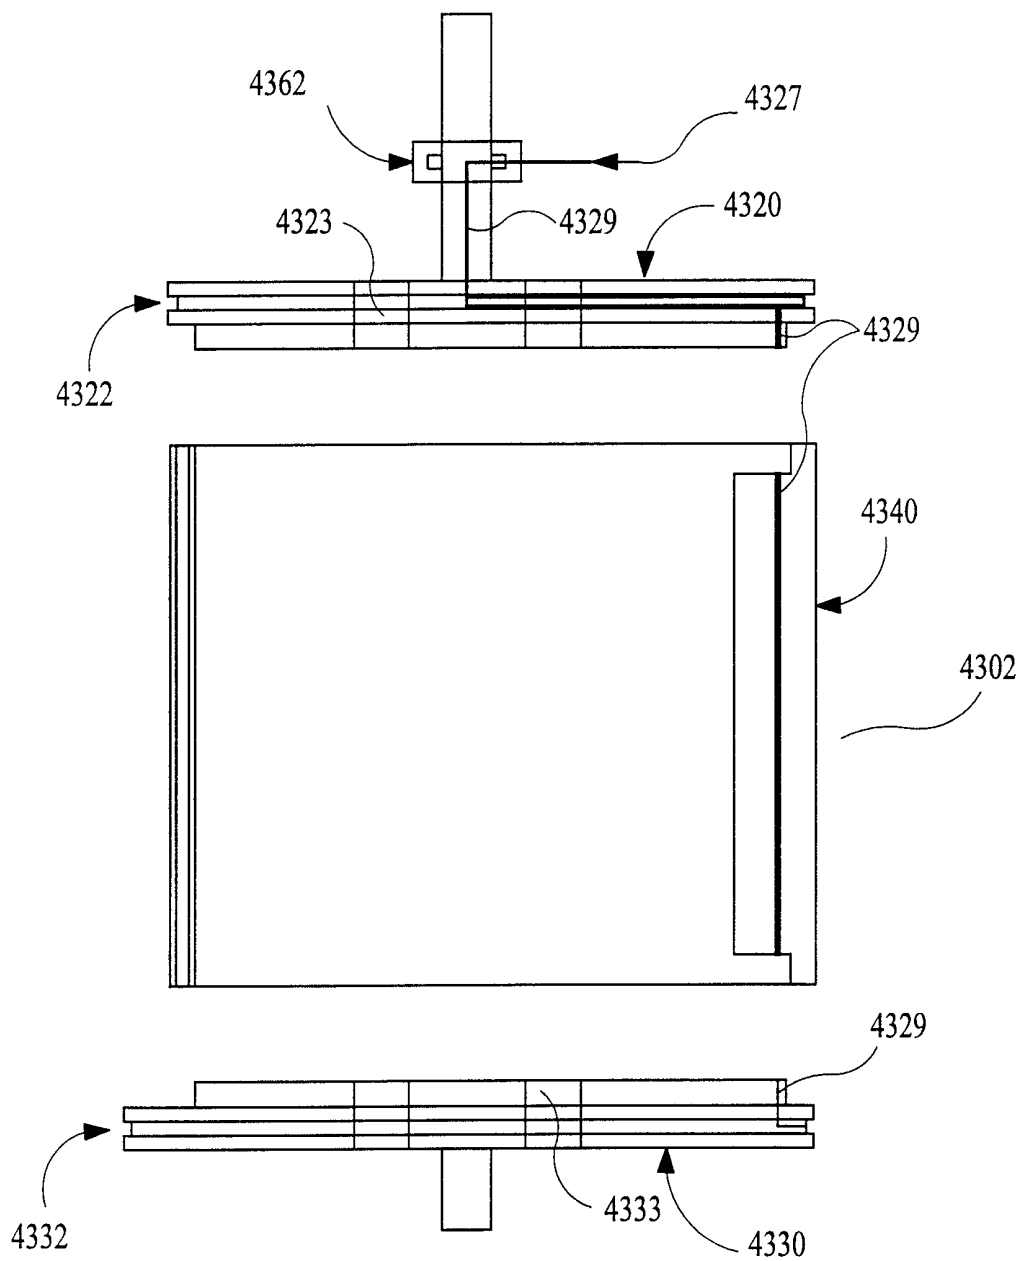


FIG. 19

17/83

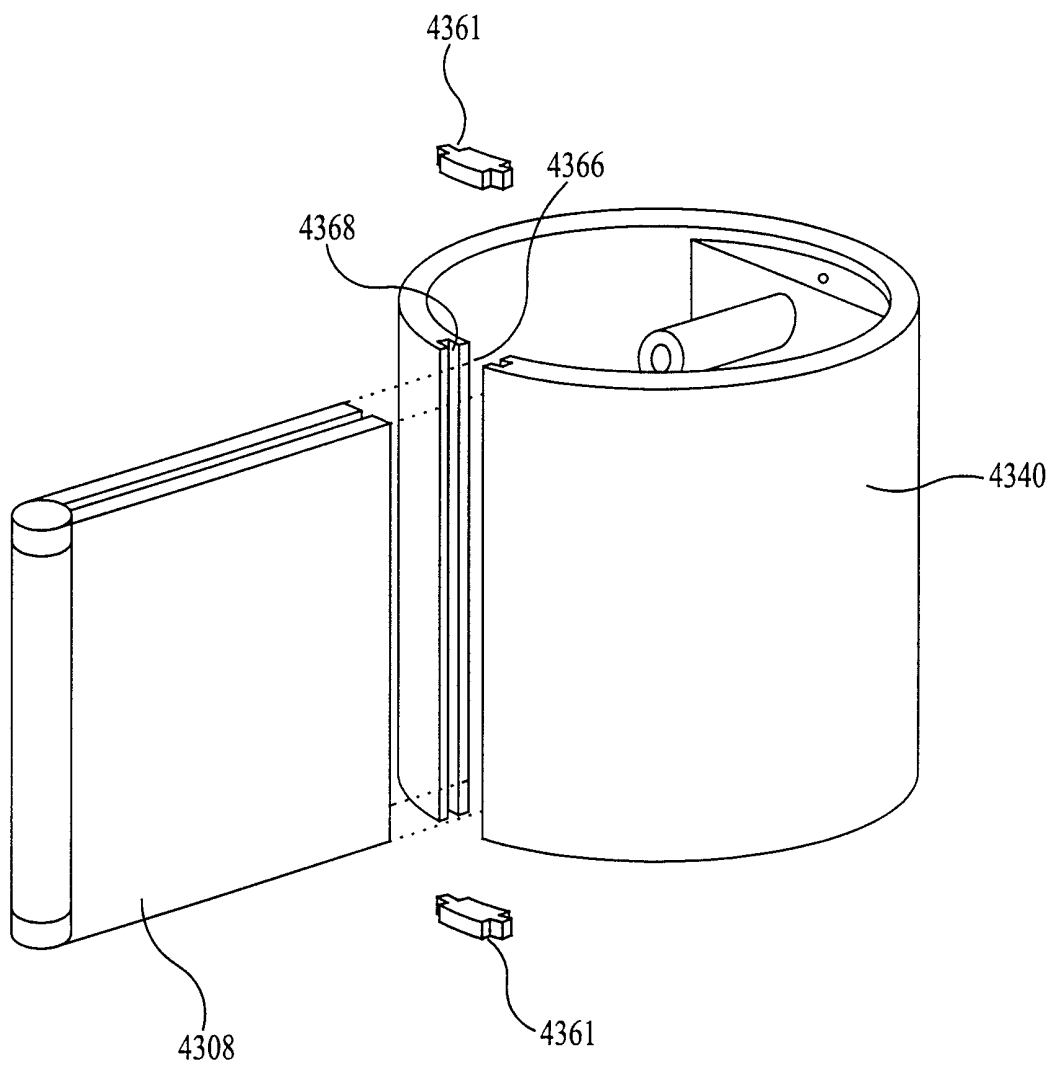


FIG. 20

18/83

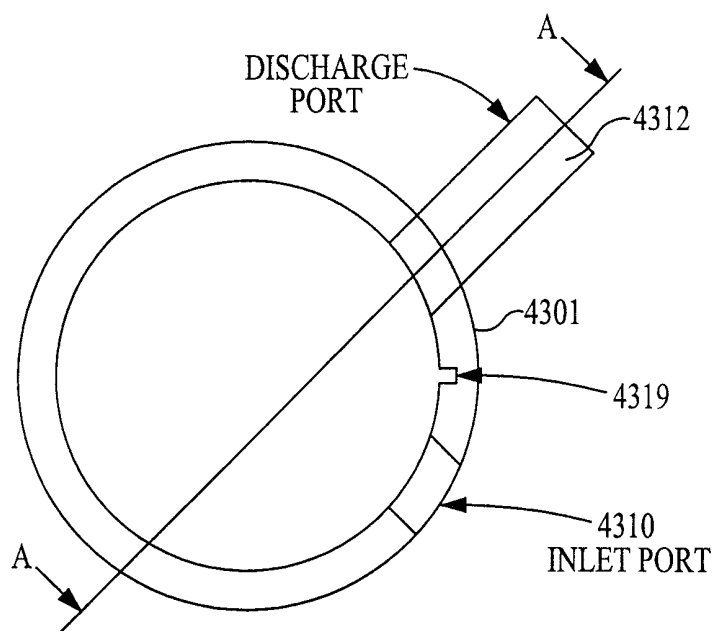


FIG. 21

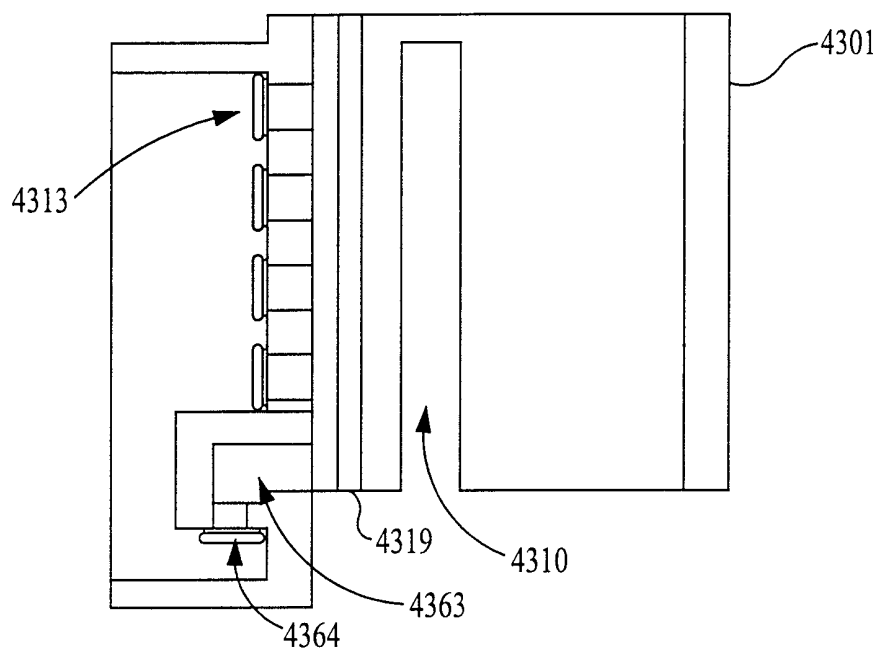


FIG. 22

19/83

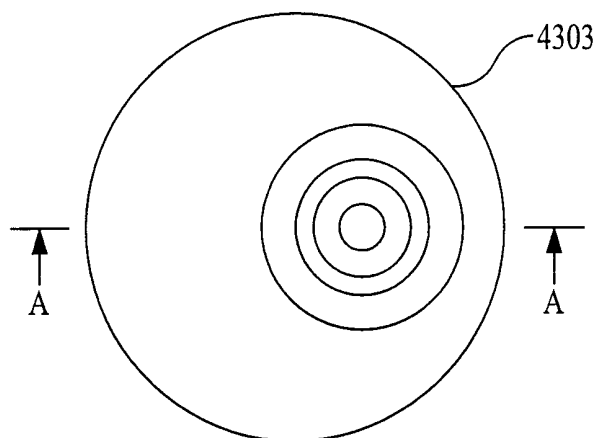


FIG. 23a

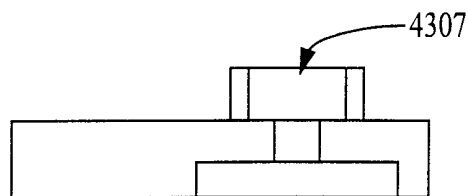


FIG. 23b

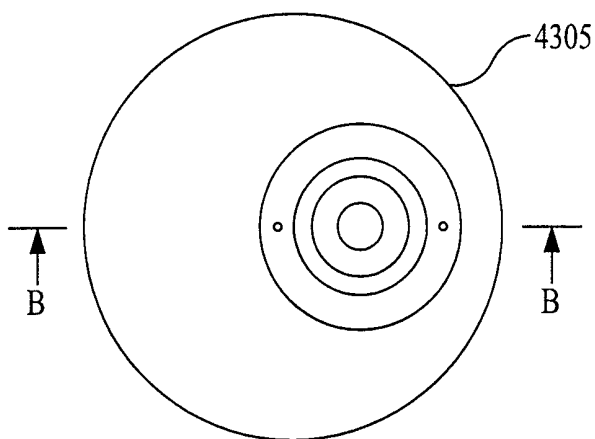


FIG. 24a







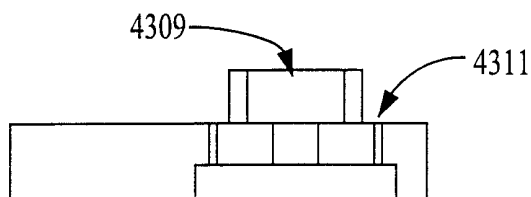


FIG. 24b

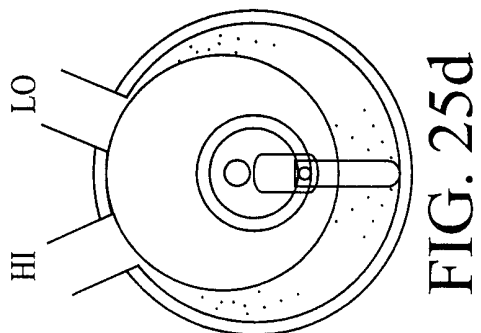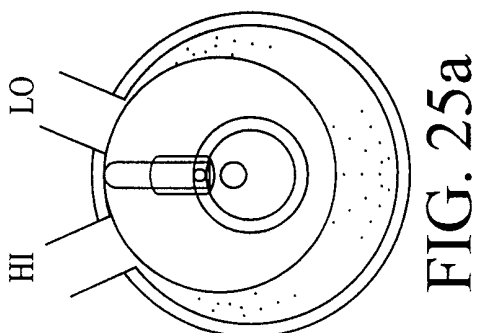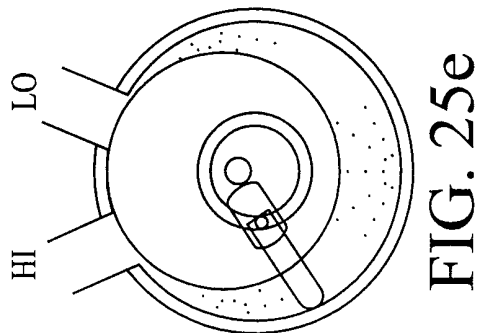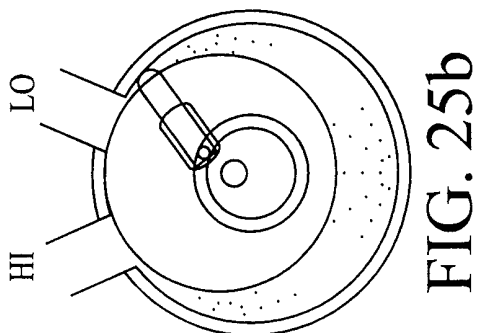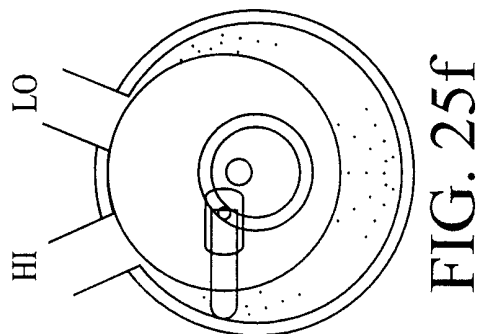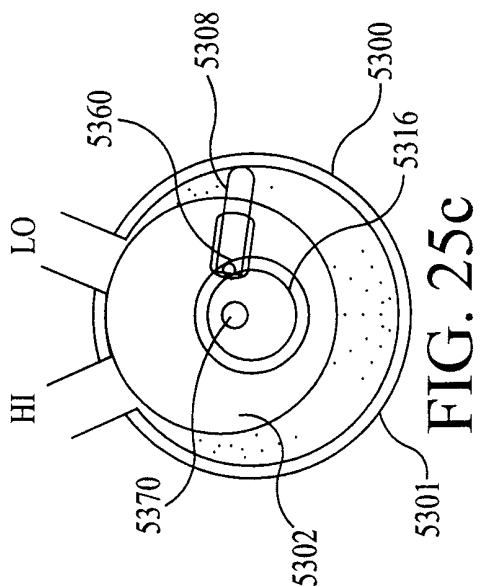

21/83

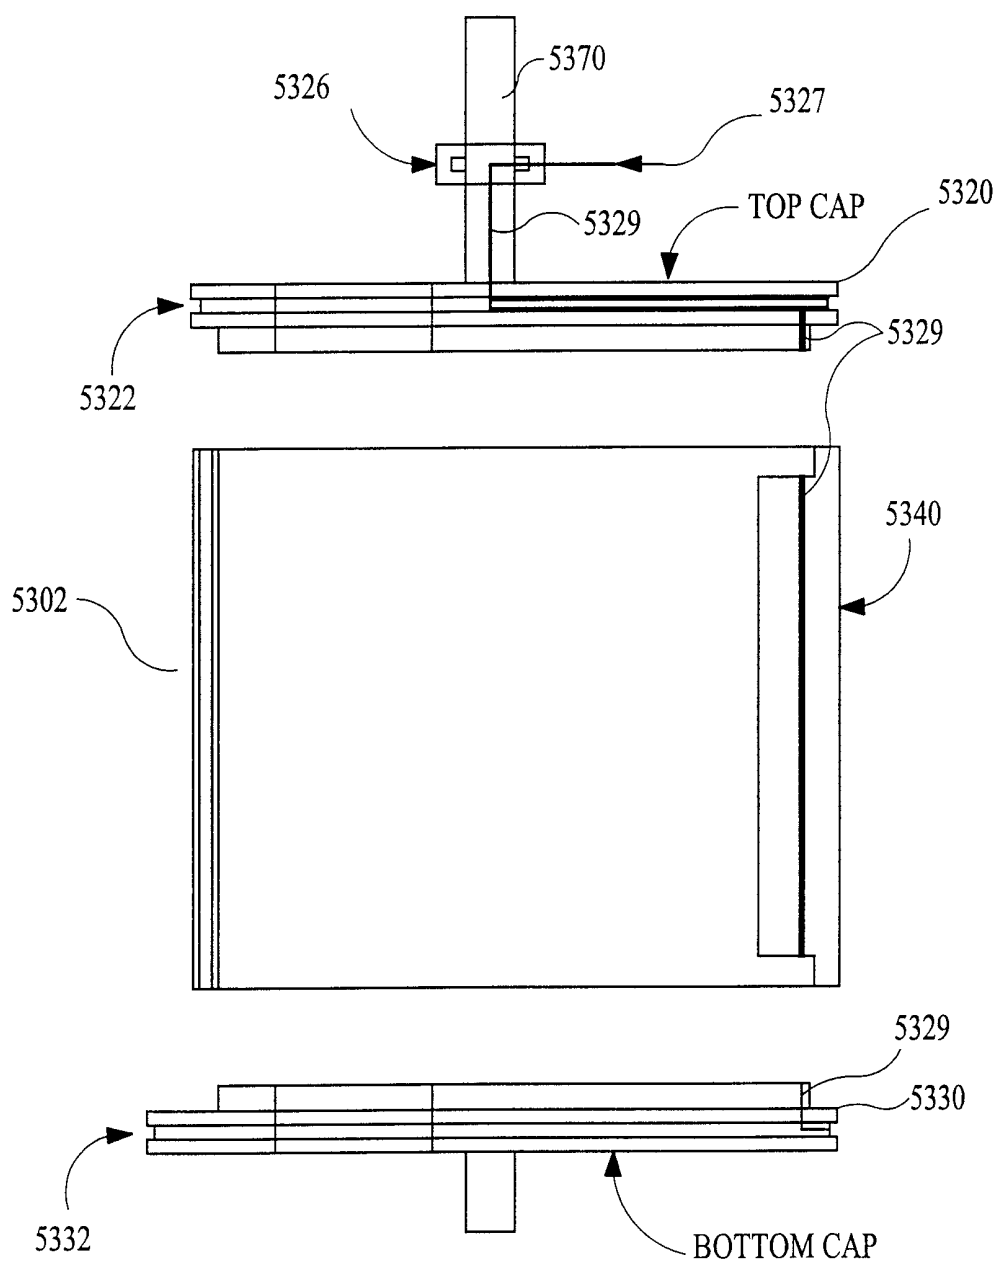


FIG. 26

22/83




FIG. 27a

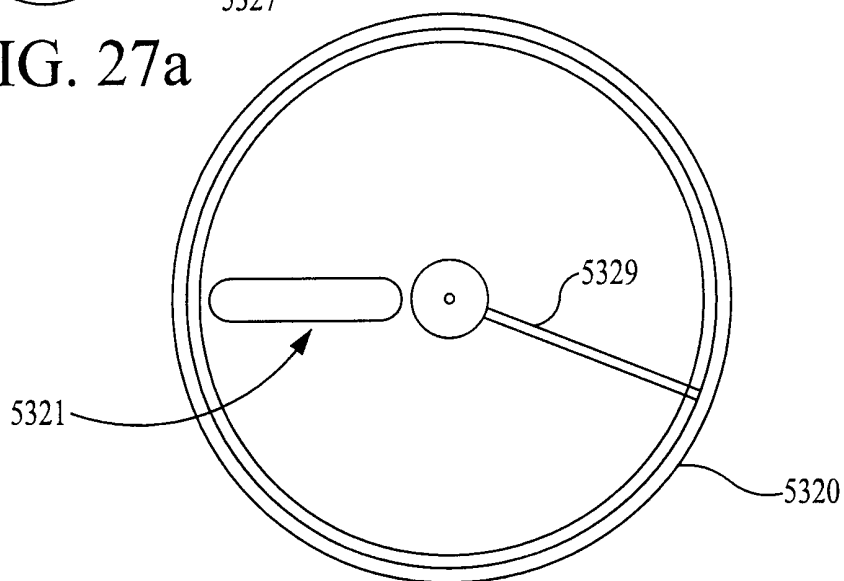


FIG. 27b

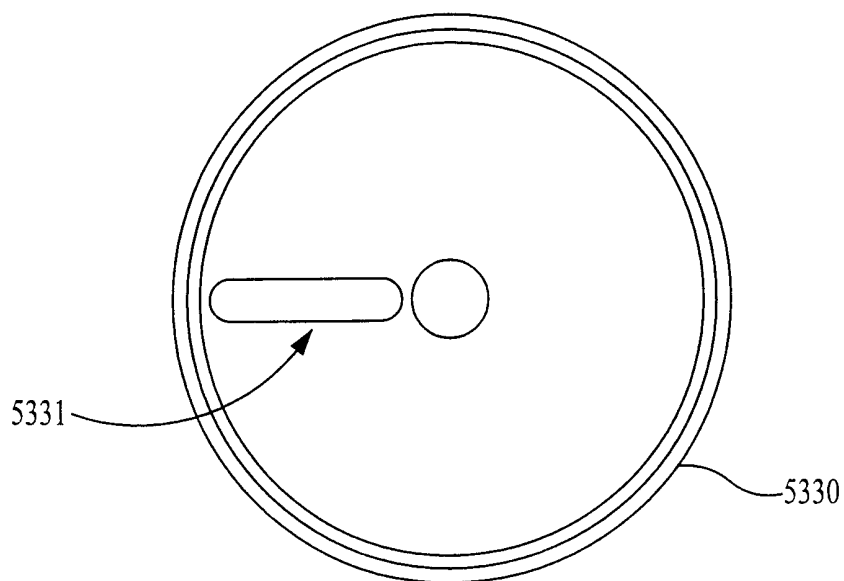


FIG. 27c

23/83

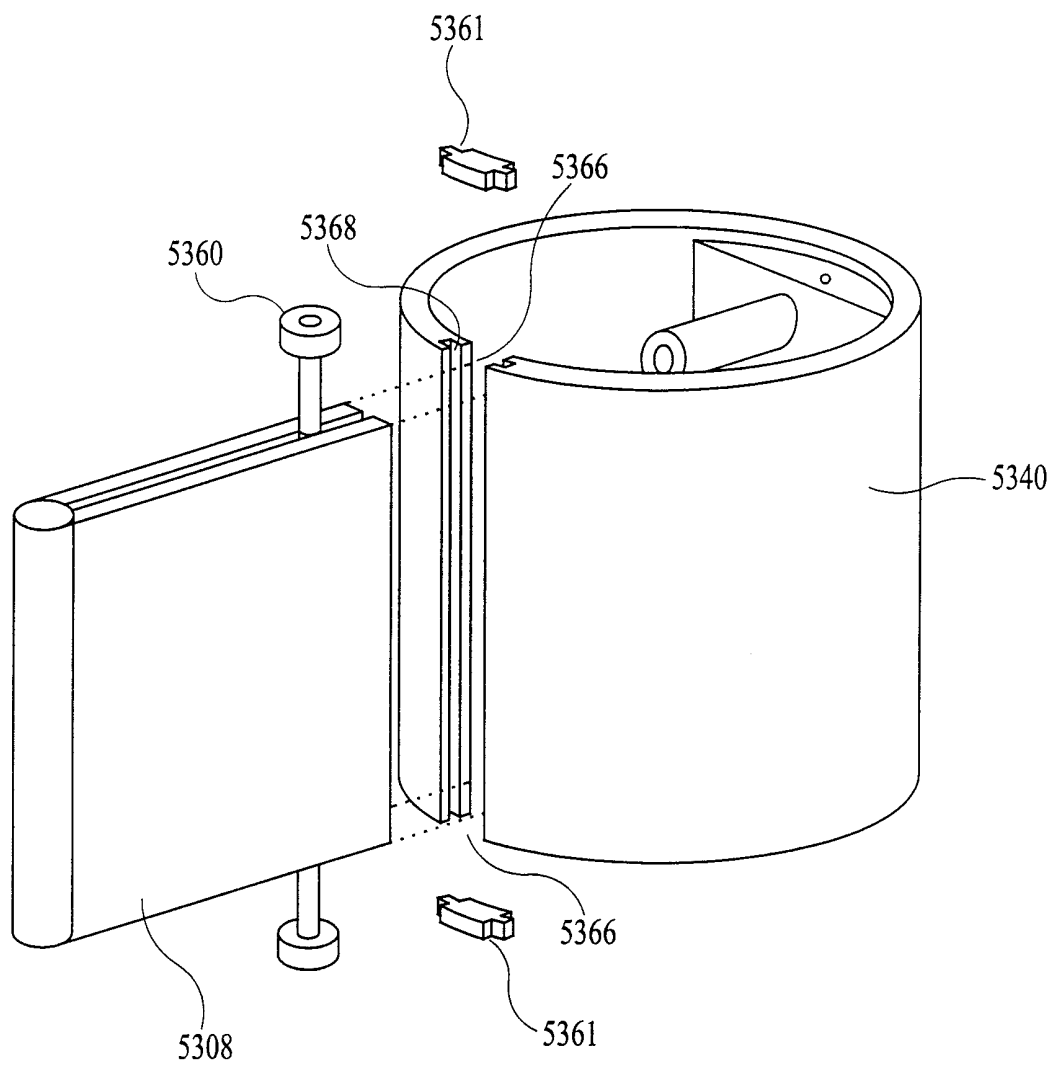


FIG. 28

24/83

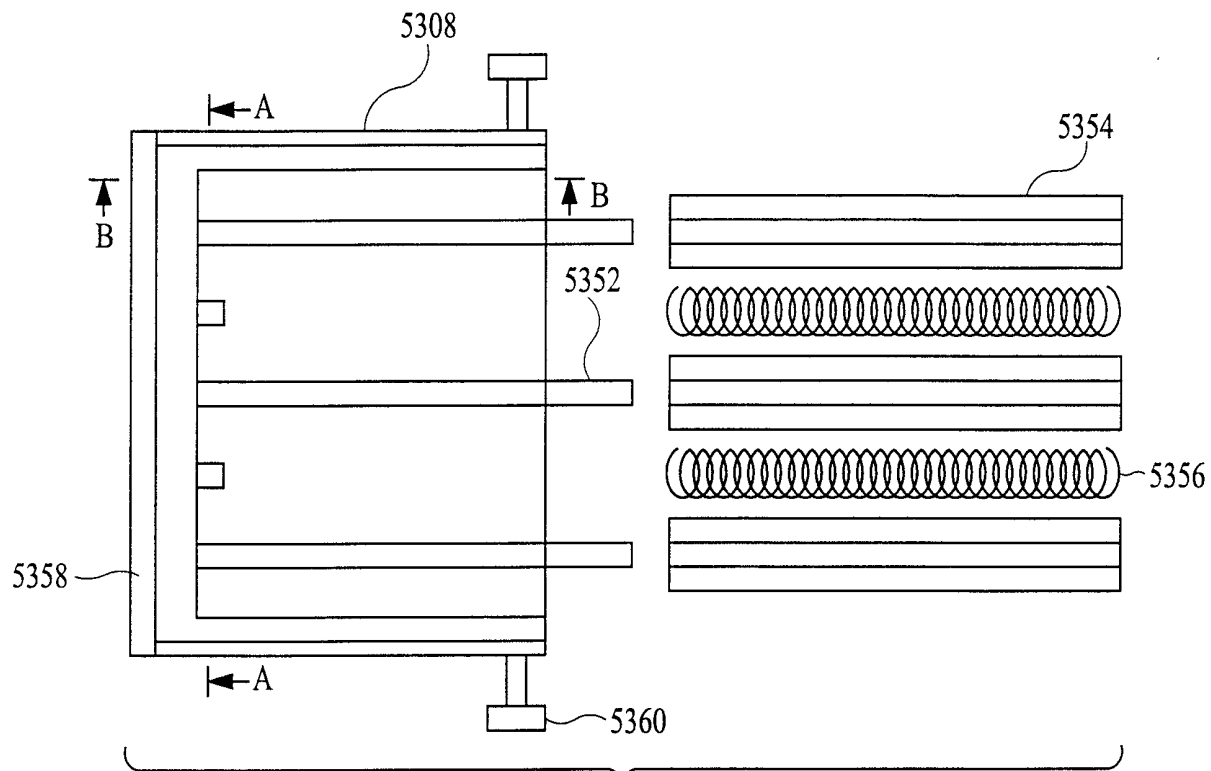


FIG. 29a




FIG. 29b




FIG. 29c

25/83

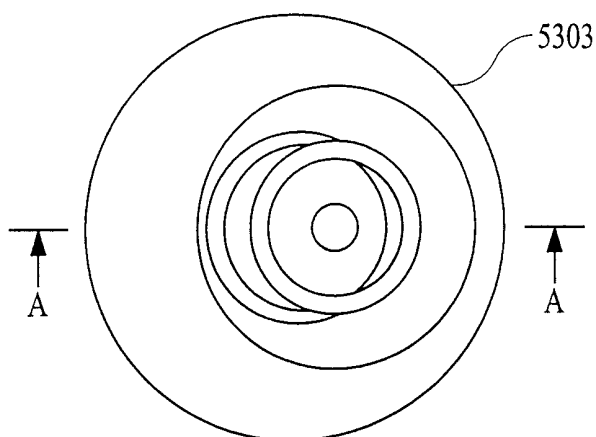


FIG. 30a

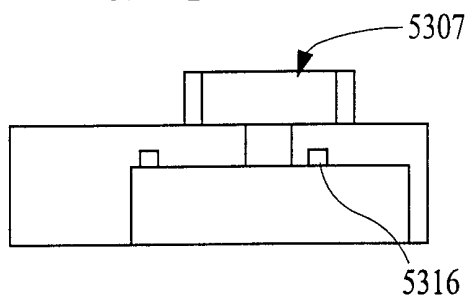


FIG. 30b

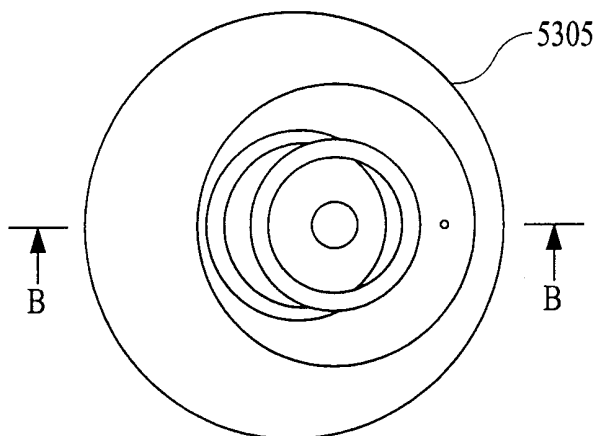


FIG. 31a

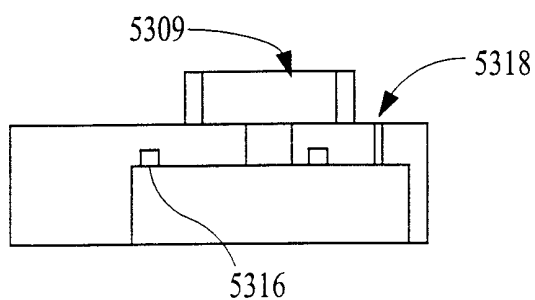


FIG. 31b

26/83

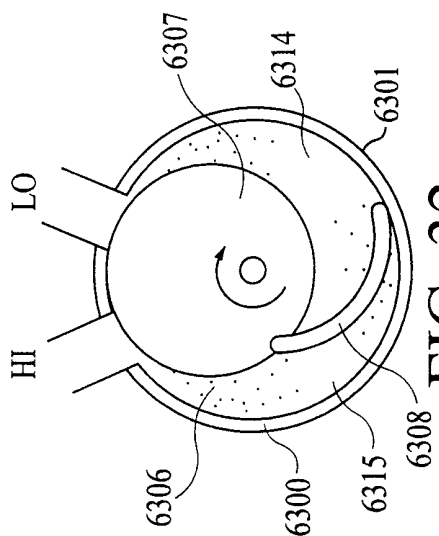


FIG. 32c

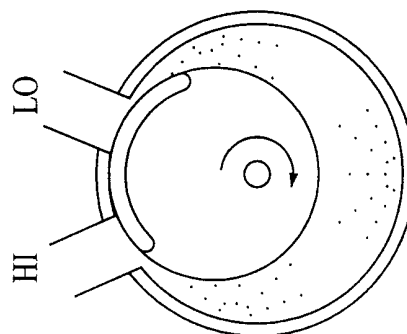


FIG. 32f

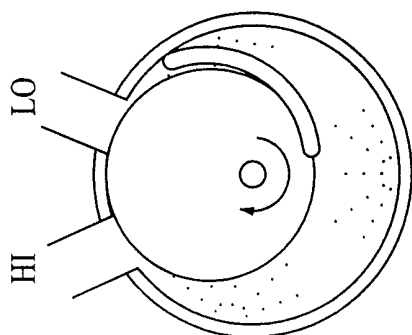


FIG. 32b

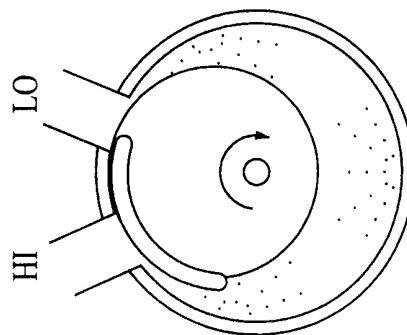


FIG. 32e

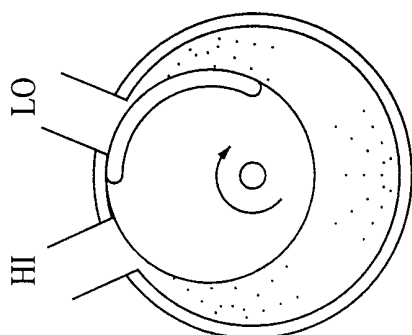


FIG. 32a

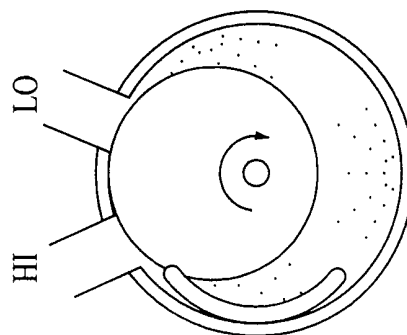


FIG. 32d

27/83

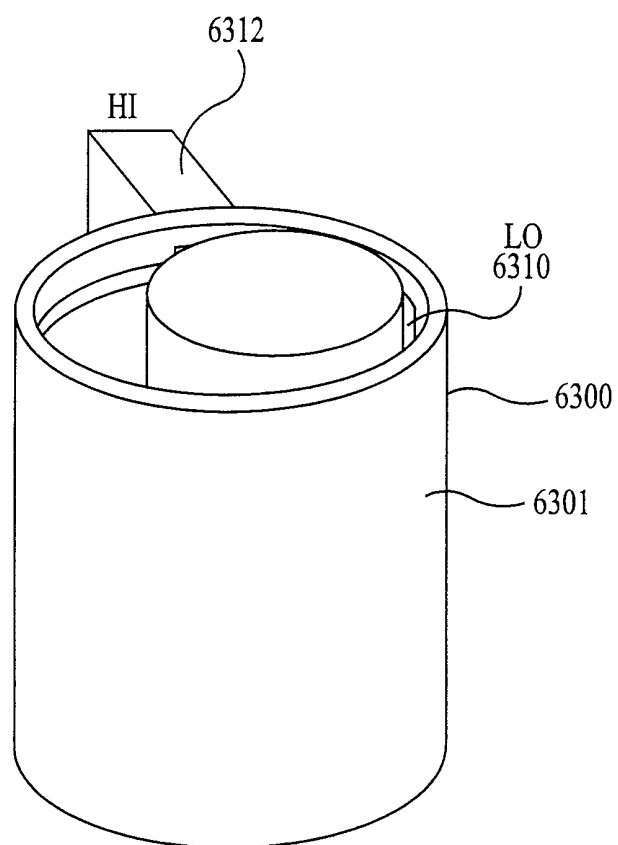


FIG. 33

29/83




FIG. 35a

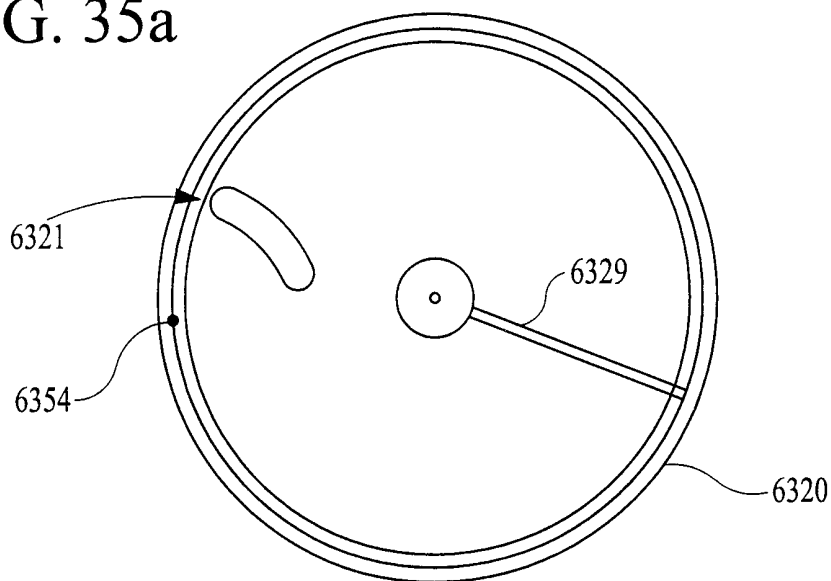


FIG. 35b

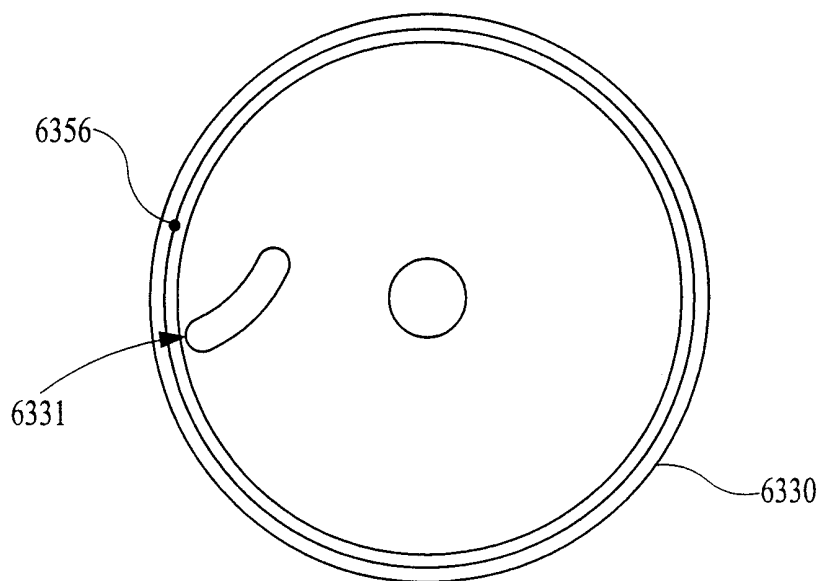


FIG. 35c

30/83

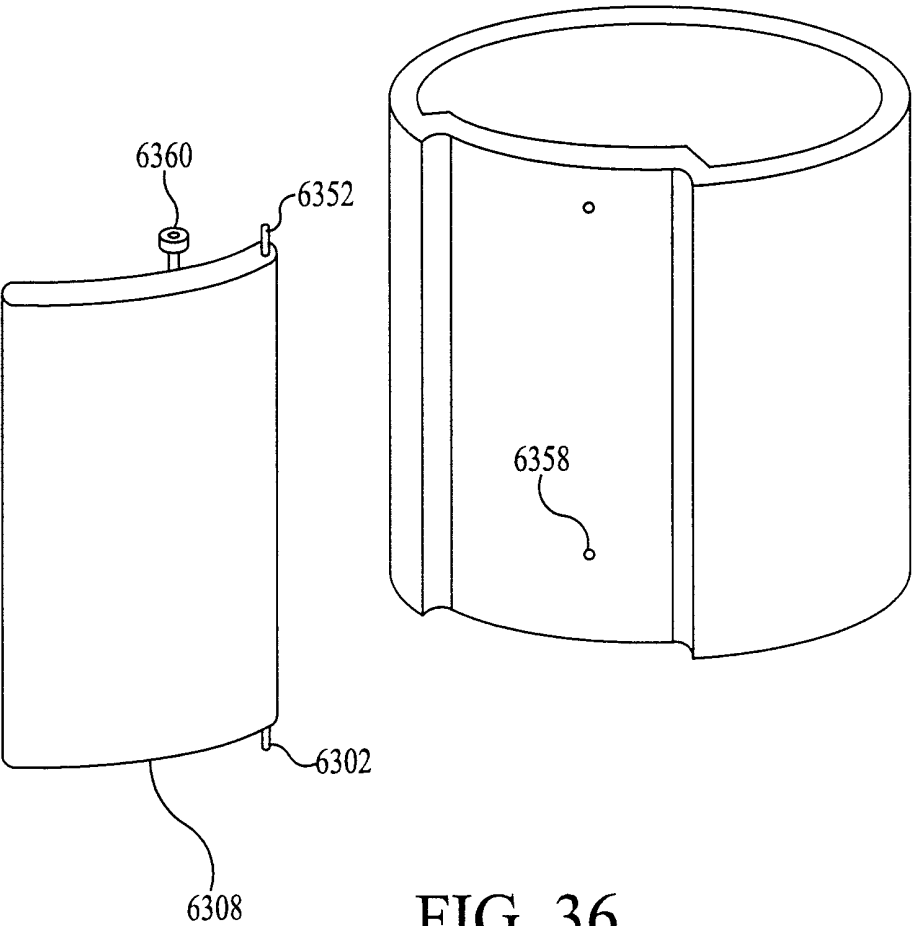


FIG. 36

31/83

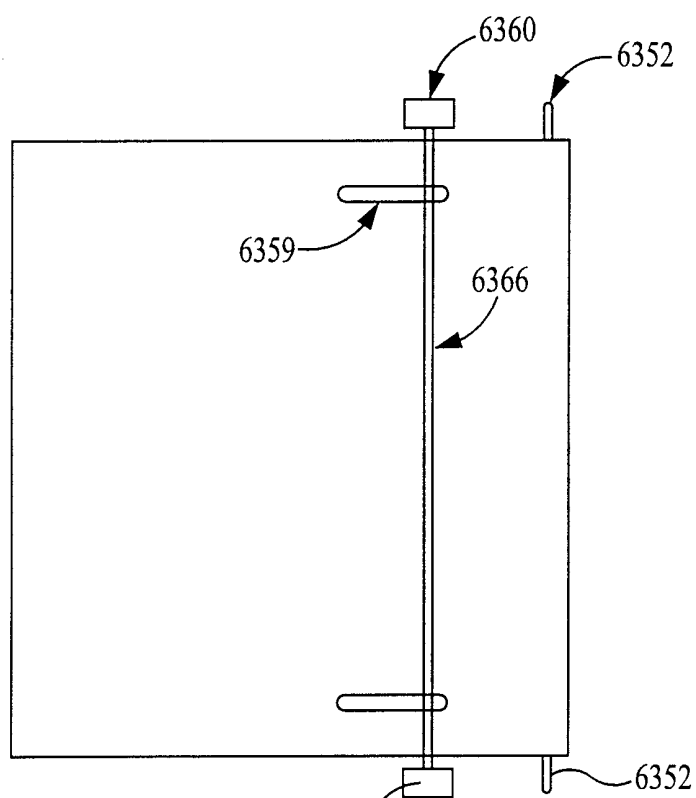


FIG. 37

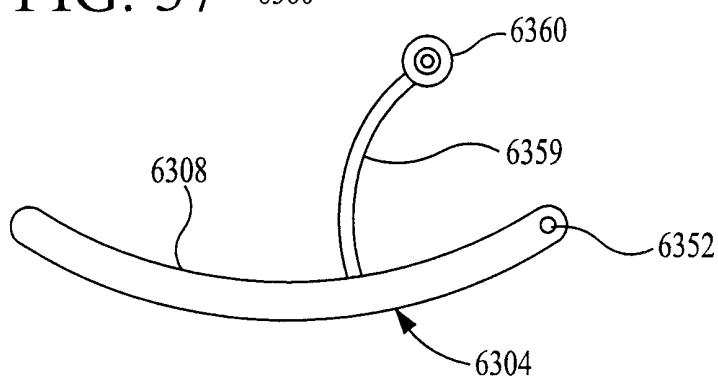


FIG. 38

32/83

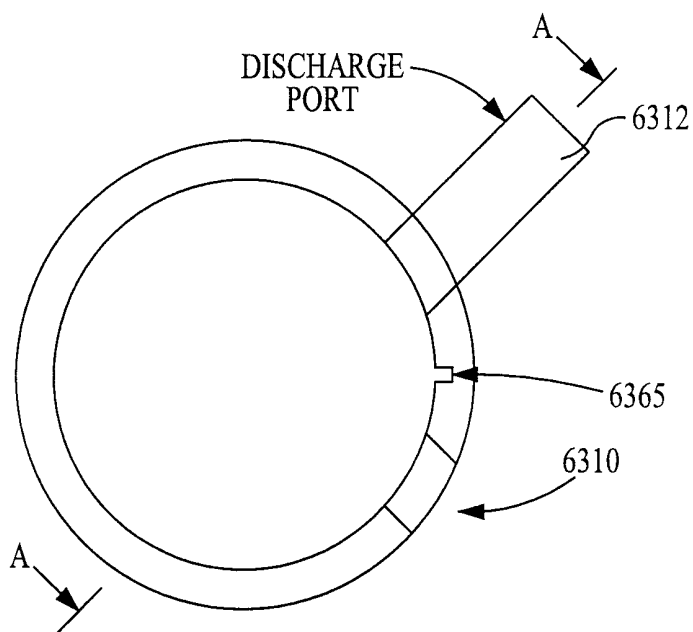


FIG. 39

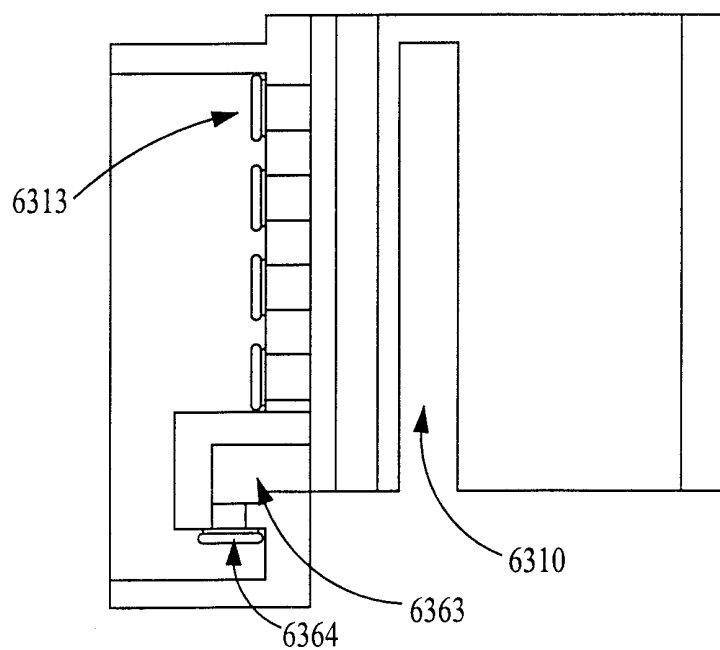


FIG. 40

33/83

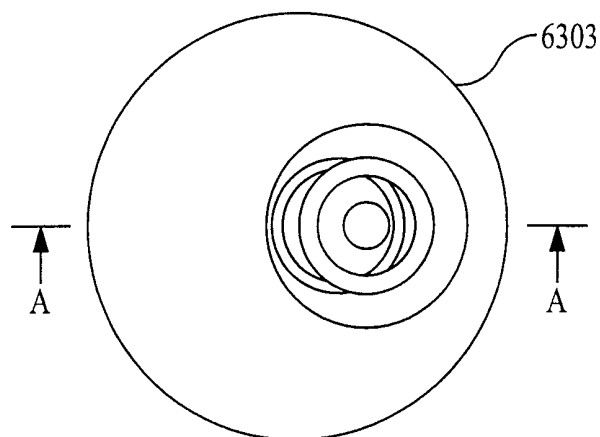


FIG. 41a

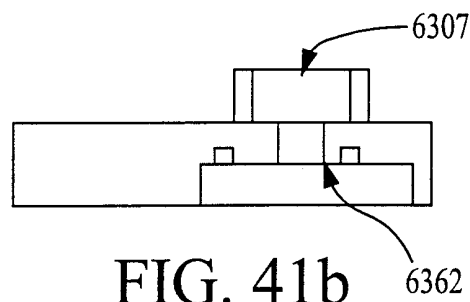


FIG. 41b

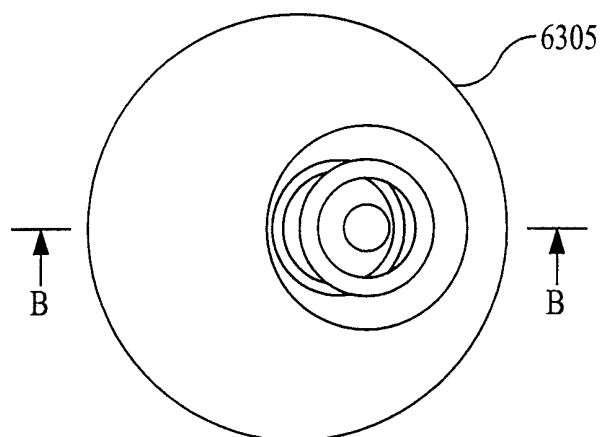


FIG. 42a


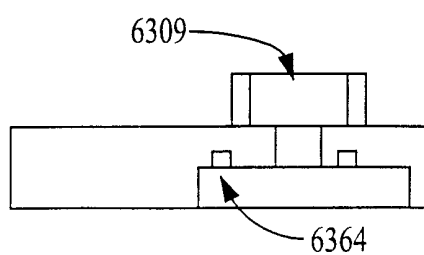


FIG. 42b

COMPRESSION 

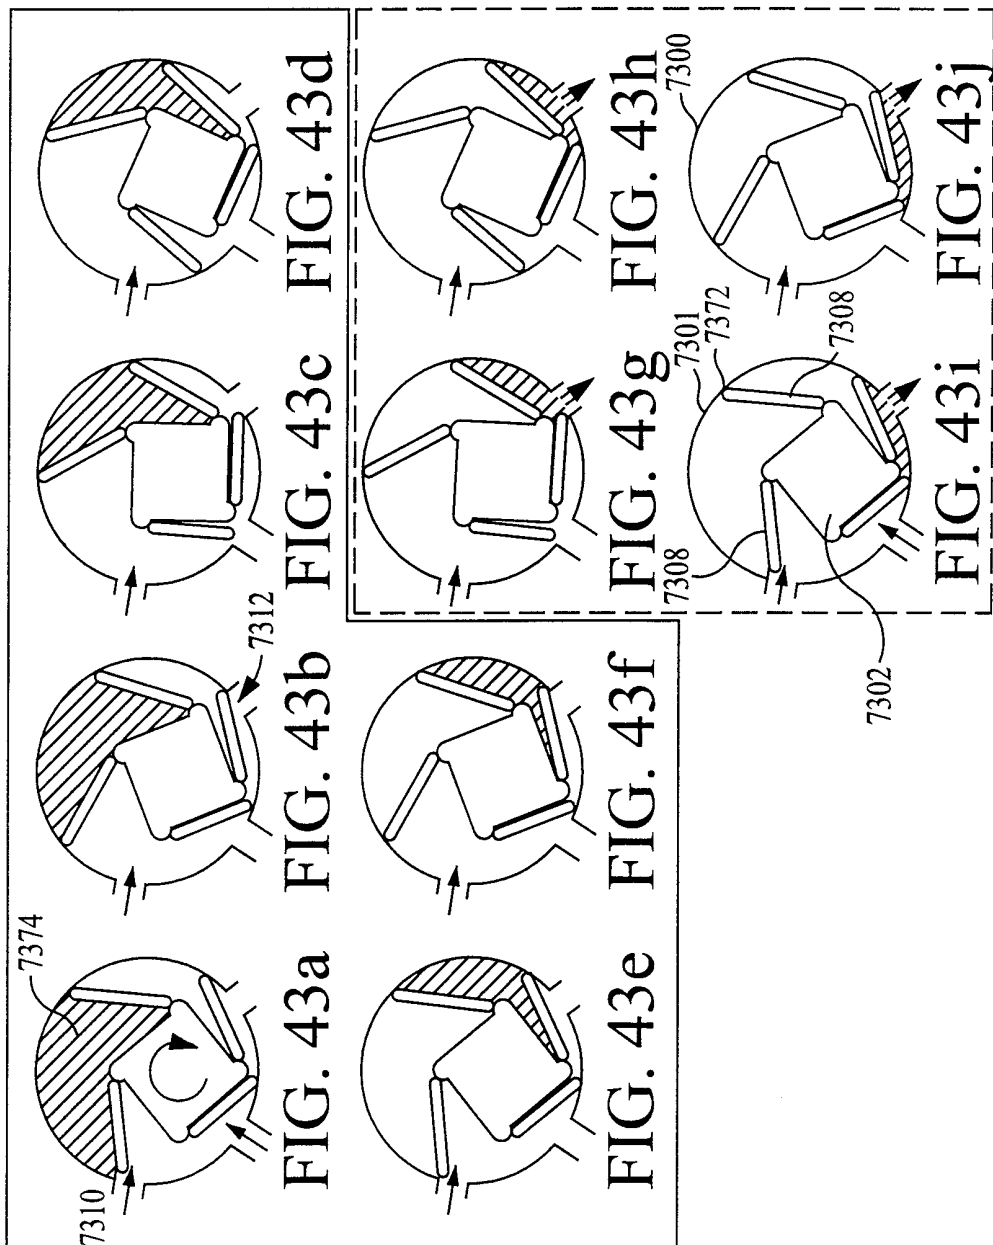

DISCHARGE 

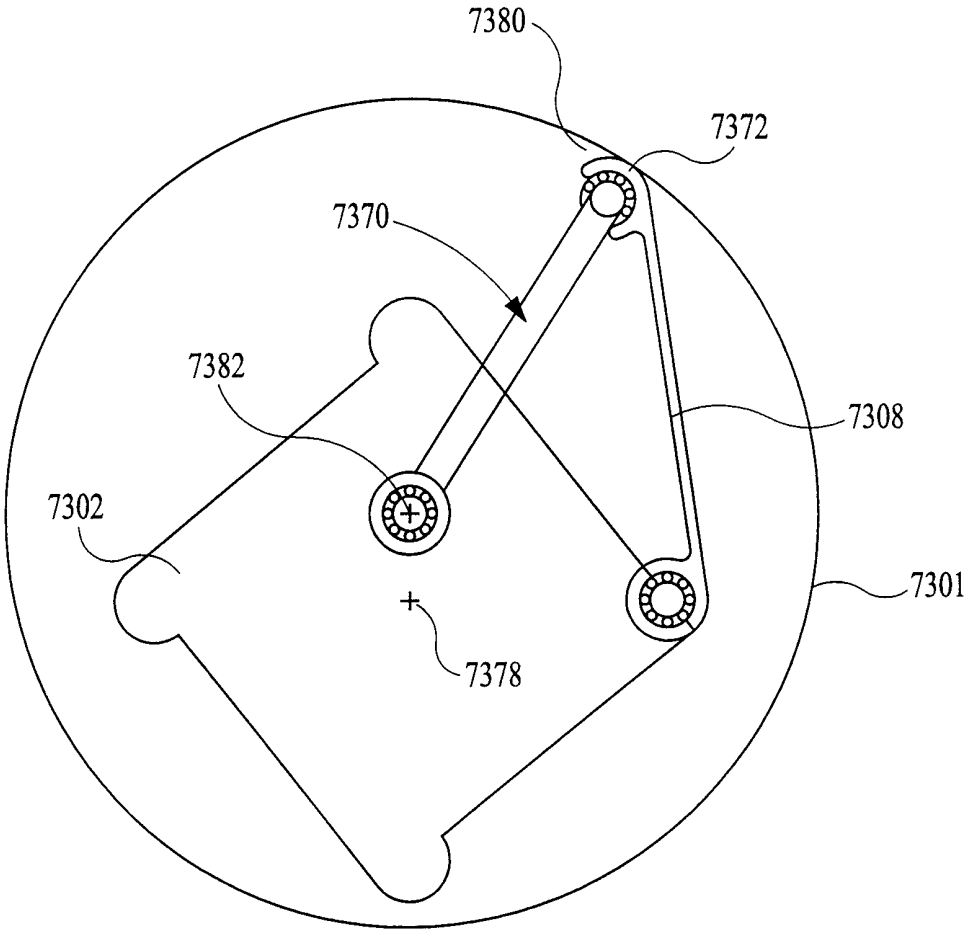


FIG. 44

36/83

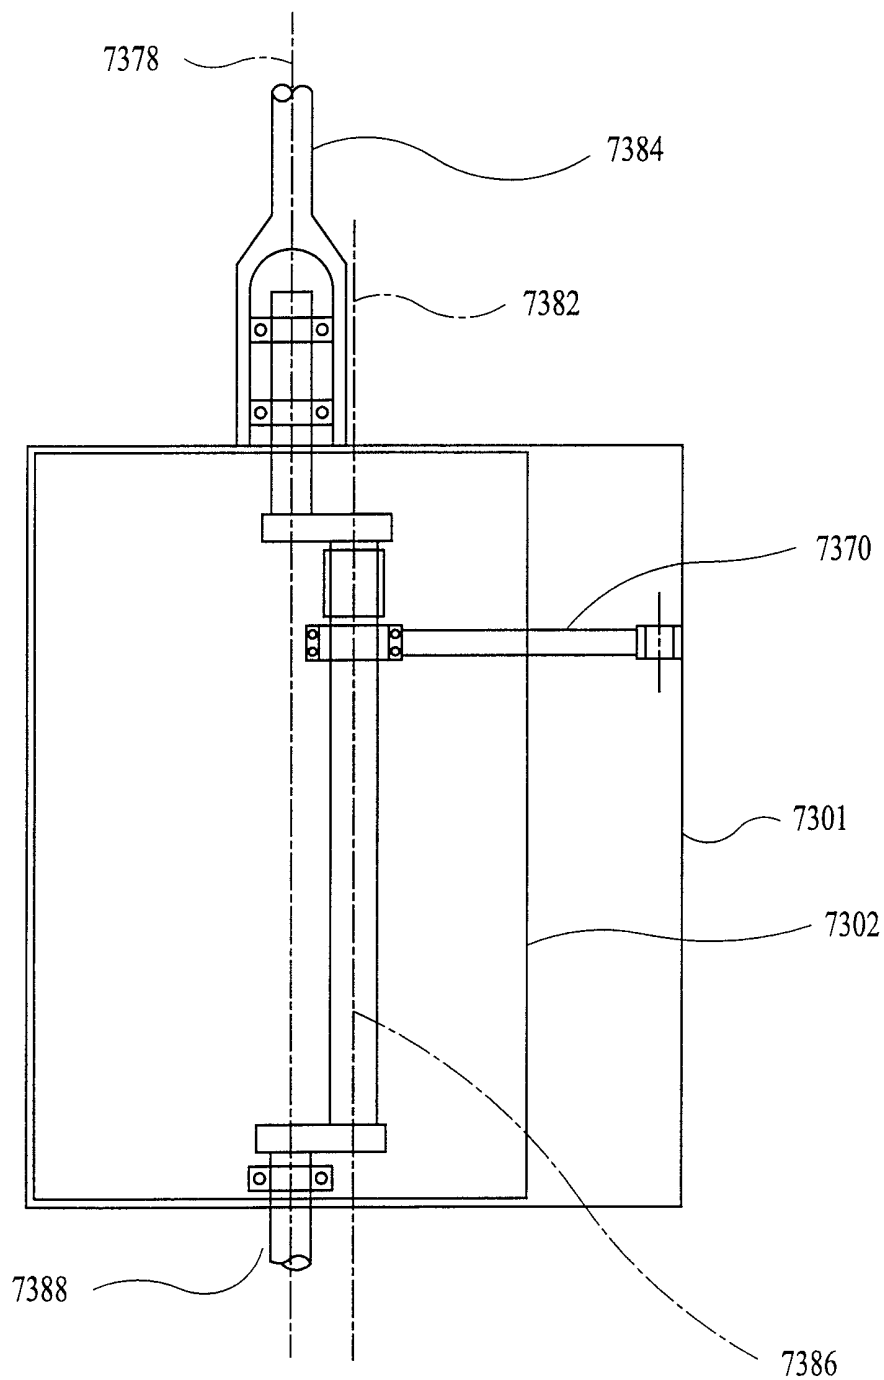


FIG. 45

37/83

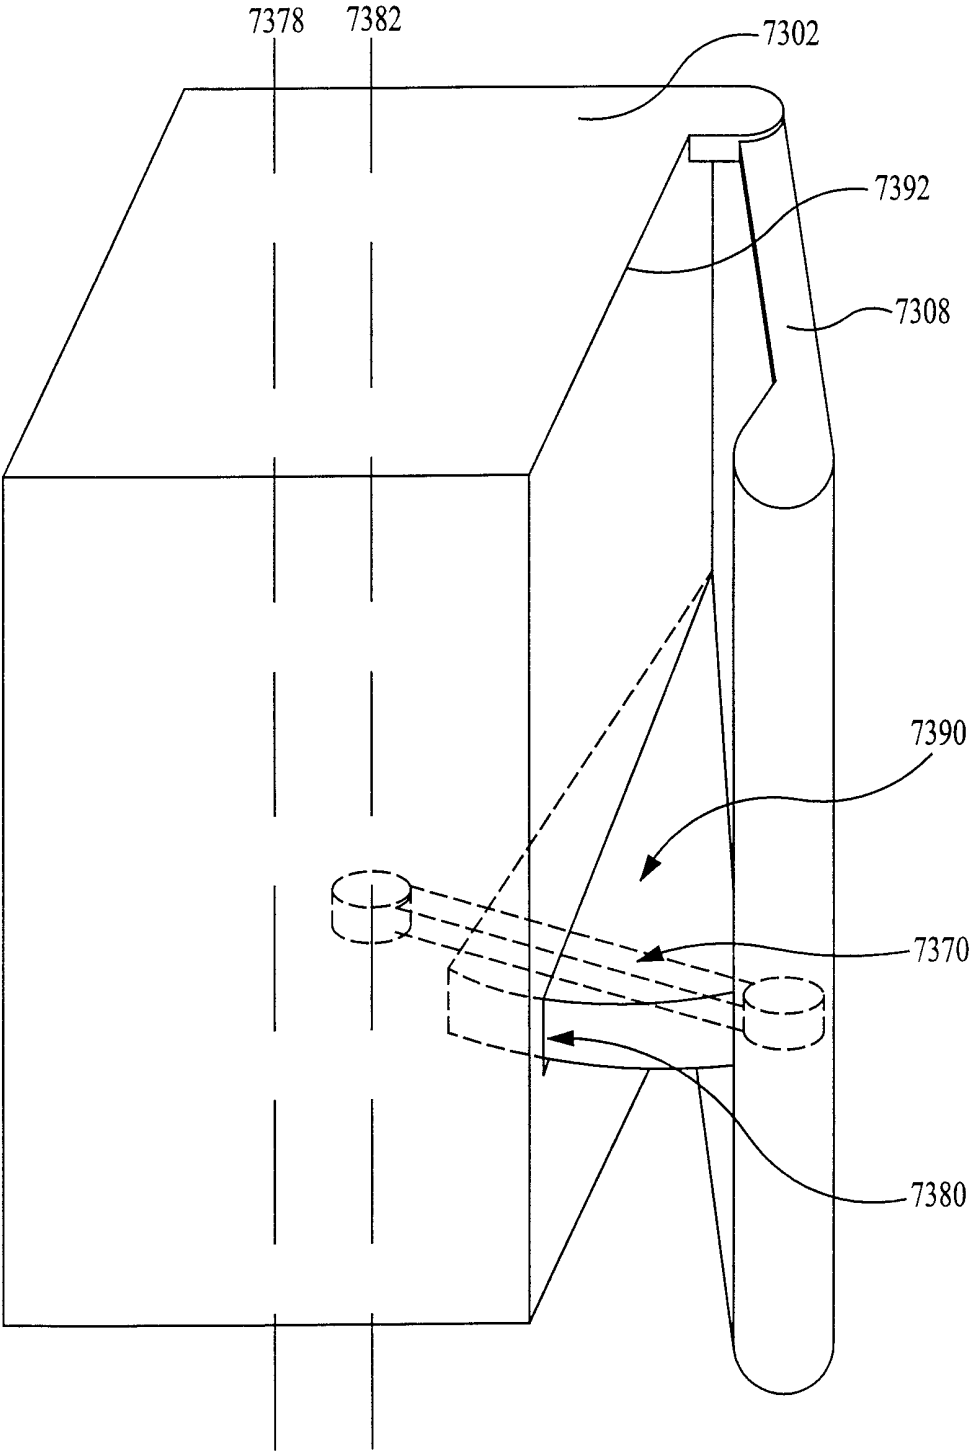


FIG. 46

38/83

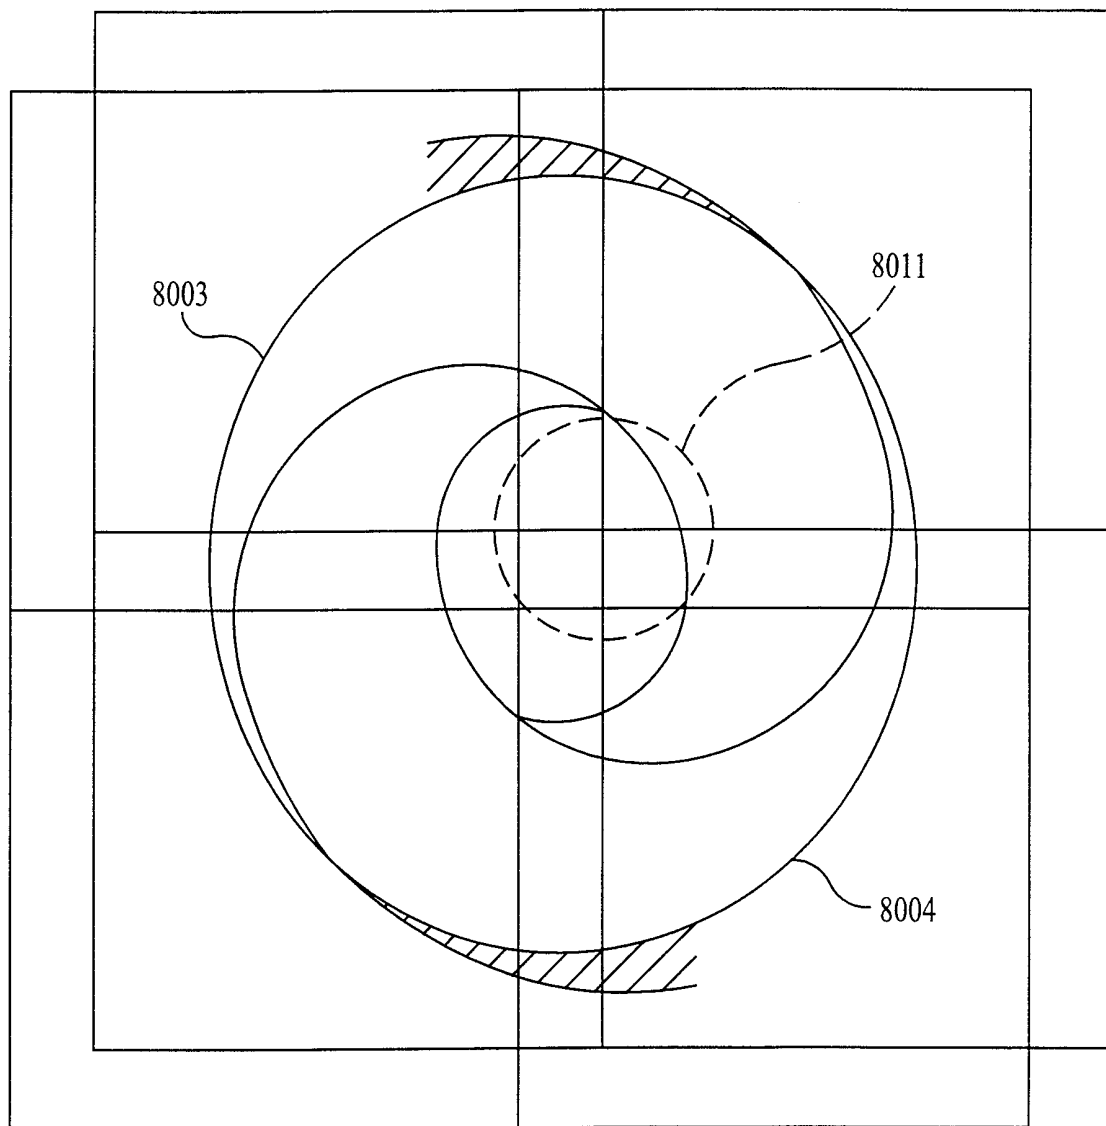


FIG. 47a

39/83

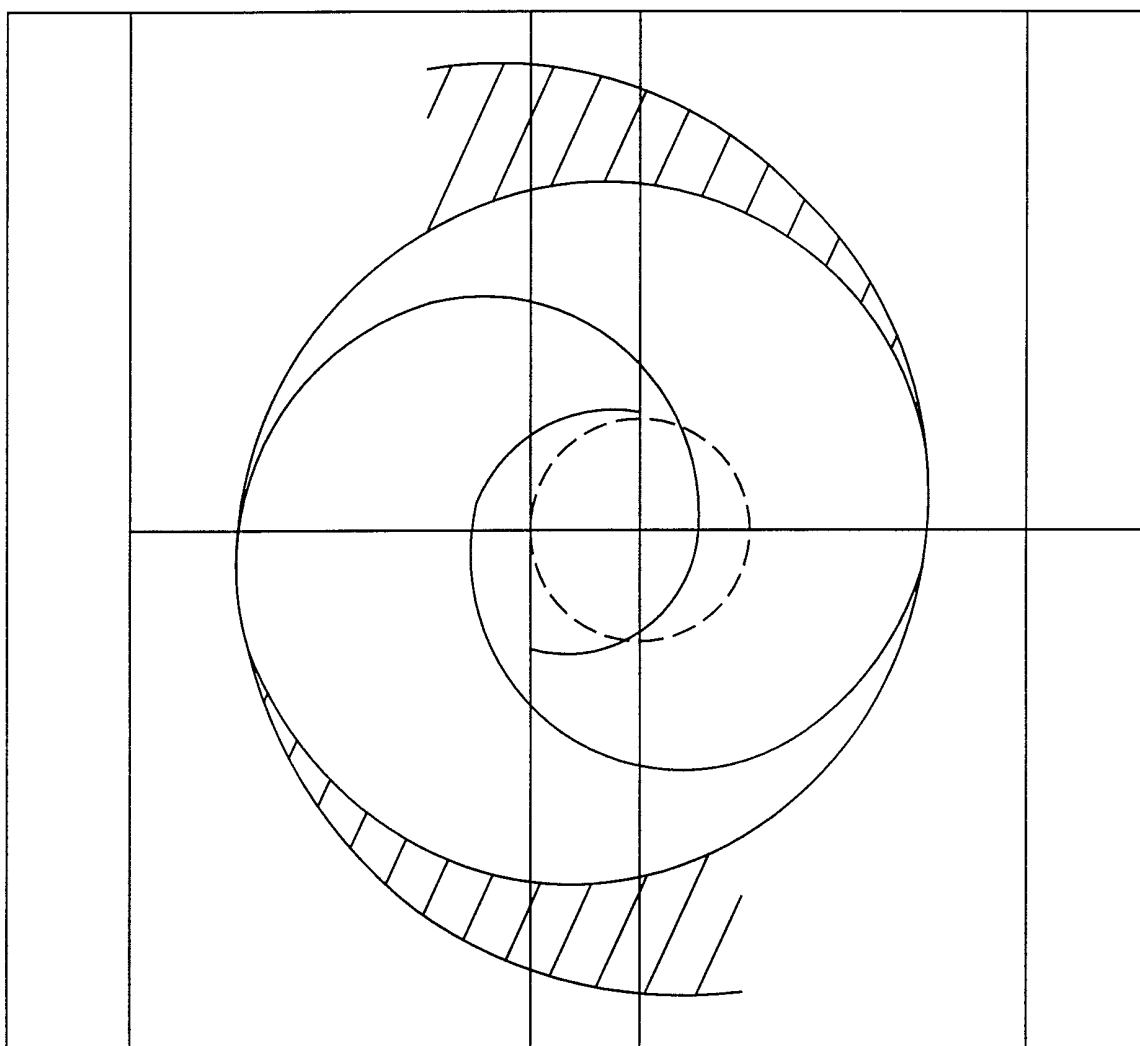


FIG. 47b

40/83

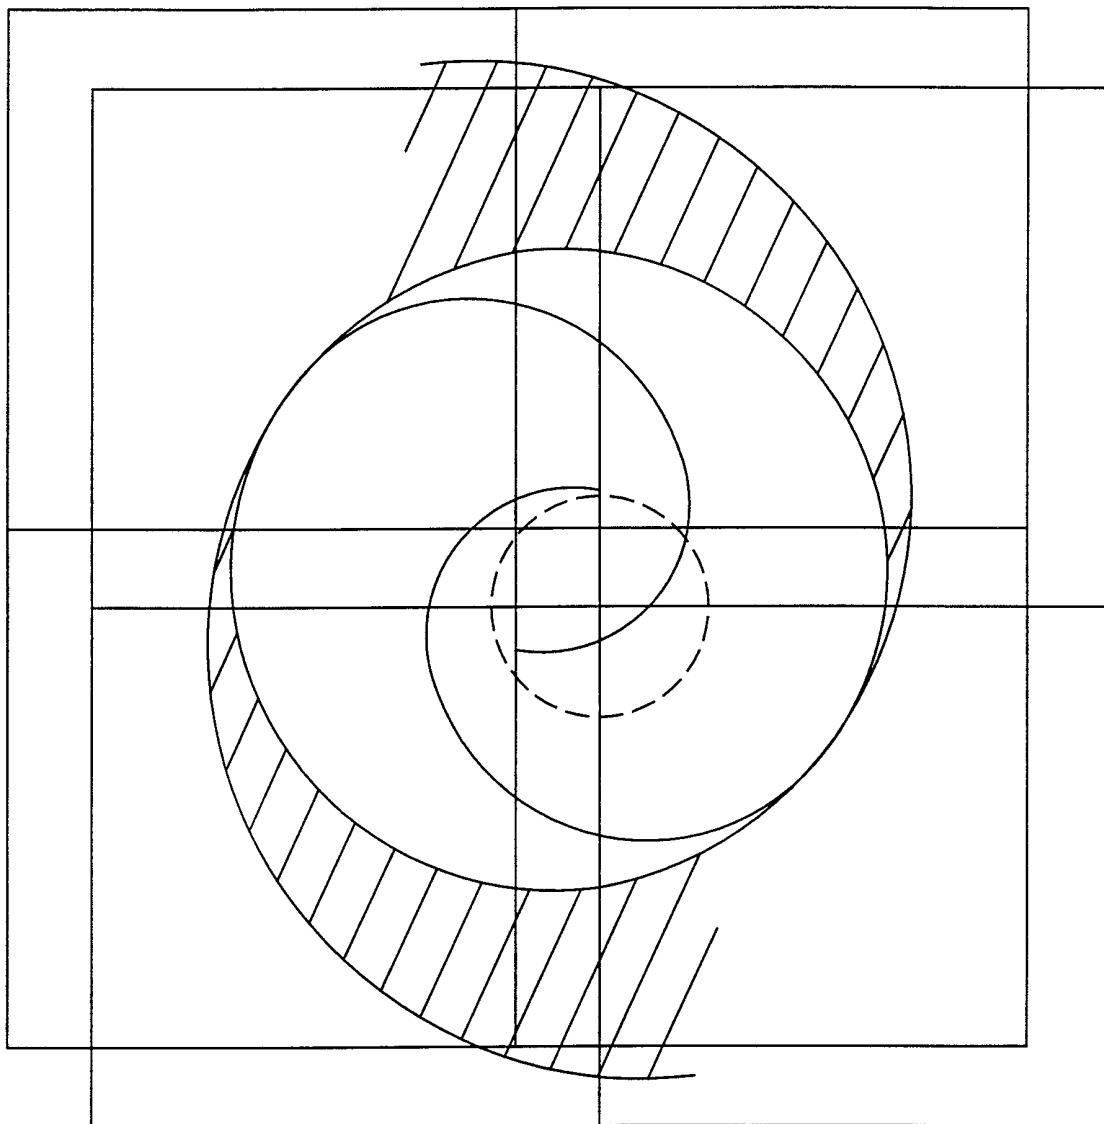


FIG. 47c

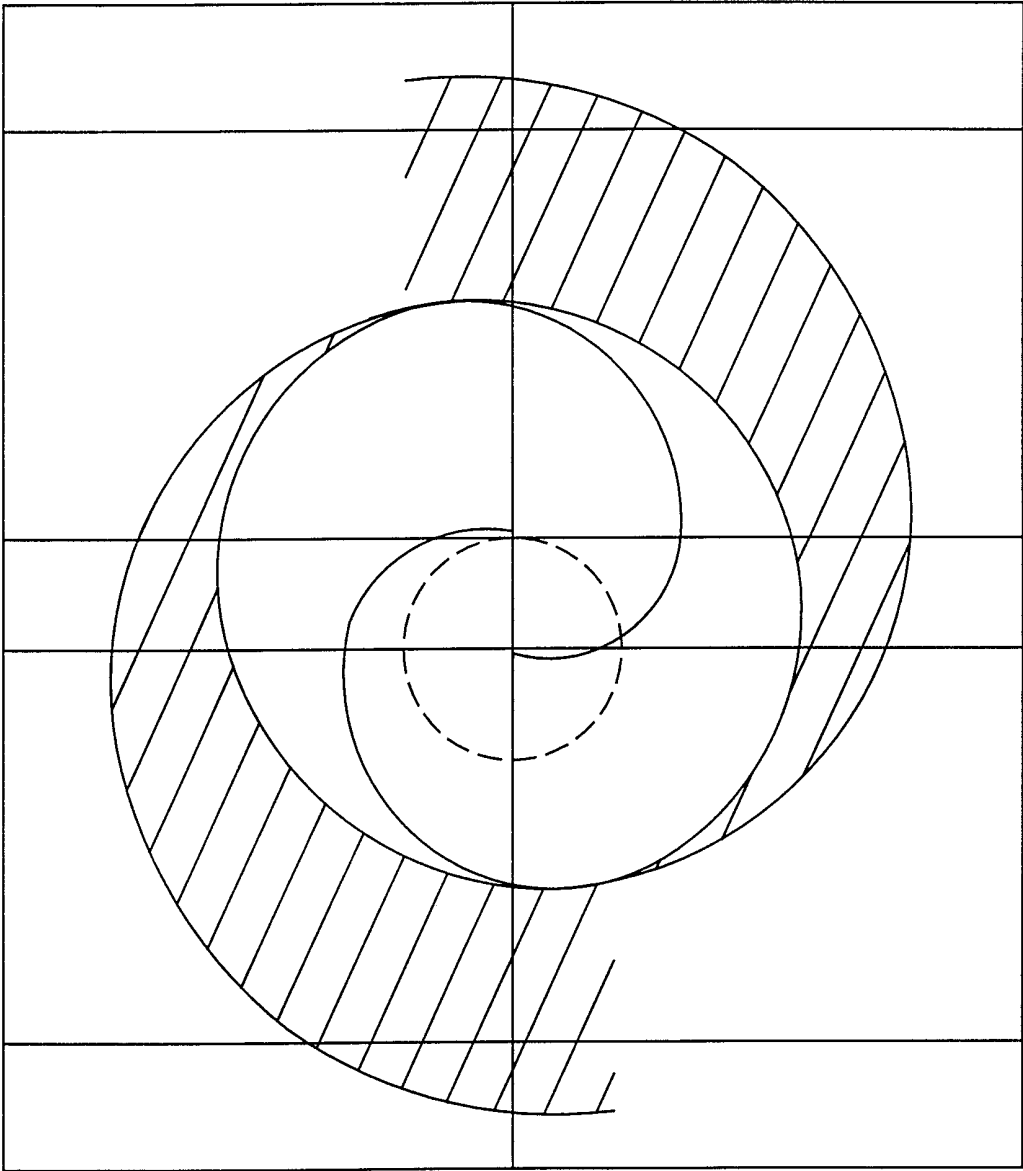


FIG. 47d

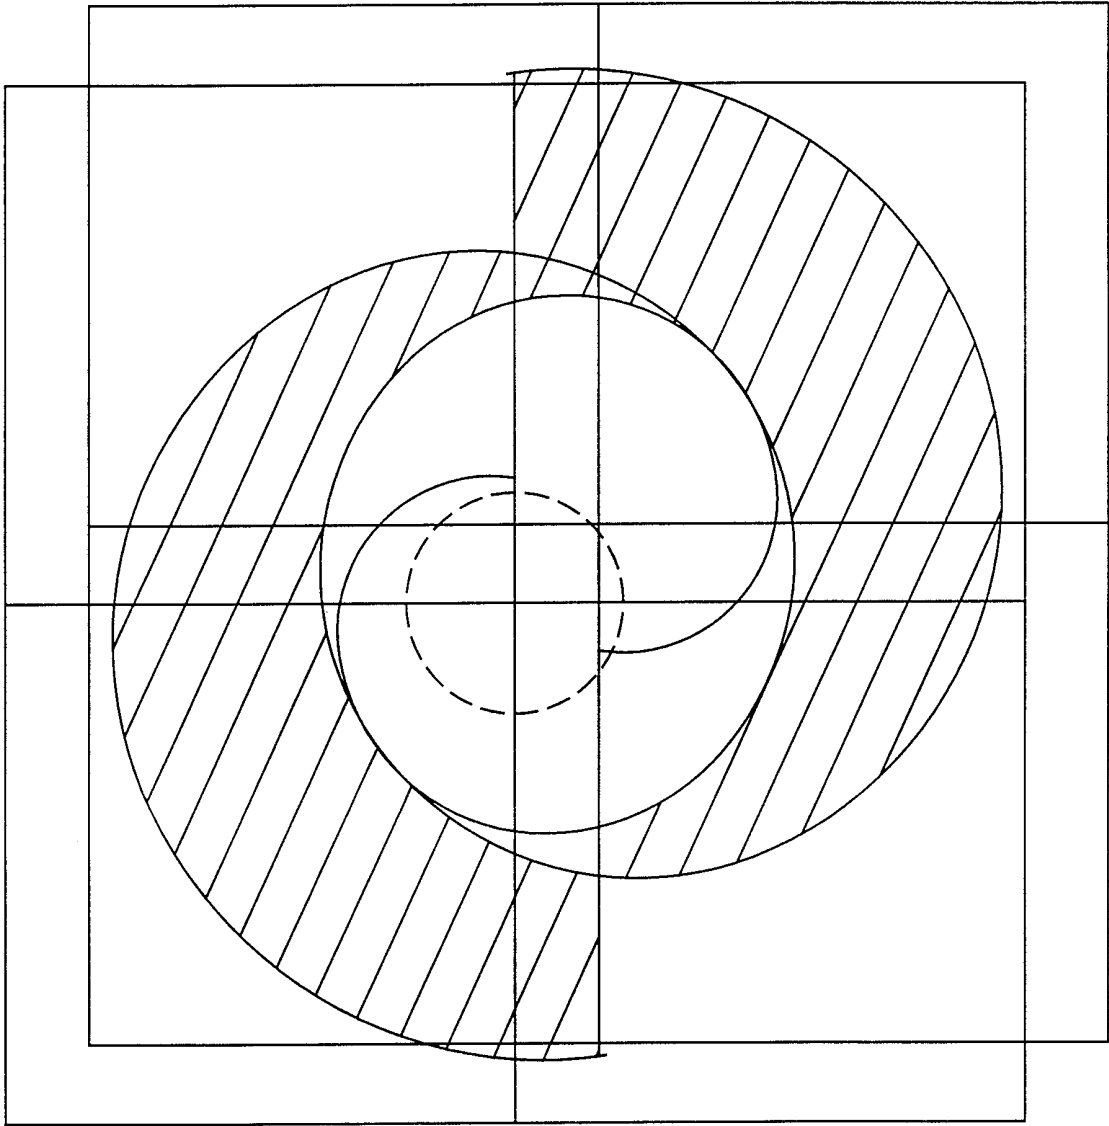


FIG. 47e

43/83

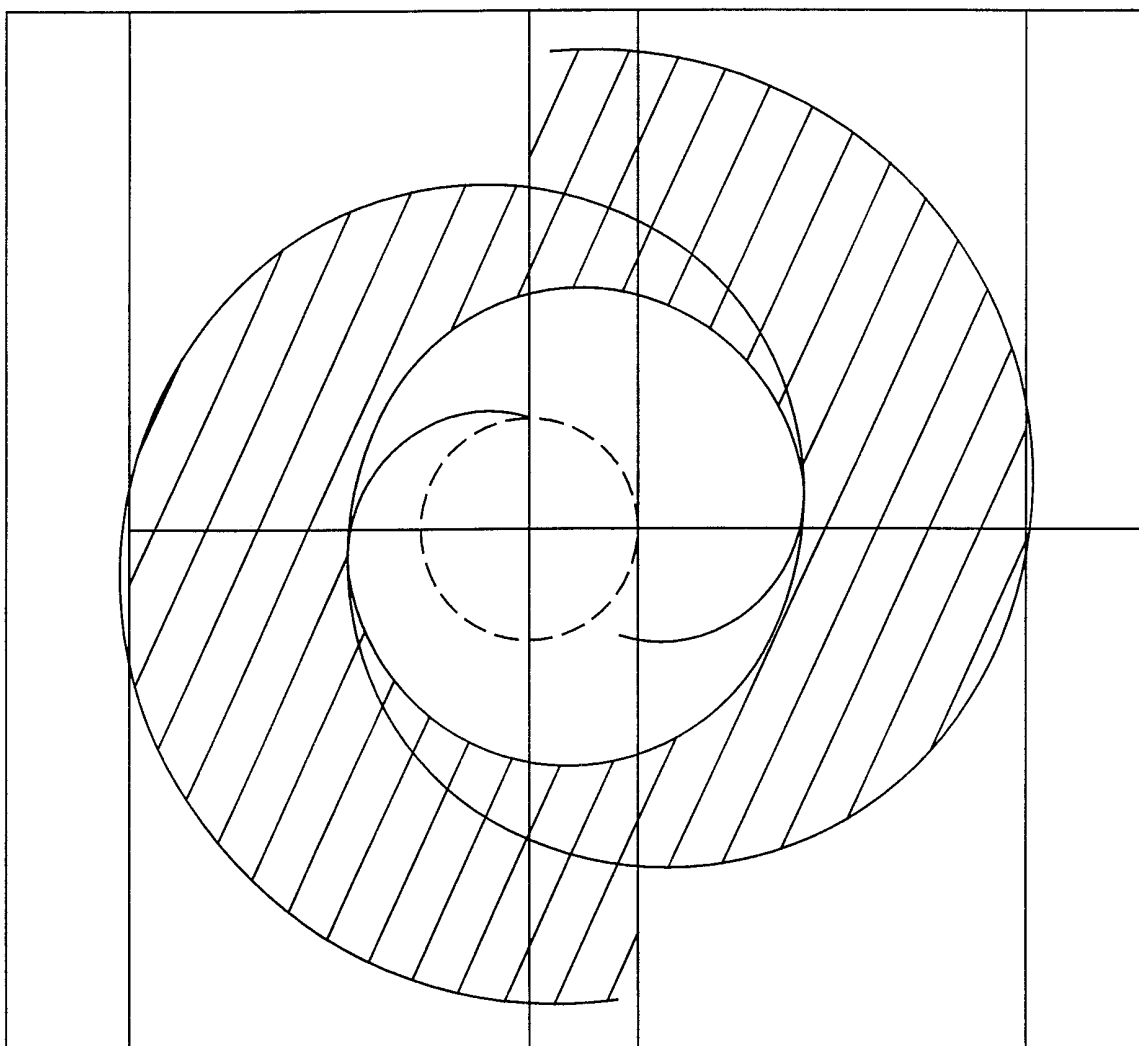


FIG. 47f

44/83

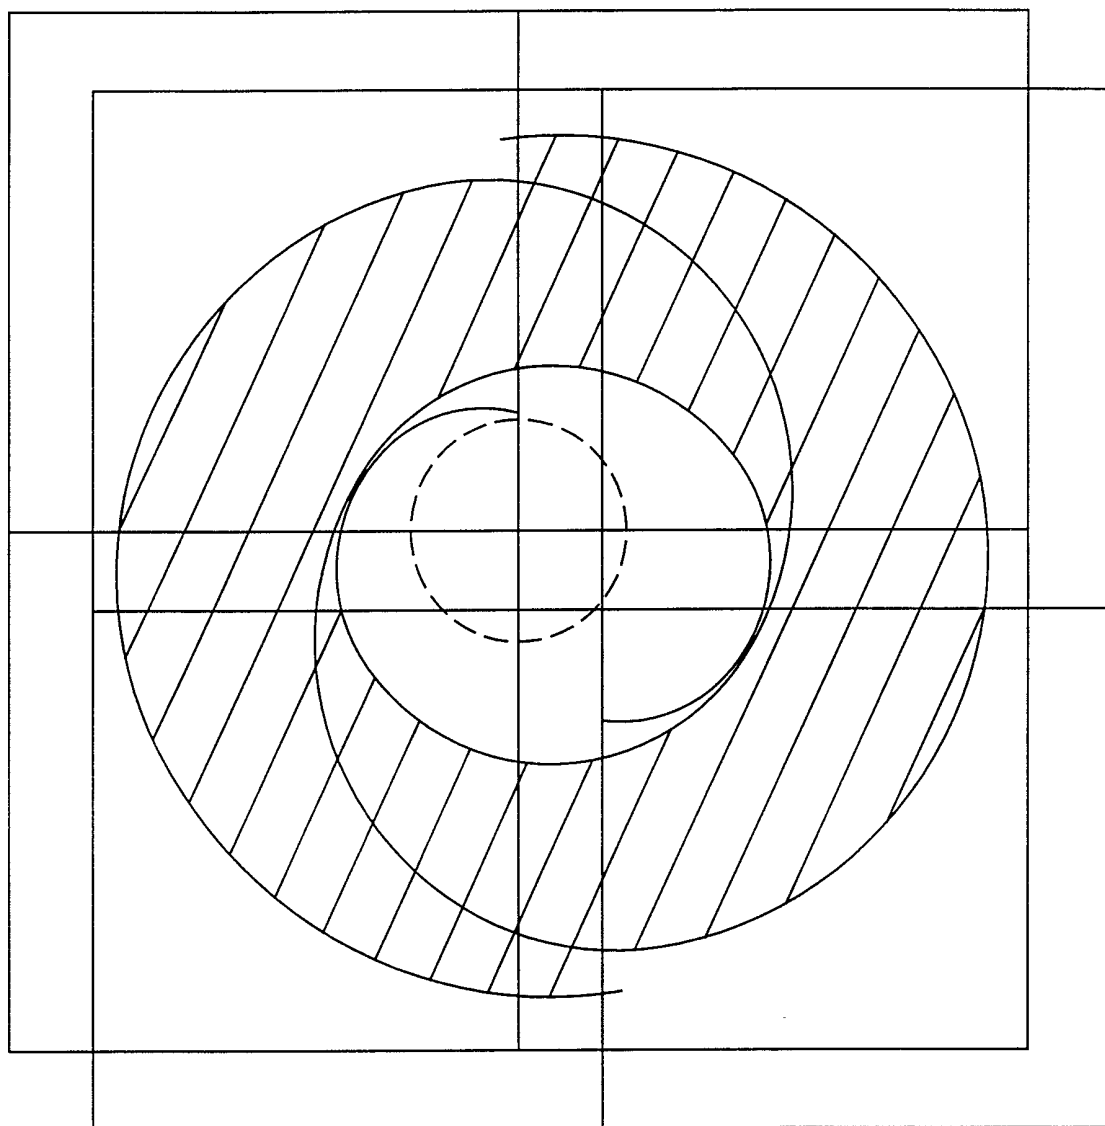


FIG. 47g

45/83

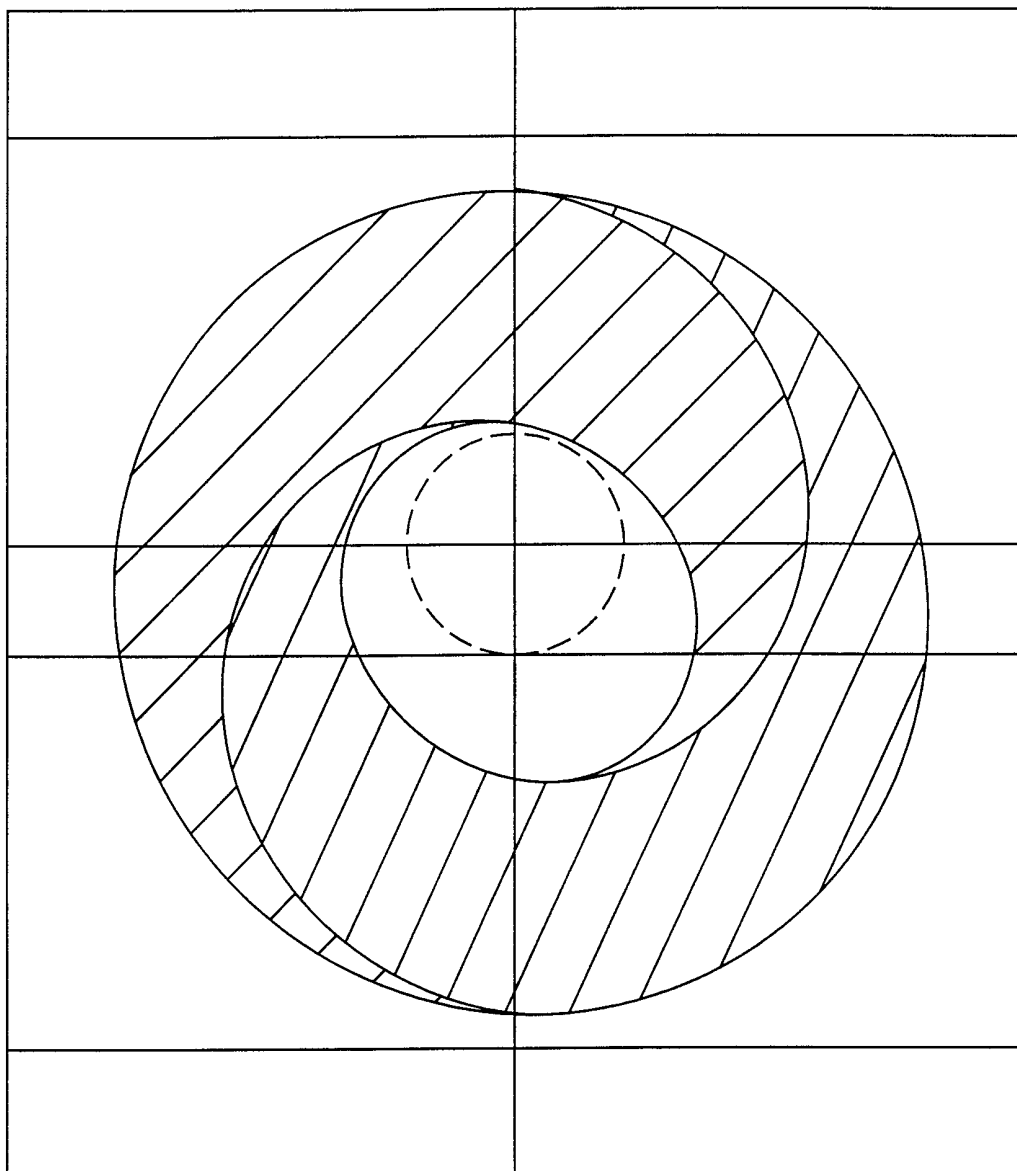


FIG. 47h

46/83

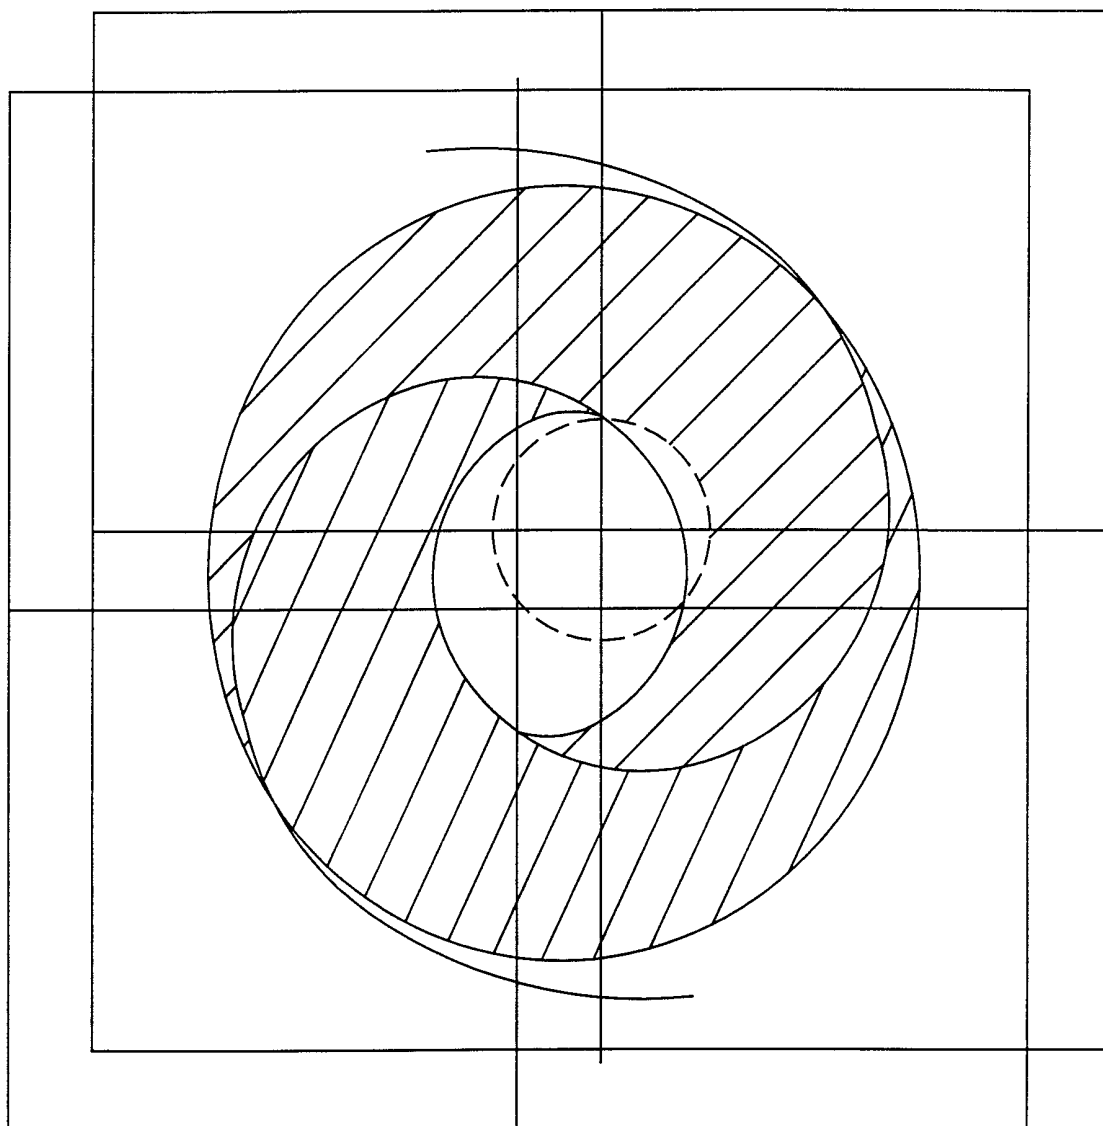


FIG. 47i

47/83

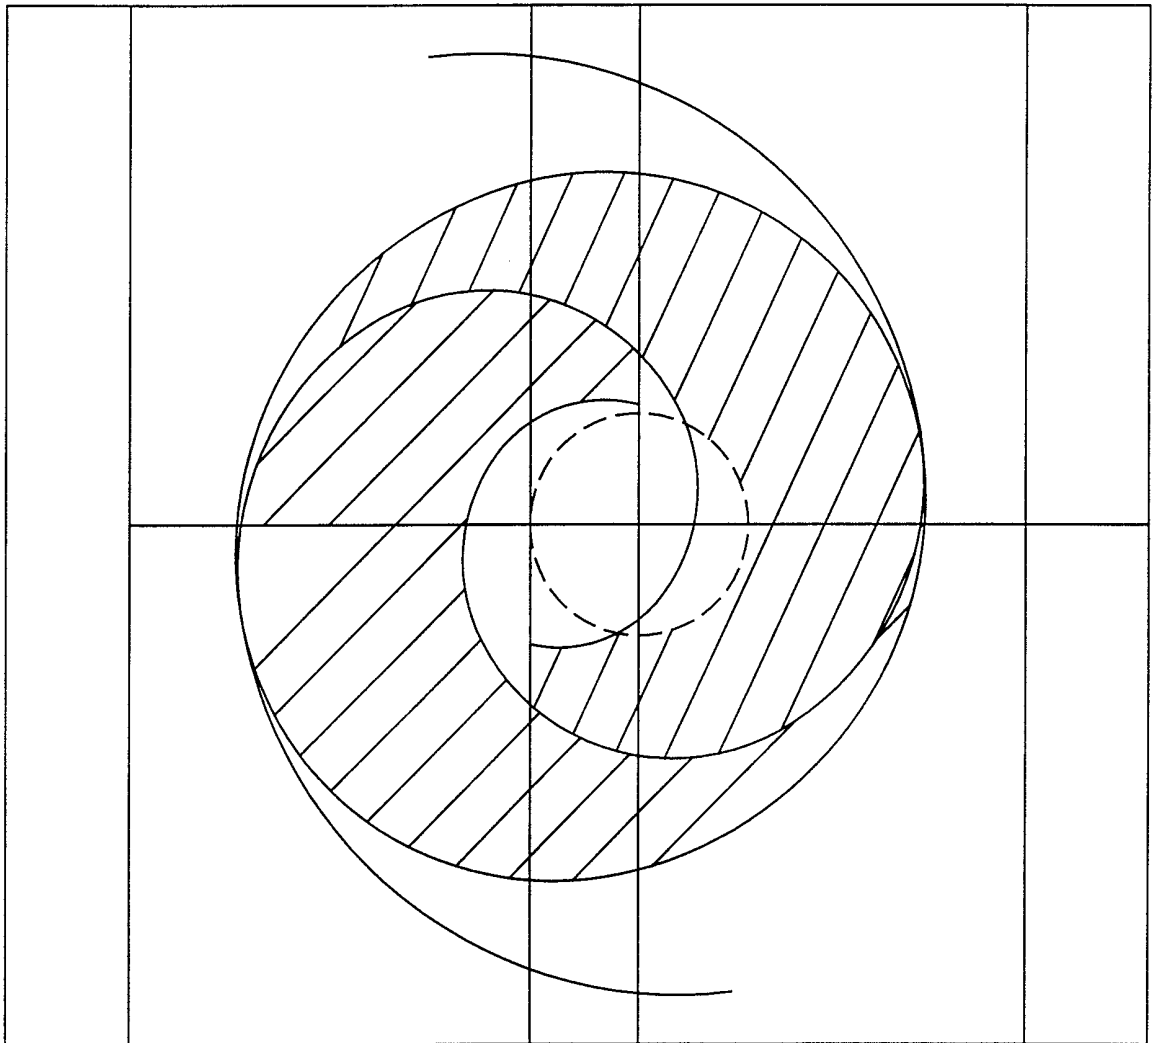


FIG. 47j

48/83

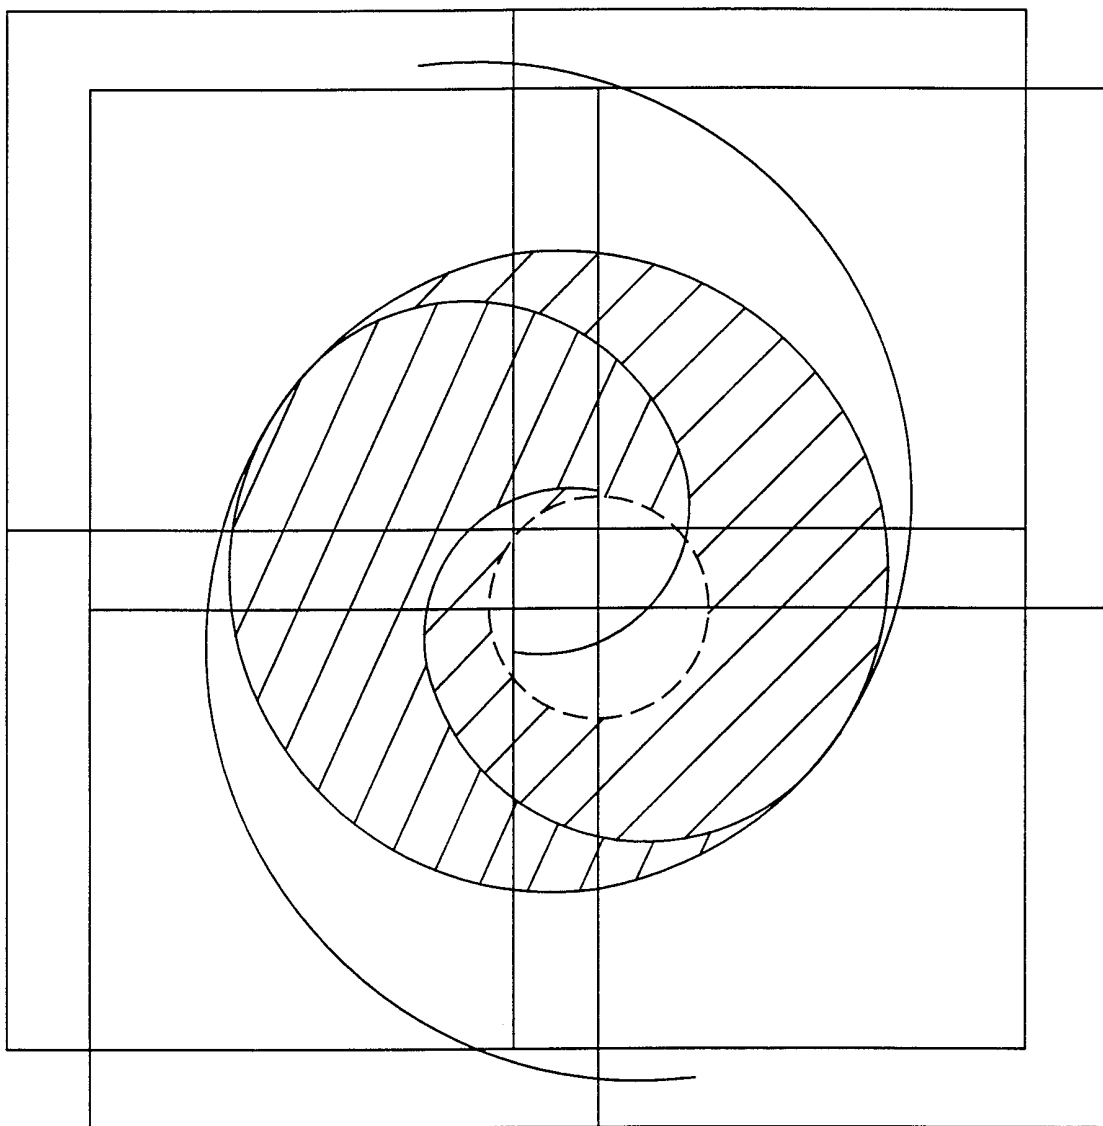


FIG. 47k

49/83

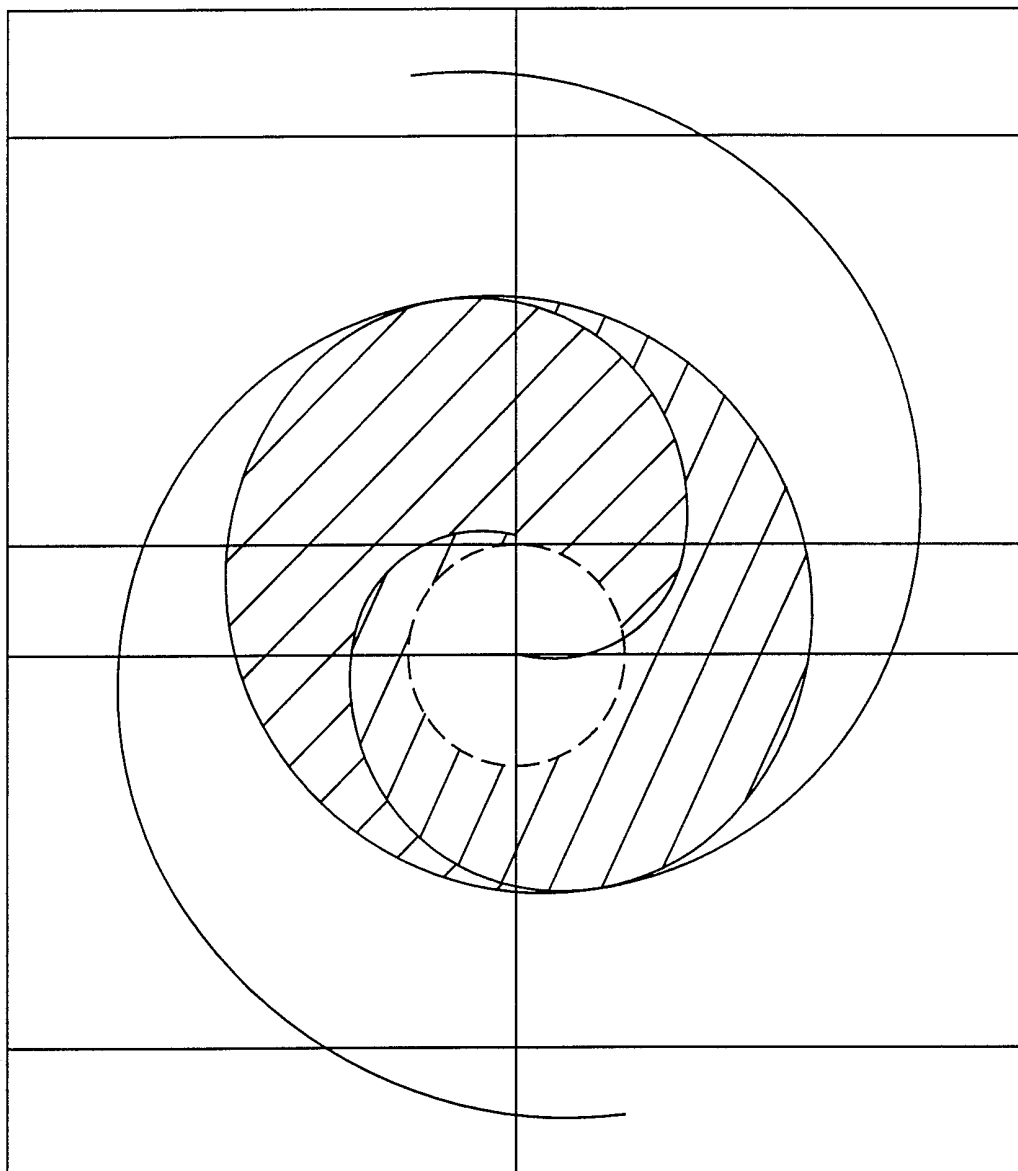


FIG. 471

50/83

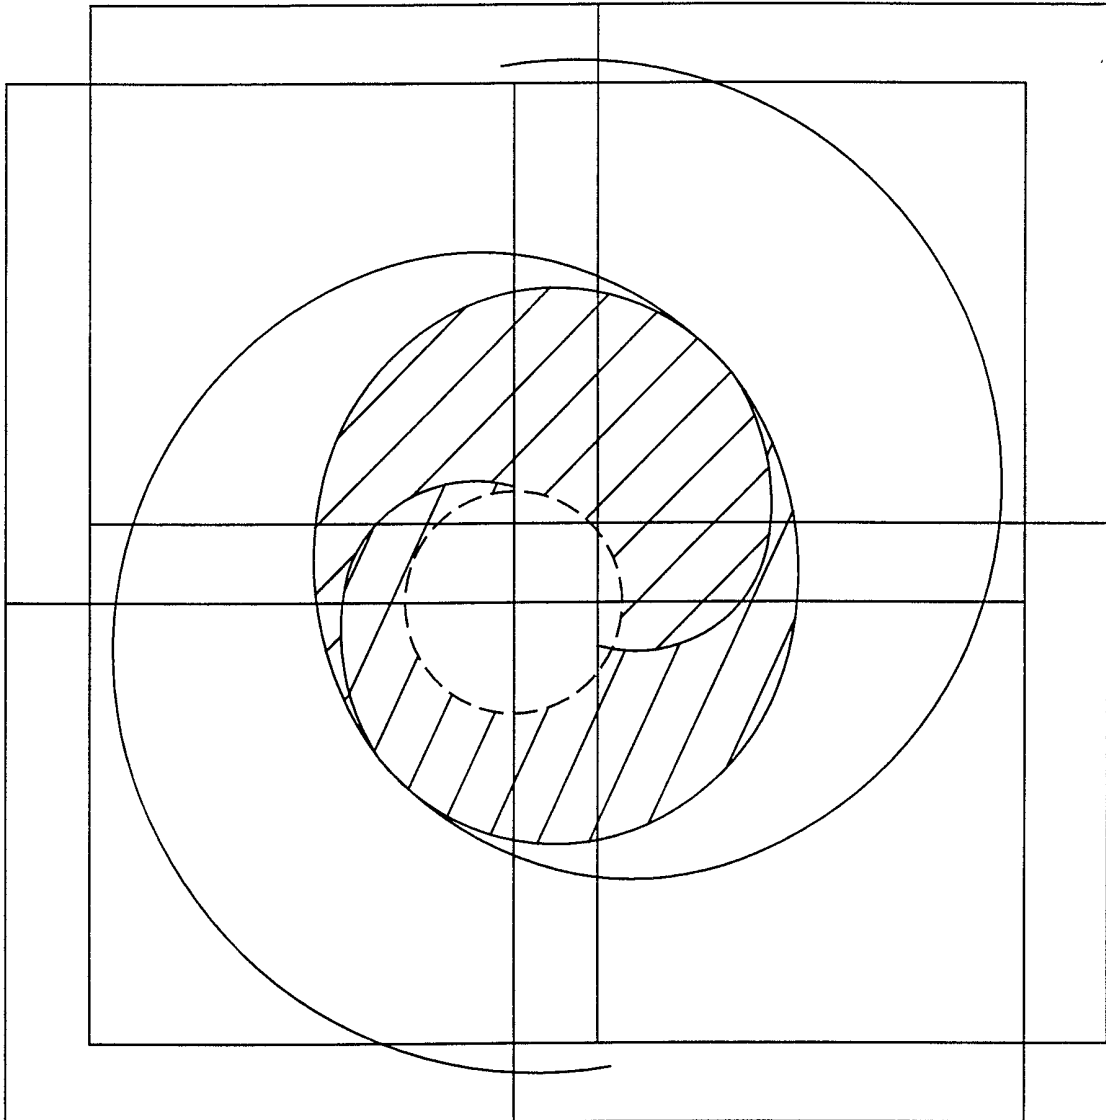


FIG. 47m

51/83

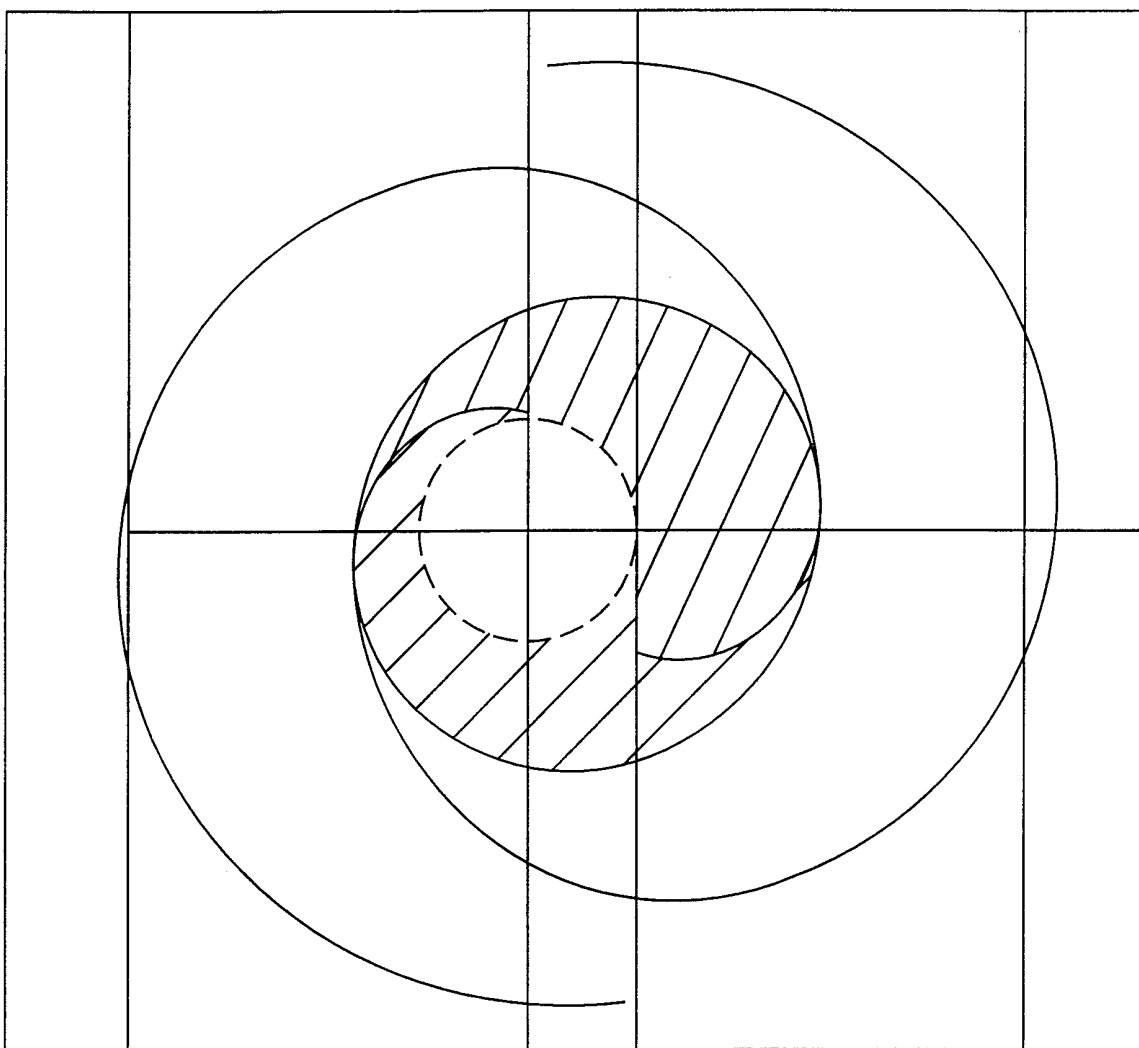


FIG. 47n

52/83

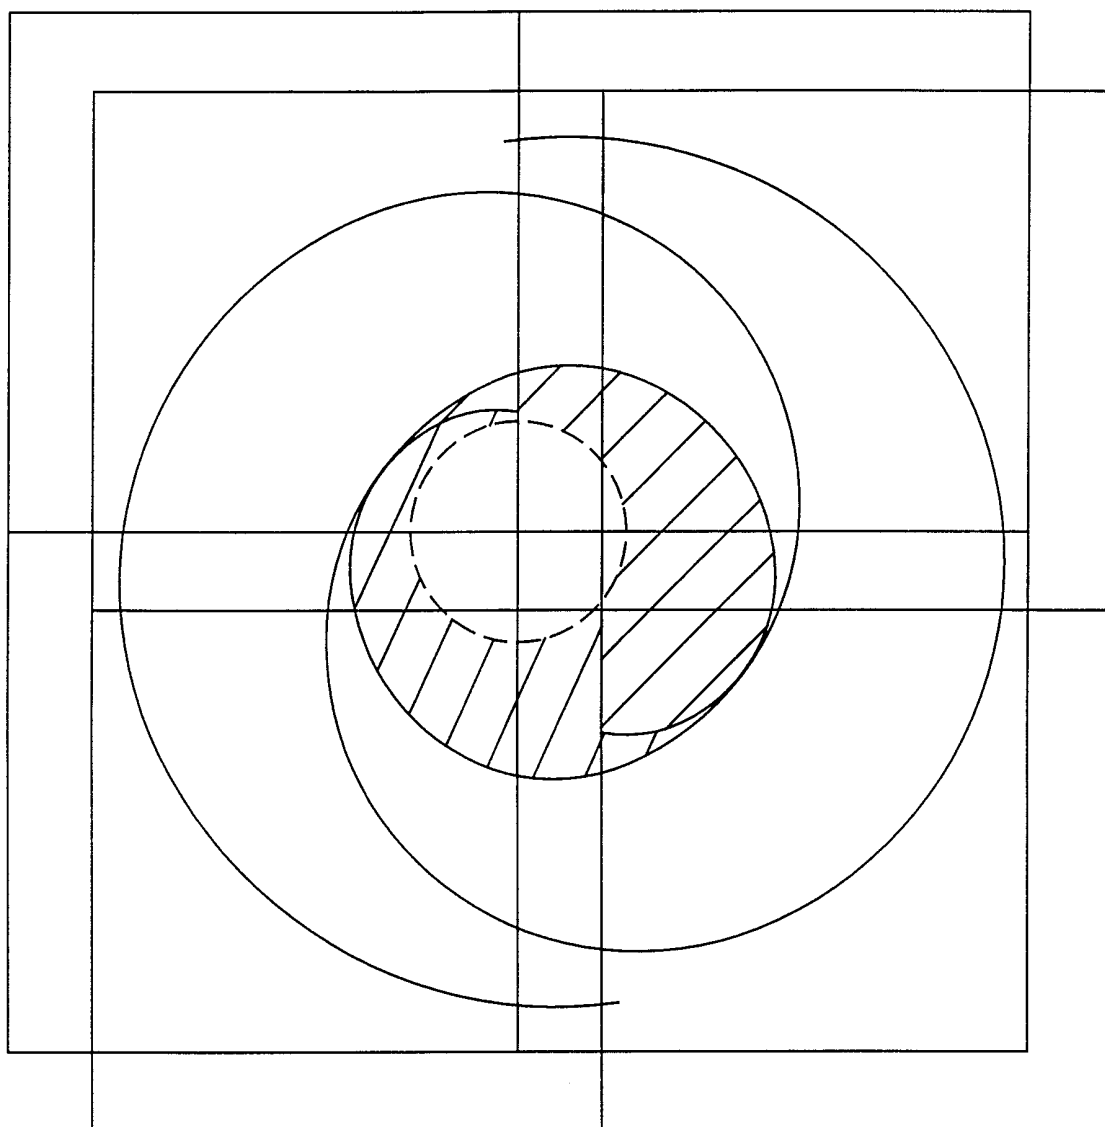


FIG. 47o

53/83

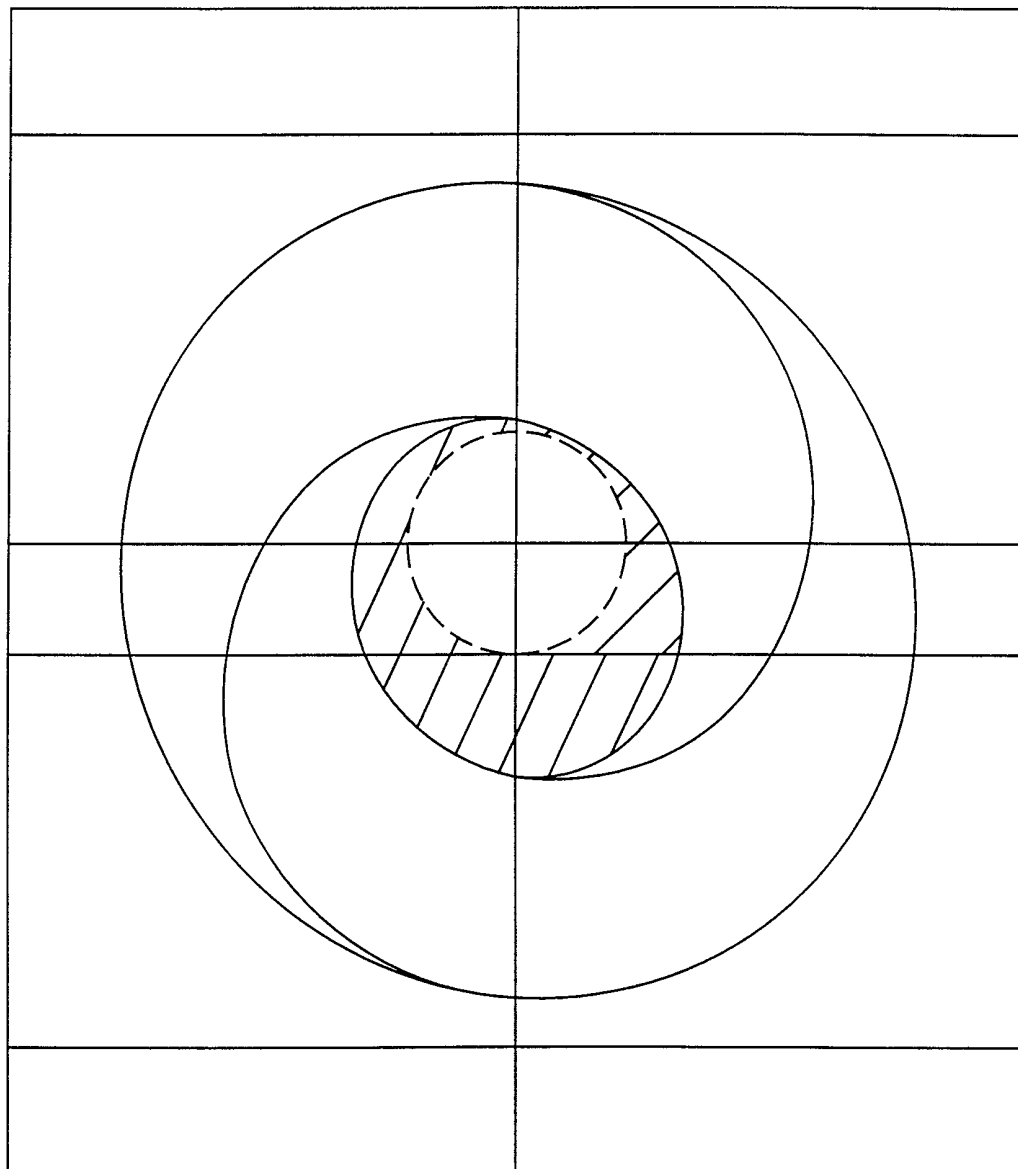


FIG. 47p

54/83


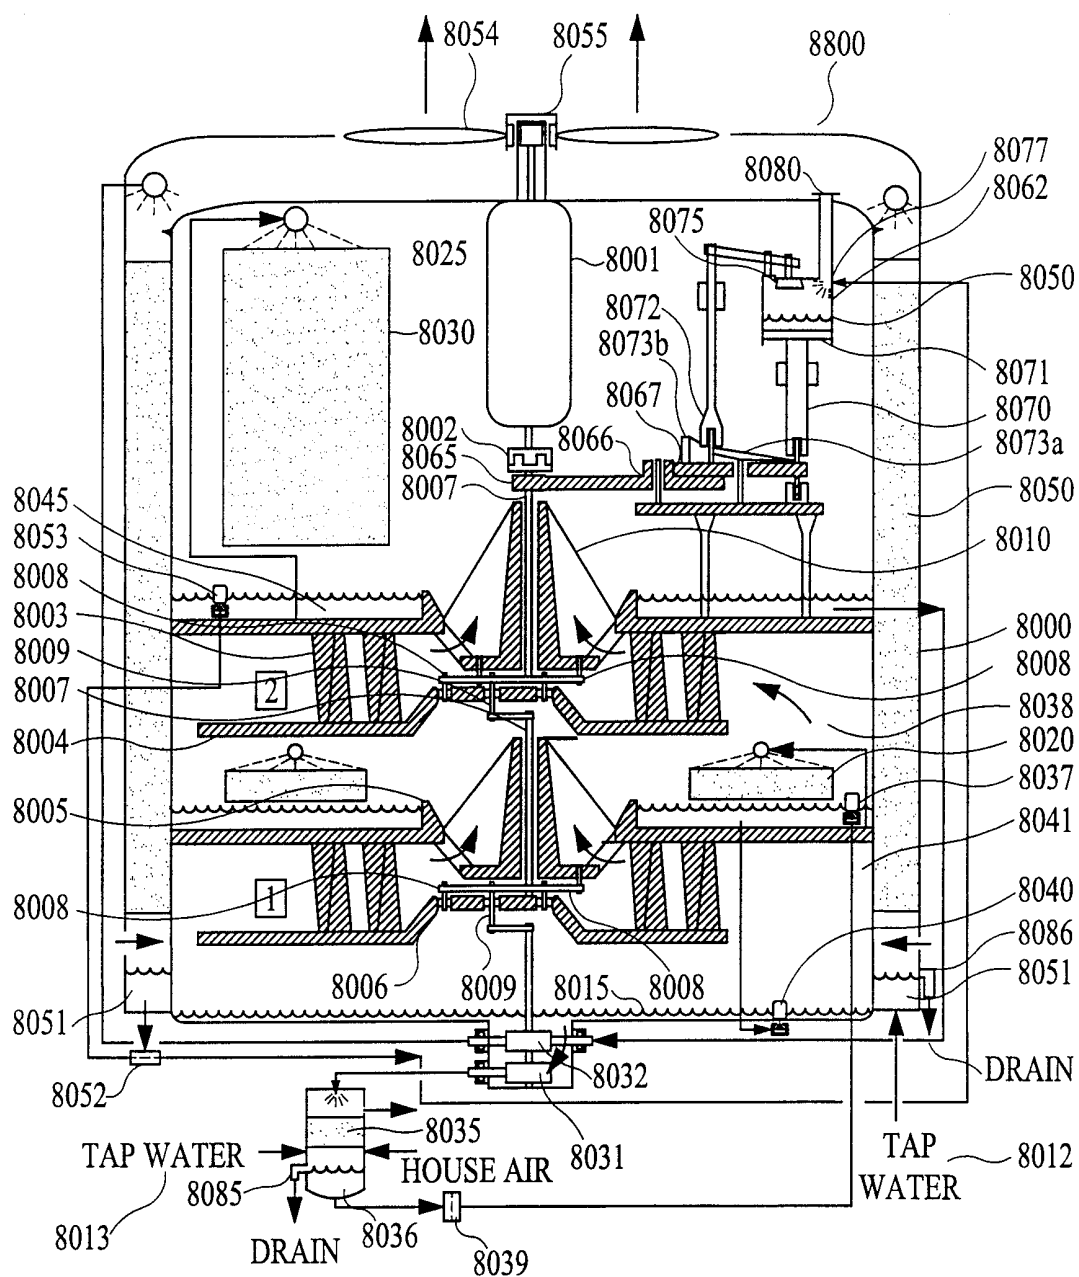


FIG.48

55/83

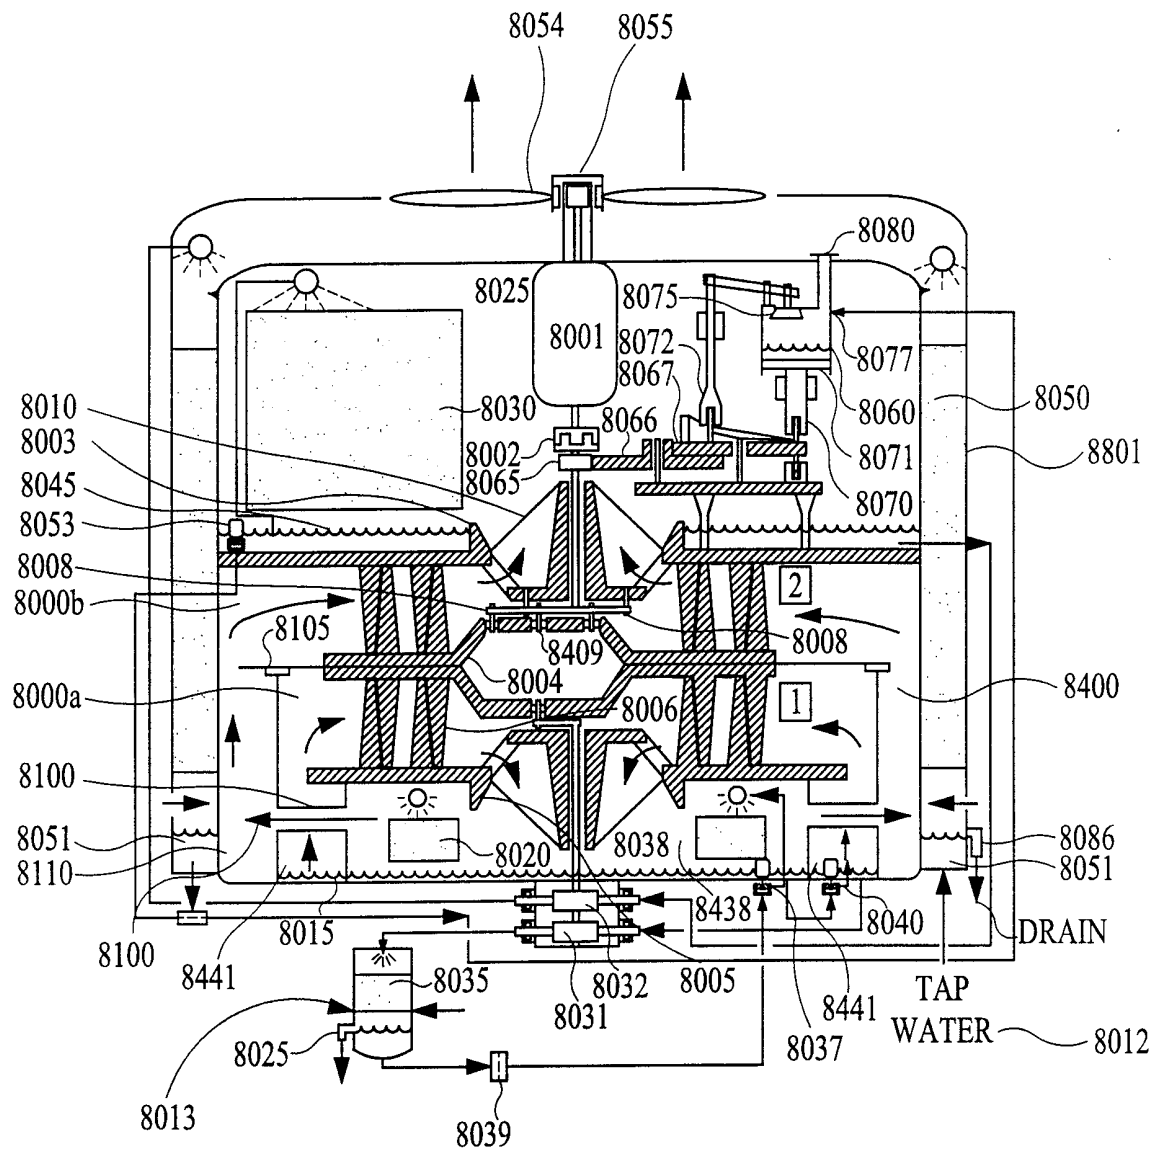

56/83

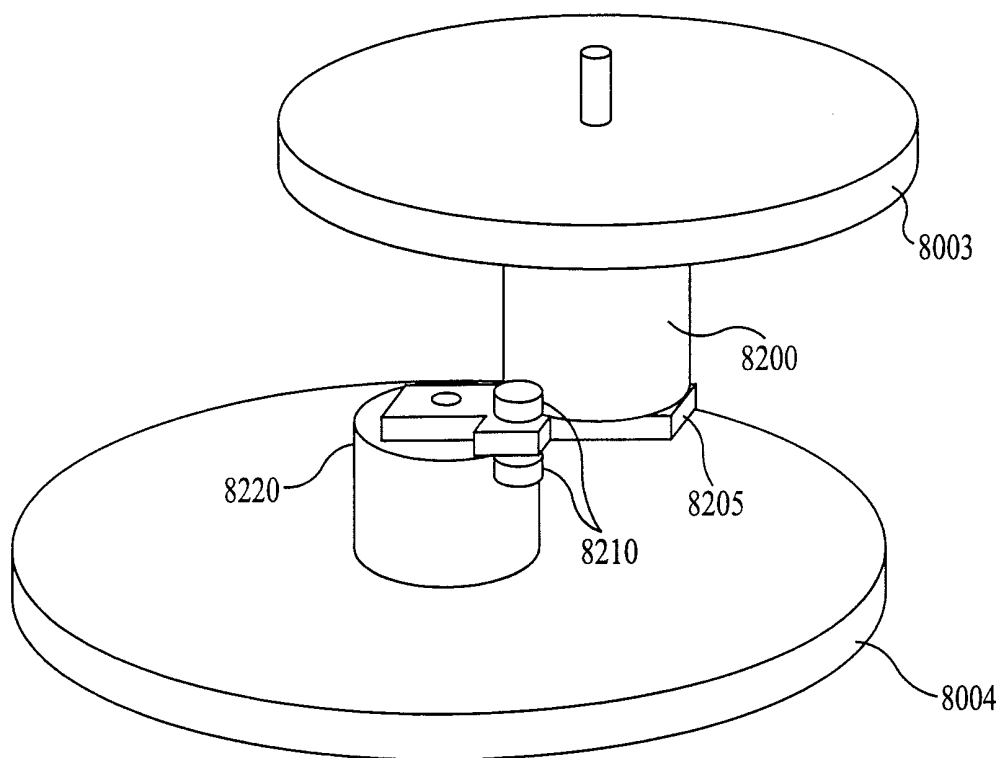


FIG. 50

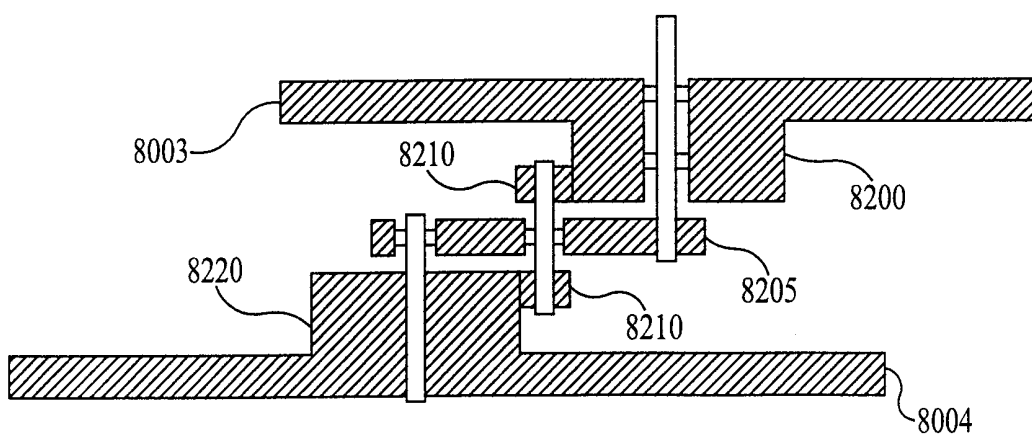


FIG. 51

57/83

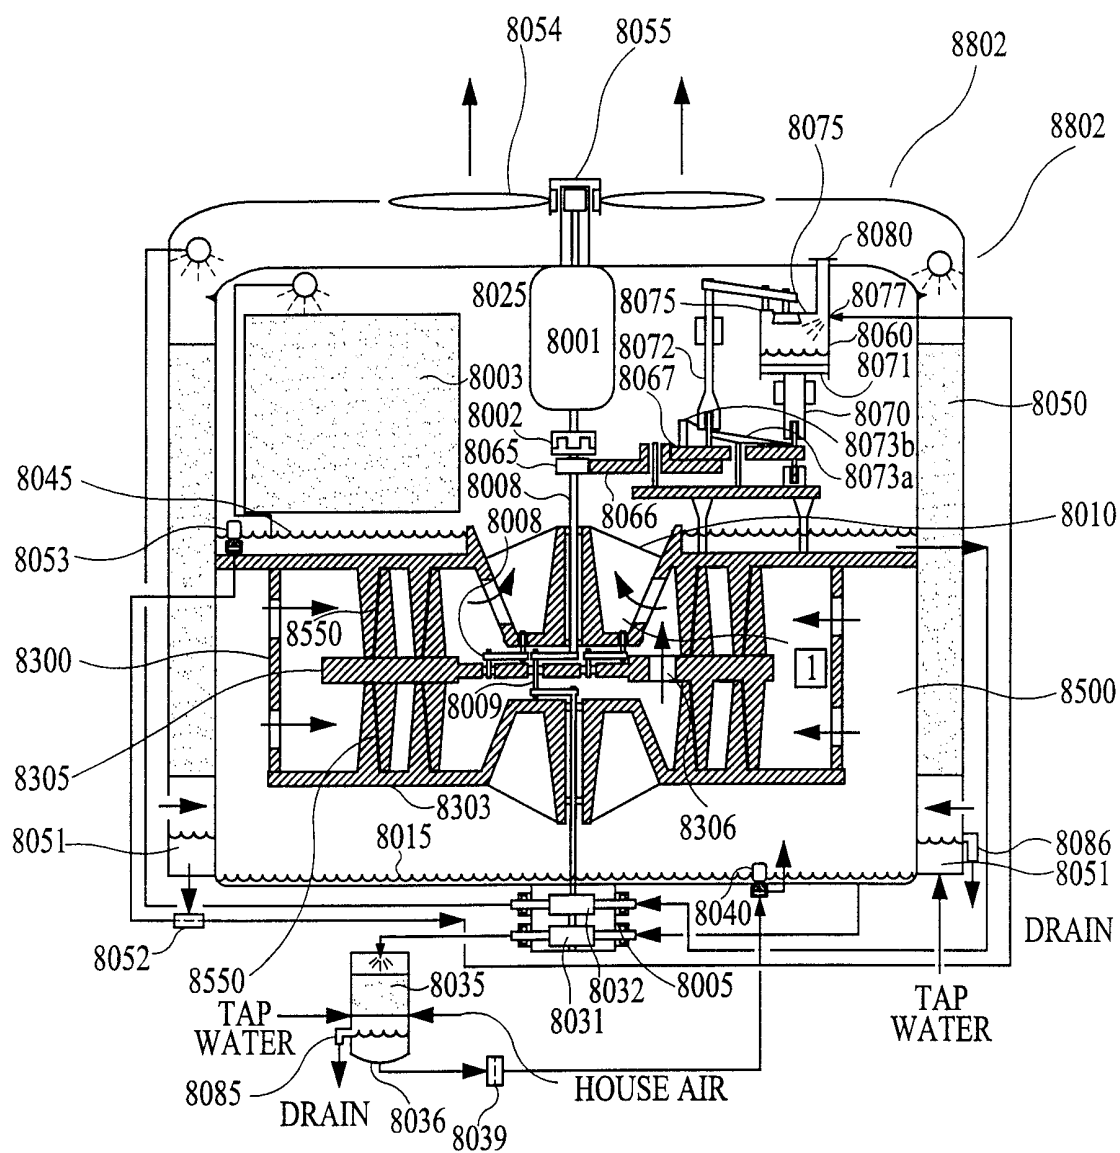


FIG. 52

58/83

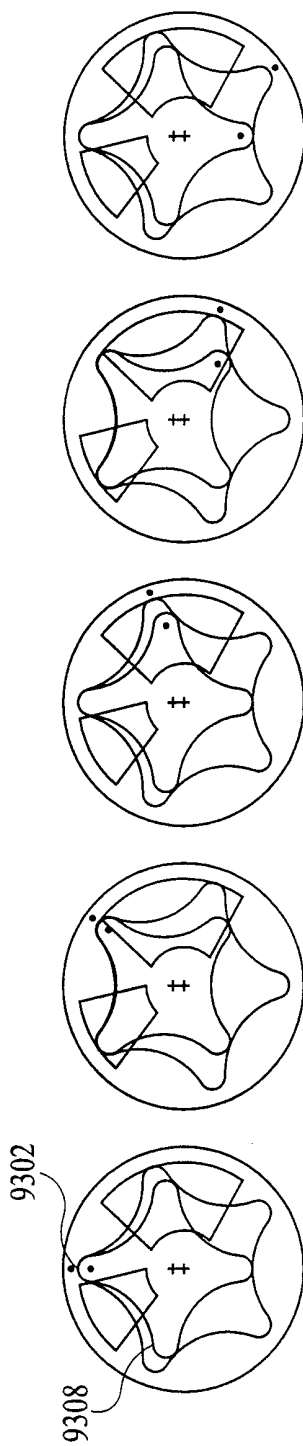


FIG. 53a FIG. 53b FIG. 53c FIG. 53d FIG. 53e

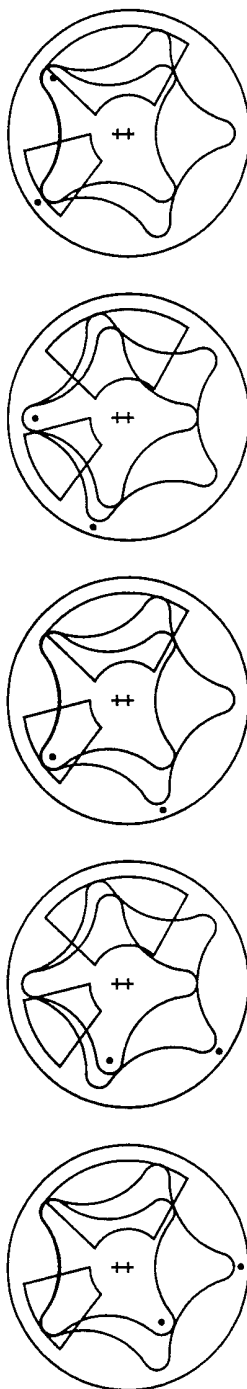


FIG. 53f FIG. 53g FIG. 53h FIG. 53i FIG. 53j

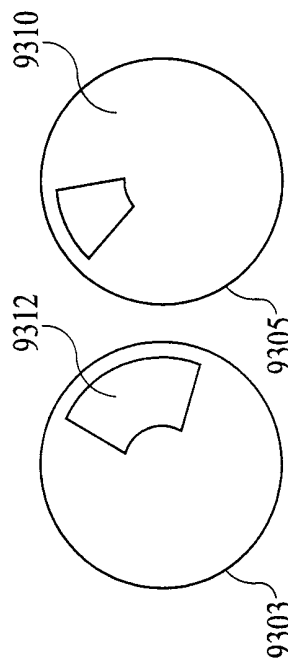


FIG. 54 FIG. 55

59/83

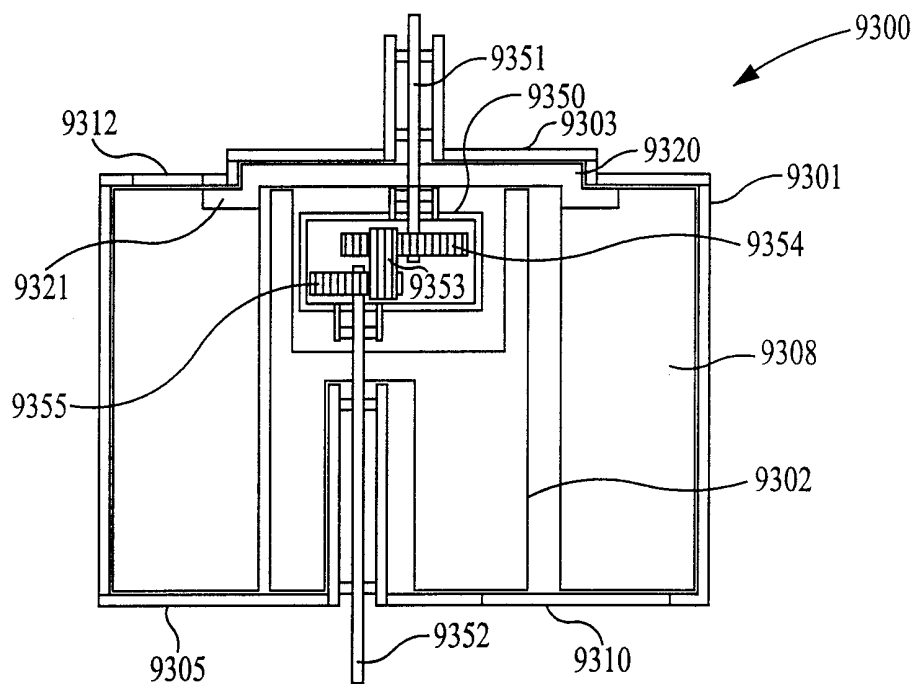


FIG. 56

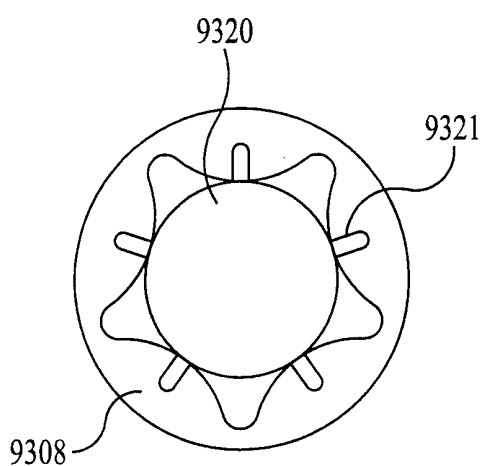


FIG. 57

60/83

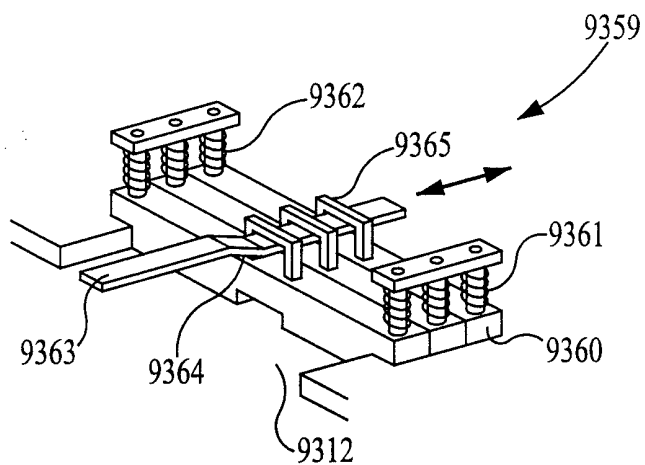


FIG. 58

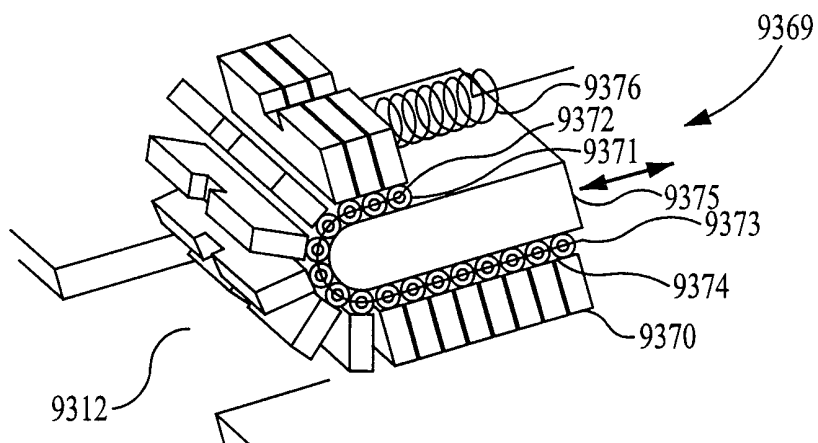


FIG. 59



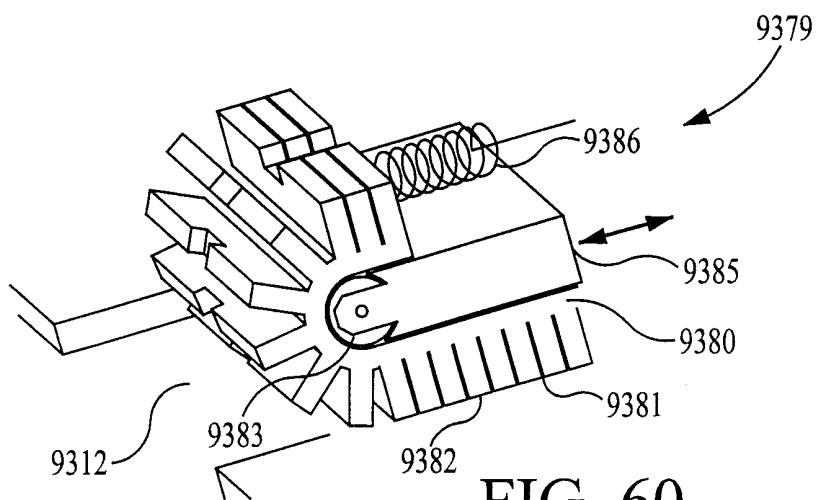


FIG. 60

61/83

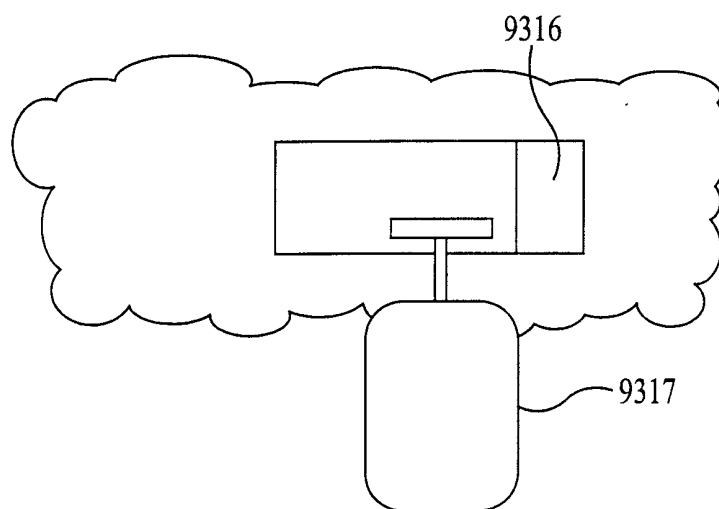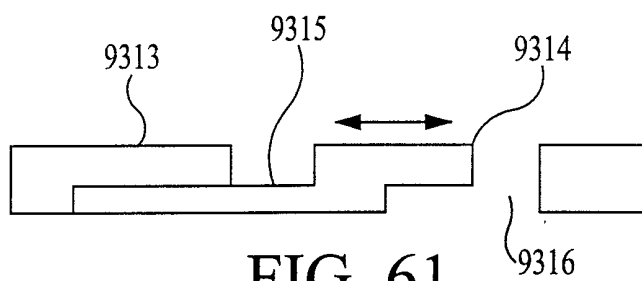

62/83

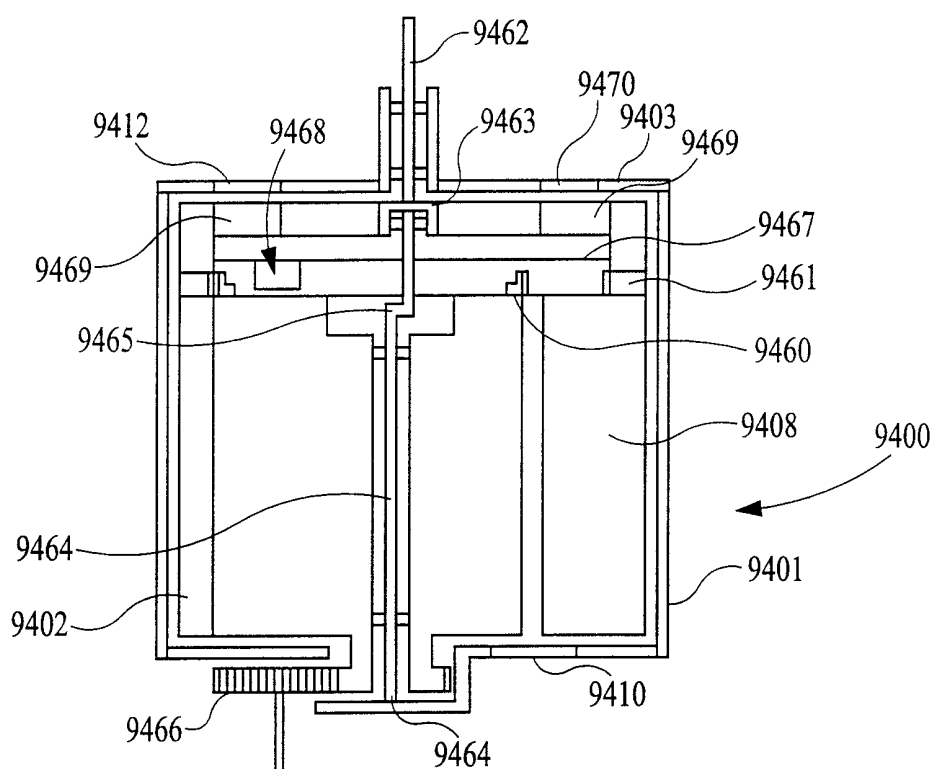


FIG. 63

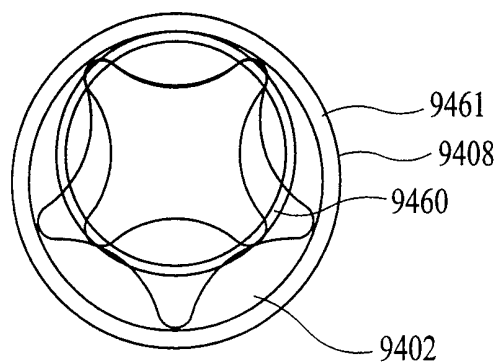


FIG. 64

63/83

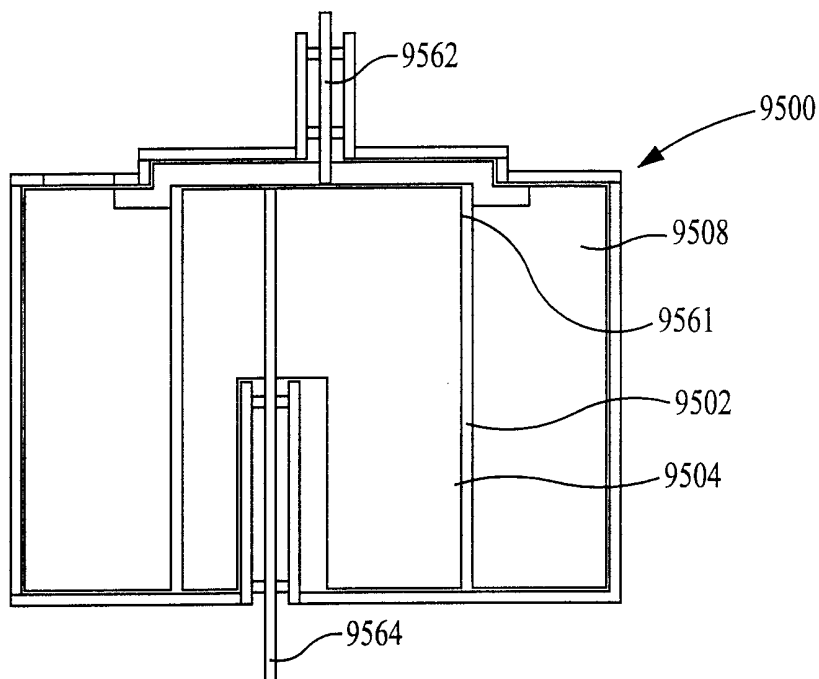


FIG. 65

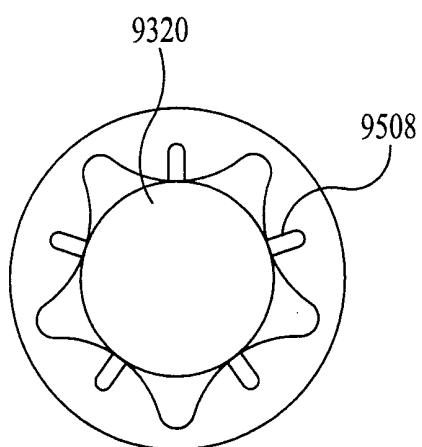


FIG. 66




FIG. 67

65/83

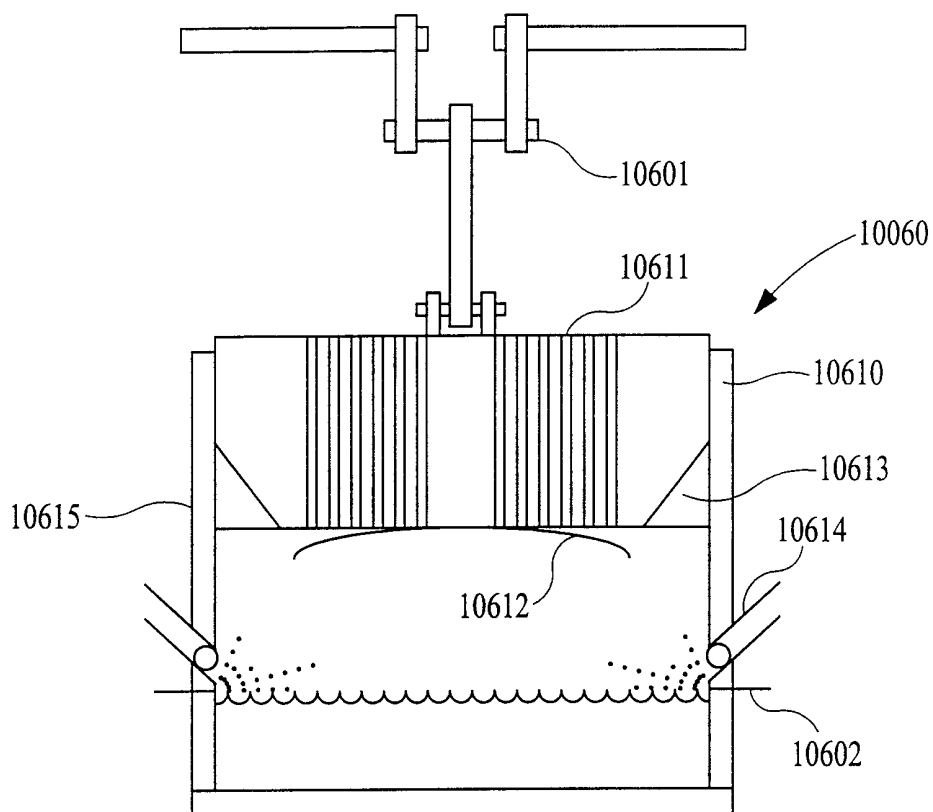


FIG. 69

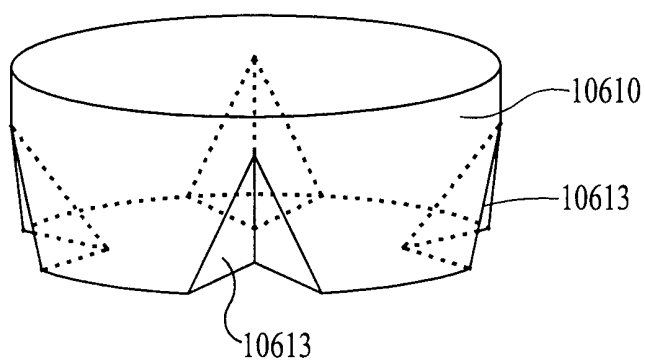


FIG. 70

66/83

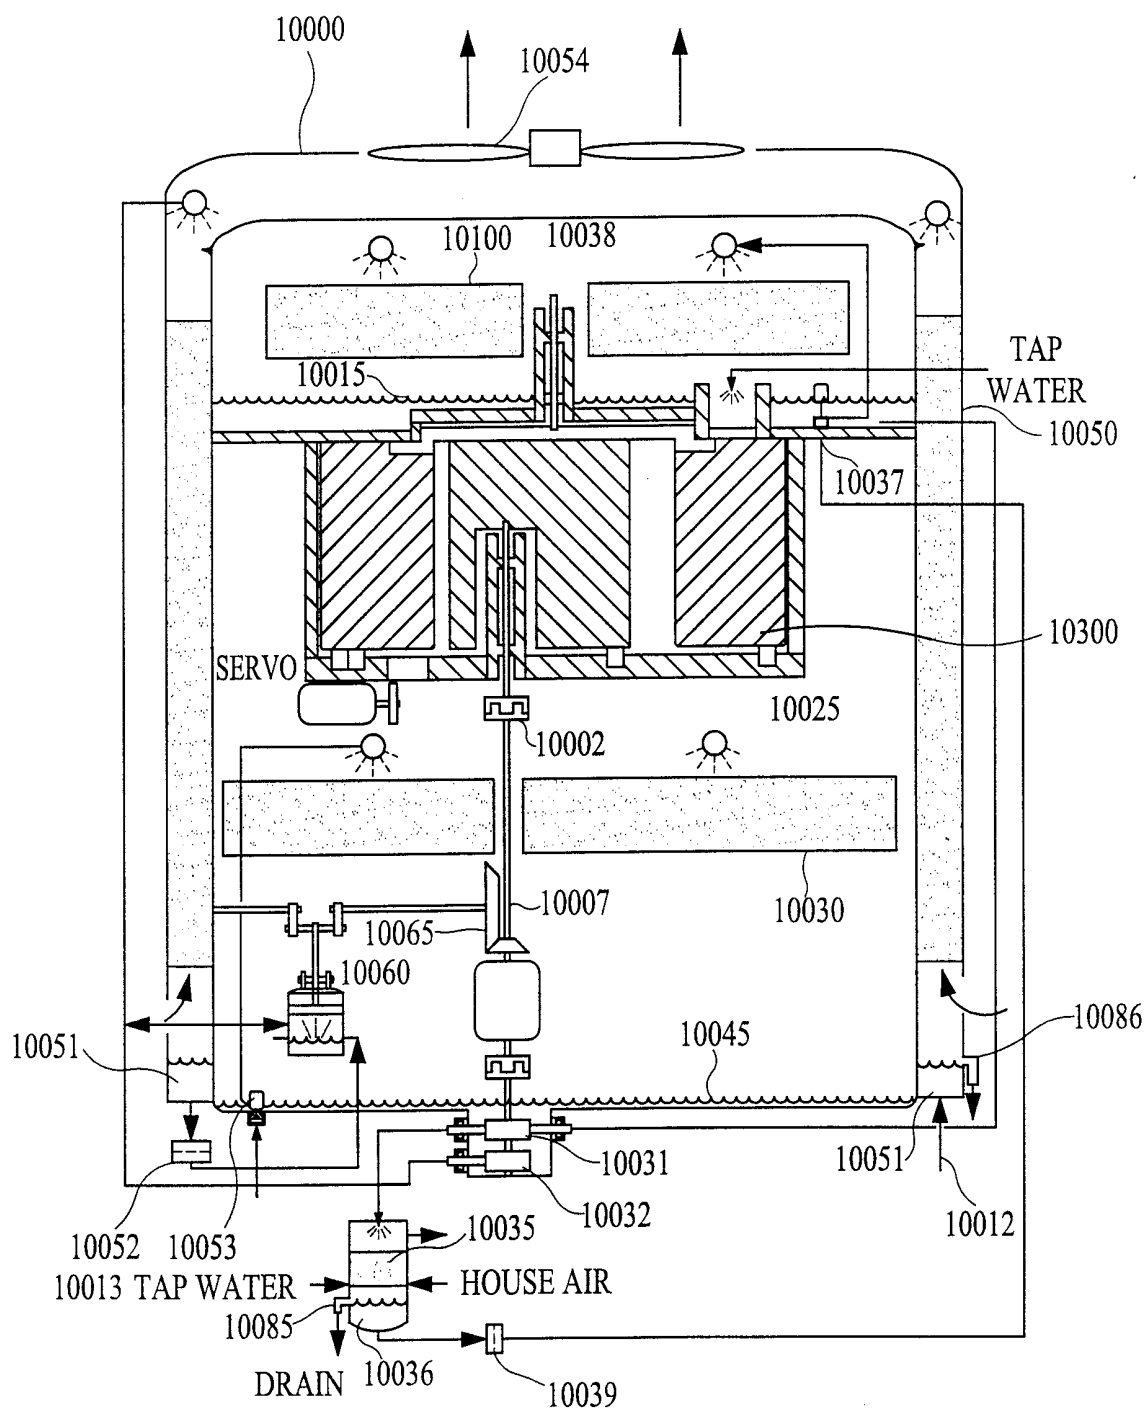


FIG. 71

67/83

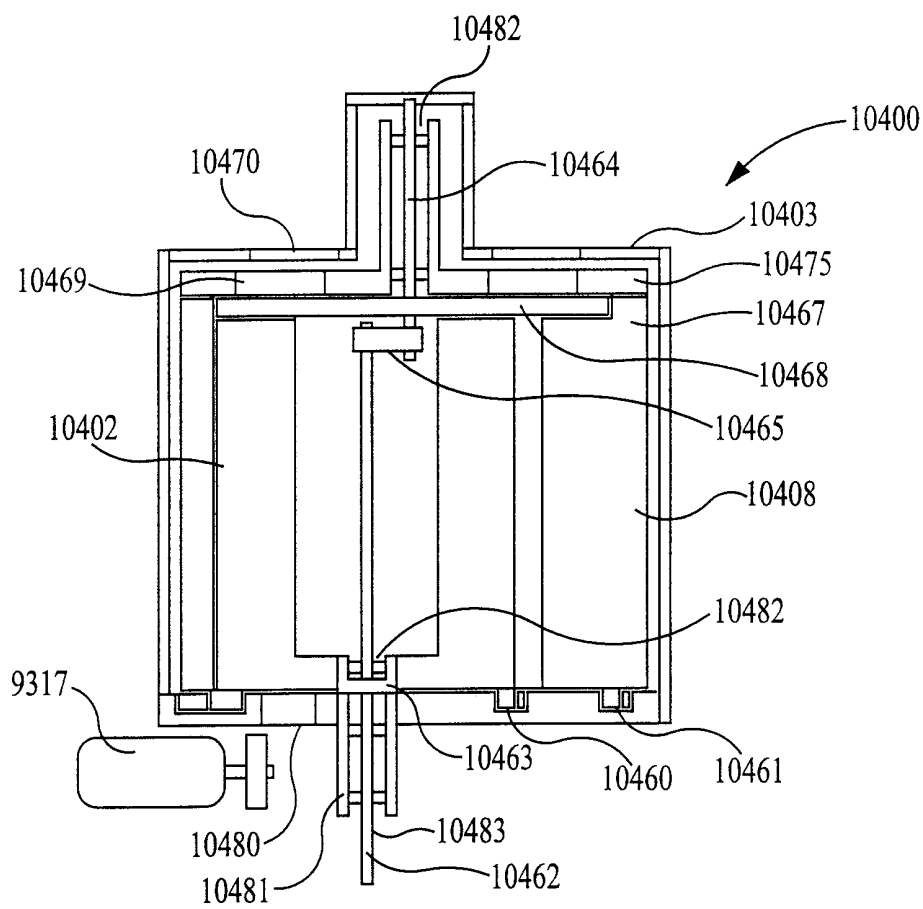


FIG. 72

68/83

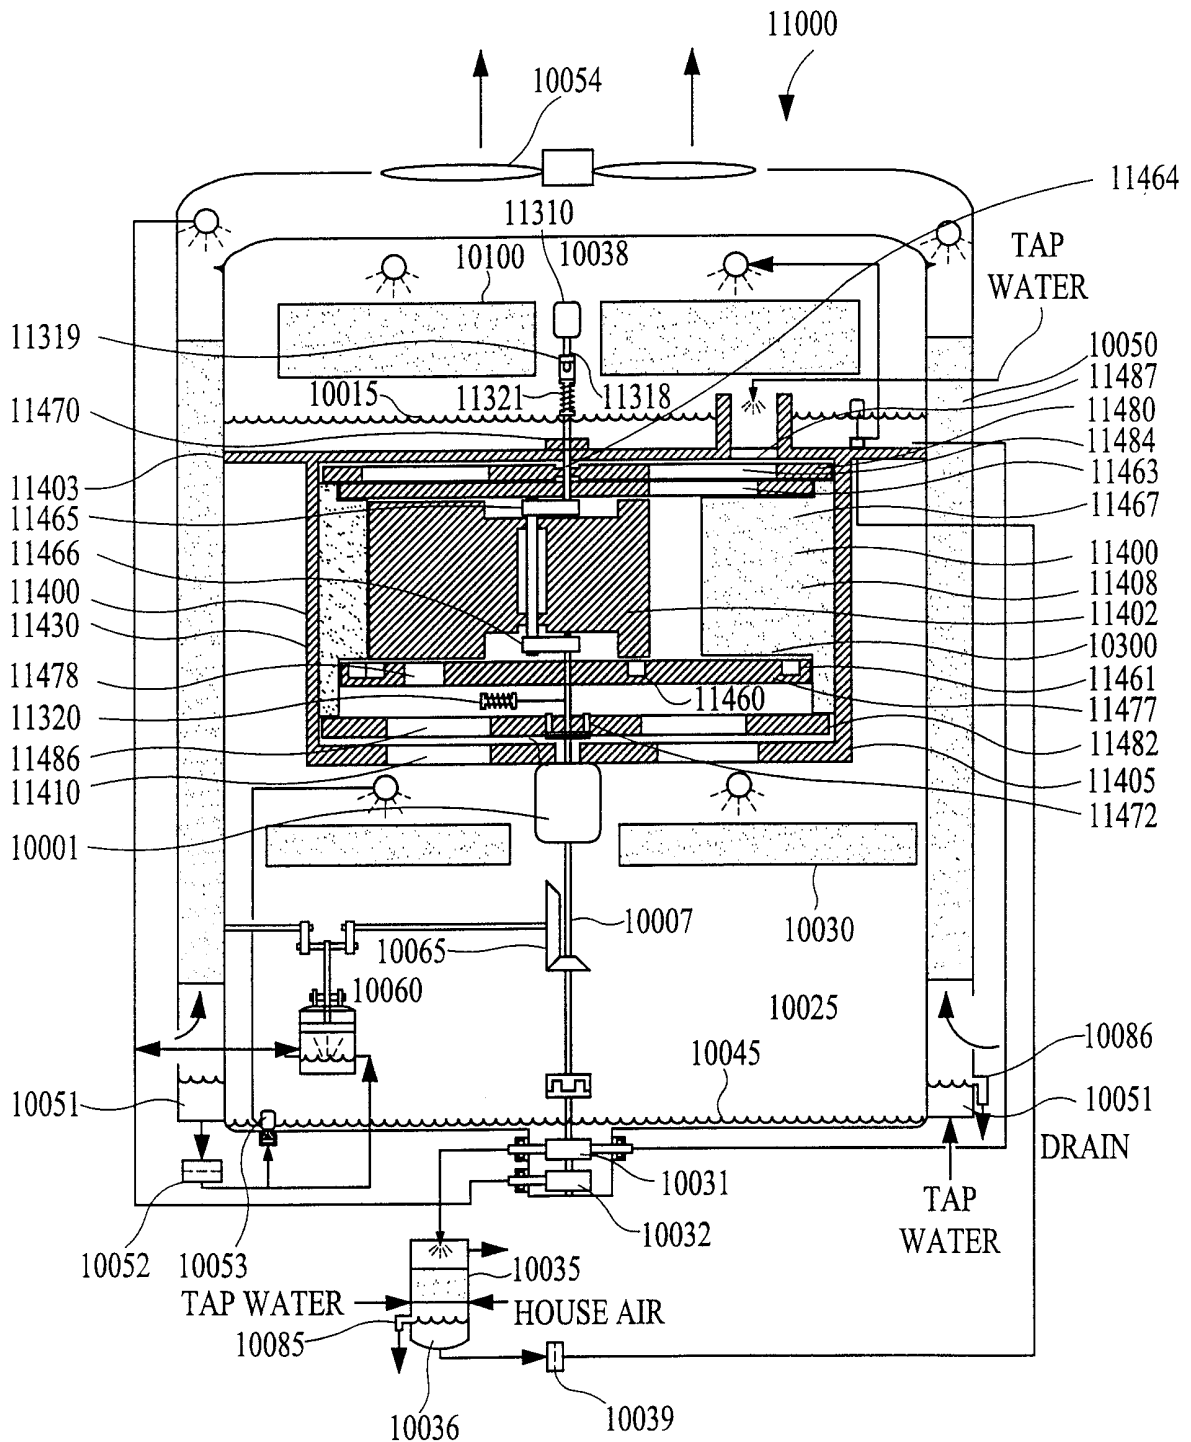


FIG. 73

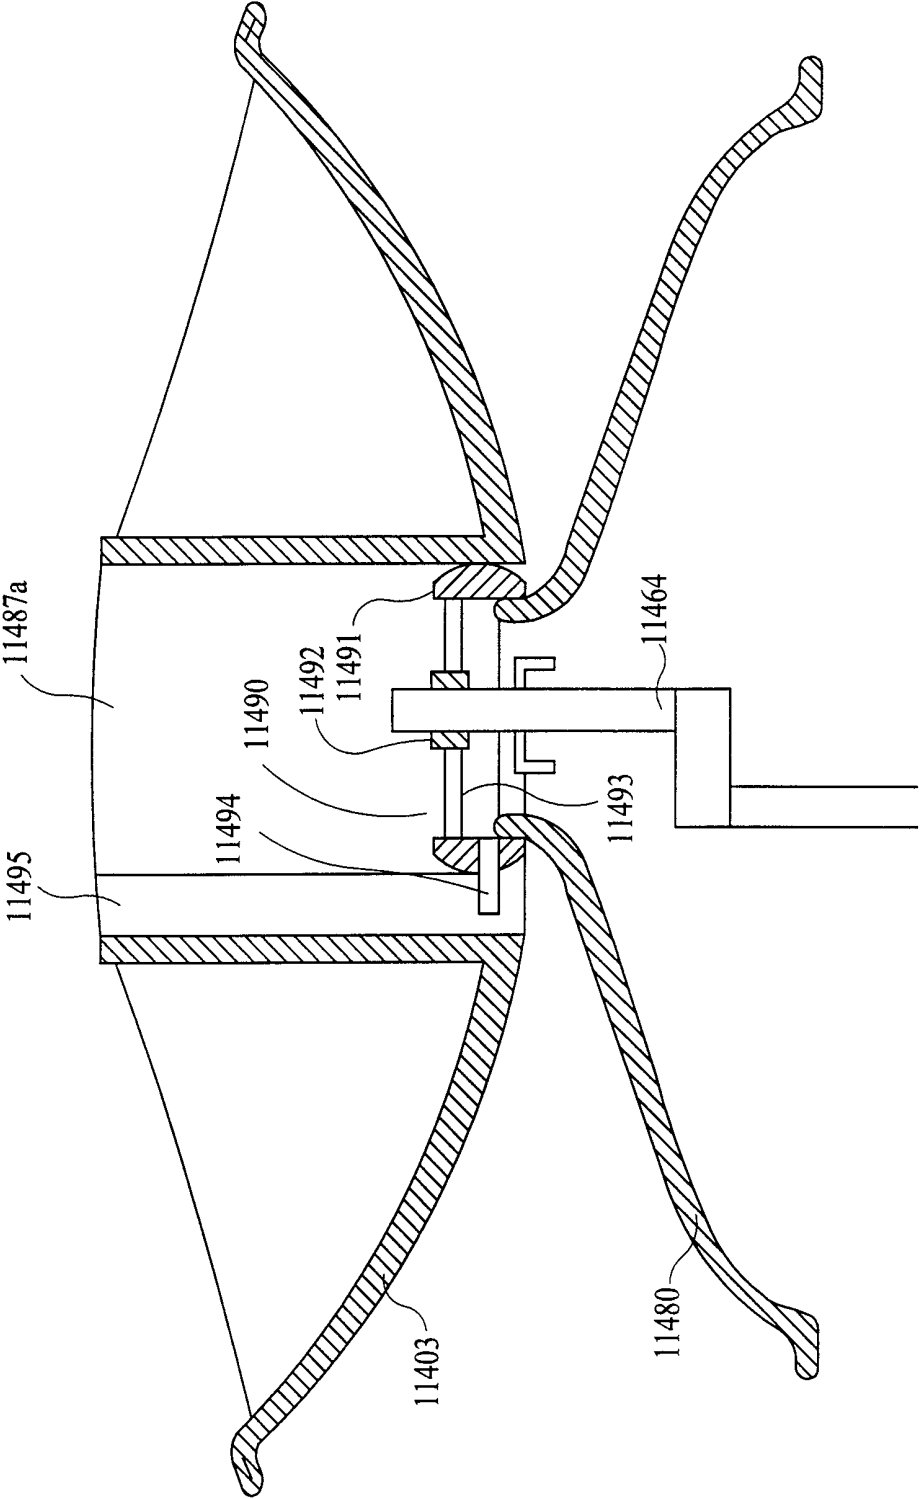


FIG. 74a

70/83

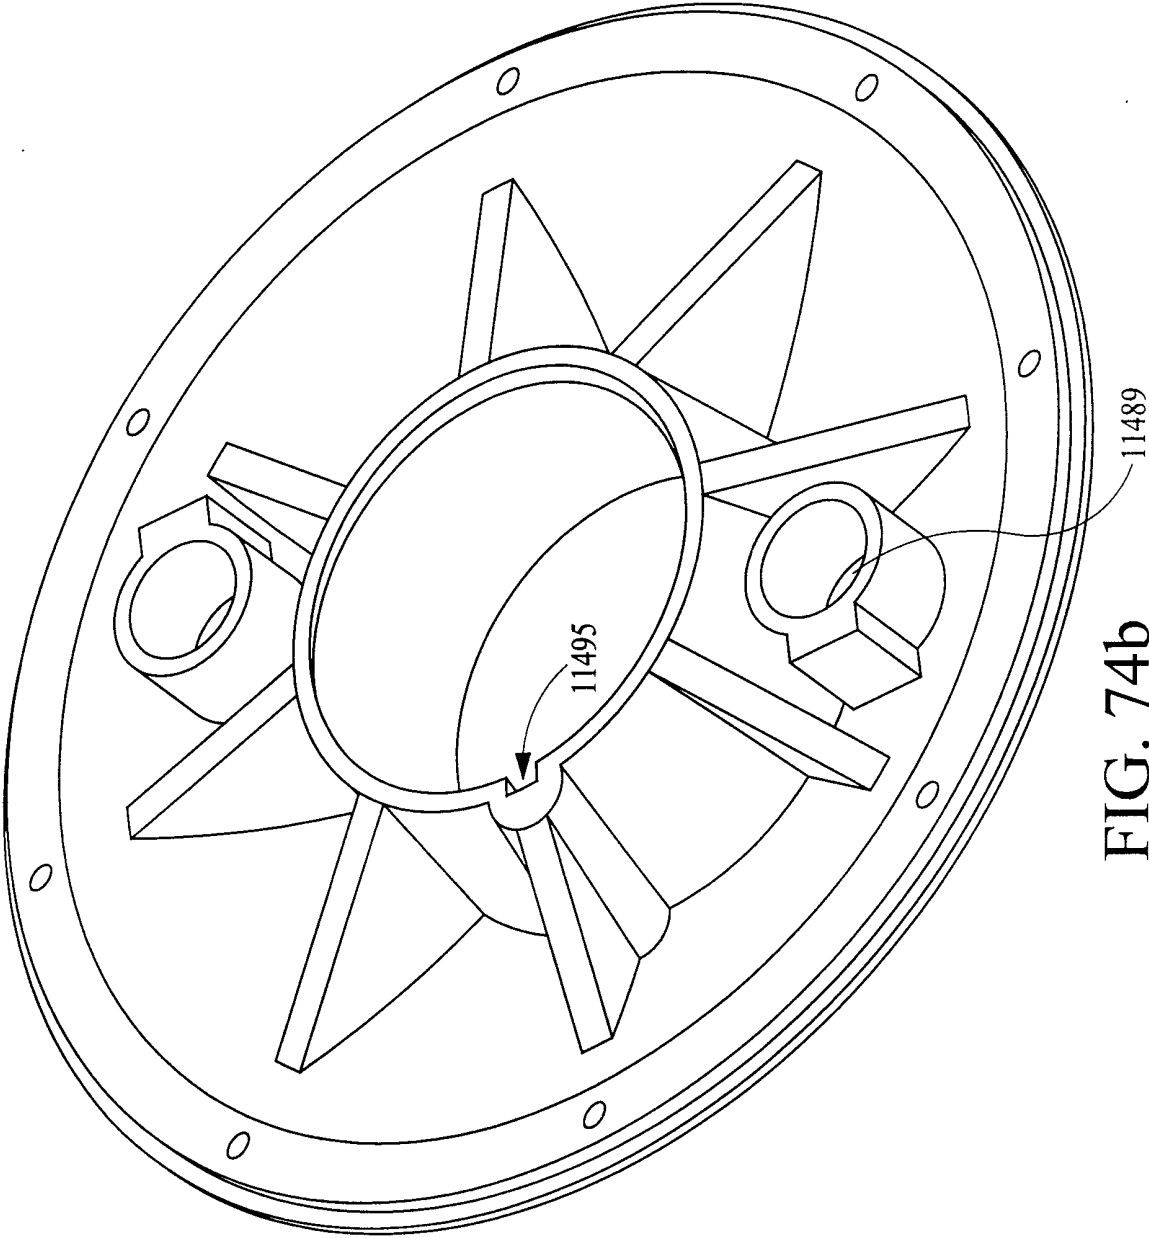


FIG. 74b

71/83

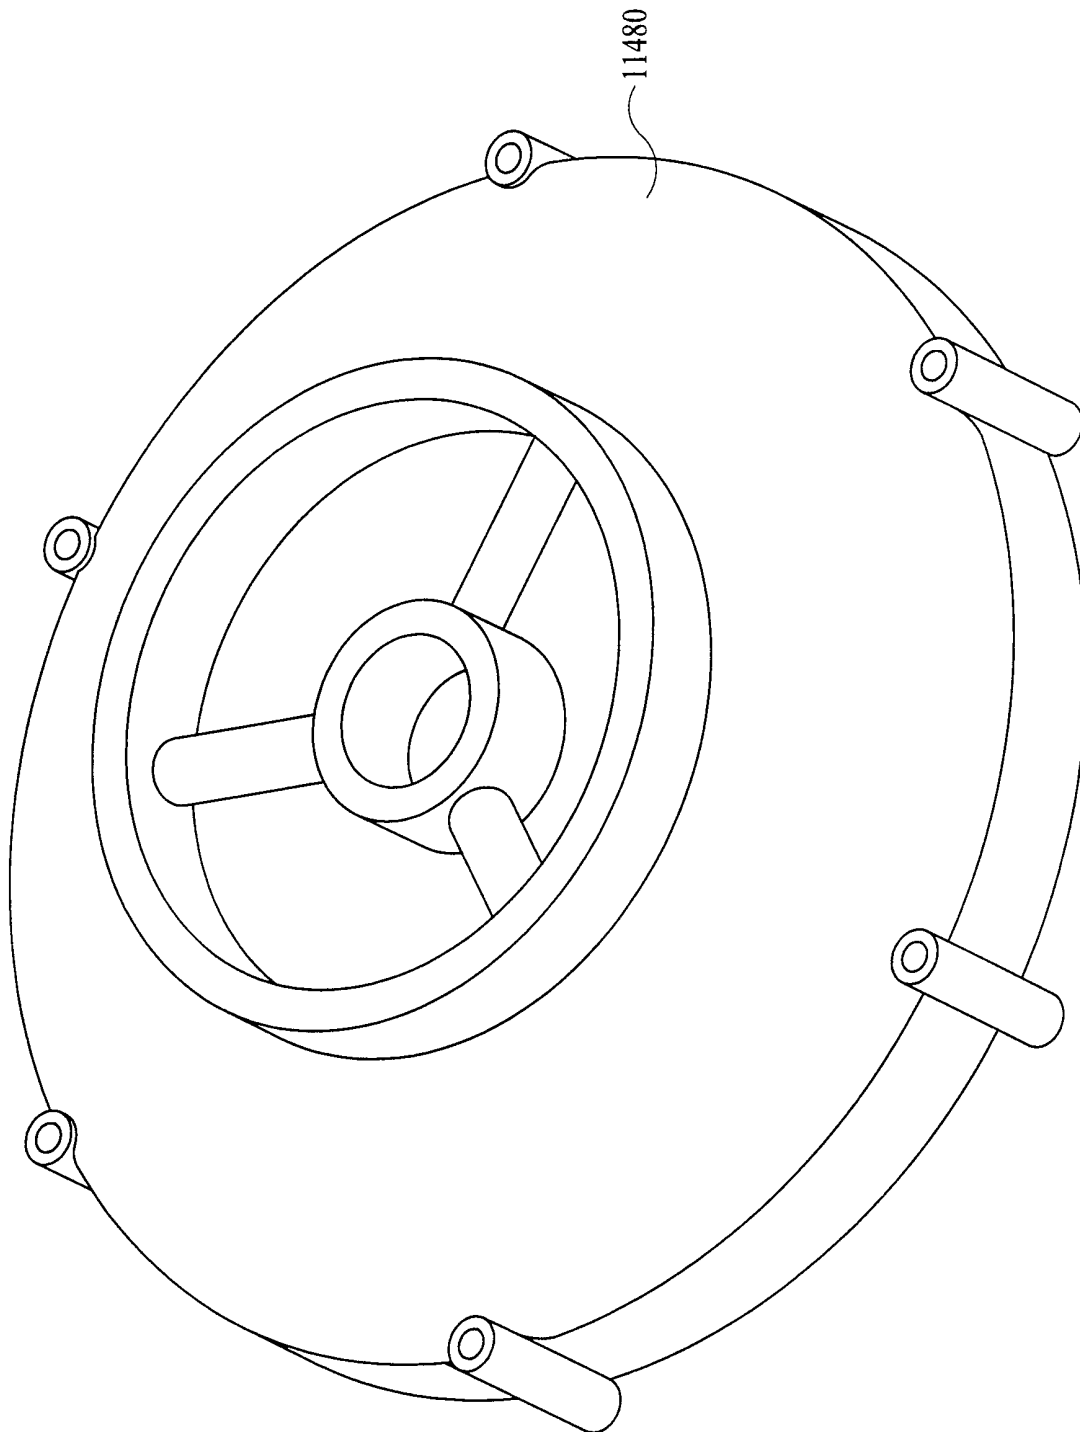


FIG. 74c

72/83

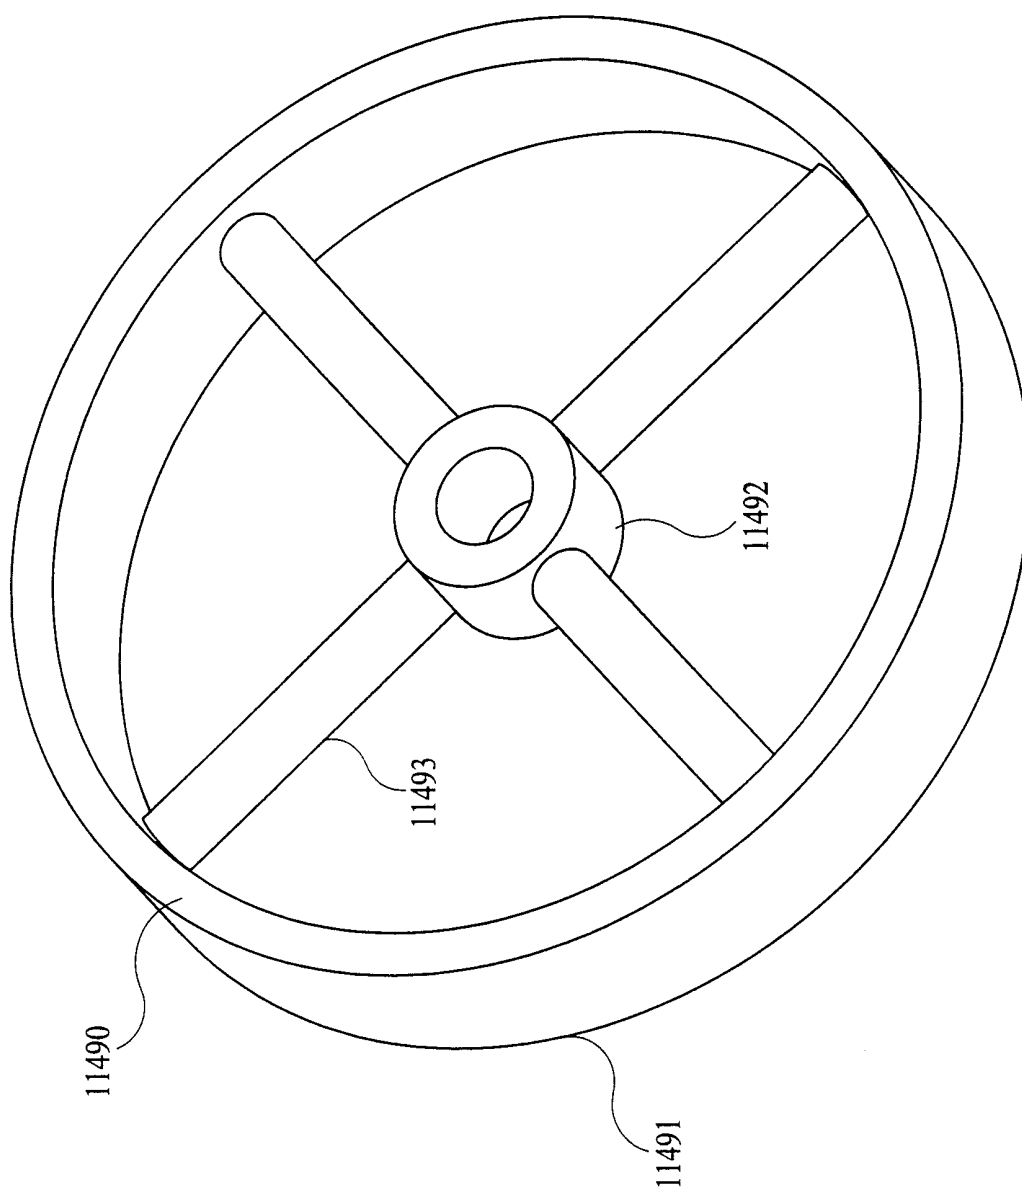


FIG. 74d

73/83

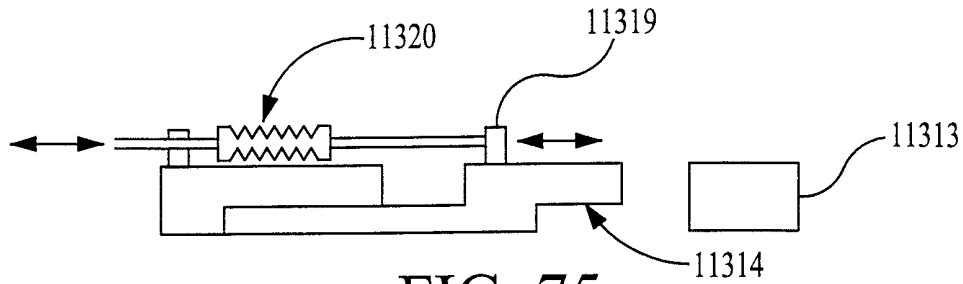


FIG. 75

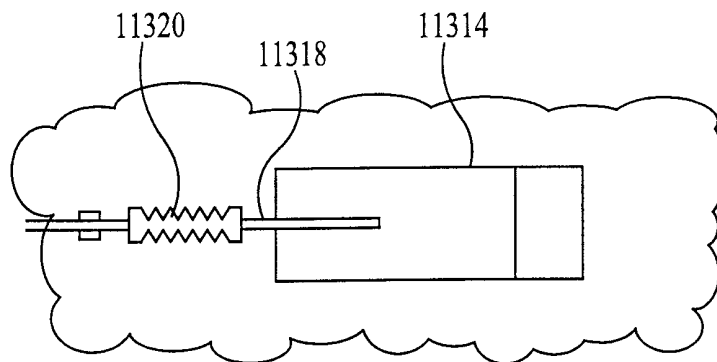


FIG. 76

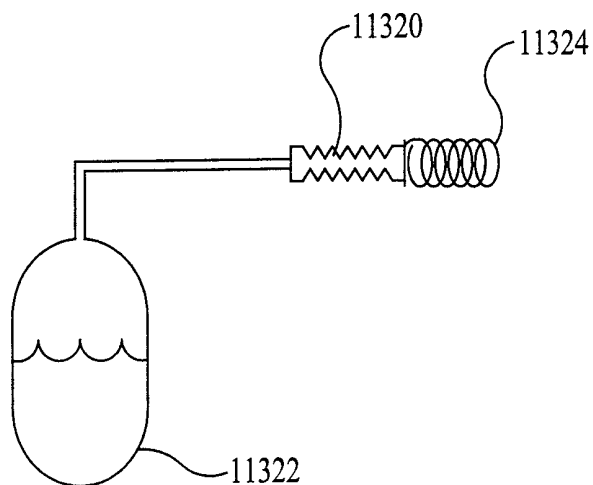


FIG. 77

74/83

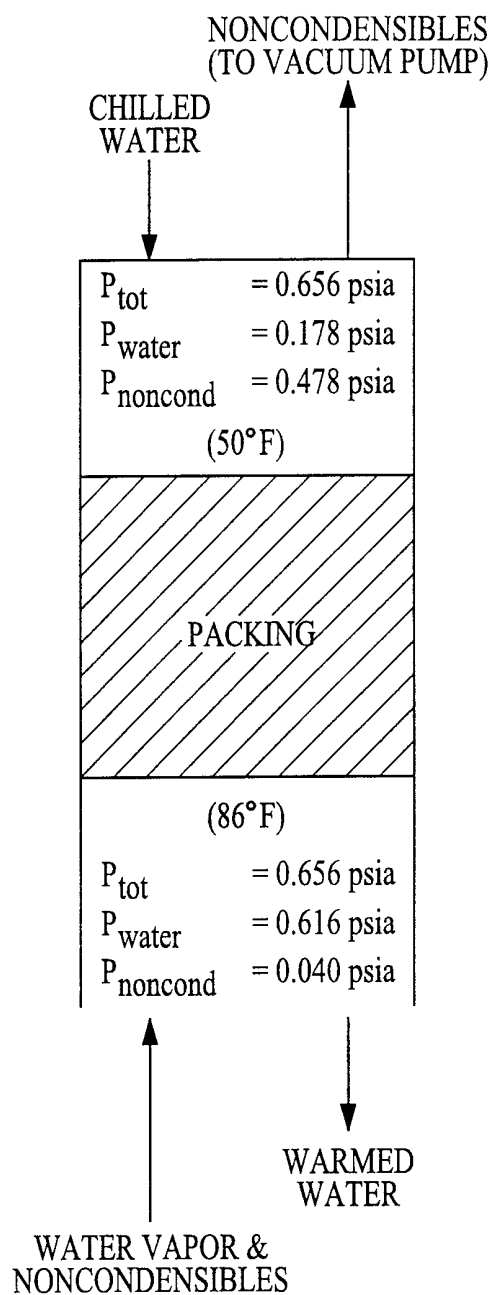


FIG. 78

75/83

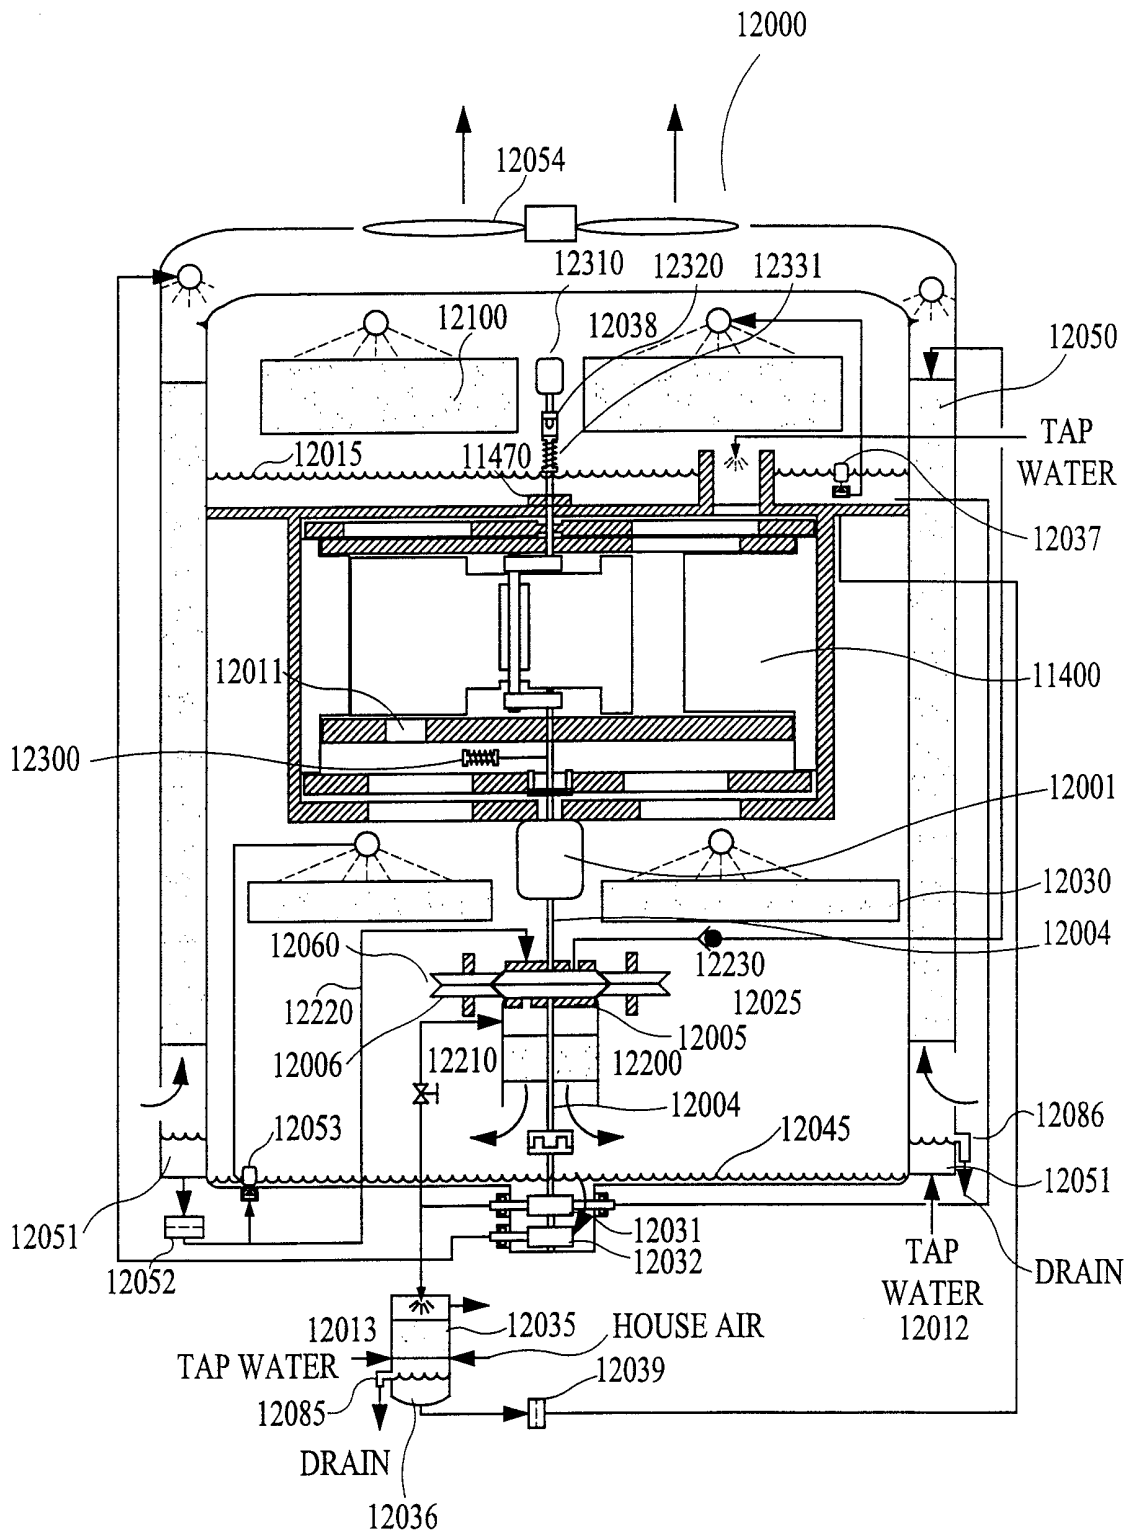


FIG. 79

76/83

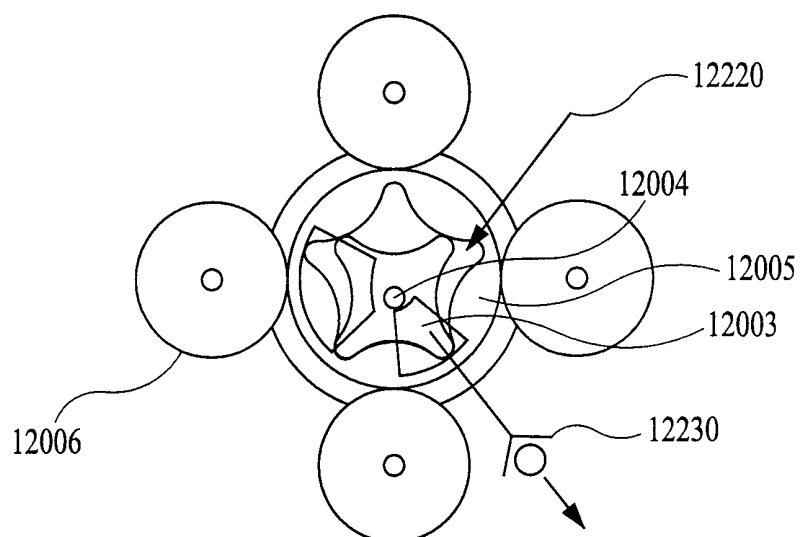


FIG. 80a

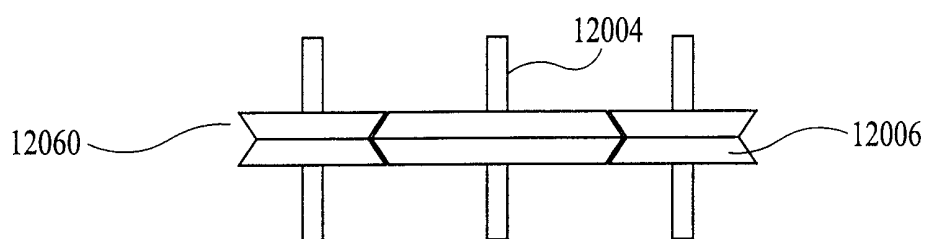


FIG. 80b

77/83

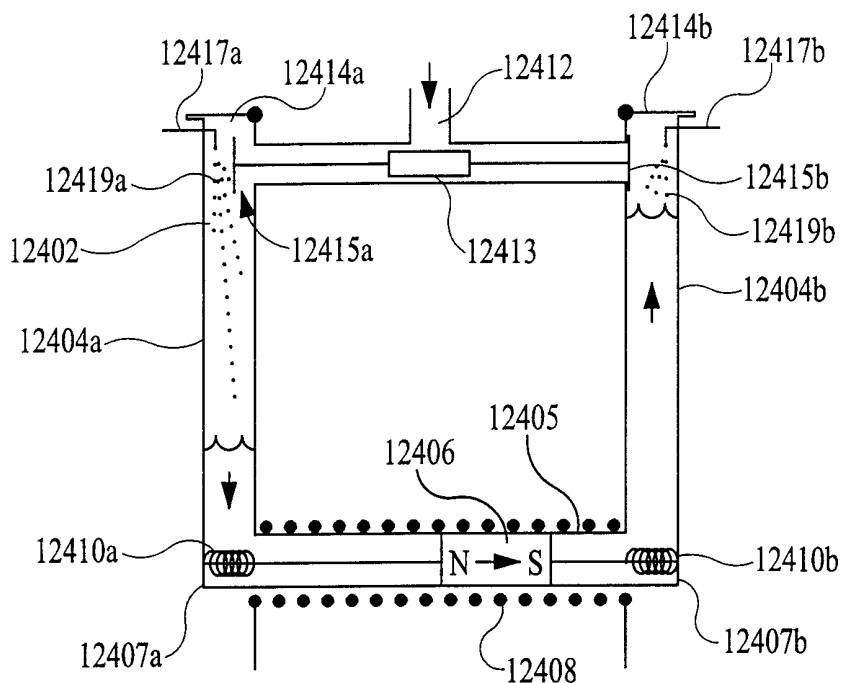


FIG. 81

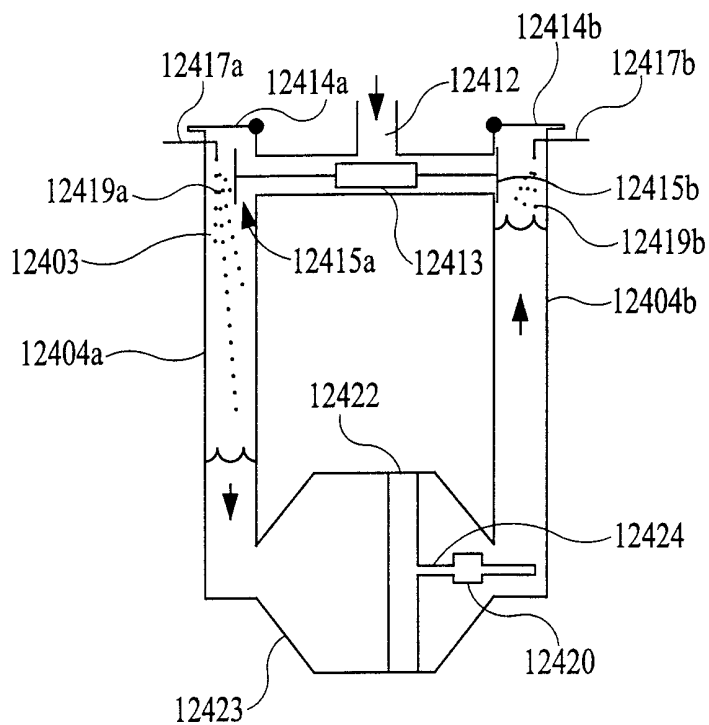


FIG. 82

78/83

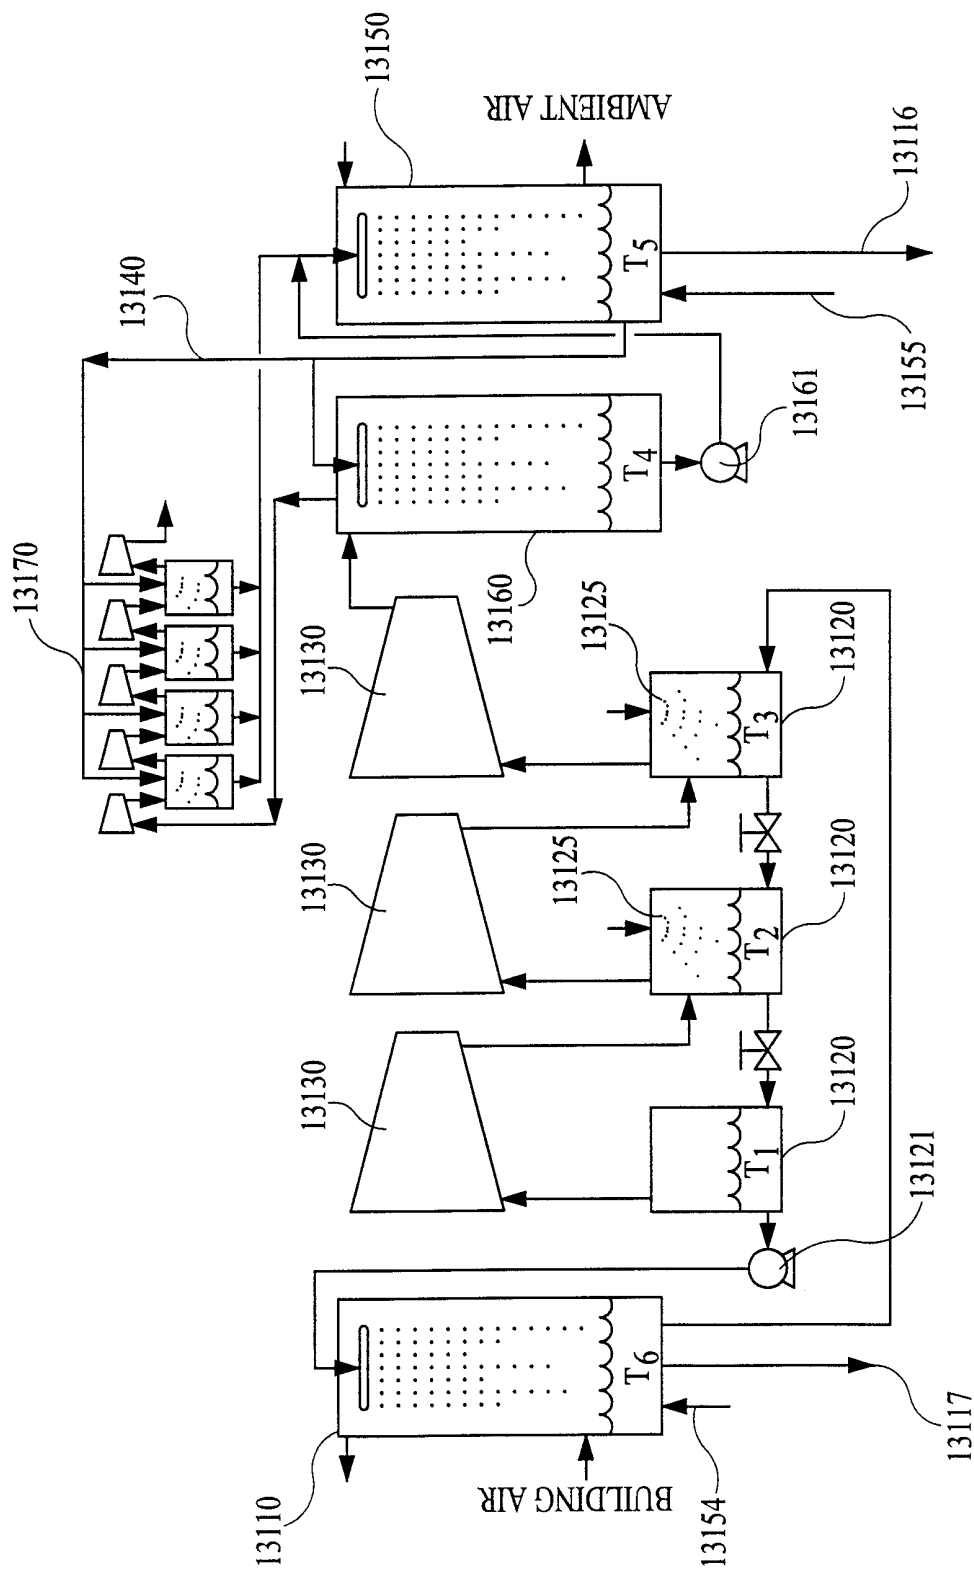


FIG. 83

79/83

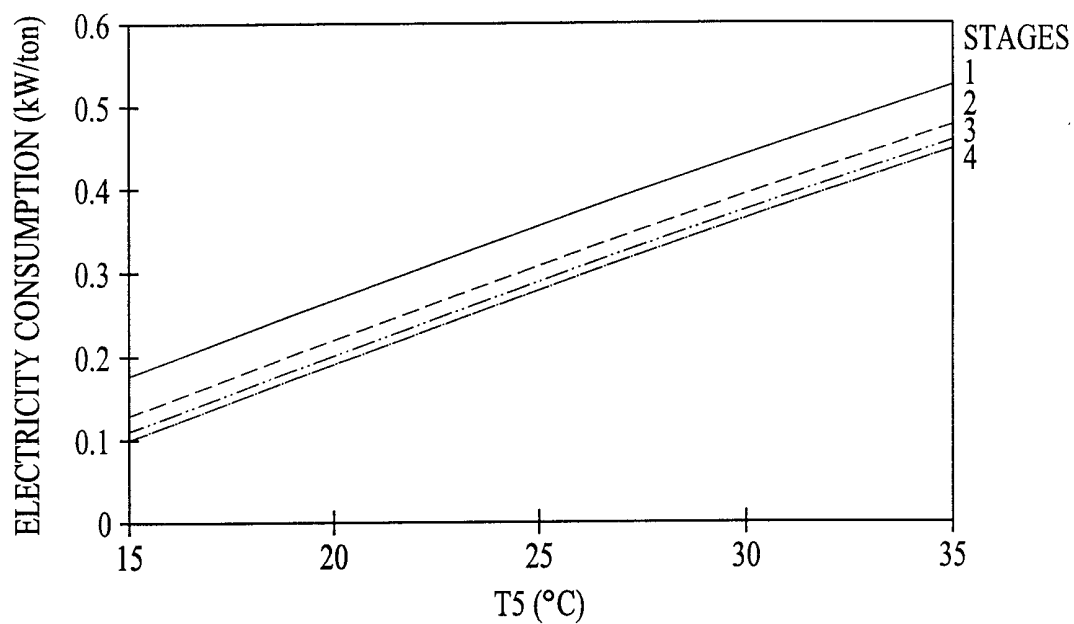


FIG. 84

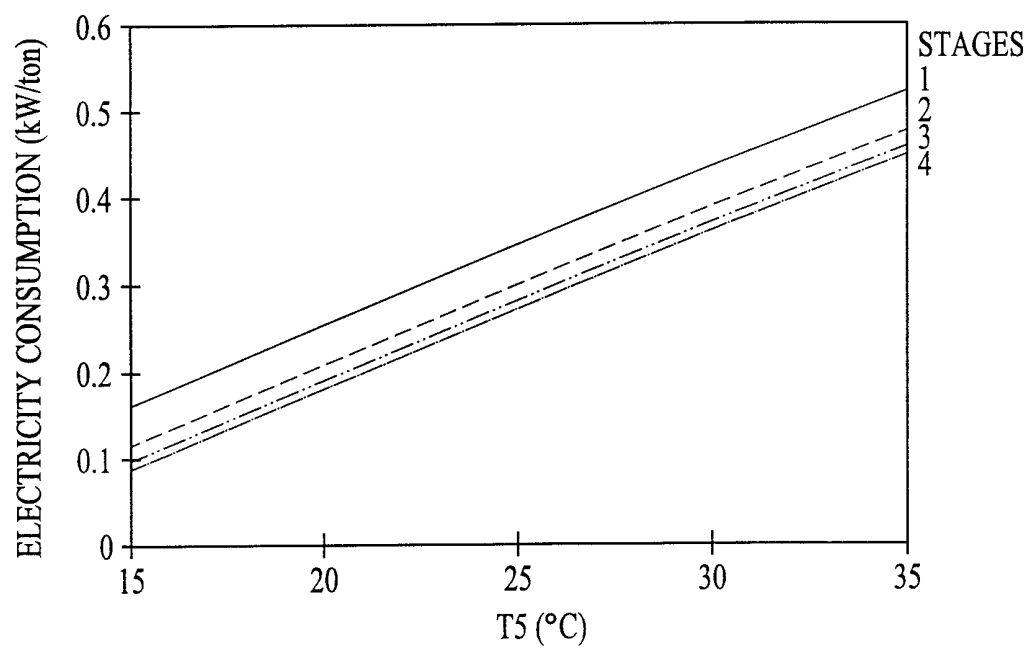


FIG. 85

80/83

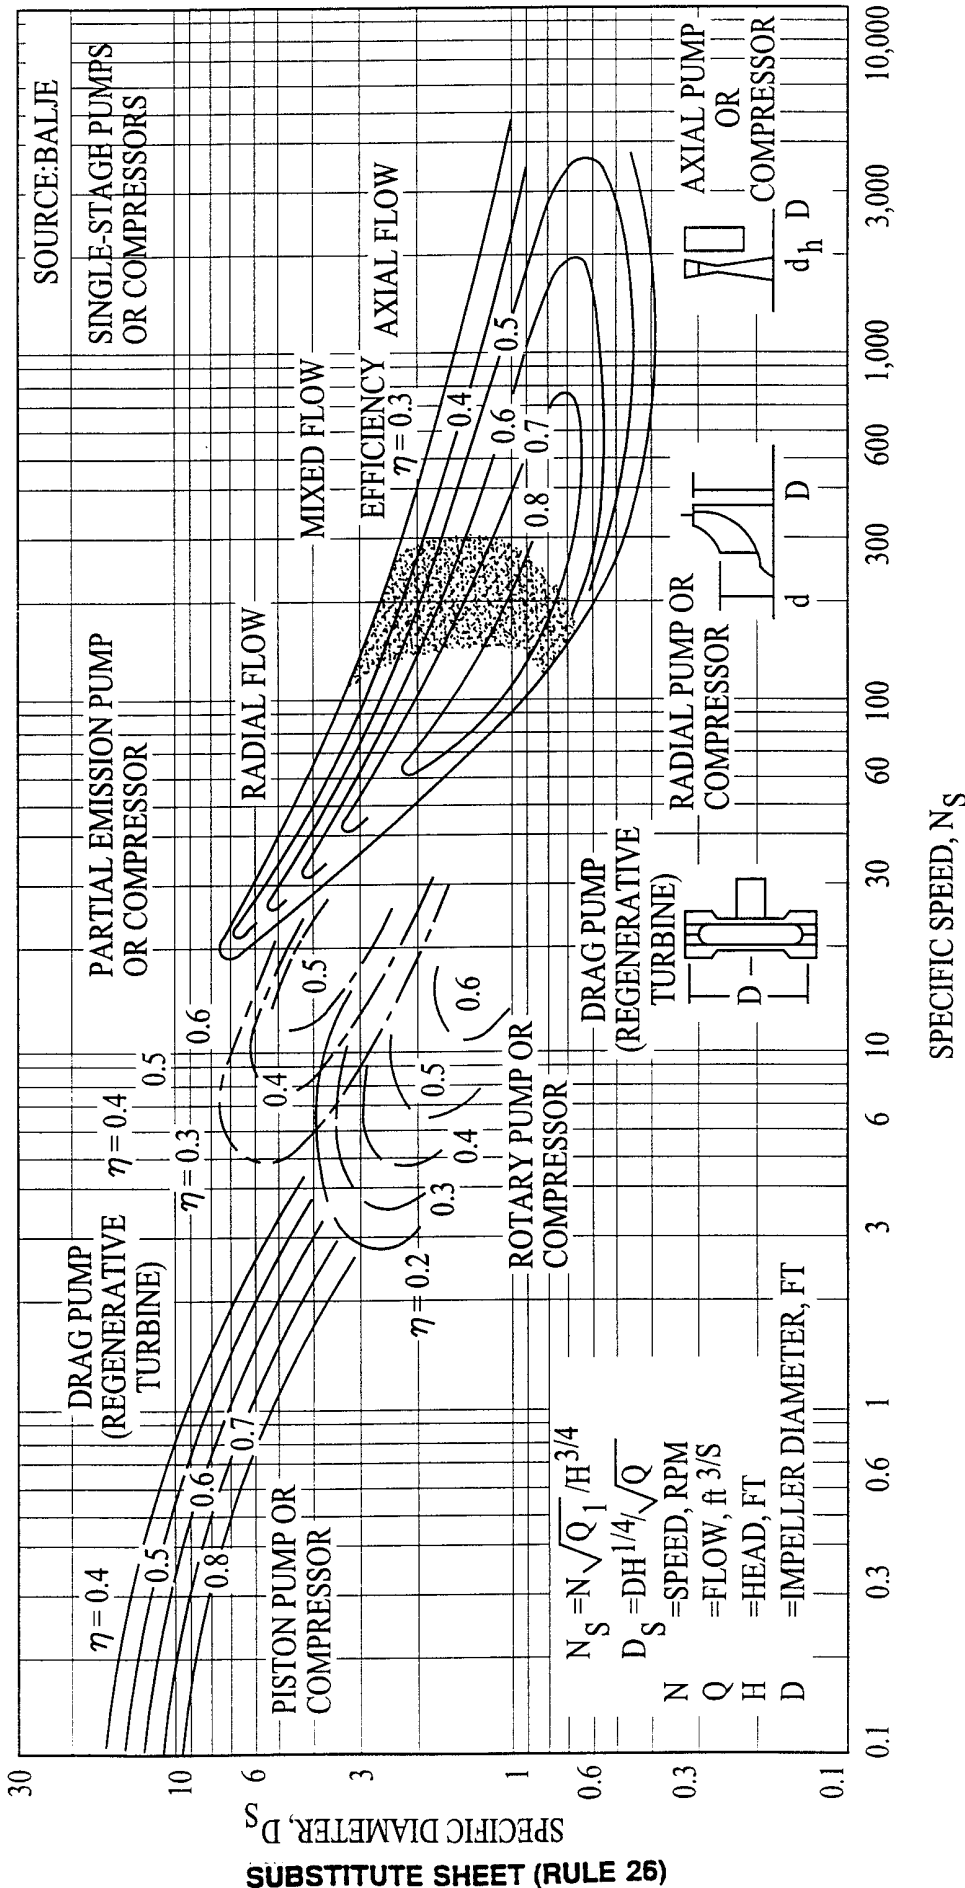


FIG. 86

TABLE I. RESULTS OF LOW-PRESSURE COMPRESSOR ANALYSIS.					
NUMBER OF STAGES	COMPRESSION RATIO PER STAGE	HEAD (ft-lb _f /lb _m)	ROTATION (rpm)	DIAMETER (ft)	TIP SPEED (ft/s)
1	1.540	20,077	3,598	4.73	890
2	1.241	9,774	2,097	5.66	621
3	1.155	6,458	1,537	6.27	505
4	1.114	4,823	1,234	6.75	436
5	1.090	3,848	1,042	7.14	390
6	1.075	3,201	908	7.48	355
7	1.064	2,740	808	7.77	329
8	1.055	2,395	730	8.04	308
9	1.049	2,127	668	8.28	290
10	1.044	1,913	617	8.51	275

FIG. 87

82/83

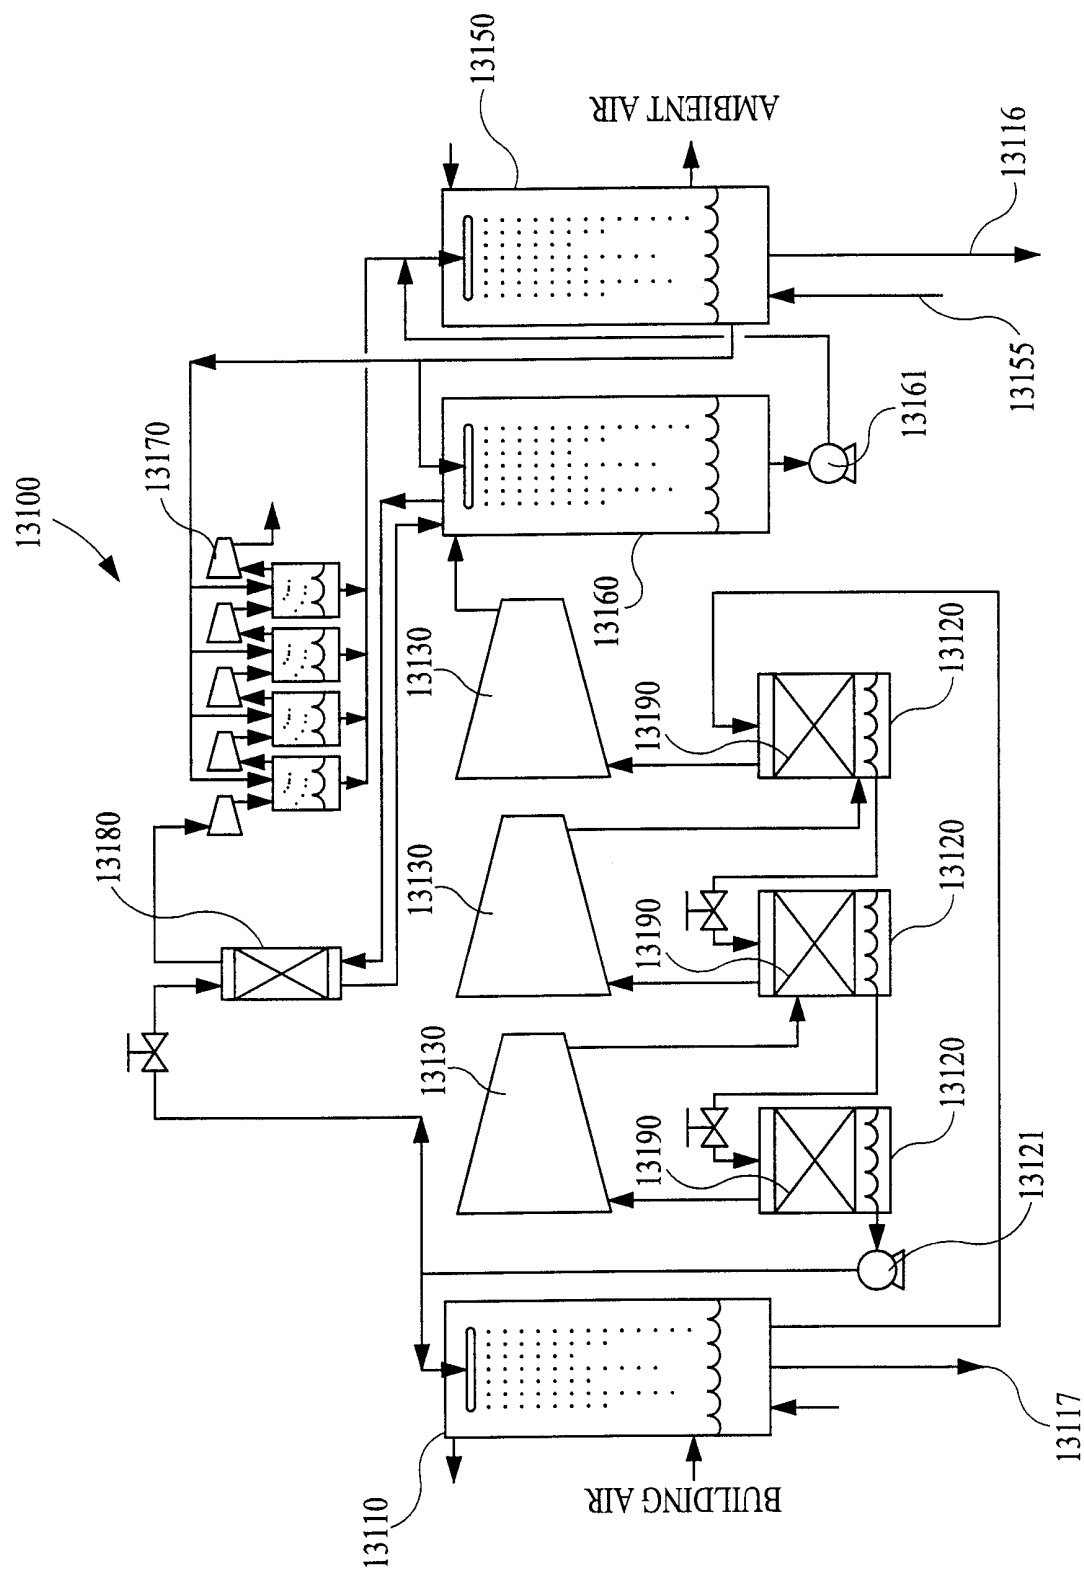


FIG. 88

83/83

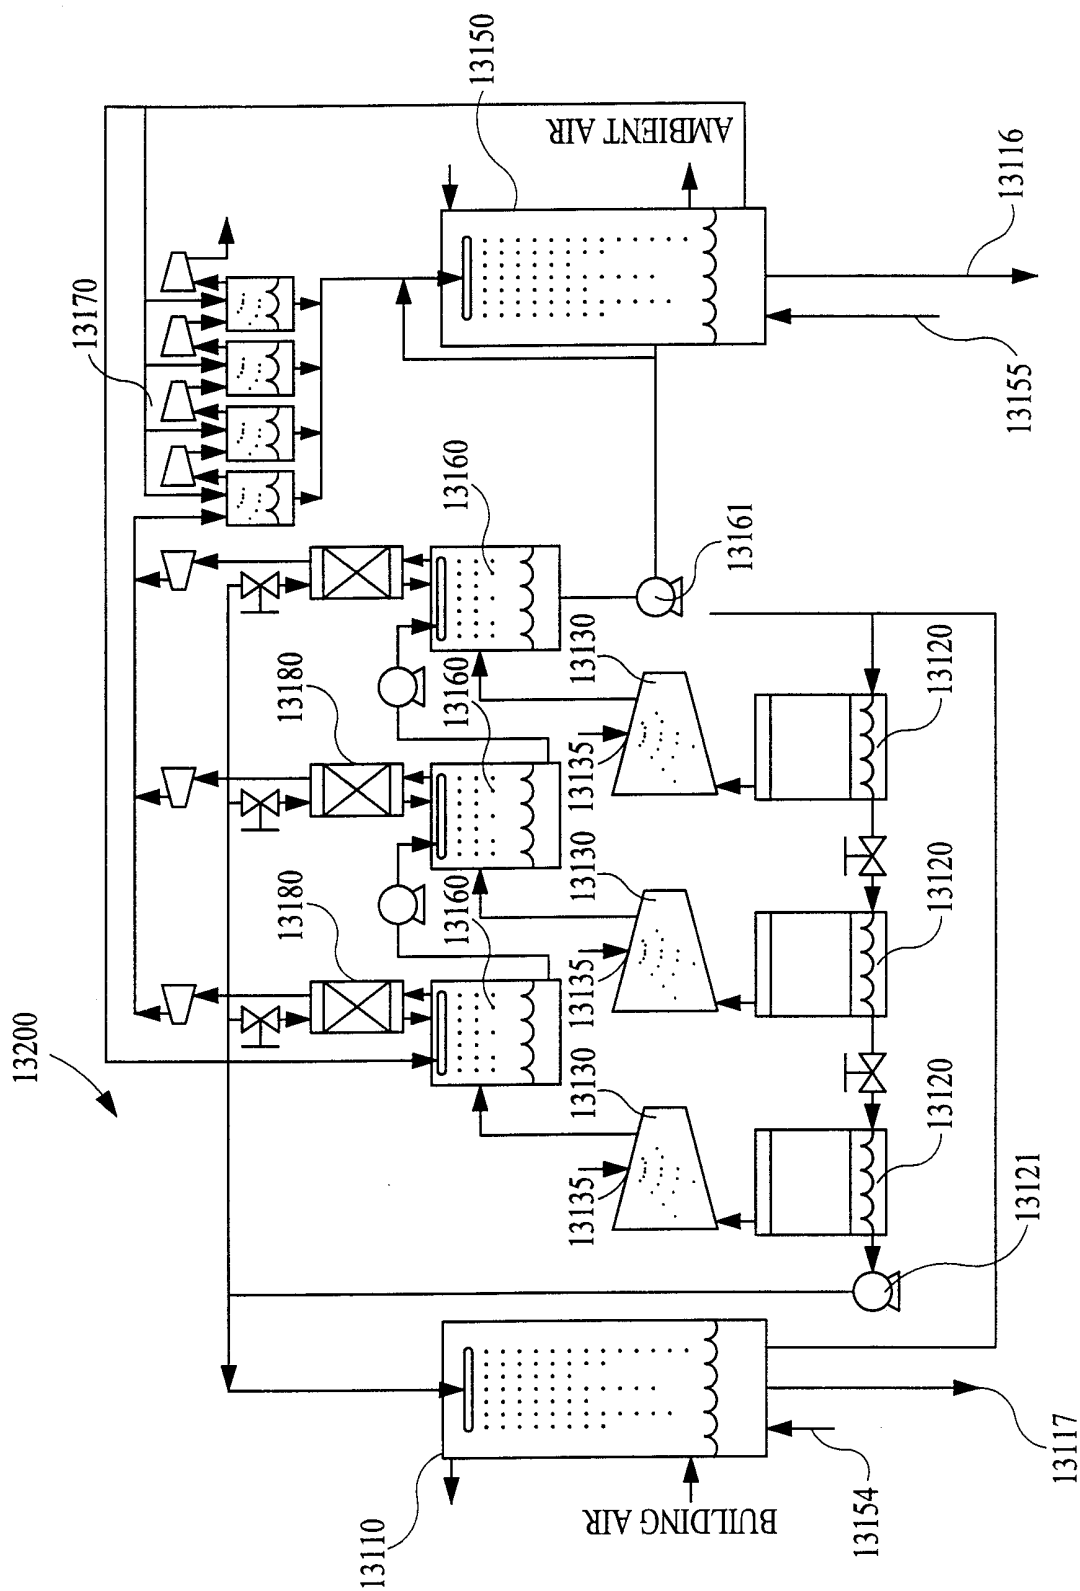


FIG. 89