

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 December 2007 (13.12.2007)

PCT

(10) International Publication Number
WO 2007/141059 A2

(51) International Patent Classification:
C23C 16/18 (2006.01)

(74) Agent: **CONAN, Philippe**; c/o L'Air Liquide SA, DPI, 75
Quai d'Orsay, F-75321 Paris Cedex 07 (FR).

(21) International Application Number:
PCT/EP2007/052507

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 16 March 2007 (16.03.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PCT/EP2006/062893 2 June 2006 (02.06.2006) EP

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **L'AIR LIQUIDE SOCIETE ANONYME POUR L'ETUDE ET L'EXPLOITATION DES PROCEDES GEORGES CLAUDE** [FR/FR]; 75 Quai d'Orsay, F-75007 Paris (FR).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **DUSSARRAT, Christian** [FR/JP]; Tsukuba-Matsushiro 4-2-1 204, 4-15-2 Matsushiro, Tsukuba-shi, 305-00035 Ibaraki (JP). **BLASCO, Nicolas** [FR/FR]; 184 avenue de la Division Leclerc, F-92160 Antony (FR). **PINCHART, Audrey** [FR/FR]; 29 allée des Ormes, F-91090 Lisses (FR). **LACHAUD, Christophe** [FR/FR]; 64 rue La Fontaine, F-91240 Saint Michel s'Orge (FR).

Published:

— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF FORMING DIELECTRIC FILMS, NEW PRECURSORS AND THEIR USE IN THE SEMI-CONDUCTOR MANUFACTURING

(57) Abstract: Method of deposition on a substrate, of a metal containing dielectric film comprising a compound of the formula (I): $(M_{1-a}^{1}M_a^{2})O_bN_c$, (I) wherein $0 \leq a < 1$, $0 < b \leq 3$, $0 \leq c \leq 1$, M^1 represents a metal selected from (Hf), (Zr) and (Ti); and M^2 represents a metal atom, which comprises the following steps: - A step a) of providing a substrate into a reaction chamber; - A step (b) of vaporizing a M^1 metal containing precursor of the formula (II): $(R^1_yOp)_x(R^2_zCp)_z M^1 R'_{4-x-z}$ (II) wherein $0 \leq x \leq 3$, preferably $x = 0$ or 1, $0 \leq z \leq 3$, preferably $z = 1$ or 2, $1 \leq (x + z) \leq 4$, $0 \leq y \leq 7$, preferably $y = 2$, $0 \leq t \leq 5$, preferably $t = 1$, (R^1_yOp) represents a pentadienyl ligand, which is either unsubstituted or substituted; (R^2_zCp) represents a cyclopentadienyl (Cp) ligand, which is either unsubstituted or substituted, to form a first gas phase metal source; - A step c) of introducing the first gas phase metal source in the reaction chamber, in order to provoke their contact with said substrate, to generate the deposition of a metal containing dielectric film comprising a compound of the formula (I) as hereinbefore defined, on said substrate. Compound the formula (II): $(R^2_zCp)M^1[N(R^{39})(R^{40})]_3$ (II₁) corresponding to the formula (II) as hereinabove defined in Claim 1, wherein $x = 0$, $z = 1$ and R' represents the group $N(R^{39})(R^{40})$.

WO 2007/141059 A2

Method of forming dielectric films, new precursors and their use in the semi-conductor manufacturing

The invention relates to a method of forming high-k dielectric films such as hafnium or zirconium oxides or oxynitrides and their use for manufacturing
5 semi-conductors.

With the shrink of the critical dimensions of the future generation of semi-conductor devices, the introduction of new materials, especially having high dielectric constant, is required. In CMOS architectures, high-k dielectrics are required to replace SiO₂ which reaches its physical limits, having typically a
10 SiO₂ equivalent thickness of about 1nm.

Similarly, high-k dielectrics are required in Metal-Insulator-Metal architectures for RAM applications. Various metal compositions have been considered to fulfill both the materials requirements (dielectric constant, leakage current, crystallization temperature, charge trapping) and the integration
15 requirements (thermal stability at the interface, dry etching feasibility...).

The Group IV based materials, such as HfO₂, HfSiO₄, ZrO₂, ZrSiO₄, HfZrO₄, HfLnO_x (Ln being selected from the group comprising scandium, yttrium and rare-earth elements) and more generally HfMO_x and ZrMO_x, M being an element selected from Group II, Group IIIa and Group IIIb, or a transition metal,
20 are among most promising materials. Furthermore, Group IV metals composition can also be considered for electrode and/or Cu diffusion barrier applications, such as TiN for mid-gap metal gate and HfN, ZrN, HfSi, ZrSi, HfSiN, ZrSiN, TiSiN for MIM electrodes.

The main industrial options to enable the deposition of such thin films with
25 a reasonable throughput and an acceptable purity are vapor phase deposition techniques, such as MOCVD (Metal-organic Chemical Vapor Deposition) or ALD (Atomic Layer Deposition). Such deposition processes require metal precursors that must fulfill drastic requirements for a proper industrial use. Metal-organic or metal-halide precursors are required for those processes. Various hafnium and
30 zirconium metal-organic compounds have been considered as precursors to enable such a deposition.

Halides such as HfCl₄, ZrCl₄ are the most common Hf/Zr precursors and

have been widely described. Kim et al. disclosed the use of HfCl_4 for the deposition of HfO_2 by ALD (Kim et al., Electrochem Soc Proceedings 2005-05, 397, 2005). However, some by-products generated during the deposition process, such as HCl or Cl_2 , can cause surface/interface roughness that can be detrimental to the final properties. Other possible byproducts, depending on the oxygen source used, may be hazardous. For instance, OCl_2 , through the OCl fragment by QMS, has been detected as a byproduct of the reaction between HfCl_4 and O_3 . Moreover, in the case of high-k oxide, Cl or F impurities are highly detrimental to the final electrical properties.

10 Triyoso et al. and Chang et al. studied the use of $\text{Hf}(\text{OtBu})_4$ for HfO_2 MOCVD and ALD, respectively [Triyoso et al.; J. Electrochem. Soc., 152(3), G203 - G209 (2005); Chang et al.; Electrochem. Solid. State Let., 7(6), F42-F44 (2004)]. Williams et al. have evaluated $\text{Hf}(\text{mmp})_4$ and $\text{Hf}(\text{OtBu})_2(\text{mmp})_2$ for MOCVD of HfO_2 . In WO2003035926, Jones et al. disclose solid Ti, Hf, Zr and La precursors improved with donor functionalized alkoxy ligand (1-methoxy-2-methyl-2-propanolate [$\text{OCMe}_2\text{CH}_2\text{OMe}$, mmp]) which helps inhibiting oligomerization of Zr and Hf alkoxide compounds and increasing their stability towards moisture. However, all those alkoxide precursors have the drawback not to enable self-limited deposition in ALD process as suggested by
20 Potter et al. (R.J.Potter, P.R.Chalker, T.D.Manning, H.C.Aspinall, Y.F.Loo, A.C.Jones, L.M.Smith, G.W.Critchlow, M.Schumacher, Chem. Vap. Deposition, 2005, 11, N°3, 159-167).

Alkylamides precursors such as $\text{Hf}(\text{NEtMe})_4$, $\text{Hf}(\text{NMe}_2)_4$, $\text{Hf}(\text{NEt}_2)_4$ have been widely disclosed in the literature [Senzaki et al, J. Vac. Sci. Technol. A 22(4) Jul/Aug 2004; Haussmann et al, Chem. Mater. 2002, 14, 4350-4353; Kawahara et al., J. Appl. Phys., Vol 43, N°7A, 2004, pp 4129-4134; Hideaki et al., JP 2002-093804; Metzner et al. US 6,858,547; Dip et al. US 2005/0056219 A1]. Group IV alkylamides are both suitable for ALD and MOCVD processes. Furthermore, some are liquid at room temperature ($\text{Hf}(\text{NEt}_2)_4$ and $\text{Hf}(\text{NEtMe})_4$) and of sufficient volatility, and they allow self-limited ALD at low temperature for
30 a limited thermal budget process. However, Group IV alkylamides, alkylamides in particular Zr compounds, have several drawbacks, among which they may

decompose during the distribution to some extent leading to a possible clogging of the feeding line or the vaporizer, they may generate particles during deposition, they may entail non-uniform compositions during deep trenches deposition processes, and they only allow a narrow self-limited ALD temperature window, hence reducing the process window. In particular, $\text{Zr}(\text{NEtMe})_4$ may
5 decompose in the distribution lines and generate particles above 170°C which is a common distribution temperature. $\text{Hf}(\text{NEtMe})_4$ is more thermally stable yet do not afford self-limited atomic layer deposition above 300°C due to thermal decomposition.

10 In WO 2007/055088, Thenappan et al. disclose hafnium and zirconium guanidines complexes and their application for vapor phase deposition. $\text{Hf}(\text{NEt}_2)_2[(\text{NiPr}-\text{CNEt}_2)_2]$ is given as example. Hafnium and zirconium guanidines are however generally solids with a very limited volatility. As exemplified in thermal gravimetric analysis, one may not obtain
15 $\text{Hf}(\text{NEt}_2)_2[(\text{NiPr}-\text{CNEt}_2)_2]$ in vapour phase, without a risk of thermal decomposition and a subsequent particle generation.

Lehn et al. (Chem. Vap. Deposition, 2006, 12, 280-284) disclose tetrakis(trimethylhydrazido) zirconium [$\text{Zr}(\text{NMeNMe}_2)_4$,] and hafnium and their use for low temperature CVD. The exemplified compounds have an acceptable
20 volatility (sublimation at 0.06 Torr, 90°C reported) but they are solid at room temperature.

Carta et al. disclose the use of bis(cyclopentadienyl)bisdimethyl hafnium, [HfCp_2Me_2] (Carta et al. discloses in Electrochem Soc Proceedings, 260, 2005-09, 2005) and several authors (Codato et al., Chem Vapor Deposition, 159,
25 5, 1995 ; Putkonen et al., J Mater Chem, 3141, 11, 2001 ; Niinisto et al., Langmuir, 7321, 21, 2005) proposed a new family of Zr and Hf compounds as alternatives to hafnium and zirconium alkylamides: Bis(cyclopentadienyl) bisdimethyl hafnium, bis(cyclopentadienyl) bisdimethyl zirconium, which allow an efficient ALD deposition process with an ALD window up to 400°C and an
30 achievement of films with less than 0.2% C in optimized conditions with H_2O as co-reactant. However, HfCp_2Me_2 and ZrCp_2Me_2 both have the drawback of being solid products at room temperature (HfCp_2Me_2 melting point is 57.5°C). This

prevents IC makers to use those precursors in an industrial manner, that is using delocalized containers filling, and entail both facilitation and process issues.

In US 6,743,473, Parkhe et al. disclose the use of $(\text{Cp}(\text{R})_n)_x\text{MH}_{y-x}$, to make a metal and/or a metal nitride layer, where M is selected from tantalum, vanadium, niobium and hafnium, Cp is cyclopentadienyl, R is an organic group.
5 Only examples of tantalum and niobium cyclopentadienyl compounds are disclosed. However, no liquid precursor or a precursor having a melting point lower than 50°C is disclosed.


Liquid bis(cyclopentadienyl) derivatives have recently been proposed by
10 Heys et al. in WO 2006/131751 A1. However, they still present the disadvantage of limited volatility and also present large steric hindrance that may limit the achieved growth rate.

Today, there is a need for providing liquid or low melting point (<50°C) group IV precursor compounds, and in particular Hf and Zr compounds, that
15 would allow simultaneously a proper distribution (physical state, thermal stability at distribution temperatures), a wide self-limited ALD window, and a deposition of pure films either by ALD or MOCVD.

According to the invention, certain cyclopentadienyl or pentadienyl based group IV metal-organic precursors have been found suitable for the deposition of
20 Group IV metal containing thin films by either ALD or MOCVD processes and to have the following advantages:

- They are liquid at room temperature or having a melting point lower than 50°C,
 - They are thermally stable to enable proper distribution (gas phase
25 or direct liquid injection) without particles generation,
 - They are thermally stable to allow wide self-limited ALD window,
- 4) allowing deposition of a variety of Group IV metals containing films, including ternary or quaternary materials, by using one or a combination of co-reactants (selected from the group comprising of H_2 , NH_3 , O_2 , H_2O , O_3 , SiH_4 , Si_2H_6 , Si_3H_8 ,
30 TriDMAS , BDMAS , BDEAS , TDEAS , TDMAS , TEMAS , $(\text{SiH}_3)_3\text{N}$, $(\text{SiH}_3)_2\text{O}$, TMA or an aluminum-containing precursor, TBTDET , TAT-DMAE , PET , TBTDEN , PEN , lanthanide-containing precursors such as $\text{Ln}(\text{tmhd})_3$...).

According to a first embodiment, the invention relates to a method of deposition on a substrate, of at least one metal containing dielectric film comprising a compound of the formula (I):



5 wherein:

$$0 \leq a < 1,$$

$$0 < b \leq 3, \text{ preferably } 1.5 \leq b \leq 2.5;$$

$$0 \leq c \leq 1,$$


M^1 represents a metal selected from hafnium (Hf), zirconium (Zr) and
10 titanium (Ti); and

M^2 represents a metal atom selected from magnesium (Mg), calcium (Ca), zinc (Zn), bore (B), aluminum (A), indium (In), silicon (Si), germanium (Ge), tin (Sn), hafnium (Hf), zirconium (Zr), titanium (Ti), vanadium (V), niobium (Nb), tantalum (Ta); and the Lanthanides atoms, more particularly scandium (Sc),
15 yttrium (Y) and lanthanum (La) and rare-earth metal atoms,

which comprises the following steps:

- A step a) of providing a substrate into a reaction chamber;

- A step (b) of vaporizing at least one M^1 metal containing precursor of the
20 formula (II):



wherein:

M^1 is as hereinabove defined;

$$0 \leq x \leq 3, \text{ preferably } x = 0 \text{ or } 1;$$

25 $0 \leq z \leq 3, \text{ preferably } z = 1 \text{ or } 2;$

$$1 \leq (x + z) \leq 4;$$

$$0 \leq y \leq 7, \text{ preferably } y=2 \quad 0 \leq t \leq 5, \text{ preferably } t=1;$$

$(R^1_y Op)$ represents a pentadienyl (Op) ligand, which is either unsubstituted or substituted by one ore more R^1 groups, y representing the
30 number of substituting R^1 groups on said pentadienyl ligand;

$(R^2_t Cp)$ represents a cyclopentadienyl (Cp) ligand, which is either unsubstituted or substituted by one or more R^2 groups, t representing the number

of substituting R^1 groups on said cyclopentadienyl ligand;

R^1 and R^2 , are identical or different and are independently selected from the group consisting of the chloro group, the linear or branched, alkyl groups having from one to four carbon atoms, the N-alkyl amino groups, wherein the
5 alkyl group is linear or branched and has from one to four carbon atoms, the N,N - dialkyl amino groups, wherein each alkyl group, identical or different from the other, is linear or branched and has from one to four carbon atoms, the linear or branched alkoxy groups, having from one to four carbon atoms, the alkylsilylamides groups, the amidinates groups and the carbonyl group;

10 R' represents a ligand independently selected from the group consisting of the hydrogen, fluoro, chloro, bromo or iodo atoms, the linear or branched, alkyl groups having from one to four carbon atoms, the N-alkyl amino groups, wherein the alkyl group is linear or branched and has from one to four carbon atoms, the N,N-dialkyl amino groups, wherein each alkyl group, identical or different from
15 the other, is linear or branched and has from one to four carbon atoms, the linear or branched alkoxy groups, having from one to four carbon atoms, the alkylsilyl amino groups wherein the alkyl group is linear or branched and has from one to four carbon atoms, the dialkylsilyl amino groups wherein each alkyl group, identical or different from the other, is linear or branched and has from one to
20 four carbon atoms, the trialkylsilyl amino groups wherein each alkyl group, identical or different from the other, is linear or branched and has from one to four carbon atoms, the amidinates groups and the carbonyl, being understood that, if said formula (II) comprises more than one R' groups, each R' may be identical or different one from another,
25 to form a first gas phase metal source;

- Optionally a step b') of vaporizing at least one M^2 metal containing precursor, M^2 being as hereinabove defined; to form an optional second gas phase metal source;

30


- A step c) of introducing said first gas phase metal source and said optional second gas phase metal source, in the reaction chamber, in order to

provoke their contact with said substrate, to generate the deposition of a metal containing dielectric film comprising a compound of the formula (I) as hereinbefore defined, on said substrate;

provided that, if the at least one metal containing dielectric film to be
5 formed comprises the compound of the formula (I'):




corresponding to the formula (I), as hereinbefore defined wherein, $a=0$, $b=2$, and $c=0$, and if the M^1 metal containing precursor, which is involved in step b), is a compound of the formula (II'):



corresponding to the formula (II) as hereinabove defined wherein $x=0$, and $z=2$, in said formula (II'), $t > 0$ in at least one of the two $(R^2_t Cp)$ ligands.

In the method as hereinabove defined, the at least one metal containing precursor of the formula (II) and if necessary, the least one M^2 metal containing
15 precursor, have a melting point generally below $50^\circ C$, preferably below $35^\circ C$ and they are preferably liquid at room temperature.

According to a particular embodiment of the method as hereinbefore defined, the vaporization step b) and if necessary, the vaporization step b') are achieved by introducing a carrier gas into a heated container containing the at
20 least one M^1 metal containing precursor of the formula (II):



and if necessary, both the at least one M^2 metal containing precursor. The container is preferably heated at a temperature allowing to get the said metal sources in liquid phase and at a sufficient vapor pressure. If necessary, one or
25 both metal precursors may be mixed to a solvent or to a mixture of solvents and/or to a stabilizer. The said solvent is for example selected from octane, hexane, pentane or tetramethylsilane. The concentration of the metal precursors in the solvent or in the mixture of solvents is usually between 0.01M and 0.5M and is more particularly around 0.05M. The carrier gas is selected, without
30 limitation, from Ar, He, H_2 , N_2 or mixtures of thereof. If necessary, the container may be heated at temperatures in the range of $80-110^\circ C$. Those skilled in the art will consider that the temperature of the container can be adjusted to control the

amount of precursor to be vaporized.

The carrier gas flow is usually comprised between 10 sccm (standard cubic centimeter) and 500 sccm. Preferably, the carrier gas flow is comprised between 50 sccm and 200 sccm.

5 According to another particular embodiment of the method as hereinbefore defined, the vaporization step b) and if necessary, the vaporization step b') are achieved by introducing in a liquid form, the M¹ metal containing precursor of the formula (II):



10 and if necessary both the M² metal containing precursor to a vaporizer where it is vaporized. If necessary, one or both metal precursors may be mixed to a solvent or to a mixture of solvents and/or to a stabilizer. The said solvent is for example selected from octane, hexane, pentane or tetramethylsilane. The concentration of the metal precursors in the solvent or in the mixture of solvents is usually
15 between 0.01M and 0.5M and is more particularly around 0.05M.

According to a more particular embodiment, the vaporization step b) and the vaporization step b') are combined in one vaporization step b'') of both sources.

During the step c) of the method as hereinbefore defined, the vaporized
20 metal containing precursor is introduced into a reaction chamber where it is contacted to a substrate.

In the context of the present invention, substrate means any substrate used in the semiconductors manufacturing, which, because of their technical function, requires to be coated by metal containing films. Such substrates are for
25 example not only selected from silicon substrates (Si), silica substrates (SiO₂), silicon nitride substrates (SiN) or silicon oxy nitride substrates (SiON), but also from tungsten substrates (W) or noble metal substrates such as for example, Platinum substrates (Pt), Palladium substrates (Pd), Rhodium substrates (Rh) or gold substrates (Au).

30 The substrate is heated until the required temperature to obtain the desired film with a sufficient growth rate and with the desired physical state and composition.

The temperature during step c), usually ranges from 150°C to 600°C. Preferably the temperature is lower or equal to 450°C.

The pressure in the reaction chamber is controlled to obtain the desired metal containing film with a sufficient growth rate. The pressure during step c)
 5 usually ranges from around 1mTorr (0.1333224 Pa) to around 100Torr (13332.24 Pa).

In the context of the present invention, the M² metal containing precursor, is selected from the group consisting of:


Silicon derivatives or their Germanium homologues, such as:

10 disiloxane, trisilylamine, disilane, trisilane, alkoxysilane of the formula: (III₁)




wherein: $0 \leq x \leq 3$ and R³ represents a linear or branched hydrocarbon group having 1 to 6 carbon atoms;

15 silanol derivative of the formula (III₂):




wherein: $1 \leq x \leq 3$ and R⁴ represents a linear or branched alkyl group, having 1 to 6 carbon atoms, preferably Si(OH)(OR⁴)₃ and more preferably Si(OH)(OtBu)₃; aminosilane derivative of the formula (III₃):




wherein: $0 \leq x \leq 3$ and R⁵ and R⁶ are identical or different and independently represents an hydrogen atom or a linear or branched alkyl having 1 to 6 carbon atoms, preferably SiH(NMe₂)₃ (TriDMAS); SiH₂(NHtBu)₂ (BTBAS); SiH₂(NEt₂)₂ (BDEAS)) and mixtures thereof;

25 Aluminum derivatives, such as trimethylaluminum [Al(CH₃)₃], dimethyl aluminum hydride [AlH(CH₃)₂], alkoxyalane of the formula (IV₁):




wherein: $0 \leq x \leq 3$ and R⁷ represents a linear or branched alkyl having 1 to 6 carbon atom, and R⁸, identical to or different from R⁷, represents an hydrogen atom, or preferably AlR⁹R¹⁰(OR⁷), with R⁹ and R¹⁰ identical or different, which
 30 independently represent an linear or branched alkyl having 1 to 6 carbon atoms, most preferably AlMe₂(OiPr);

amidoalane of the formula (IV₂):




wherein: $0 \leq x \leq 3$ and R¹² and R¹³ identical or different, represent an hydrogen atom or a linear or branched alkyl having 1 to 6 carbon atoms, and R¹¹, identical
5 to or different from R⁷ and , represents an hydrogen atom or a linear or branched alkyl having 1 to 6 carbon atoms;


Tantalum derivatives, such as: Ta(OMe)₅, Ta(OEt)₅, Ta(NMe₂)₅, Ta(NEt₂)₅, Ta(NEt₂)₅, a tantalum derivative of the formula (V₁):



10 wherein R¹⁴, R¹⁵, R¹⁶ and R¹⁷, identical or different, independently represent an hydrogen atom or a linear or branched alkyl having 1 to 6 carbon atoms, preferably Ta(OEt)₄(OCMe₂CH₂-OMe) (TAT-DMAE), a tantalum derivative of the formula (V₂):




15 wherein R¹⁸, R¹⁹, R²⁰, R²¹ and R²², identical or different, independently represent an hydrogen atom or a linear or branched alkyl having 1 to 6 carbon atoms, a tantalum derivative of the formula (V₃):




wherein R²⁴, R²⁵ and R²⁶, identical or different, independently represent an
20 hydrogen atom or a linear or branched alkyl having 1 to 6 carbon atoms;


Niobium derivatives, such as Nb(OMe)₅, Nb(OEt)₅, Nb(NMe₂)₅, Nb(NEt₂)₄, Nb(NEt₂)₅, a niobium derivative of the formula (VI₁):



wherein R²⁷, R²⁸, R²⁹ and R³⁰, identical or different, independently represent an
25 hydrogen atom or a linear or branched alkyl having 1 to 6 carbon atoms, preferably Nb(OEt)₄(OCMe₂CH₂-OMe) (NBT-DMAE), a niobium derivative of the formula (VI₂):



wherein R³¹, R³², R³³, R³⁴ and R³⁵, identical or different, independently represent
30 an hydrogen atom or a linear or branched alkyl having 1 to 6 carbon atoms, a niobium derivative of the formula (VI₃):



wherein R^{36} , R^{37} and R^{38} , identical or different, independently represent an hydrogen atom or a linear or branched alkyl having 1 to 6 carbon atoms;

lanthanide derivatives, such as scandium derivatives, yttrium derivatives, cerium derivatives, praseodinium derivatives, gadolinium derivatives, dysprosium derivatives, erbium derivatives, lanthanum derivatives, a derivative
5 with at least one β -diketonate ligand or at least a cyclopentadienyl ligand optionally substituted with one or several linear or branched alkyl groups having 1 to 6 carbon atoms;

divalent metal derivatives, such as strontium (Sr), barium (Ba),
10 magnesium (Mg), calcium (Ca) or zinc (Zn) derivatives, with at least one β -diketonate ligand or at least a cyclopentadienyl ligand optionally substituted with one or several linear or branched alkyl groups having 1 to 6 carbon atoms;

other metal derivatives such as tungsten(W), molybdenum (Mo), hafnium (Hf) or zirconium (Zr) derivatives, for example the alkoxy derivatives, the amino
15 derivatives or adducts containing these species, being understood that said derivatives are not compounds of the formula (II) as hereinbefore defined.

According to another particular embodiment, the method as hereinbefore defined, comprise:

- A step d), wherein the at least one M^1 metal containing precursor of the
20 formula (II), and if necessary, the at least one M^2 metal containing precursor, is mixed to at least one reactant specie prior to step c).

In the context of the invention, the at least one reactant specie is chosen in relation to the targeted metal based film, which is expected

According to another embodiment, the reactant specie is an oxygen
25 source and more particularly oxygen (O_2), oxygen containing radicals $O^\bullet$ or $OH^\bullet$, for instance generated by a remote plasma, ozone (O_3), moisture (H_2O) and H_2O_2 and mixture thereof.

According to another embodiment, the reactant specie is a nitrogen source and more particularly nitrogen (N_2), nitrogen-containing radicals such as
30 $N^\bullet$, $NH^\bullet$, $NH_2^\bullet$, ammonia (NH_3), hydrazine (NH_2NH_2) and its alkyl or aryl derivatives, and mixtures thereof.

According to another embodiment, the reactant specie is both a nitrogen

and an oxygen source and more particularly, NO, NO₂, N₂O, N₂O₅, N₂O₄ and mixtures thereof.

Depending on the ratio N/O, which is required, the reactant specie which is, if necessary, used in the method as hereinbefore defined, may be either an oxygen source, either a mixture of an oxygen source and of a nitrogen source
5 either both an oxygen and a nitrogen source or a mixture thereof.

According to another embodiment of the invention, if the targeted metal based film contains carbon, such as for example without limitation metal carbide or metal carbonitride, at least one reactant specie is a carbon source more
10 particularly, methane, ethane, propane, butane, ethylene, propylene, t-butylene,

According to another embodiment of the invention if the targeted metal based film contains silicon, such as for example without limitation metal silicide, silico-nitride, silicate or silico-carbo-nitride, at least on reactant specie is a silicon source such as:

15 disiloxane, trisilylamine, disilane (Si₂H₆), trisilane (Si₃H₈), alkoxysilane of the formulas (III₁), (III₂) or (III₃), as hereinbefore defined, for example SiH(NMe₂)₃ (TriDMAS); SiH₂(NHtBu)₂ (BTBAS); SiH₂(NEt₂)₂ (BDEAS)) and mixtures thereof.

According to another particular embodiment, the method as hereinbefore defined, comprise:

20 - a step d') wherein the at least one M¹ metal containing precursor of the formula (II) and if necessary, the at least one M² metal containing precursor, is mixed to at least one reactant specie in the reaction chamber.


The mode of introduction of the at least one M¹ metal containing precursor of the formula (II) and if necessary, the at least one M² metal containing
25 precursor, and the at least one reactant specie in the reaction chamber generally depends on the mode of deposition of the film on the substrate. The metal containing precursors and the reactant species are generally introduced simultaneously in a chemical vapor deposition process, or sequentially in an atomic layer deposition process or according to several combinations, as for
30 example in a pulsed modified atomic layer deposition process wherein the at least one M¹ metal containing precursor of the formula (II) and if necessary, the at least one M² metal containing precursor, are introduced together in one pulse

and the at least one reactant specie is introduced in a separate pulse; or in a pulsed chemical vapor deposition process wherein the at least one M¹ metal containing precursor of the formula (II) and if necessary, the at least one M² metal containing precursor, are introduced by pulse and the at least one reactant
 5 specie is introduced continuously.

According to another of the invention, the at least one reactant specie is passed through a plasma system localized remotely from the reaction chamber, and decomposed to radicals.

According to another embodiment, the step (b) of the method as
 10 hereinabove defined, consists of a step (b₁) of mixing at least one first metal containing precursor of the formula (II) together with at least a second of the following precursors: M¹(NMe₂)₄, M¹(NEt₂)₄, M¹(NMeEt)₄, M¹(mmp)₄, M¹(OtBu)₄, M¹(OtBu)₂(mmp)₂ and mixtures thereof and a step (b₂) of vaporizing said mixture.

According to a more particular embodiment, the invention concerns a
 15 method as hereinbefore defined, of deposition of a metal containing dielectric film comprising a compound of the formula (I), wherein the M¹ metal containing precursor is of the formula (II₁):



corresponding to the formula (II), wherein x = 0, z = 1 and R' represents the
 20 group N(R³⁹)(R⁴⁰), wherein R³⁹ and R⁴⁰, identical or different, independently represent an hydrogen atom, a linear or branched alkyl group having from one to four carbon atoms, an alkylsilyl group, wherein the alkyl group is linear or branched and has from one to four carbon atoms, a dialkylsilyl group, wherein each alkyl group, identical or different from the other, is linear or branched and
 25 has from one to four carbon atoms or a trialkylsilyl group wherein each alkyl group, identical or different from the other, is linear or branched and has from one to four carbon atoms

According to a more particular embodiment, the invention concerns a
 method as hereinbefore defined, of deposition of a metal containing dielectric
 30 film comprising a compound of the formula (I₁):



corresponding to the formula (I), wherein a=0, b = 2 and c = 0, wherein the metal


containing precursor of the formula (II) is selected from the group consisting of:
 HfCp₂Cl₂, Hf(MeCp)₂Me₂, HfCp(MeCp)Cl₂, Hf(MeCp)₂Cl₂, HfCp(MeCp)Me₂,
 Hf(EtCp)(MeCp)Me₂, Hf(EtCp)₂Me₂, Hf(MeCp)₂(CO)₂, ZrCp₂Cl₂, Zr(MeCp)₂Me₂,
 ZrCp(MeCp)Cl₂, Zr(MeCp)₂Cl₂, ZrCp(MeCp)Me₂, Zr(EtCp)(MeCp)Me₂,
 5 Zr(EtCp)₂Me₂, Zr(MeCp)₂(CO)₂, Zr(MeCp)(NMe₂)₃, Zr(EtCp)(NMe₂)₃,
 ZrCp(NMe₂)₃, Zr(MeCp)(NEtMe)₃, Zr(EtCp)(NEtMe)₃, ZrCp(NEtMe)₃,
 Zr(MeCp)(NEt₂)₃, Zr(EtCp)(NEt₂)₃, ZrCp(NEt₂)₃, Zr(iPr₂Cp)(NMe₂)₃,
 Zr(tBu₂Cp)(NMe₂)₃, Hf(MeCp)(NMe₂)₃, Hf(EtCp)(NMe₂)₃, HfCp(NMe₂)₃,
 Hf(MeCp)(NEtMe)₃, Hf(EtCp)(NEtMe)₃, HfCp(NEtMe)₃, Hf(MeCp)(NEt₂)₃,
 10 Hf(EtCp)(NEt₂)₃, HfCp(NEt₂)₃, Hf(iPr₂Cp)(NMe₂)₃, Hf(tBu₂Cp)(NMe₂)₃
 and mixtures thereof.

According to a more particular embodiment, the invention concerns a method as hereinbefore defined, of deposition of a metal containing dielectric film comprising a compound of the formula (I₂):



corresponding to the formula (I), wherein a=0, 1.5 ≤ b ≤ 2.5 and 0 < c ≤ 0.5, wherein the metal containing precursor of the formula (II) is selected from the group consisting of: HfCp₂Cl₂, Hf(MeCp)₂Me₂, HfCp(MeCp)Cl₂, Hf(MeCp)₂Cl₂, HfCp(MeCp)Me₂, Hf(EtCp)(MeCp)Me₂, Hf(EtCp)₂Me₂, Hf(MeCp)₂(CO)₂, ZrCp₂Cl₂,
 20 Zr(MeCp)₂Me₂, Zr(MeCp)₂Cl₂, ZrCp(MeCp)Me₂, Zr(EtCp)(MeCp)Me₂,
 Zr(EtCp)₂Me₂, Zr(MeCp)₂(CO)₂, Zr(MeCp)(NMe₂)₃, Zr(EtCp)(NMe₂)₃,
 ZrCp(NMe₂)₃, Zr(MeCp)(NEtMe)₃, Zr(EtCp)(NEtMe)₃, ZrCp(NEtMe)₃,
 Zr(MeCp)(NEt₂)₃, Zr(EtCp)(NEt₂)₃, ZrCp(NEt₂)₃, Zr(iPr₂Cp)(NMe₂)₃,
 Zr(tBu₂Cp)(NMe₂)₃, Hf(MeCp)(NMe₂)₃, Hf(EtCp)(NMe₂)₃, HfCp(NMe₂)₃,
 25 Hf(MeCp)(NEtMe)₃, Hf(EtCp)(NEtMe)₃, HfCp(NEtMe)₃, Hf(MeCp)(NEt₂)₃,
 Hf(EtCp)(NEt₂)₃, HfCp(NEt₂)₃, Hf(iPr₂Cp)(NMe₂)₃, Hf(tBu₂Cp)(NMe₂)₃ and mixture thereof.

According to a more particular embodiment, the invention concerns a method as hereinbefore defined, of deposition of a metal containing dielectric film comprising a compound of the formula (I₃):



corresponding to the formula (I), wherein 0 ≤ a < 1 and c=0, wherein the metal

containing precursor of the formula (II) is selected from the group consisting of:
 HfCp₂Cl₂, Hf(MeCp)₂Me₂, HfCp(MeCp)Cl₂, Hf(MeCp)₂Cl₂, HfCp(MeCp)Me₂,
 Hf(EtCp)(MeCp)Me₂, Hf(EtCp)₂Me₂, Hf(MeCp)₂(CO)₂, ZrCp₂Cl₂, Zr(MeCp)₂Me₂,
 ZrCp(MeCp)Cl₂, Zr(MeCp)₂Cl₂, ZrCp(MeCp)Me₂, Zr(EtCp)(MeCp)Me₂,
 5 Zr(EtCp)₂Me₂, Zr(MeCp)₂(CO)₂, Zr(MeCp)(NMe₂)₃, Zr(EtCp)(NMe₂)₃,
 ZrCp(NMe₂)₃, Zr(MeCp)(NEtMe)₃, Zr(EtCp)(NEtMe)₃, ZrCp(NEtMe)₃,
 Zr(MeCp)(NEt₂)₃, Zr(EtCp)(NEt₂)₃, ZrCp(NEt₂)₃, Zr(iPr₂Cp)(NMe₂)₃,
 Zr(tBu₂Cp)(NMe₂)₃, Hf(MeCp)(NMe₂)₃, Hf(EtCp)(NMe₂)₃, HfCp(NMe₂)₃,
 Hf(MeCp)(NEtMe)₃, Hf(EtCp)(NEtMe)₃, HfCp(NEtMe)₃, Hf(MeCp)(NEt₂)₃,
 10 Hf(EtCp)(NEt₂)₃, HfCp(NEt₂)₃, Hf(iPr₂Cp)(NMe₂)₃, Hf(tBu₂Cp)(NMe₂)₃ and the M²
 metal containing precursor is preferably selected from the silicon derivatives or
 their germanium homologues, the tantalum derivatives, lanthanide derivatives,
 and the magnesium derivatives as hereinabove defined.

According to a more particular embodiment, the invention concerns a
 15 method as hereinbefore defined, of deposition of a metal containing dielectric
 film comprising a compound of the formula (I₄):




corresponding to the formula (I), wherein $0 \leq a < 1$ and $0 < c \leq 0.5$, wherein the
 metal containing precursor of the formula (II) is selected from the group
 20 consisting of HfCp₂Cl₂, Hf(MeCp)₂Me₂, HfCp(MeCp)Cl₂, Hf(MeCp)₂Cl₂,
 HfCp(MeCp)Me₂, Hf(EtCp)(MeCp)Me₂, Hf(EtCp)₂Me₂, Hf(MeCp)₂(CO)₂, ZrCp₂Cl₂,
 Zr(MeCp)₂Me₂, ZrCp(MeCp)Cl₂, Zr(MeCp)₂Cl₂, ZrCp(MeCp)Me₂,
 Zr(EtCp)(MeCp)Me₂, Zr(EtCp)₂Me₂, Zr(MeCp)₂(CO)₂, Zr(MeCp)(NMe₂)₃,
 Zr(EtCp)(NMe₂)₃, ZrCp(NMe₂)₃, Zr(MeCp)(NEtMe)₃, Zr(EtCp)(NEtMe)₃,
 25 ZrCp(NEtMe)₃, Zr(MeCp)(NEt₂)₃, Zr(EtCp)(NEt₂)₃, ZrCp(NEt₂)₃,
 Zr(iPr₂Cp)(NMe₂)₃, Zr(tBu₂Cp)(NMe₂)₃, Hf(MeCp)(NMe₂)₃, Hf(EtCp)(NMe₂)₃,
 HfCp(NMe₂)₃, Hf(MeCp)(NEtMe)₃, Hf(EtCp)(NEtMe)₃, HfCp(NEtMe)₃,
 Hf(MeCp)(NEt₂)₃, Hf(EtCp)(NEt₂)₃, HfCp(NEt₂)₃, Hf(iPr₂Cp)(NMe₂)₃,
 Hf(tBu₂Cp)(NMe₂)₃, the M² metal containing precursor is preferably selected
 30 from the silicon derivatives or their germanium homologues, the tantalum
 derivatives, lanthanide derivatives, and the magnesium derivatives as
 hereabove defined, and at least one oxygen containing precursor and at least

one nitrogen containing precursor is introduced into the reactor.

According to another embodiment the invention concerns the use of the compounds of the formula (II) as hereinbefore defined, to make dielectric films more particularly for integrated circuits or in the preparation of Metal Insulator
5 Metal (MIM) architectures for Random Access Memories.

According to another embodiment, the invention concerns a compound the formula (II₁):



corresponding to the formula (II), wherein $x = 0$, $z = 1$ and R' represents the
10 group $N(R^{39})(R^{40})$, wherein R^{39} and R^{40} , identical or different, independently represent an hydrogen atom, a linear or branched alkyl group having from one to four carbon atoms, an alkylsilyl group, wherein the alkyl group is linear or branched and has from one to four carbon atoms, a dialkylsilyl group, wherein each alkyl group, identical or different from the other, is linear or branched and
15 has from one to four carbon atoms or a trialkylsilyl group wherein each alkyl group, identical or different from the other, is linear or branched and has from one to four carbon atoms.

According to a particular embodiment, the invention relates to a compound of the formula (II₁) as hereinbefore defined, wherein R^2 , R^{39} and R^{40} ,
20 identical or different, independently represent a radical selected from the methyl, ethyl, propyl, isopropyl, butyl, isobutyl, sec-butyl and tert-butyl groups, and more specifically the following compounds:

Zr(MeCp)(NMe₂)₃, Zr(EtCp)(NMe₂)₃, ZrCp(NMe₂)₃, Zr(MeCp)(NEtMe)₃,
Zr(EtCp)(NEtMe)₃, ZrCp(NEtMe)₃, Zr(MeCp)(NEt₂)₃, Zr(EtCp)(NEt₂)₃,
25 ZrCp(NEt₂)₃, Zr(iPr₂Cp)(NMe₂)₃, Zr(tBu₂Cp)(NMe₂)₃, Hf(MeCp)(NMe₂)₃,
Hf(EtCp)(NMe₂)₃, HfCp(NMe₂)₃, Hf(MeCp)(NEtMe)₃, Hf(EtCp)(NEtMe)₃,
HfCp(NEtMe)₃, Hf(MeCp)(NEt₂)₃, Hf(EtCp)(NEt₂)₃, HfCp(NEt₂)₃,
Hf(iPr₂Cp)(NMe₂)₃, Hf(tBu₂Cp)(NMe₂)₃.

According to a more specific embodiment, the invention relates to the
30 following compounds:

Zr(EtCp)(NMe₂)₃, Zr(MeCp)(NMe₂)₃, ZrCp(NMe₂)₃, Hf(EtCp)(NMe₂)₃,
Hf(MeCp)(NMe₂)₃ and HfCp(NMe₂)₃.

Those skilled in the art will recognize that the hereinabove metal-organic compounds could be used for any other applications than vapour phase deposition processes, such as catalysts or any other industrial process or application requiring the use of metal-organic compounds...

5 According to another embodiment, the invention concerns a process for the preparation of a compound of the formula (II₁) as hereinabove defined, which comprises:

a step 1, consisting of the preparation of the compound of the formula (VII₁):



wherein M¹, R² and t are as hereinabove defined for the formula (II), by the reaction of M¹Cl₄ with (R²_tCp)Na ;

a step 2, consisting of the reaction of the compound of the formula (VII₁) prepared in step 1, with NH(R³⁹)(R⁴⁰), to produce the compound of the formula
15 (II₁).

According to a last embodiment, the invention concerns the following compounds of the formula (II) as hereinabove defined:

Hf(EtCp)₂Me₂, Zr(MeCp)₂Me₂ or Zr(EtCp)₂Me₂.

20 The following examples are an illustration of the various embodiments of the present invention, without being a limitation.

Example I: Deposition of metal oxide film M¹O₂ with M¹ being preferably hafnium and zirconium

25 The film to be deposited comprises a compound of the formula (I) wherein a = 0, b = 2 and c = 0.

To make the deposition of such film on the surface of a wafer or in a deep trench to manufacture MIM structures for DRAM, one need to vaporize the M¹ metal source as defined in step (b) and to introduce it into the reactor (preferably
30 Hafnium or Zirconium), to inject an oxygen source, preferably moisture, oxygen or ozone into said reactor, react the products at appropriate temperature (preferably between 150°C and 350°C) and pressure (preferably between 25 Pa

and 1000 Pa) for the duration necessary to achieve either a thin film deposition on the substrate or to fill out deep trenches by ALD or pulse CVD process (sequential pulse injection of metal sources are necessary in order to allow regular deposition of the oxide in the trench to progressively fill out this trench
5 and provide no voids in the dielectric film and therefore no defect in the capacitor dielectric film).

The dielectric film shall have the desired final composition (here essentially variations of the b value around 2 modifying the ratio of precursor to oxygen source).

10 Three examples of types of compounds of the formula (II) were chosen according to the three following options a, b or c:

a) The compound of the formula (II) is chosen from $\text{Zr}(\text{MeCp})_2\text{Me}_2$, $\text{Zr}(\text{EtCp})_2\text{Me}_2$, $\text{Hf}(\text{MeCp})_2\text{Me}_2$ and $\text{Hf}(\text{MeCp})_2\text{Me}_2$.

Delivery of molecules in liquid form is usually carried out by bubbling an
15 inert gas (N_2 , He, Ar, ...) into the liquid and providing the inert gas plus liquid gas mixture to the reactor.

b) The compound of the formula (II) is chosen from $\text{Zr}(2,4\text{-Me}_2\text{Op})_2\text{Me}_2$ and $\text{Hf}(2,4\text{-Me}_2\text{Op})_2\text{Me}_2$.

c) The compound of the formula (II) is chosen from
20 $\text{Zr}(\text{MeCp})(2,4\text{-Me}_2\text{Op})\text{Me}_2$ and $\text{Hf}(\text{MeCp})(2,4\text{-Me}_2\text{Op})\text{Me}_2$.

The oxygen source shall be preferably, without limitations, oxygen (O_2), oxygen radicals (for instance $\text{O}^\cdot$ or $\text{OH}^\cdot$), such as radicals generated by a remote plasma system, ozone, NO, N_2O , NO_2 , moisture (H_2O) and H_2O_2 .

25 Regarding the deposition process by itself, the reactants can be introduced into the reactor simultaneously (chemical vapor deposition), sequentially (atomic layer deposition) or different combinations (one example is to introduce metal source and the other metal source together in one pulse and oxygen in a separate pulse [modified atomic layer deposition]; another option is
30 to introduce oxygen continuously and/or to introduce the metal source by pulse (pulsed-chemical vapor deposition).

Example II: Deposition of metal oxynitride films M^1ON with M^1 being preferably Hafnium and Zirconium

The film to be deposited comprises a compound of the formula (I) wherein $a=0$ and b and c are different from zero.

5 All the information given in Example I, is applicable in this Example II, except that nitrogen needs to be introduced into the reactor.

The nitrogen shall be selected from a nitrogen source selected from the group comprising nitrogen (N_2), ammonia, hydrazine and alkyl derivatives, N-containing radicals (for instance $N^\bullet$, $NH^\bullet$, $NH_2^\bullet$), NO, N_2O , NO_2 or the like.

10

Example III: Deposition of M^1M^2 metal oxide films with M^1 being preferably Hf or Zr and M^2 being preferably Si or Al

The film to be deposited comprises a compound of the formula (I) wherein $a \neq 0$, $b \neq 0$ and $c=0$.

15 All the information given in Example I, is applicable in this Example III, except that a M^2 metal source is additionally needed.

The M^2 containing precursor is also introduced into the reactor to create the M^2 source of metal. This M^2 containing precursor source shall be preferably:

a) a silicon (or germanium) source, for example $Si(OH)(OtBu)_3$,
20 $SiH(NMe_2)_3$ (TriDMAS); $SiH_2(NHtBu)_2$ (BTBAS) and $SiH_2(NEt_2)_2$ (BDEAS)

b) an aluminum source, for example $AlMe_2(OiPr)$; or

c) a tantalum (or niobium) source, for example $Ta(OMe)_5$, $Ta(OEt)_5$ and $Ta(OEt)(OCMe_2CH_2-OMe)$ (TATDMAE);

25 The invention is directed to the deposition of dielectric films of the formula I, onto a support such as a wafer, in a reactor using ALD, CVD, MOCVD, pulse CVD processes.

Example IV: Deposition of M^1M^2 metal oxynitride films with M^1 being preferably Hf or Zr and M^2 being preferably Si or Al

30 The film to be deposited comprises a compound of the formula (I) wherein $a \neq 0$, $b \neq 0$ and $c \neq 0$.

All the information given in Example III, is applicable in this case, except

that nitrogen needs to be introduced into the reactor.

The nitrogen source shall be selected from the group comprising nitrogen (N₂), ammonia, hydrazine and alkyl derivatives, N-containing radicals (for instance N[·], NH[·], NH₂[·]), NO, N₂O, NO₂.

5

Example V: Synthesis of (ethylcyclopentadienyl) tris(dimethylamino) zirconium, Zr(EtCp)(NMe₂)₃

Zr(EtCp)(NMe₂)₃ is prepared in 3 steps.

10 The first step is the preparation of Zr(EtCp)Cl₃ by the reaction of (EtCp)Na over ZrCl₄;

The second step is the reaction LiNMe₂ with Zr(EtCp)Cl₃ to produce Zr(EtCp)(NMe₂)₃. The resulting compound is purified by distillation. Overall yield was 35%.

15 (Ethylcyclopentadienyl)tris(dimethylamino)zirconium has been found to be a stable liquid pale yellow compound.

TGA analysis of Zr(EtCp)(NMe₂)₃

20 The thermal gravimetric apparatus was stored in an argon glove box with moisture and oxygen content maintained below 1ppmv. Thermal gravimetric analysis was performed by placing a 35mg sample in an aluminum crucible. The sample was then heated at a 10°C/min temperature ramp from 35°C to 400°C. The mass loss was monitored as a function of the crucible temperature. The residue level was 2.6% with full evaporation temperatures of 260°C. The resulting graph is on Figure 1.

25 **Example VI: Atomic Layer Deposition of ZrO₂ thin films using Zr(EtCp)(NMe₂)₃**

30 Zr(EtCp)(NMe₂)₃ is stored into a container. The container is heated at 90°C and N₂ is used as carrier gas at a flow of 50sccm. The pressure the container is controlled at 50Torr. O₃ is used as oxygen source. The substrate is heated at 350°C. During a first step, Zr(EtCp)(NMe₂)₃ is introduced into the reaction chamber during 2s. A N₂ purge of 5s is performed afterwards as second step. As third step, a pulse of O₃ is then introduced into the reaction chamber

during 2s, followed by a 2s N₂ purge as fourth step. All four steps are repeated 100 times to obtain a ZrO₂ film. Self-limited atomic layer deposition is obtained.

Similar experiments can be performed with Hf analogs. Similar experiments can be conducted with H₂O as oxygen source.

5

Example VII: Metal-Organic Chemical Vapor Deposition of ZrO₂ using Zr(EtCp)(NMe₂)₃

Zr(EtCp)(NMe₂)₃ is stored into a container. The container is heated at 90°C and N₂ is used as carrier gas at a flow of 50sccm. The pressure in the
10 container is controlled at 50Torr. Zr(EtCp)(NMe₂)₃ is mixed to an O₂/N₂ gas mixture into the reaction chamber. The substrate is heated at 500°C. The pressure inside the reaction chamber is set at 10Torr. A film of zirconium oxide is obtained.

Similar experiments can be performed with Hf analogs.

15

Example VIII: Comparison of Zr(EtCp)(NMe₂)₃ and Zr(NEtMe)₄ thermal behavior

Thermal gravimetric analysis is performed on Zr(EtCp)(NMe₂)₃ and Zr(NEtMe)₄ in similar conditions. Thermal gravimetric apparatus was stored in an
20 argon glove box with moisture and oxygen content maintained below 1ppmv. Thermal gravimetric analysis was performed by placing a 35mg sample in an aluminum crucible. The sample was then heated at a 10°C/min temperature ramp from 35°C to 400°C. The mass loss was monitored as a function of the crucible temperature. In closed cup configuration, a pierced pan (0.8 mm) is
25 placed over the crucible containing the metal-organic compound to slow down the evaporation. This indicates the thermal stability at higher temperature. The results indicates that Zr(EtCp)(NMe₂)₃ is much more thermally stable than Zr(NEtMe)₄, making it further attractive for use as vapor phase precursor. The results are shown on Figure 2.

30

Example IX: Synthesis and thermal behavior of Hf(EtCp)₂Me₂

Hf(EtCp)₂Cl₂ is readily obtained by the reaction of 1 mole HfCl₄ over

EtCpNa.

Hf(EtCp)₂Me₂ is then obtained by a slow addition of 2 moles LiMe over 1 mole Hf(EtCp)₂Cl₂ at -20°C and increasing the temperature until 0°C. The obtained transparent liquid Hf(EtCp)₂Me₂ is separated from LiCl and solvent by distillation. TGA analysis of Hf(EtCp)₂Me₂ in vacuum conditions, leaves a residue of 1.0% for a starting mass of about 30mg.(see Figure 3)

Example X: atomic layer deposition of HfO₂ from Hf(EtCp)₂Me₂ and O₃

This example concerns the fabrication of hafnium oxide films. A silicon wafer is mounted in a deposition chamber that is provided with a heater over its circumference and the desired film is formed on the surface of the silicon wafer. The chamber is evacuated by a pump. The metal precursor, in this case dimethylhafnocene HfMe₂(EtCp)₂, is stored in a heated liquid container. Nitrogen gas is used as the carrier gas for the Hf(EtCp)₂Me₂. The Hf(EtCp)₂Me₂ in the liquid container is transported by flowing the nitrogen through the liquefied material. Nitrogen is transported through a mass flow controller into the vaporizer. The Hf(EtCp)₂Me₂ vapors were carried by nitrogen and fed to the chamber along, or diverted to a bypass line when the valve allowing the introduction of the precursor into the reactor is closed. An oxygen/ozone gas mixture (oxidizing agent) is also fed through a mass flow controller either into the chamber or to a bypass line. Oxygen/ozone on one side and Hf(EtCp)₂Me₂ on the other side were never introduced together to avoid a highly probable CVD reaction. They were usually introduced one by one, each reactant pulse being separated by purge time where only N₂ was introduced into the chamber.


Hafnium oxide films were produced at a ~0.7 Å/cycle under the following conditions using the described tool:

Pressure = 3 torr, temperature = 350°C, $\text{Hf}(\text{EtCp})_2\text{Me}_2$ flow rate = 0.5 sccm, O_2 flow rate = 100 sccm. O_3 flow rate = 8 sccm. N_2 flow rate = 100 sccm.

An Auger profile of the obtained film is given as example (See Figure 4).

CLAIMS

1. Method of deposition on a substrate, of at least one metal containing dielectric film comprising a compound of the formula (I):



wherein:

$$0 \leq a < 1,$$

$$0 < b \leq 3, \text{ preferably } 1.5 \leq b \leq 2.5;$$

$$0 \leq c \leq 1,$$

10 M^1 represents a metal selected from hafnium (Hf), zirconium (Zr) and titanium (Ti); and

M^2 represents a metal atom selected from magnesium (Mg), calcium (Ca), zinc (Zn), bore (B), aluminum (Al), indium (In), silicon (Si), germanium (Ge), tin (Sn), hafnium (Hf), zirconium (Zr), titanium (Ti), vanadium (V), niobium (Nb),
15 tantalum (Ta); and the Lanthanides atoms, more particularly scandium (Sc), yttrium (Y) and lanthanum (La) and rare-earth metal atoms,
which comprises the following steps:

- A step a) of providing a substrate into a reaction chamber;

20 - A step (b) of vaporizing at least one M^1 metal containing precursor of the formula (II):



wherein:

M^1 is as hereinabove defined;

$$25 \quad 0 \leq x \leq 3, \text{ preferably } x = 0 \text{ or } 1;$$

$$0 \leq z \leq 3, \text{ preferably } z = 1 \text{ or } 2;$$

$$1 \leq (x + z) \leq 4;$$

$$0 \leq y \leq 7, \text{ preferably } y=2 \quad 0 \leq t \leq 5, \text{ preferably } t=1;$$

30 $(R^1_y Op)$ represents a pentadienyl (Op) ligand, which is either unsubstituted or substituted by one or more R^1 groups, y representing the number of substituting R^1 groups on said pentadienyl ligand;

$(R^2_t Cp)$ represents a cyclopentadienyl (Cp) ligand, which is either

unsubstituted or substituted by one or more R^2 groups, t representing the number of substituting R^1 groups on said cyclopentadienyl ligand;

R^1 and R^2 , are identical or different and are independently selected from the group consisting of the chloro group, the linear or branched, alkyl groups
5 having from one to four carbon atoms, the N-alkyl amino groups, wherein the alkyl group is linear or branched and has from one to four carbon atoms, the N,N - dialkyl amino groups, wherein each alkyl group, identical or different from the other, is linear or branched and has from one to four carbon atoms, the linear or branched alkoxy groups, having from one to four carbon atoms, the
10 alkylsilylamides groups, the amidinates groups and the carbonyl group;


R' represents a ligand independently selected from the group consisting of the hydrogen, fluoro, chloro, bromo or iodo atoms, the linear or branched, alkyl groups having from one to four carbon atoms, the N-alkyl amino groups, wherein the alkyl group is linear or branched and has from one to four carbon atoms, the
15 N,N-dialkyl amino groups, wherein each alkyl group, identical or different from the other, is linear or branched and has from one to four carbon atoms, the linear or branched alkoxy groups, having from one to four carbon atoms, the alkylsilyl amino groups wherein the alkyl group is linear or branched and has from one to four carbon atoms, the dialkylsilyl amino groups wherein each alkyl group,
20 identical or different from the other, is linear or branched and has from one to four carbon atoms, the trialkylsilyl amino groups wherein each alkyl group, identical or different from the other, is linear or branched and has from one to four carbon atoms, the amidinates groups and the carbonyl, being understood that, if said formula (II) comprises more than one R' groups, each R' may be
25 identical or different one from another,
to form a first gas phase metal source;

- Optionally a step b') of vaporizing at least one M^2 metal containing precursor, M^2 being as hereinabove defined; to form an optional second gas
30 phase metal source;


- A step c) of introducing said first gas phase metal source and said

optional second gas phase metal source, in the reaction chamber, in order to provoke their contact with said substrate, to generate the deposition of a metal containing dielectric film comprising a compound of the formula (I) as hereinbefore defined, on said substrate;

- 5 provided that, if the at least one metal containing dielectric film to be formed comprises the compound of the formula (I'):



- corresponding to the formula (I), as hereinbefore defined wherein, $a = 0$, $b = 2$, and $c = 0$, and if the M^1 metal containing precursor, which is involved in step b), is
10 a compound of the formula (II'):



corresponding to the formula (II) as hereinabove defined wherein $x = 0$, and $z = 2$, in said formula (II'), $t > 0$ in at least one of the two $(R^2_t Cp)$ ligands.

- 15 2. Method according to claim 1, wherein the vaporization step b) and the vaporization step b') are combined in one vaporization step b") of both sources.

3. Method according to claim 1 or to claim 2 wherein the M^2 metal containing precursor, is selected from the group consisting of:

- 20 Silicon derivatives or their Germanium homologues, such as:


disiloxane, trisilylamine, disilane, trisilane, alkoxysilane of the formula:

(III₁)



- wherein: $0 \leq x \leq 3$ and R^3 represents a linear or branched hydrocarbon group
25 having 1 to 6 carbon atoms;

silanol derivative of the formula (III₂):



wherein: $1 \leq x \leq 3$ and R^4 represents a linear or branched alkyl group, having 1 to 6 carbon atoms, preferably $Si(OH)(OR^4)_3$ and more preferably $Si(OH)(OtBu)_3$;


- 30 aminosilane derivative of the formula (III₃):



wherein: $0 \leq x \leq 3$ and R^5 and R^6 are identical or different and independently


represents an hydrogen atom or a linear or branched alkyl having 1 to 6 carbon atoms, preferably $\text{SiH}(\text{NMe}_2)_3$ (TriDMAS); $\text{SiH}_2(\text{NHtBu})_2$ (BTBAS); $\text{SiH}_2(\text{NEt}_2)_2$ (BDEAS)) and mixtures thereof;

Aluminum derivatives, such as trimethylaluminum $[\text{Al}(\text{CH}_3)_3]$, dimethyl
5 aluminum hydride $[\text{AlH}(\text{CH}_3)_2]$, alkoxyalane of the formula (IV₁):




wherein: $0 \leq x \leq 3$ and R^7 represents a linear or branched alkyl having 1 to 6 carbon atom, and R^8 , identical to or different from R^7 , represents an hydrogen atom, or preferably $\text{AlR}^9\text{R}^{10}(\text{OR}^7)$, with R^9 and R^{10} identical or different, which
10 independently represent an linear or branched alkyl having 1 to 6 carbon atoms, most preferably $\text{AlMe}_2(\text{OiPr})$;

amidoalane of the formula (IV₂):




wherein: $0 \leq x \leq 3$ and R^{12} and R^{13} identical or different, represent an hydrogen
15 atom or a linear or branched alkyl having 1 to 6 carbon atoms, and R^{11} , identical to or different from R^7 and , represents an hydrogen atom or a linear or branched alkyl having 1 to 6 carbon atoms;


Tantalum derivatives, such as: $\text{Ta}(\text{OMe})_5$, $\text{Ta}(\text{OEt})_5$, $\text{Ta}(\text{NMe}_2)_5$, $\text{Ta}(\text{NEt}_2)_5$, $\text{Ta}(\text{NEt}_2)_5$, a tantalum derivative of the formula (V₁):



wherein R^{14} , R^{15} , R^{16} and R^{17} , identical or different, independently represent an hydrogen atom or a linear or branched alkyl having 1 to 6 carbon atoms, preferably $\text{Ta}(\text{OEt})_4(\text{OCMe}_2\text{CH}_2-\text{OMe})$ (TAT-DMAE), a tantalum derivative of the formula (V₂):




wherein R^{18} , R^{19} , R^{20} , R^{21} and R^{22} , identical or different, independently represent an hydrogen atom or a linear or branched alkyl having 1 to 6 carbon atoms, a tantalum derivative of the formula (V₃):




30 wherein R^{24} , R^{25} and R^{26} , identical or different, independently represent an hydrogen atom or a linear or branched alkyl having 1 to 6 carbon atoms;

Niobium derivatives, such as $\text{Nb}(\text{OMe})_5$, $\text{Nb}(\text{OEt})_5$, $\text{Nb}(\text{NMe}_2)_5$, $\text{Nb}(\text{NEt}_2)_4$,


Nb(NEt₂)₅, a niobium derivative of the formula (VI₁):



wherein R²⁷, R²⁸, R²⁹ and R³⁰, identical or different, independently represent an hydrogen atom or a linear or branched alkyl having 1 to 6 carbon atoms,
 5 preferably Nb(OEt)₄(OCMe₂CH₂-OMe) (NBT-DMAE), a niobium derivative of the formula (VI₂):



wherein R³¹, R³², R³³, R³⁴ and R³⁵, identical or different, independently represent an hydrogen atom or a linear or branched alkyl having 1 to 6 carbon atoms, a
 10 niobium derivative of the formula (VI₃):



wherein R³⁶, R³⁷ and R³⁸, identical or different, independently represent an hydrogen atom or a linear or branched alkyl having 1 to 6 carbon atoms;

lanthanide derivatives, such as scandium derivatives, yttrium derivatives,
 15 cerium derivatives, praeisidium derivatives, gadolinium derivatives or Nd derivatives, a derivative with at least one β-diketonate ligand or at least a cyclopentadienyl ligand optionally substituted with one or several linear or branched alkyl groups having 1 to 6 carbon atoms;

divalent metal derivatives, such as strontium (Sr), barium (Ba),
 20 magnesium (Mg), calcium (Ca) or zinc (Zn) derivatives, with at least one β-diketonate ligand or at least a cyclopentadienyl ligand optionally substituted with one or several linear or branched alkyl groups having 1 to 6 carbon atoms;

other metal derivatives such as tungsten(W), molybdenum (Mo), hafnium (Hf) or zirconium (Zr) derivatives, for example the alkoxy derivatives, the amino
 25 derivatives or adducts containing these species, being understood that said derivatives are not compounds of the formula (II) as hereinbefore defined.

4. Method according to one of Claim 1 to 3, which further comprises:

- A step d), wherein the at least one M¹ metal containing precursor of the
 30 formula (II), and if necessary, the at least one M² metal containing precursor, is mixed to at least one reactant specie prior to step c).

5. Method according to one of Claim 1 to 4, which further comprises:


- a step d') wherein the at least one M¹ metal containing precursor of the formula (II) and if necessary, the at least one M² metal containing precursor, is mixed to at least one reactant specie in the reaction chamber.

5

6. Method according to one of Claim 1 to 5, wherein the step (b) consists of a step (b₁) of mixing at least one first metal containing precursor of the formula (II) together with at least a second of the following precursors: M¹(NMe₂)₄, M¹(NEt₂)₄, M¹(NMeEt)₄, M¹(mmp)₄, M¹(OtBu)₄, M¹(OtBu)₂(mmp)₂ and mixtures thereof and a step (b₂) of vaporizing said mixture.

10

7. Method according to one of Claim 1 to 6, wherein the M¹ metal containing precursor is of the formula (II₁):



15 corresponding to the formula (II), wherein x = 0, z = 1 and R' represents the group N(R³⁹)(R⁴⁰), wherein R³⁹ and R⁴⁰, identical or different, independently represent an hydrogen atom, a linear or branched alkyl group having from one to four carbon atoms, an alkylsilyl group, wherein the alkyl group is linear or branched and has from one to four carbon atoms, a dialkylsilyl group, wherein
20 each alkyl group, identical or different from the other, is linear or branched and has from one to four carbon atoms or a trialkylsilyl group wherein each alkyl group, identical or different from the other, is linear or branched and has from one to four carbon atoms

25 8. Method according to one of Claim 1 to 7, of deposition of a metal containing dielectric film comprising a compound of the formula (I₁):



corresponding to the formula (I), wherein a=0, b = 2 and c = 0, wherein the metal containing precursor of the formula (II) is selected from the group consisting of:

30 HfCp₂Cl₂, Hf(MeCp)₂Me₂, HfCp(MeCp)Cl₂, Hf(MeCp)₂Cl₂, HfCp(MeCp)Me₂, Hf(EtCp)(MeCp)Me₂, Hf(EtCp)₂Me₂, Hf(MeCp)₂(CO)₂, ZrCp₂Cl₂, Zr(MeCp)₂Me₂, ZrCp(MeCp)Cl₂, Zr(MeCp)₂Cl₂, ZrCp(MeCp)Me₂, Zr(EtCp)(MeCp)Me₂,


$\text{Zr}(\text{EtCp})_2\text{Me}_2$, $\text{Zr}(\text{MeCp})_2(\text{CO})_2$, $\text{Zr}(\text{MeCp})(\text{NMe}_2)_3$, $\text{Zr}(\text{EtCp})(\text{NMe}_2)_3$,
 $\text{ZrCp}(\text{NMe}_2)_3$, $\text{Zr}(\text{MeCp})(\text{NEtMe})_3$, $\text{Zr}(\text{EtCp})(\text{NEtMe})_3$, $\text{ZrCp}(\text{NEtMe})_3$,
 $\text{Zr}(\text{MeCp})(\text{NEt}_2)_3$, $\text{Zr}(\text{EtCp})(\text{NEt}_2)_3$, $\text{ZrCp}(\text{NEt}_2)_3$, $\text{Zr}(\text{iPr}_2\text{Cp})(\text{NMe}_2)_3$,
 $\text{Zr}(\text{tBu}_2\text{Cp})(\text{NMe}_2)_3$, $\text{Hf}(\text{MeCp})(\text{NMe}_2)_3$, $\text{Hf}(\text{EtCp})(\text{NMe}_2)_3$, $\text{HfCp}(\text{NMe}_2)_3$,
5 $\text{Hf}(\text{MeCp})(\text{NEtMe})_3$, $\text{Hf}(\text{EtCp})(\text{NEtMe})_3$, $\text{HfCp}(\text{NEtMe})_3$, $\text{Hf}(\text{MeCp})(\text{NEt}_2)_3$,
 $\text{Hf}(\text{EtCp})(\text{NEt}_2)_3$, $\text{HfCp}(\text{NEt}_2)_3$, $\text{Hf}(\text{iPr}_2\text{Cp})(\text{NMe}_2)_3$, $\text{Hf}(\text{tBu}_2\text{Cp})(\text{NMe}_2)_3$.
 and mixtures thereof.

9. Method according to one of Claim 1 to 7, of deposition of a metal
 10 containing dielectric film comprising a compound of the formula (I₂):



corresponding to the formula (I), wherein $a=0$, $1.5 \leq b \leq 2.5$ and $0 < c \leq 0.5$,
 wherein the metal containing precursor of the formula (II) is selected from the
 group consisting of: HfCp_2Cl_2 , $\text{Hf}(\text{MeCp})_2\text{Me}_2$, $\text{HfCp}(\text{MeCp})\text{Cl}_2$, $\text{Hf}(\text{MeCp})_2\text{Cl}_2$,
 15 $\text{HfCp}(\text{MeCp})\text{Me}_2$, $\text{Hf}(\text{EtCp})(\text{MeCp})\text{Me}_2$, $\text{Hf}(\text{EtCp})_2\text{Me}_2$, $\text{Hf}(\text{MeCp})_2(\text{CO})_2$, ZrCp_2Cl_2 ,
 $\text{Zr}(\text{MeCp})_2\text{Me}_2$, $\text{Zr}(\text{MeCp})_2\text{Cl}_2$, $\text{ZrCp}(\text{MeCp})\text{Me}_2$, $\text{Zr}(\text{EtCp})(\text{MeCp})\text{Me}_2$,
 $\text{Zr}(\text{EtCp})_2\text{Me}_2$, $\text{Zr}(\text{MeCp})_2(\text{CO})_2$, $\text{Zr}(\text{MeCp})(\text{NMe}_2)_3$, $\text{Zr}(\text{EtCp})(\text{NMe}_2)_3$,
 $\text{ZrCp}(\text{NMe}_2)_3$, $\text{Zr}(\text{MeCp})(\text{NEtMe})_3$, $\text{Zr}(\text{EtCp})(\text{NEtMe})_3$, $\text{ZrCp}(\text{NEtMe})_3$,
 $\text{Zr}(\text{MeCp})(\text{NEt}_2)_3$, $\text{Zr}(\text{EtCp})(\text{NEt}_2)_3$, $\text{ZrCp}(\text{NEt}_2)_3$, $\text{Zr}(\text{iPr}_2\text{Cp})(\text{NMe}_2)_3$,
 20 $\text{Zr}(\text{tBu}_2\text{Cp})(\text{NMe}_2)_3$, $\text{Hf}(\text{MeCp})(\text{NMe}_2)_3$, $\text{Hf}(\text{EtCp})(\text{NMe}_2)_3$, $\text{HfCp}(\text{NMe}_2)_3$,
 $\text{Hf}(\text{MeCp})(\text{NEtMe})_3$, $\text{Hf}(\text{EtCp})(\text{NEtMe})_3$, $\text{HfCp}(\text{NEtMe})_3$, $\text{Hf}(\text{MeCp})(\text{NEt}_2)_3$,
 $\text{Hf}(\text{EtCp})(\text{NEt}_2)_3$, $\text{HfCp}(\text{NEt}_2)_3$, $\text{Hf}(\text{iPr}_2\text{Cp})(\text{NMe}_2)_3$, $\text{Hf}(\text{tBu}_2\text{Cp})(\text{NMe}_2)_3$ and mixture
 thereof.

25 10. Method according to one of Claim 1 to 7, of deposition of a metal
 containing dielectric film comprising a compound of the formula (I₃):



corresponding to the formula (I), wherein $0 \leq a < 1$ and $c=0$, wherein the metal
 containing precursor of the formula (II) is selected from the group consisting of:
 30 HfCp_2Cl_2 , $\text{Hf}(\text{MeCp})_2\text{Me}_2$, $\text{HfCp}(\text{MeCp})\text{Cl}_2$, $\text{Hf}(\text{MeCp})_2\text{Cl}_2$, $\text{HfCp}(\text{MeCp})\text{Me}_2$,
 $\text{Hf}(\text{EtCp})(\text{MeCp})\text{Me}_2$, $\text{Hf}(\text{EtCp})_2\text{Me}_2$, $\text{Hf}(\text{MeCp})_2(\text{CO})_2$, ZrCp_2Cl_2 , $\text{Zr}(\text{MeCp})_2\text{Me}_2$,
 $\text{ZrCp}(\text{MeCp})\text{Cl}_2$, $\text{Zr}(\text{MeCp})_2\text{Cl}_2$, $\text{ZrCp}(\text{MeCp})\text{Me}_2$, $\text{Zr}(\text{EtCp})(\text{MeCp})\text{Me}_2$,

$\text{Zr}(\text{EtCp})_2\text{Me}_2$, $\text{Zr}(\text{MeCp})_2(\text{CO})_2$, $\text{Zr}(\text{MeCp})(\text{NMe}_2)_3$, $\text{Zr}(\text{EtCp})(\text{NMe}_2)_3$,
 $\text{ZrCp}(\text{NMe}_2)_3$, $\text{Zr}(\text{MeCp})(\text{NEtMe})_3$, $\text{Zr}(\text{EtCp})(\text{NEtMe})_3$, $\text{ZrCp}(\text{NEtMe})_3$,
 $\text{Zr}(\text{MeCp})(\text{NEt}_2)_3$, $\text{Zr}(\text{EtCp})(\text{NEt}_2)_3$, $\text{ZrCp}(\text{NEt}_2)_3$, $\text{Zr}(\text{iPr}_2\text{Cp})(\text{NMe}_2)_3$,
 $\text{Zr}(\text{tBu}_2\text{Cp})(\text{NMe}_2)_3$, $\text{Hf}(\text{MeCp})(\text{NMe}_2)_3$, $\text{Hf}(\text{EtCp})(\text{NMe}_2)_3$, $\text{HfCp}(\text{NMe}_2)_3$,
 5 $\text{Hf}(\text{MeCp})(\text{NEtMe})_3$, $\text{Hf}(\text{EtCp})(\text{NEtMe})_3$, $\text{HfCp}(\text{NEtMe})_3$, $\text{Hf}(\text{MeCp})(\text{NEt}_2)_3$,
 $\text{Hf}(\text{EtCp})(\text{NEt}_2)_3$, $\text{HfCp}(\text{NEt}_2)_3$, $\text{Hf}(\text{iPr}_2\text{Cp})(\text{NMe}_2)_3$, $\text{Hf}(\text{tBu}_2\text{Cp})(\text{NMe}_2)_3$ and the M^2
 metal containing precursor is preferably selected from the silicon derivatives or
 their germanium homologues, the tantalum derivatives, lanthanide derivatives,
 and the magnesium derivatives as hereabove defined.

10

11. Method according to one of Claim 1 to 7, of deposition of a metal containing dielectric film comprising a compound of the formula (I₄):




corresponding to the formula (I), wherein $0 \leq a < 1$ and $0 < c \leq 0.5$, wherein the
 15 metal containing precursor of the formula (II) is selected from the group
 consisting of HfCp_2Cl_2 , $\text{Hf}(\text{MeCp})_2\text{Me}_2$, $\text{HfCp}(\text{MeCp})\text{Cl}_2$, $\text{Hf}(\text{MeCp})_2\text{Cl}_2$,
 $\text{HfCp}(\text{MeCp})\text{Me}_2$, $\text{Hf}(\text{EtCp})(\text{MeCp})\text{Me}_2$, $\text{Hf}(\text{EtCp})_2\text{Me}_2$, $\text{Hf}(\text{MeCp})_2(\text{CO})_2$, ZrCp_2Cl_2 ,
 $\text{Zr}(\text{MeCp})_2\text{Me}_2$, $\text{ZrCp}(\text{MeCp})\text{Cl}_2$, $\text{Zr}(\text{MeCp})_2\text{Cl}_2$, $\text{ZrCp}(\text{MeCp})\text{Me}_2$,
 $\text{Zr}(\text{EtCp})(\text{MeCp})\text{Me}_2$, $\text{Zr}(\text{EtCp})_2\text{Me}_2$, $\text{Zr}(\text{MeCp})_2(\text{CO})_2$, $\text{Zr}(\text{MeCp})(\text{NMe}_2)_3$,
 20 $\text{Zr}(\text{EtCp})(\text{NMe}_2)_3$, $\text{ZrCp}(\text{NMe}_2)_3$, $\text{Zr}(\text{MeCp})(\text{NEtMe})_3$, $\text{Zr}(\text{EtCp})(\text{NEtMe})_3$,
 $\text{ZrCp}(\text{NEtMe})_3$, $\text{Zr}(\text{MeCp})(\text{NEt}_2)_3$, $\text{Zr}(\text{EtCp})(\text{NEt}_2)_3$, $\text{ZrCp}(\text{NEt}_2)_3$,
 $\text{Zr}(\text{iPr}_2\text{Cp})(\text{NMe}_2)_3$, $\text{Zr}(\text{tBu}_2\text{Cp})(\text{NMe}_2)_3$, $\text{Hf}(\text{MeCp})(\text{NMe}_2)_3$, $\text{Hf}(\text{EtCp})(\text{NMe}_2)_3$,
 $\text{HfCp}(\text{NMe}_2)_3$, $\text{Hf}(\text{MeCp})(\text{NEtMe})_3$, $\text{Hf}(\text{EtCp})(\text{NEtMe})_3$, $\text{HfCp}(\text{NEtMe})_3$,
 $\text{Hf}(\text{MeCp})(\text{NEt}_2)_3$, $\text{Hf}(\text{EtCp})(\text{NEt}_2)_3$, $\text{HfCp}(\text{NEt}_2)_3$, $\text{Hf}(\text{iPr}_2\text{Cp})(\text{NMe}_2)_3$,
 25 $\text{Hf}(\text{tBu}_2\text{Cp})(\text{NMe}_2)_3$, the M^2 metal containing precursor is preferably selected
 from the silicon derivatives or their germanium homologues, the tantalum
 derivatives, lanthanide derivatives, and the magnesium derivatives as
 hereabove defined, and at least one oxygen containing precursor and at least
 one nitrogen containing precursor is introduced into the reactor.

30

12. The use of the compounds of the formula (II) as defined in Claim 1, to make dielectric films more particularly for integrated circuits or in the preparation

of Metal Insulator Metal (MIM) architectures for Random Access Memories.

13. Compound the formula (II₁):



5 corresponding to the formula (II) as hereinabove defined in Claim 1, wherein x = 0, z = 1 and R' represents the group N(R³⁹)(R⁴⁰), wherein R³⁹ and R⁴⁰, identical or different, independently represent an hydrogen atom, a linear or branched alkyl group having from one to four carbon atoms, an alkylsilyl group, wherein the alkyl group is linear or branched and has from one to four carbon atoms, a dialkylsilyl group, wherein each alkyl group, identical or different from the other, is linear or branched and has from one to four carbon atoms or a trialkylsilyl group wherein each alkyl group, identical or different from the other, is linear or branched and has from one to four carbon atoms.

15 14. Compound of the formula (II₁) as defined in Claim 13, wherein R², R³⁹ and R⁴⁰, identical or different, independently represent a radical selected from the methyl, ethyl, propyl, isopropyl, butyl, isobutyl, sec-butyl and tert-butyl groups.

20 15 The following compounds the formula (II₁) as defined in Claim 14:

Zr(MeCp)(NMe₂)₃, Zr(EtCp)(NMe₂)₃, ZrCp(NMe₂)₃, Zr(MeCp)(NEtMe)₃,
 Zr(EtCp)(NEtMe)₃, ZrCp(NEtMe)₃, Zr(MeCp)(NEt₂)₃, Zr(EtCp)(NEt₂)₃,
 ZrCp(NEt₂)₃, Zr(iPr₂Cp)(NMe₂)₃, Zr(tBu₂Cp)(NMe₂)₃, Hf(MeCp)(NMe₂)₃,
 Hf(EtCp)(NMe₂)₃, HfCp(NMe₂)₃, Hf(MeCp)(NEtMe)₃, Hf(EtCp)(NEtMe)₃,
 25 HfCp(NEtMe)₃, Hf(MeCp)(NEt₂)₃, Hf(EtCp)(NEt₂)₃, HfCp(NEt₂)₃,
 Hf(iPr₂Cp)(NMe₂)₃, Hf(tBu₂Cp)(NMe₂)₃.


16 The following compounds the formula (II₁) as defined in Claim 15:

Zr(EtCp)(NMe₂)₃, Zr(MeCp)(NMe₂)₃, ZrCp(NMe₂)₃, Hf(EtCp)(NMe₂)₃,
 30 Hf(MeCp)(NMe₂)₃ and HfCp(NMe₂)₃.

17. Process for the preparation of a compound of the formula (II₁), as

defined in one of Claim 13 to Claim 16, comprising:

a step 1, consisting of the preparation of the compound of the formula (VII₁):



5 wherein M¹, R² and t are as hereinabove defined for the formula (II), by the reaction of M¹Cl₄ with (R²_tCp)Na ;

a step 2, consisting of the reaction of the compound of the formula (VII₁) prepared in step 1, with NH(R³⁹)(R⁴⁰), to produce the compound of the formula (II₁).

10

18. The following compounds the formula (II) as defined in Claim 1:
Hf(EtCp)₂Me₂, Zr(MeCp)₂Me₂ or Zr(EtCp)₂Me₂.

1/2

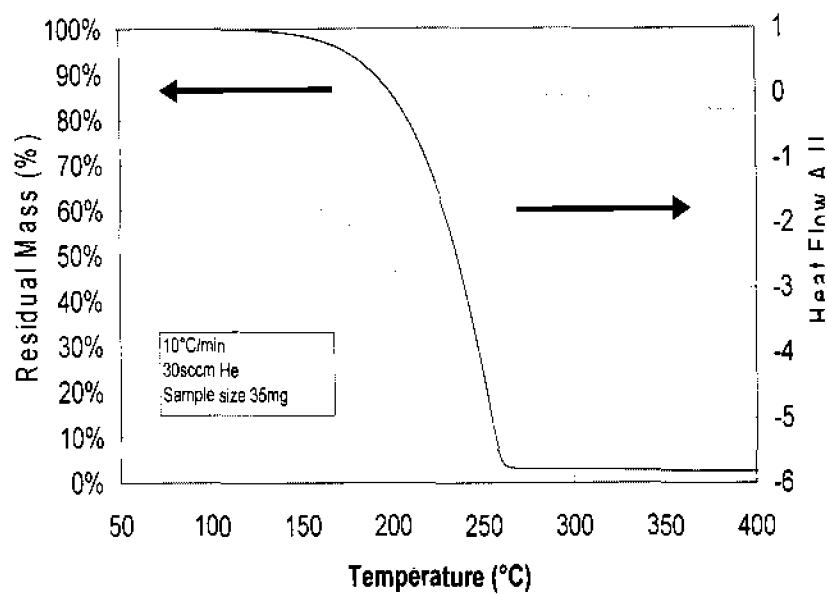


Figure 1

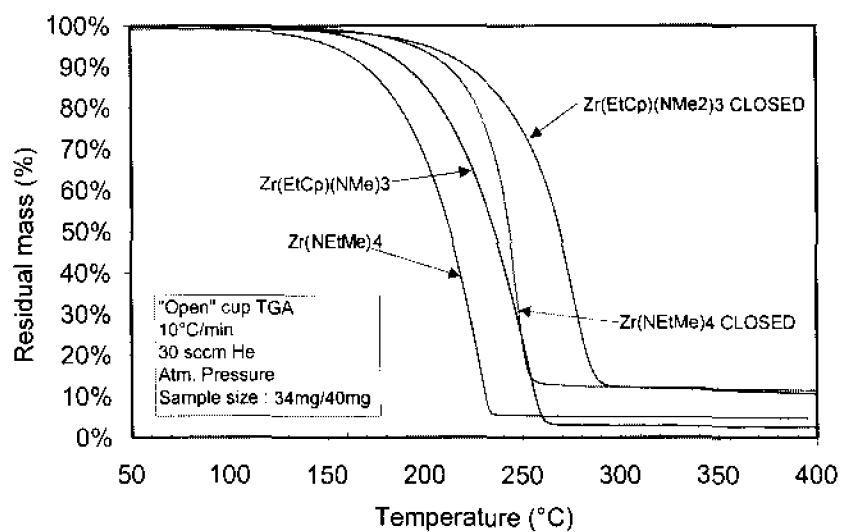


Figure 2

2/2

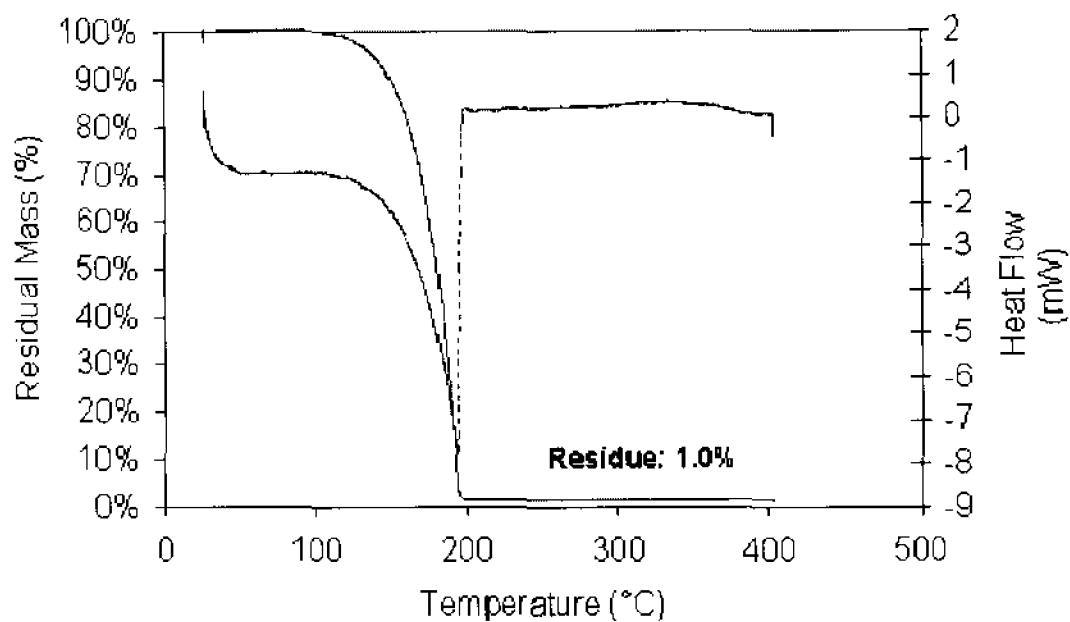


Figure 3

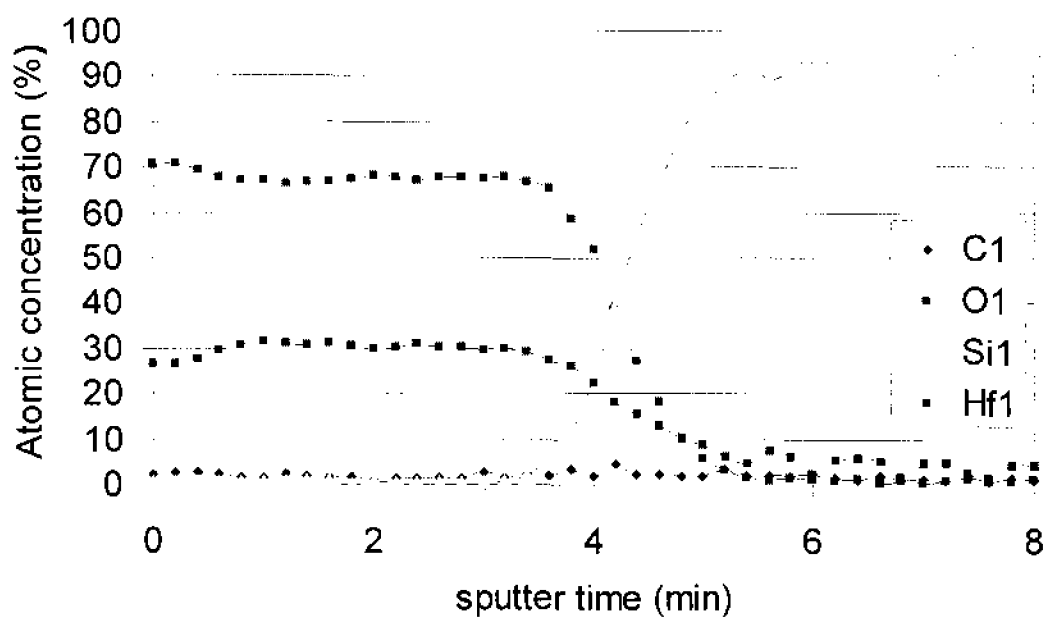


Figure 4