



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
06.09.2017 Bulletin 2017/36

(51) Int Cl.:
B65D 43/02 (2006.01) B65D 43/16 (2006.01)

(21) Application number: **17156958.5**

(22) Date of filing: **20.02.2017**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(71) Applicant: **Dart Container Corporation**
Mason, MI 48854 (US)

(72) Inventor: **MYER, Wayne**
Mason, MI Michigan 48854 (US)

(74) Representative: **Sessford, Russell**
Forresters IP LLP
Skygarden
Erika-Mann-Strasse 11
80636 München (DE)

(30) Priority: **02.03.2016 US 201615058226**

(54) **TAMPER EVIDENT AND RESISTANT CONTAINER**

(57) A container 10 having tamper evident and resistant features comprises a tray 14 having a bottom wall 30 and a peripheral side wall 32 extending upwardly from the bottom wall, which collectively define a compartment, and terminating in a tray rib 34 to at least partially define an open top providing access to the compartment. The container further comprises a cover 12 comprising a top wall 16 that terminates in a cover rib 18 having a peripheral cover lip 24, an interference element 70 extending from the container. The cover further comprising a tab 60 associated with the interference element, and at least one line of weakness 62a, 62b coupling the tab to the cover. The tab is moveable between a first position where the line of weakness is not severed and a second position where the line of weakness is severed.

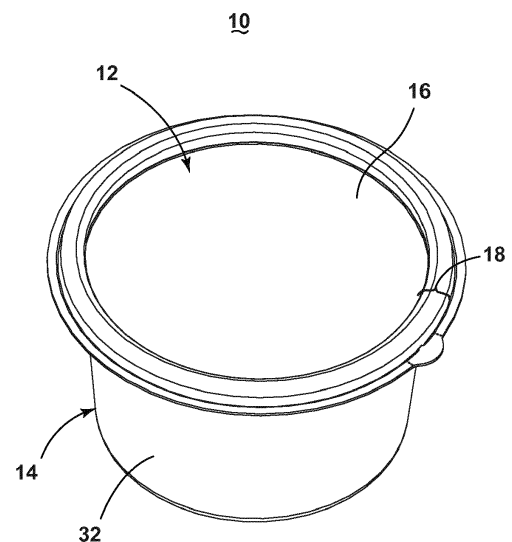


FIG. 1

Description

BACKGROUND

[0001] Disposable containers for packaging and storing edible goods are often provided with tamper resistant and tamper evident features to prevent unauthorized access to the interior of the container and to indicate to a consumer when the container has previously been opened. That the consumer still finds it desirable to have the tamper evident and resistant features in combination with a resealable container increases the complexity of the container, which may make it more difficult and time consuming to open.

BRIEF DESCRIPTION

[0002] In one aspect, an embodiment of the disclosure relates to a container that comprises a tray comprising a bottom wall and a peripheral side wall extending upwardly from the bottom wall, which collectively define a compartment, and terminating in a tray rib to at least partially define an open top providing access to the compartment. The container further comprises a cover comprising a top wall that terminates in a cover rib having a peripheral cover lip, an interference element extending from the container, at least one tab provided in the container and associated with the interference element, and at least one line of weakness coupling the tab to the container. The tab is moveable between a first position where the line of weakness is not severed and a second position where the line of weakness is severed. The at least one tab and interference element are juxtaposed such that the interference element prevents the return of the tab to the first position after the tab is moved to the second position.

[0003] An aspect of the present invention provides a container comprising: a tray comprising a bottom wall and a peripheral side wall extending upwardly from the bottom wall, which collectively define a compartment, and terminating in a tray rib to at least partially define an open top providing access to the compartment; a blocking wall extending from the tray rib and having an opening; a cover comprising a top wall terminating in a cover rib having a peripheral cover lip; a tab extending from the cover rib and through the opening in the blocking wall; an interference element provided on the tray beneath the tab; at least one line of weakness coupling the tab to the cover; wherein the tab is movable between a first position where the line of weakness is not severed and a second position where the line of weakness is severed, and the tab and interference element are juxtaposed such that the interference element prevents the return of the tab to the first position after the tab is moved to the second position.

[0004] The at least one tear line may comprise at least two tear lines on opposite sides of the tab.

[0005] The tab may block access to the peripheral cov-

er lip in the first position but not in the second position.

[0006] The tray and cover may define a corner and the tab may be located on a corner.

[0007] The interference element may be located on one of the tray rib or blocking wall.

[0008] The tab may be pivotable relative to the cover.

[0009] The container may further comprise a living hinge pivotally connecting the tab to the cover.

[0010] The tab may remain at least partially connected with the cover when the at least one line of weakness is severed.

[0011] The blocking wall may be spaced from an outer wall of the tray rib by a gap and the peripheral cover lip may be received within the gap when the cover is in the closed position.

[0012] The tray rib may comprise a tray seal structure and the cover rib may comprise a cover seal structure that engages the tray seal structure when the cover is in the closed position to form a peripheral seal.

[0013] The interference element may comprise an angled face to facilitate deflection of the peripheral cover lip during placement of the cover on the tray into the initial closed position.

[0014] The container may further comprise a hinge defining a hinge axis and connecting the tray and the cover for relative rotation about the hinge axis between the closed position and an opened position.

[0015] The interference element may be offset from a central portion of the tab.

[0016] The interference element may deflect the tab when the cover is in the initial closed position

[0017] The blocking wall may form the cover rib.

[0018] Another aspect provides a container comprising: a tray comprising a bottom wall and a peripheral side wall extending upwardly from the bottom wall, which collectively define a compartment, and terminating in a tray rib to at least partially define an open top providing access to the compartment; a cover comprising a top wall terminating in a cover rib having a peripheral cover lip; an interference element extending from the container; at least one tab provided in the container and associated with the interference element; at least one line of weakness coupling the tab to the container; wherein the tab is movable between a first position where the line of weakness is not severed and a second position where the line of weakness is severed, and the at least one tab and interference element are juxtaposed such that the interference element prevents the return of the tab to the first position after the tab is moved to the second position.

[0019] The container may further comprise a blocking wall and the tab extends through an opening in the blocking wall.

[0020] The at least one tear line may comprise at least two tear lines on opposite sides of the tab adjacent the blocking wall.

[0021] The blocking wall may be positioned relative to the peripheral cover lip to block access to the peripheral cover lip.

[0022] The tab may block access to the peripheral cover lip in the first position but not in the second position.

[0023] The tray and cover may define a corner and the tab is located on a corner.

[0024] The interference element may be located on one of the tray and cover and the tab may be located on the other of the tray and cover.

[0025] The at least one tab may be pivotable relative to the blocking wall.

[0026] The at least one tab may remain at least partially connected with the container when the at least one line of weakness is severed.

[0027] The at least one tab may be removed from the container when the at least one line of weakness is severed.

[0028] The at least one line of weakness may comprise perforations, score lines, areas of removed material, a series of crests and troughs of narrowed thickness, or combinations thereof.

[0029] The blocking wall may be spaced from an outer wall of the tray rib by a gap and the peripheral cover lip may be received within the gap when the cover is in the closed position.

[0030] The interference element may extend from the at least one tab into the gap to deflect the peripheral cover lip when the cover is in the initial closed position and the tab is in the first position.

[0031] The tray rib may comprise a tray seal structure and the cover rib may comprise a cover seal structure that may engage the tray seal structure when the cover is in the closed position to form a peripheral seal.

[0032] The at least one tab may include a projection to facilitate grasping the at least one tab to move the at least one tab from the first position to the second position.

[0033] The interference element may comprise a rib or a rounded protuberance.

[0034] The interference element may comprise an angled face to facilitate deflection of the peripheral cover lip during placement of the cover on the tray into the initial closed position.

[0035] A perimeter of the tray and the cover may comprise a circular, rectangular, square, or oval shape.

[0036] The container may further comprise a hinge defining a hinge axis and connecting the tray and the cover for relative rotation about the hinge axis between the closed position and an opened position.

[0037] The interference element may be offset from a central portion of the tab.

[0038] The at least one tab may form a portion of the blocking wall.

[0039] The peripheral cover lip may deflect the interference element and/or the at least one tab when the cover may be in the initial closed position.

BRIEF DESCRIPTION OF THE DRAWINGS

[0040] Embodiments are described, by way of example only, in relation to the accompanying drawings, in

which:

Figure 1 is a perspective view of a container having a cover mounted to a tray in a closed position according to an embodiment of the invention;

Figure 2 is an exploded view of the container of Figure 1 according to an embodiment of the invention; Figure 3 is a perspective view of a portion of the tray of Figure 2 according to an embodiment of the invention;

Figure 4 is a perspective view of a portion of the container of Figure 1 showing a tab provided on the tray in a first position according to an embodiment of the invention;

Figure 5 is a partial cross-section of the container of Figure 4 taken along the line V-V according to an embodiment of the invention;

Figure 6 is a partial cross-section of the container of Figure 4 taken along the line VI-VI according to an embodiment of the invention;

Figure 7 is a perspective view of the container of Figure 1 illustrating the tab in a second position according to an embodiment of the invention;

Figure 8 is a partial cross-section of the container of Figure 7 according to an embodiment of the invention;

Figure 9 is a perspective view of a portion of a container having a cover and a tray provided with a tab in a first position according to an embodiment of the invention;

Figure 10 is a perspective view of a portion of the container of Figure 9 illustrating the tab in a second position according to an embodiment of the invention;

Figure 11 is a perspective view of a hinged container having a cover mounted to a tray in a closed position according to an embodiment of the invention;

Figure 12 is a top view of a portion of a container having a cover mounted to a tray, showing a tab provided on the cover in a first position according to an embodiment of the invention;

Figure 13 is a front view of a portion of the container of Figure 12 illustrating the tab in a second position according to an embodiment of the invention; and

Figure 14 is a partial cross-section of the container of Figure 13 according to an embodiment of the invention.

DESCRIPTION OF AN EMBODIMENT OF THE INVENTION

[0041] Figures 1 and 2 illustrate a container 10 comprising a cover 12 and a tray 14. Non-limiting examples of suitable materials for the container 10 include oriented polystyrene, polypropylene and polyethylene terephthalate. All or a portion of the container 10 can be formed so as to be translucent, transparent, opaque or a combination thereof. While the container 10 is illustrated as

having a generally circular shape, the container 10 can have any geometric shape, non-limiting examples of which include square, rectangular, oval, octagonal, and hexagonal.

[0042] Referring now to Figure 2, the cover 12 includes a top wall 16 defining a plane. References to above/below the plane are made with respect to the cover 12 in a closed position, as illustrated in Figure 1. References to inward/outward are made with respect to central axis of the container 10. The cover 12 includes a top wall 16 terminating in a cover rib 18 that extends around the perimeter of the top wall 16. The cover rib 18 can include a cover rib inner wall 20 extending from the top wall 16 and connected with a peripheral cover lip 24 by a cover rib top wall 22. In the embodiment of Figure 2, the cover rib 18 is illustrated as having a generally U-shaped cross-section, although it is within the scope of the invention for the cover rib 18 to have an alternative cross-sectional shape.

[0043] As illustrated in Figures 2 and 3, the tray 14 includes a bottom wall 30 from which extends a peripheral side wall 32 which terminates in a tray rib 34 that at least partially defines an open top providing access to the interior compartment of the container defined by the bottom 30 and the peripheral side wall 32. In the embodiment of Figures 2 and 3, the tray rib 34 includes a tray rib inner wall 36 extending from the peripheral side wall 32 and connected with a tray rib outer wall 40 by a tray rib top wall 38 such that the tray rib 34 has a generally U-shaped cross-section, although it is within the scope of the invention for the tray rib 34 to have a different cross-sectional shape. The tray rib 34 can also be provided with a blocking wall 50 that is either part of the tray rib 34 or a separate structure. The blocking wall 50 can be spaced from the tray rib outer wall 40 by a gap 52. The blocking wall 50 can optionally include a flange 54 which can define the exterior perimeter of the container 10 or the blocking wall 50 can include additional structural features, such as a downwardly depending skirt, or no additional structural features without deviating from the scope of the invention.

[0044] The blocking wall 50 can be provided with at least one tab 60 that can form a portion of the blocking wall 50 (as illustrated) or be separated from the blocking wall 50. The tab 60 is configured so as to be at least partially separable from the container 10 along at least one line of weakness. In the embodiment of Figures 2 and 3, the tab 60 is coupled with the blocking wall 50 along two lines of weakness 62a, 62b. While two lines of weakness 62a, 62b are illustrated, it will be understood that the tab 60 can be defined by a single line of weakness or more than two lines of weakness. The lines of weakness can be in the form of a score line or a series of perforations configured to allow the tab 60 to be separated from the blocking wall 50 along the lines of weakness 62a, 62b. Alternatively, the lines of weakness 62a, 62b can be formed from a series of alternating rounded crests and troughs of narrowed thickness or areas of re-

moved material. The lines of weakness 62a, 62b can extend around a portion of the tab 60 such that the tab 60 is only partially removed from the blocking wall 50 and remains attached to the container 10 when the lines of weakness 62a, 62b are severed. Alternatively, the lines of weakness 62a, 62b can extend around the entire perimeter of the tab 60 such that the tab 60 is removed from the blocking wall 50 and the container 10 when the lines of weakness 62a, 62b are severed.

[0045] Referring now to Figures 3 and 4, the tab 60 can optionally include a projection 64 to facilitate grasping the tab 60 to separate the tab 60 from the blocking wall 50 along the lines of weakness 62a, 62b. The tab 60 further includes an interference element 70 extending from the tab 60 into the gap 52. The interference element 70 can extend partially into the gap 52, as illustrated, or span the entire distance of the gap 52. As illustrated in Figure 4, when the cover 12 is in the closed position on the tray 14, the peripheral cover lip 24 is received within the gap 52 and engages the interference element 70 on the tab 60 when the tab 60 is in a first position corresponding to a position in which the tab 60 prevents direct access to the peripheral cover lip 24, which, in the embodiment of Figure 4, corresponds to a position in which the tab 60 has not been separated from the blocking wall 50 along the lines of weakness 62a, 62b. When the cover 12 is in the closed position and the tab 60 is in the first position, the blocking wall 50 and the tab 60 inhibit access to the peripheral cover lip 24 and in this manner inhibit removal of the cover 12 from the tray 14 to open the container 10.

[0046] The tab 60 can be separated from the blocking wall 50 along the lines of weakness 62a, 62b such that the tab 60 can be moved into a second position to provide access to the peripheral cover lip 24 such that a consumer can grasp the peripheral cover lip 24 to remove the cover 12 from the tray 14. In this manner, separation of the tab 60 along the lines of weakness 62a, 62b provides an indication that the container 10 has been opened and thus provides an indication that the container 10 may have been tampered with. As used herein, providing an indication that the container 10 has been opened refers to indicating that the container 10 was in a condition in which the cover 12 could be removed from the tray 14 in the intended manner, regardless of whether the cover 12 was actually removed from the tray 14. The blocking wall 50 inhibits a consumer from opening the container 10 without destroying or damaging the blocking wall 50 and/or the peripheral cover lip 24 without using the tab 60 in the intended manner.

[0047] Referring now to Figures 5 and 6, when the cover 12 is in the closed position and the tab 60 is in the first position, the peripheral cover lip 24 extends into the gap 52 between the blocking wall 50 and tab 60 and the tray rib outer wall 40, thus inhibiting direct access to the peripheral cover lip 24. The interference element 70 extends from the tab 60 into the gap 52 such that the interference element 70 engages the peripheral cover lip 24

through an interference fit. As can best be seen in Figure 5, the interference element 70 engages and deflects the peripheral cover lip 24. It is also within the scope of the invention for there to be some deflection of the tab 60 and/or interference element 70 by the peripheral cover lip 24 depending on the extent to which the peripheral cover lip 24 and interference element 70 extend into the gap 52 and the relative strength of the peripheral cover lip 24 and the interference element 70/tab 60. The interference element 70 can be provided with an angled face 72 to facilitate deflecting the peripheral cover lip 24 as the cover 12 is positioned on the tray 14 and moved into the closed position.

[0048] The interference element 70 can be in the form of a vertical rib (as illustrated), a rounded protuberance, or have any other geometric cross-sectional shape. While the interference element 70 is illustrated as positioned in a central portion of the tab 60, it is within the scope of the invention for the interference element 70 to be positioned off-center with the respect to the tab 60. It is also within the scope of the invention for the tab 60 to include multiple interference elements 70.

[0049] The interference element 70 is configured of a size and shape to extend into the gap 52 to such an extent as to engage the peripheral cover lip 24 through an interference fit and deflect the peripheral cover lip 24. The width of the gap 52, the extent to which peripheral cover lip 24 extends into the gap 52, and the extent to which the peripheral cover lip 24 is deflected by the interference element 70 can be configured to inhibit direct access to the peripheral cover lip 24 while still allowing the cover 12 to be seated on the tray 14 in an initial closed condition prior to a first opening of the container 10 and prior to separation of the tab 60 along the lines of weakness 62a, 62b. As illustrated in Figure 6, which is a partial cross-section through a portion of the container 10 that does not include the interference element 70, the peripheral cover lip 24 can have little to no engagement with the blocking wall 50 when the cover is in the closed condition.

[0050] Still referring to Figures 5 and 6, the cover rib 18 can have a generally U-shaped cross-section defined by the cover rib inner wall 20, top wall 22, and peripheral cover lip 24 that is configured to receive a correspondingly U-shaped tray rib 34 defined by the tray rib inner wall 36, top wall 38 and outer wall 40. The cover rib 18 can include a cover seal structure formed at least in part by the cover rib inner wall 20 and the tray rib 34 can include a tray seal structure formed at least in part by the tray rib inner wall 36 which engages the cover seal structure when the cover 12 is in the closed position to form a peripheral seal. In the embodiment of Figures 5 and 6, the perimeter of the tray 14 as defined by the tray rib inner wall 36 can be slightly smaller than the perimeter of the cover 12 as defined by the cover rib inner wall 20 to provide an interference fit between the tray rib inner wall 36 and the cover rib inner wall 20 to form the peripheral seal when the cover 12 is in the closed position. Additionally, or alternatively, the tray 14 can further in-

clude an inner tray flange 74 provided between the peripheral side wall 32 and the tray rib 34 to form a seat that engages a portion of the cover top wall 16 and the cover rib inner wall 20 through an interference fit to form a peripheral seal between the cover 12 and the tray 14. Non-limiting examples of a peripheral seal a liquid-tight peripheral seal and a liquid-resistant peripheral seal.

[0051] To open the container 10, a consumer separates the tab 60 from the blocking wall 50 along the lines of weakness 62a, 62b, as illustrated in Figures 7 and 8, to move the tab 60 from the first position to the second position to gain access to the peripheral cover lip 24. In the embodiment of Figures 7 and 8, the tab 60 is separable from the blocking wall 50 along parallel lines of weakness 62a, 62b, but remains connected with the container 10 at a tray outer flange 80 adjacent the blocking wall 50 by a living hinge 82. The living hinge 82 can be formed by scoring or thinning the material forming the living hinge 82. In this manner, after the lines of weakness 62a, 62b are severed, the tab 60 can be pivoted about the living hinge 82 away from the blocking wall 50 to provide access to the peripheral cover lip 24. The consumer can then grasp the exposed portion of the peripheral cover lip 24 and remove the cover 12 from the open top of the tray 14.

[0052] The dimensions of the tab 60, as defined by the spacing of the lines of weakness 62a, 62b, can be configured to provide sufficient space between first and second ends 90a, 90b of the blocking wall 50, formed when the lines of weakness 62a, 62b are severed, to allow a consumer to grasp enough of the peripheral cover lip 24 to overcome the peripheral seal between the cover 12 and tray 14 to remove the cover 12 from the tray 14. In addition, while the living hinge 82 is described as being formed in the tray outer flange 80, the living hinge 82 can be formed in the blocking wall 50 or within the tray rib outer wall 40 in a similar manner, as long as the positioning of the living hinge 82 is configured to allow the tab 60 to be pivoted into the second position such that the consumer can grasp the peripheral cover lip 24 in order to remove the cover 12 from the tray 14. Alternatively, the living hinge 82 can be configured as a line of weakness similar to the lines of weakness 62a, 62b, such that the tab 60 can be separated from the container 10 to provide access to the peripheral cover lip 24.

[0053] Movement of the tab 60 from the first position to the second position provides an indication that the container 10 has been opened and thus provides the container 10 with a tamper evident feature. The blocking wall 50 and the tab 60 inhibit a consumer from accessing the peripheral cover lip 24 to open the container 10 without destroying or damaging the blocking wall 50 and/or the peripheral cover lip 24. In this manner, the blocking wall 50 and tab 60 provide the container 10 with a tamper resistant feature in that the container 10 cannot be opened except in a manner which provides evidence that the container 10 has been opened.

[0054] Once the tab 60 is moved into the second po-

sition, as illustrated in Figures 7 and 8, the interference element 70 inhibits replacement of the tab 60 back into the first position. As illustrated in Figures 4 and 5, the interference element 70 is configured to extend into the gap 52 and deflect the peripheral cover lip 24 when the cover 12 is in the closed position. Once the tab 60 is separated from the blocking wall 50 along the lines of weakness 62a, 62b, the tab 60 does not have sufficient strength to deflect the peripheral cover lip 24 and thus the peripheral cover lip 24 will deflect the tab 60, preventing the tab 60 from being replaced into the first position after the lines of weakness 62a, 62b have been severed. The peripheral cover lip 24 and interference element 70 are configured such that there is at least some deflection of the peripheral cover lip 24 by the interference element 70 when the interference element 70 is in the first position such that once the tab 60 is severed along the lines of weakness 62a, 62b and the tab 60 is moved into the second position, the extent to which the peripheral cover lip 24 extends across the gap 52 and the dimensions of the interference element 70 inhibit re-positioning of the tab 60 back into the first position. Thus, it is possible that the peripheral cover lip 24 and the interference element 70, when the tab 60 is in the first position, are configured to extend across the gap 52 such that there is at least some deflection, either equal or unequal, of both the peripheral cover lip 24 and the interference element 70 and/or tab 60. Regardless of whether or not there is deflection of both the peripheral cover lip 24 and the interference element 70 and/or tab 60 when the tab 60 is in the first position, the peripheral cover lip 24 and interference element 70 are configured to extend into the gap 52 to inhibit re-positioning of the tab 60 back into the first position severing the lines of weakness 62a, 62b to move the tab 60 to the second position.

[0055] Without the interference element 70, it may be possible for the tab 60 to be re-positioned between the first and second ends 90a, 90b of the blocking wall 50 such that the tab 60 appears to be in the first position. In this scenario, it may not be evident to a consumer that the tab 60 has already been moved such that the cover 12 could be removed. The interference element 70 inhibits replacement of the tab 60 back into the first position after the container has been opened and enhances the visual indication provided by the tab 60 that the container 10 has been opened.

[0056] While the container 10 is illustrated as having a single tab 60, it is within the scope of the invention for the container 10 to include multiple tabs 60 providing more than one location by which the consumer can gain access to the peripheral cover lip 24.

[0057] Figures 9-10 illustrate another embodiment of the invention comprising a container 110, which is similar to the first container 10 except for the manner in which a tab 60 is formed. Therefore, elements in the container 110 similar to those of the container 10 will be numbered with the prefix 100.

[0058] The tab 160 is similar to the tab 60 except that

the tab 160 is configured to pivot laterally rather than downward when the lines of weakness 162a, 162b are severed. While Figures 9 and 10 illustrate two lines of weakness 162a, 162b, it is within the scope of the invention for the tab 160 to be defined by a single line of weakness or more than two lines of weakness. In the container 110, the tab 160 is connected at one end to the blocking wall 150 by a line of weakness 162b and connected to the blocking wall 150 at an opposite end by a living hinge 182. The tab 160 can further be defined by an additional line of weakness 162a connecting the tab 160 to the tray outer flange 180. In this manner, the tab 160 can be separated from the blocking wall 150 at one end and along a bottom edge and pivoted laterally about the living hinge 182 to provide access to the peripheral cover lip 124 to open the container 110 in the same manner as described above for the container 10.

[0059] The tab 160 also includes the interference element 170 which inhibits the tab 160 from being re-positioned back into the first position after the lines of weakness 162a, 162b are severed. In the embodiment of Figures 9 and 10, the interference element 170 can be positioned off-center with respect to the tab 160 such that the interference element 170 is adjacent to the living hinge 182. Positioning the interference element 170 adjacent the living hinge 182 limits the extent to which the tab 160 can be moved back towards the first position; the farther away from the living hinge 182 the interference element 170 is positioned, the further the tab 160 can be moved back towards the first position before being deflected by the peripheral cover lip 124.

[0060] Figure 11 illustrates another embodiment of the invention comprising a container 210, which is similar to the first container 10 except for the manner in which the cover 212 is connected with the tray 214. Therefore, elements in the container 210 similar to those of the container 10 will be numbered with the prefix 200.

[0061] As illustrated in Figure 11, a hinge 300 can be provided to connect the cover 212 and the tray 214. A cover flange 302 can extend from a portion of the cover rib 218 between first and second ends 304 in the blocking wall 250 and be connected with a tray flange 306 extending from a portion of the tray rib 234 by a hinge line 308 that forms a hinge axis about which the cover 212 and tray 214 relatively rotate to move the container 10 between the opened and closed positions. The container 210 can be opened in the same manner as described above with respect to the container 10 and the blocking wall 250 provides a tamper resistant feature while the tab 260 and interference element 270 provide tamper evident features in the same manner as described above with respect to the container 10. The hinge 300 can include a single hinge line 308, as illustrated, or multiple hinge lines. It is also within the scope of the invention for the hinge 300 to include at least one line of weakness such that the cover 212 can be separated from the tray 214 along the at least one line of weakness. It is also within the scope of the invention for the tab 260 to be

provided on the hinge 300.

[0062] Figures 12-14 illustrate another embodiment of the invention comprising a container 310, which is similar to the first container 10 except for features related to the tab 60. Therefore, elements in the container 310 similar to those of the container 10 will be numbered alike, but with the prefix 3.

[0063] The tab 360 is similar to the tab 60 except that the tab 360 is located as an extension from the cover 312, rather than the tray 314, as in previous embodiments. Further, the tab 360 is configured to pivot upward rather than downward, pivoting about the living hinge 382, when the lines of weakness 362a, 362b are severed. In this exemplary embodiment, the interference element 370, which inhibits the tab 360 from being re-positioned back into the first position after the lines of weakness 362a, 362b are severed, is positioned such that it protrudes from the tray 314, rather than from the tab 360 itself. While the tab 360 is illustrated as having two lines of weakness 362a, 362b, it is within the scope of the invention for the tab 360 to be defined by a single line of weakness or more than two lines of weakness.

[0064] Figure 12 illustrates a top view of the container 310, showing the tab 360 provided on the cover 312 in a first position. When the tab 360 is in the first position, the lines of weakness 362a, 362b have not been severed and are intact. The interference element 370 protrudes upwardly from the tray 314, contacting the tab 360. Although the contact between the interference element 370 and the tab 360 results in some strain being put upon the lines of weakness 362a, 362b, the force is not sufficient to cause the lines of weakness 362a, 362b to sever without the action of a consumer. Further, the tab 360 extends through an opening in the blocking wall 350. The blocking wall 350 is positioned adjacent to the peripheral cover lip 324 and also serves to block access to the peripheral cover lip 324.

[0065] Figure 13 illustrates a front view of the container 310, showing the tab 360 provided on the cover 312 in a second position. When the tab 360 is in the second position, the lines of weakness 362a, 362b are severed. The tab 360, when lifted by a consumer, can be separated along the lines of weakness 362a, 362b from the adjacent portions of the cover 312 and pivoted upwardly about the living hinge 382. Further lifting force applied by the consumer results in the cover 312 separating from the tray 314, with the tab 360 serving as the grasping point by which the consumer can begin to lift the cover 312 away from the tray 314.

[0066] The tray 314 also includes the interference element 370 which inhibits the tab 360 from being re-positioned back into the first position after the lines of weakness 362a, 362b are severed. In the embodiment of Figure 13, the interference element 370 can be positioned either centered or off-center with respect to the tab 360 such that the interference element 370 is adjacent to the living hinge 382. Positioning the interference element 370 adjacent the living hinge 382 limits the extent to which

the tab 360 can be moved back towards the first position. The farther away from the living hinge 382 the interference element 370 is positioned, the further the tab 360 can be moved back towards the first position before being deflected by the interference element 370.

[0067] Figure 14 illustrates a partial cross-section of the container 310, showing the tab 360 provided on the cover 312 in a second position after it has been torn along the line of weaknesses and moved from the first position (shown in dashed lines). From this view, the upward pivot, as indicated by the arrow 400, of the tab 360 about the living hinge 382 can be more clearly seen. Further, it is shown that the placement of the interference element 370 adjacent the living hinge 382 prevents the tab 360 from being moved back towards the first position. Therefore, once the tab 360 is moved from the first position to the second position as part of removing the cover, the replacement of the cover will result in the interference element 370 preventing the return of the tab 360 to the first position. With the tab 360 being in the second position, the tab indicates that the container has been opened.

[0068] It will be understood that the examples described herein showing the location of the tab 60, 160, 260, 360 and the interference element 70, 170, 270, 370 are non-limiting. Any suitable combination of tab 60, 160, 260, 360 and interference element 70, 170, 270, 370 location is within the scope of the invention. For example, the tab 60, 160, 260, 360 can be located at any suitable point either on the tray 14, 114, 214, 314 or the cover 12, 112, 212, 312. The interference element need not be located on the tab and the tab can be located on either cover or tray. When the interference element is located on the tab, the interference element 70, 170, 270, 370 can be located at any suitable point either on the tab 60, 160, 260, 360 or not on the tab 60, 160, 260, 360.

[0069] It will be further understood that the shape of the container is not limiting. The container can be of any desired shape, such as circular or polygonal. The container can or cannot have corners. The tabs and interference element can or cannot be located at a corner. There may be one or more combinations of tabs/interference elements per container.

[0070] The embodiments of the invention described herein provide a container 10, 110, 210, 310 which is tamper resistant and also provides evidence to a consumer when tampering or attempts at tampering have occurred. The blocking wall 50, 150, 250, 350 inhibits a consumer from opening the container 10, 110, 210, 310 without destroying or damaging the blocking wall 50, 150, 250, 350 and/or the peripheral cover lip 24, 124, 224, 324 without using the tab 60, 160, 260, 360 in the intended manner. The tab 60, 160, 260, 360 is configured to be movable with respect to the blocking wall 50, 150, 250, 350 to provide access to the peripheral cover lip 24, 124, 224, 324 to remove the cover 12, 112, 212, 312 from the tray 14, 114, 214, 314 while also providing a visual indication that the container 10, 110, 210, 310 has been

opened. The interference element 70, 170, 270, 370 enhances the visual indication that the container 10, 110, 210, 310 has been opened by inhibiting replacement of the tab 60, 160, 260, 360 back into a position in which it appears that the container 10, 110, 210, 310 has not been opened. The tab 60, 160, 260, 360 is configured such that once the container 10, 110, 210, 310 has been opened and the cover 12, 112, 212, 312 has been removed, the cover 12, 112, 212, 312 can be replaced and re-sealed with the tray 14, 114, 214, 314 while still providing visual evidence to a consumer that the container 10, 110, 210, 310 has already been opened.

[0071] To the extent not already described, the different features and structures of the various embodiments of the container 10, 110, 210, and 310 may be used in combination with each other as desired. That one feature may not be illustrated in all of the embodiments is not meant to be construed that it cannot be, but is done for brevity of description. Thus, the various features of the different embodiments of the containers 10, 110, 210, and 310 may be mixed and matched as desired to form new embodiments, whether or not the new embodiments are expressly described.

[0072] While the invention has been specifically described in connection with certain specific embodiments thereof, it is to be understood that this is by way of illustration and not of limitation. Reasonable variation and modification are possible within the scope of the forgoing disclosure and drawings without departing from the spirit of the invention which is defined in the appended claims.

[0073] When used in this specification and claims, the terms "comprises" and "comprising" and variations thereof mean that the specified features, steps or integers are included. The terms are not to be interpreted to exclude the presence of other features, steps or components.

[0074] The features disclosed in the foregoing description, or the following claims, or the accompanying drawings, expressed in their specific forms or in terms of a means for performing the disclosed function, or a method or process for attaining the disclosed result, as appropriate, may, separately, or in any combination of such features, be utilised for realising the invention in diverse forms thereof.

Claims

1. A container comprising:

a tray comprising a bottom wall and a peripheral side wall extending upwardly from the bottom wall, which collectively define a compartment, and terminating in a tray rib to at least partially define an open top providing access to the compartment;
a blocking wall extending from the tray rib and having an opening;
a cover comprising a top wall terminating in a

cover rib having a peripheral cover lip;
a tab extending from the cover rib and through the opening in the blocking wall;
an interference element provided on the tray beneath the tab;
at least one line of weakness coupling the tab to the cover;
wherein the tab is movable between a first position where the line of weakness is not severed and a second position where the line of weakness is severed, and the tab and interference element are juxtaposed such that the interference element prevents the return of the tab to the first position after the tab is moved to the second position.

2. The container of claim 1, wherein the at least one tear line comprises at least two tear lines on opposite sides of the tab.

3. The container of any of prior claims, wherein the tab blocks access to the peripheral cover lip in the first position but not in the second position.

4. The container of any of the prior claims, wherein the tray and cover define a corner and the tab is located on a corner.

5. The container of any of the prior claims, wherein the interference element is located on one of the tray rib or blocking wall.

6. The container of any of the prior claims, wherein the tab is pivotable relative to the cover.

7. The container of claim 6, further comprising a living hinge pivotally connecting the tab to the cover.

8. The container of any of the prior claims, wherein the tab remains at least partially connected with the cover when the at least one line of weakness is severed.

9. The container of any of the prior claims, wherein the blocking wall is spaced from an outer wall of the tray rib by a gap and the peripheral cover lip is received within the gap when the cover is in the closed position.

10. The container of any of the prior claims, wherein the tray rib comprises a tray seal structure and the cover rib comprises a cover seal structure that engages the tray seal structure when the cover is in the closed position to form a peripheral seal.

11. The container of any of the prior claims, wherein the interference element comprises an angled face to facilitate deflection of the peripheral cover lip during placement of the cover on the tray into the initial

closed position.

12. The container of any of the prior claims, further comprising a hinge defining a hinge axis and connecting the tray and the cover for relative rotation about the hinge axis between the closed position and an opened position. 5
13. The container of any of the prior claims, wherein the interference element is offset from a central portion of the tab. 10
14. The container of any of the prior claims, wherein the interference element deflects the tab when the cover is in the initial closed position 15
15. The container of any of the prior claims, wherein the blocking wall forms the cover rib.

20

25

30

35

40

45

50

55

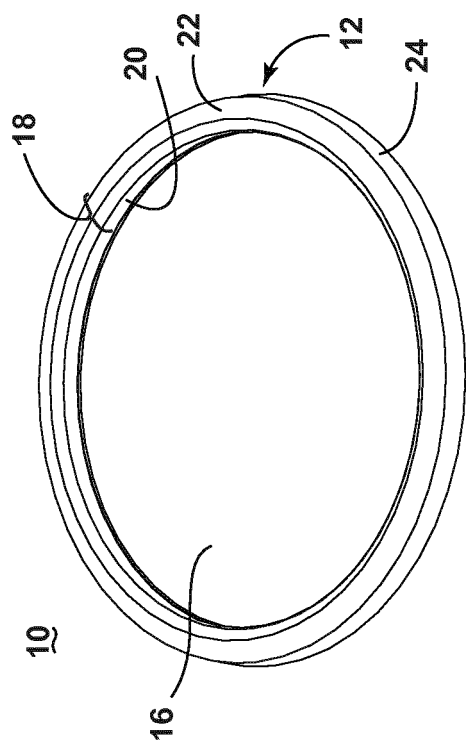


FIG. 1

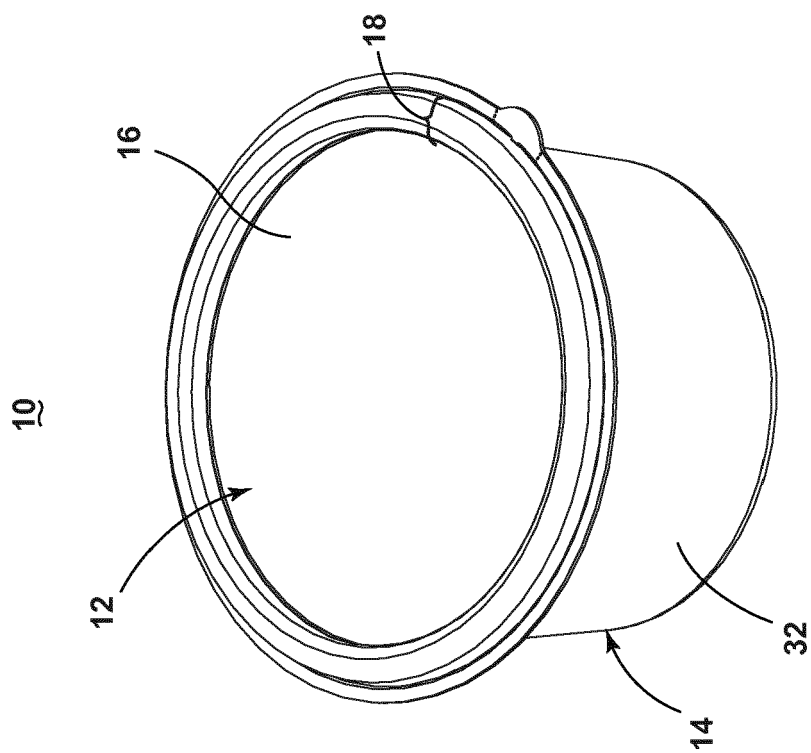


FIG. 2

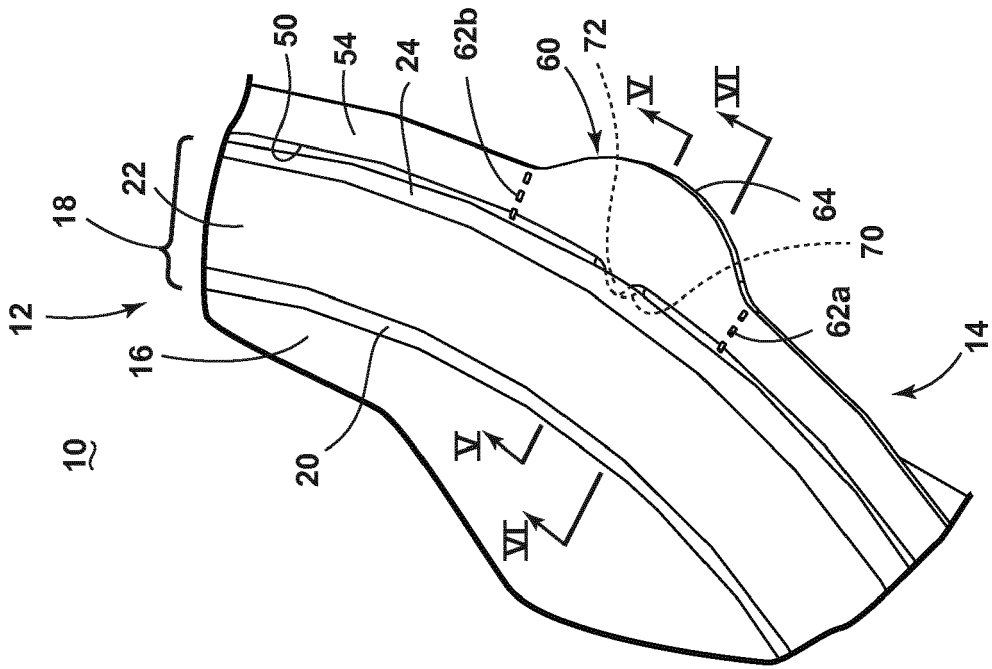


FIG. 4

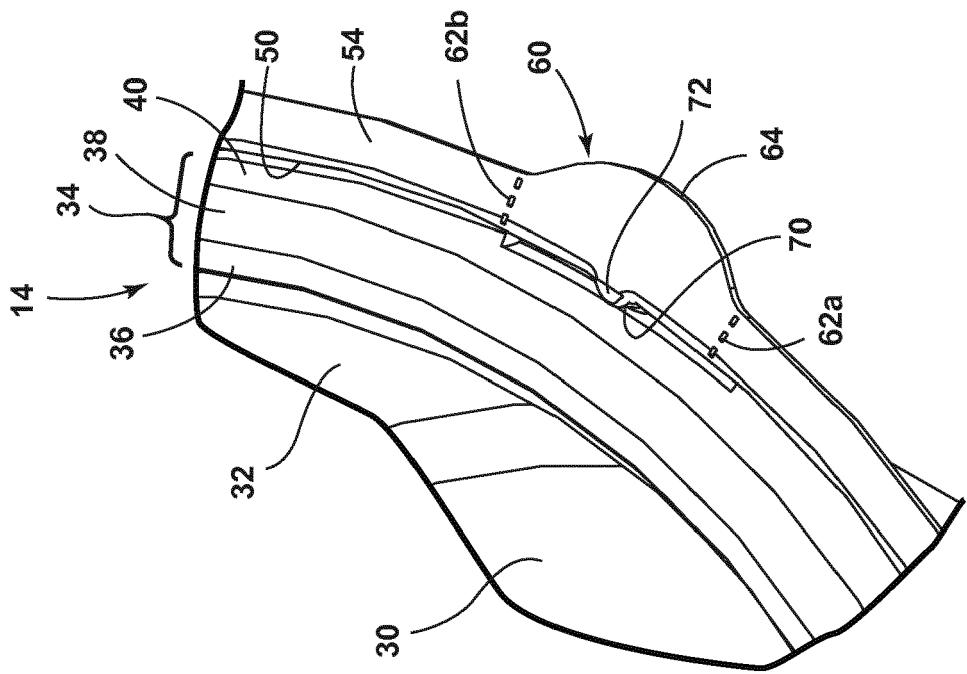
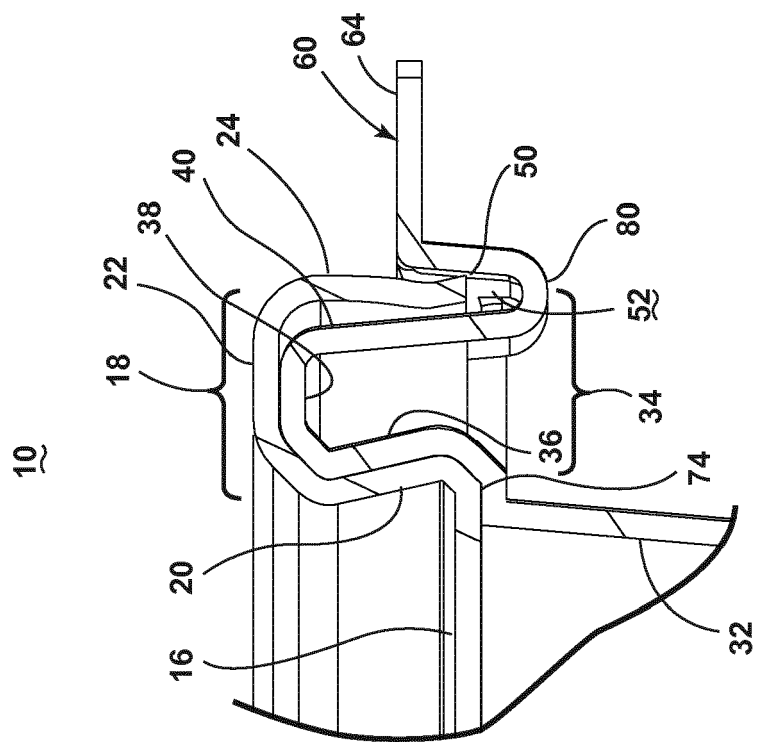
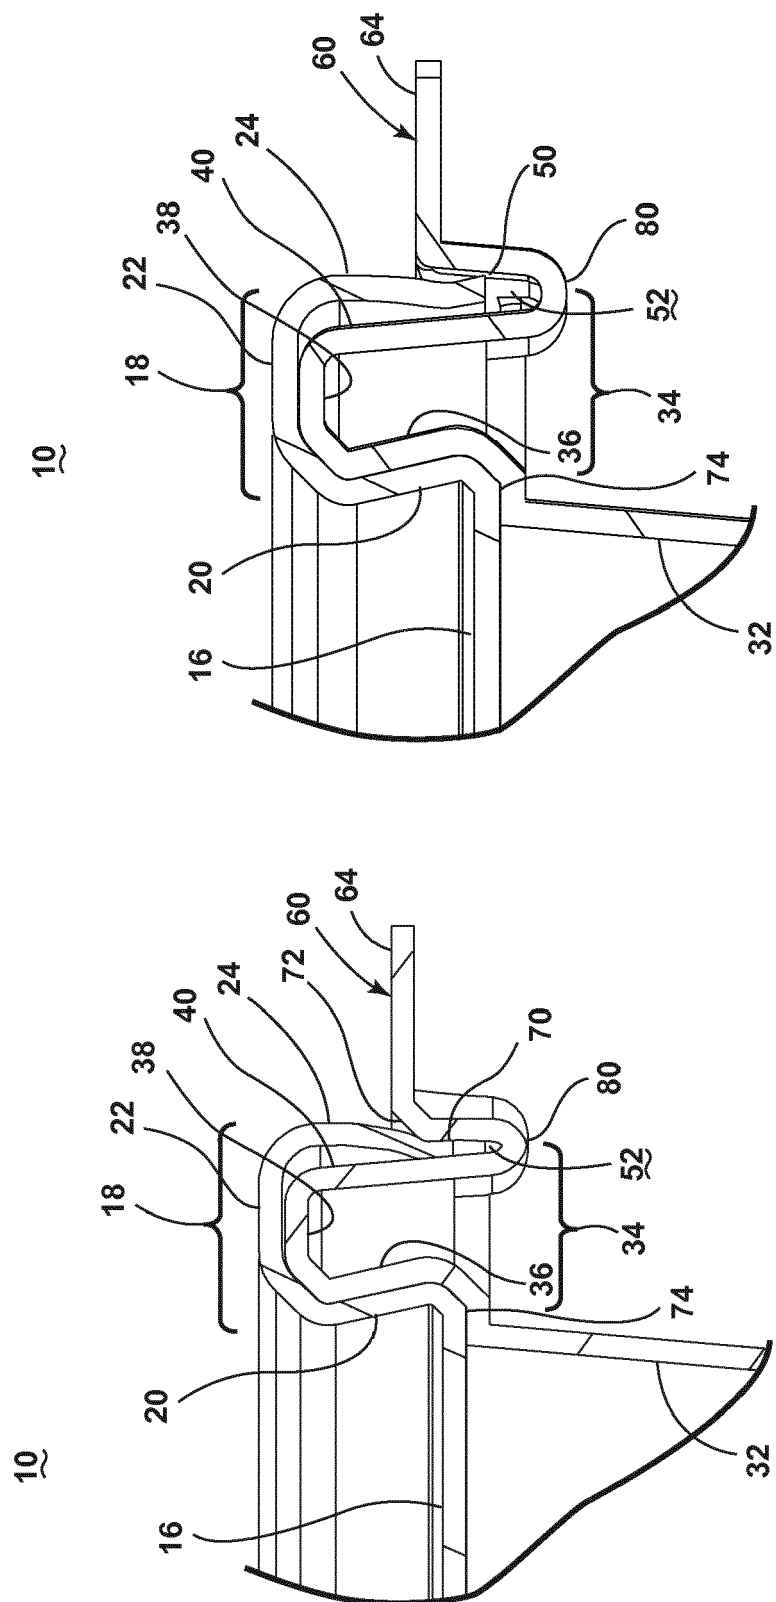


FIG. 3



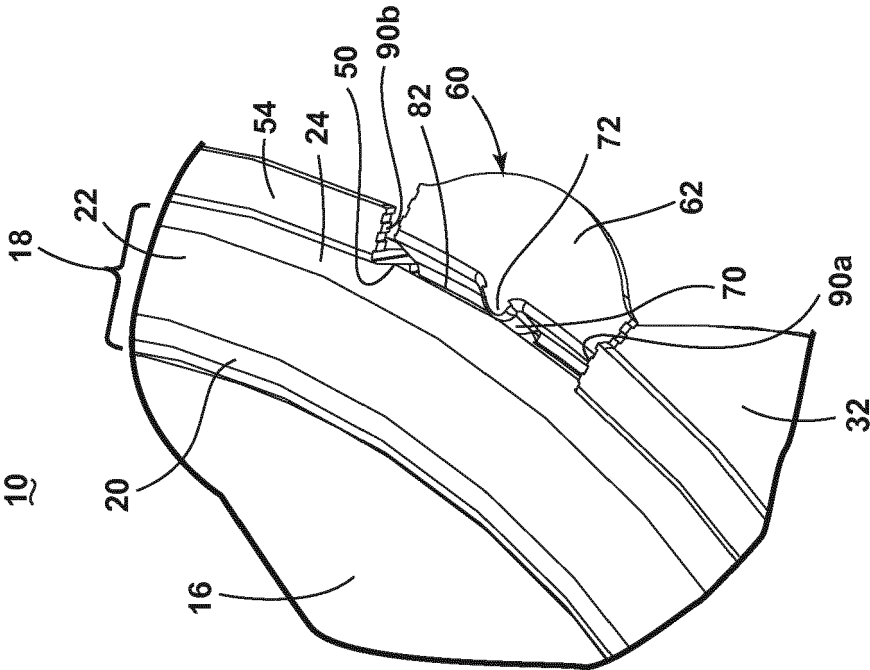


FIG. 7

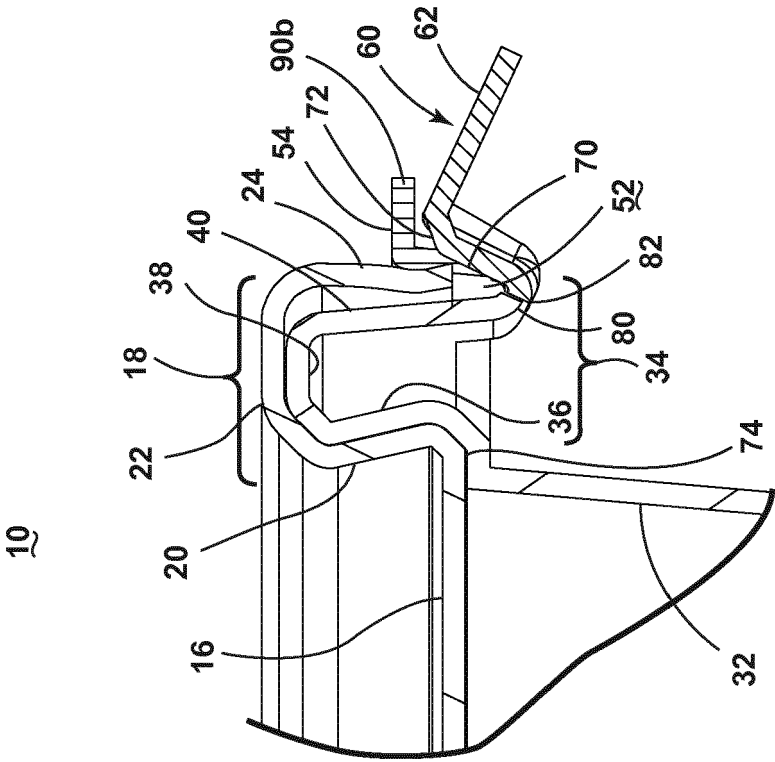


FIG. 8

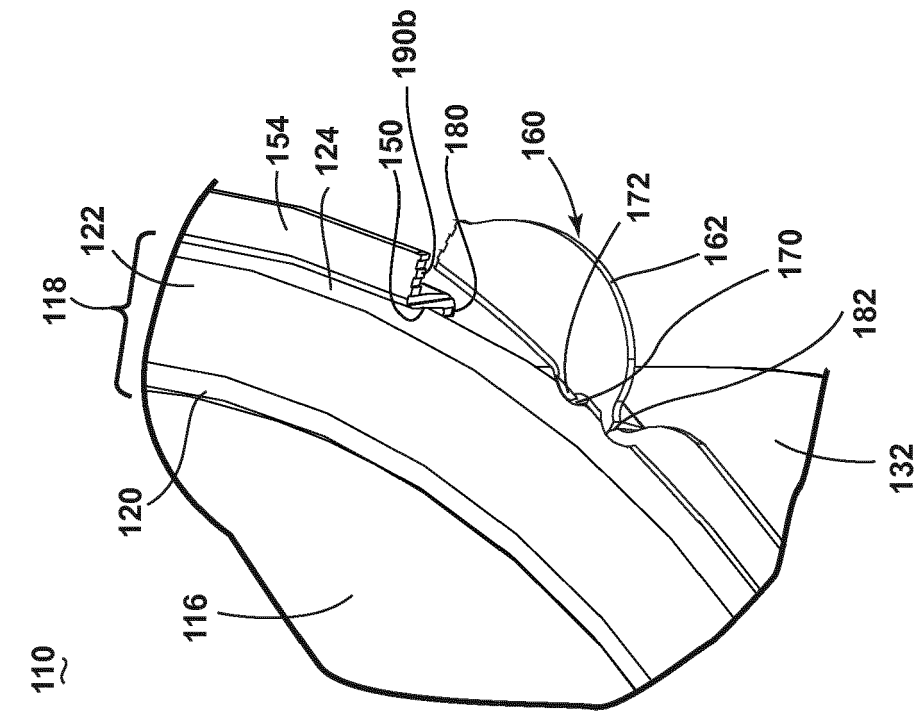


FIG. 9

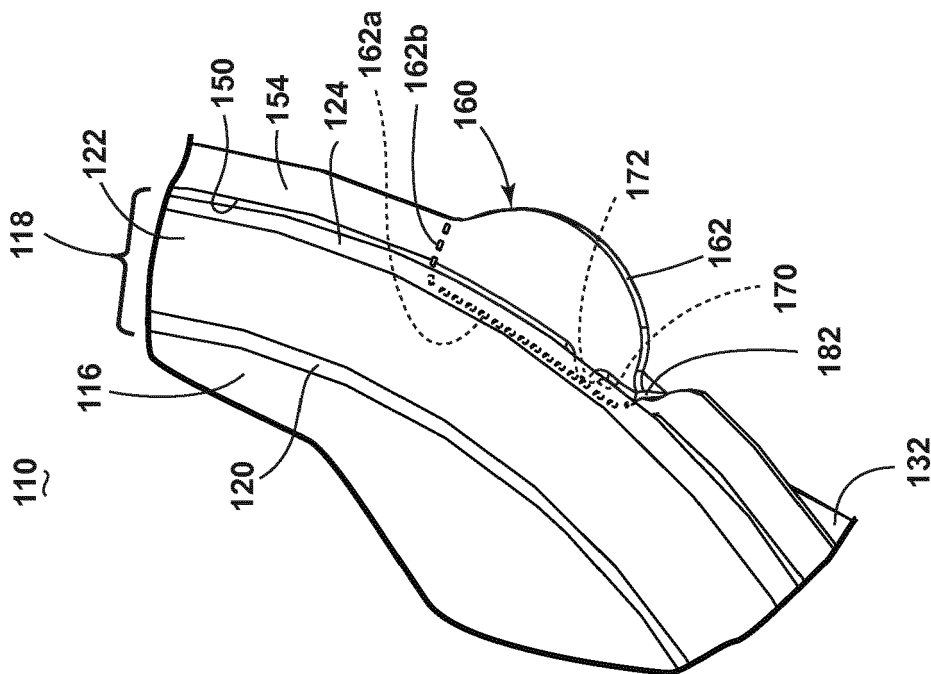


FIG. 10

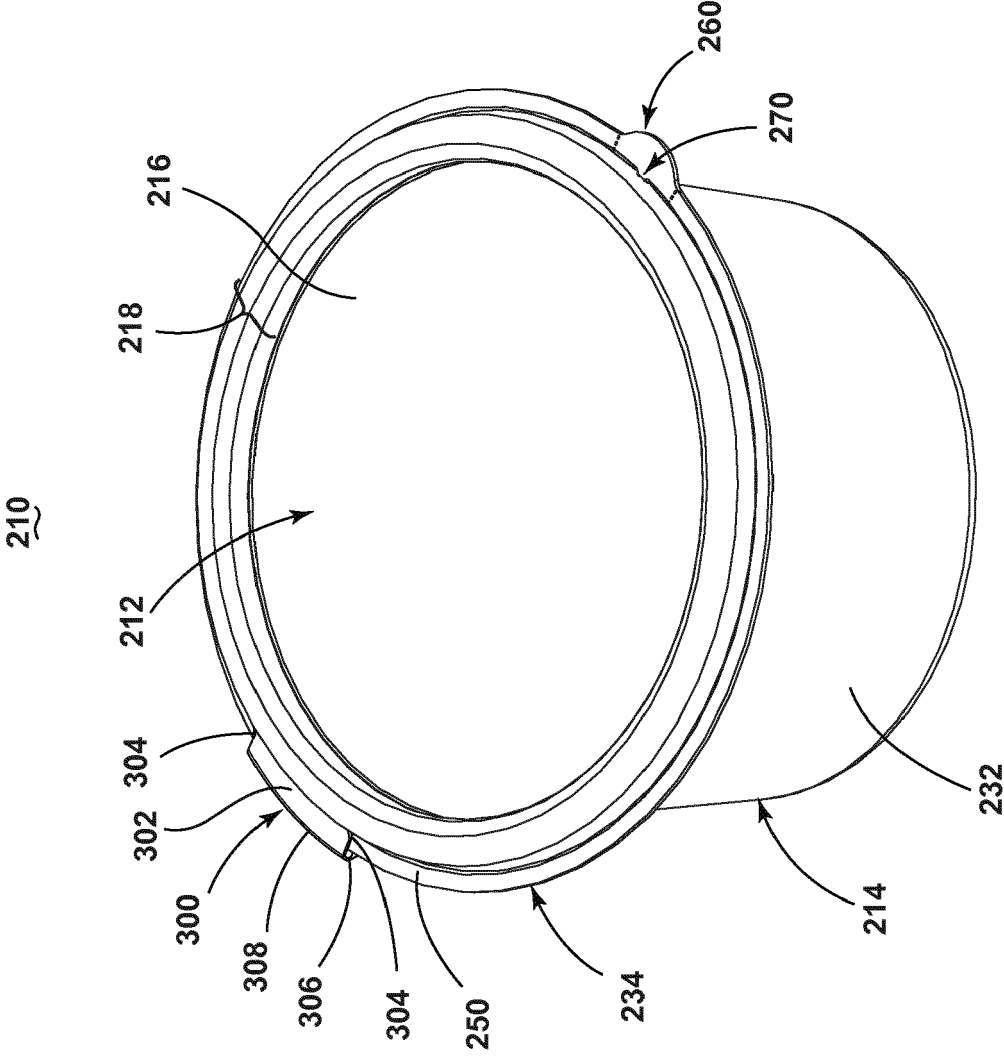


FIG. 11

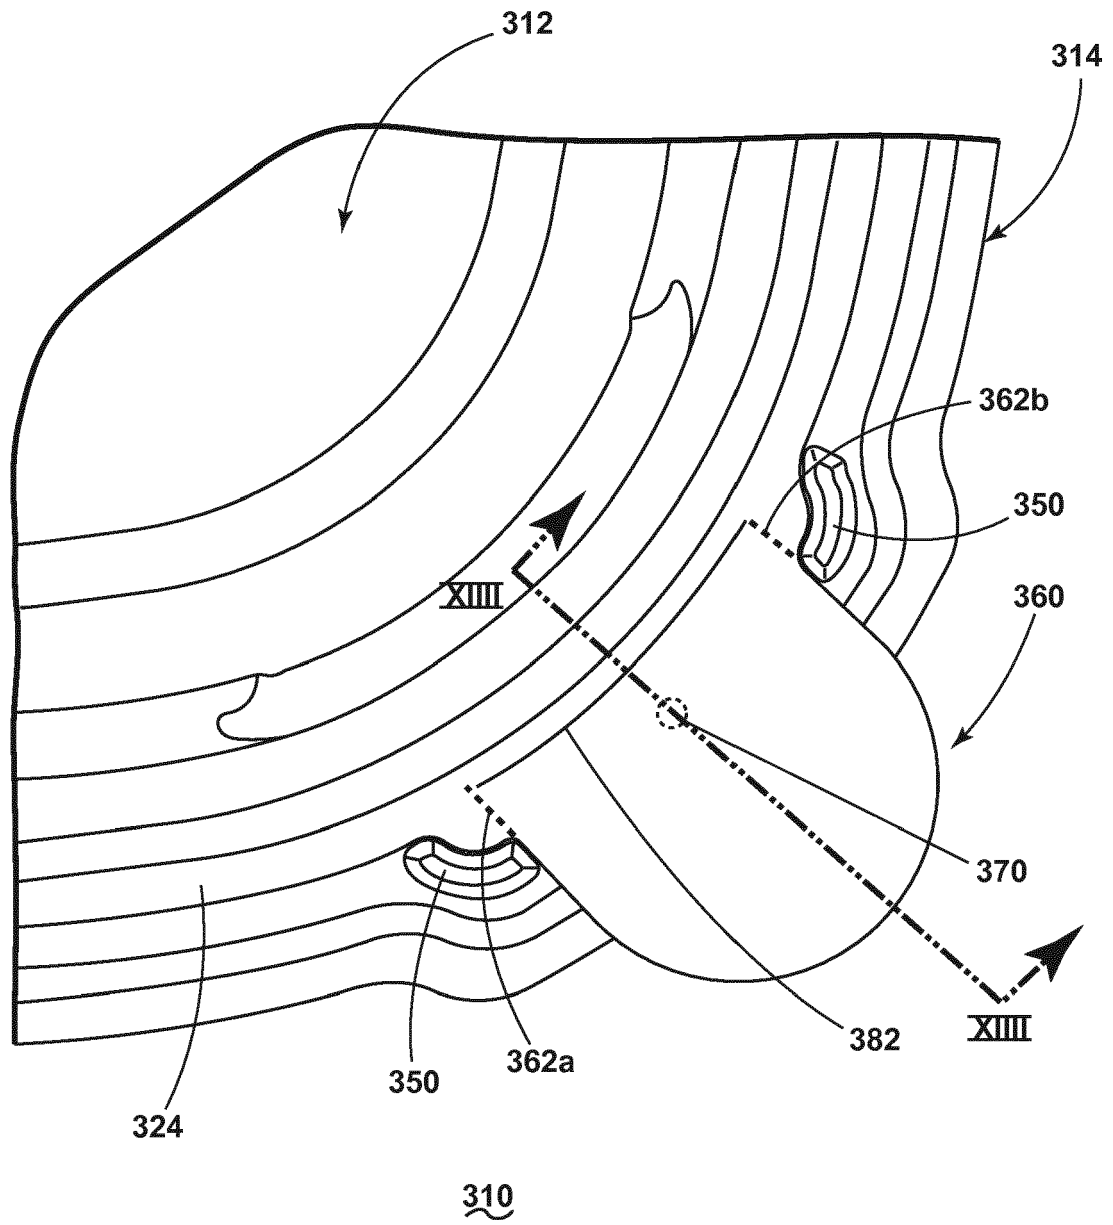


FIG. 12

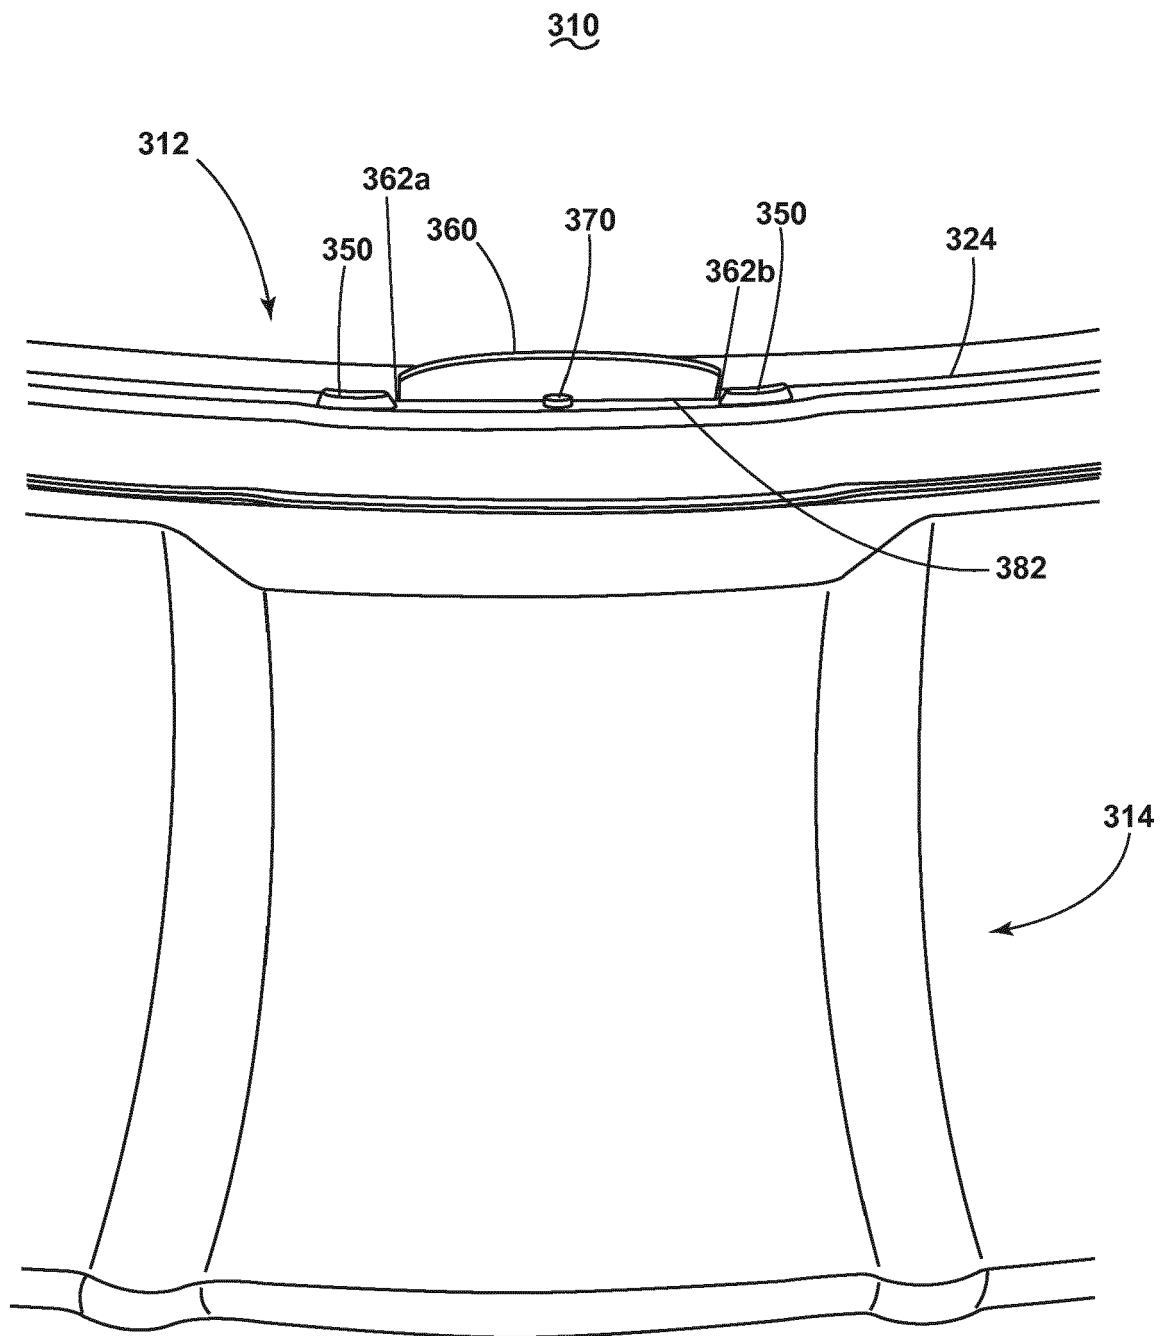


FIG. 13

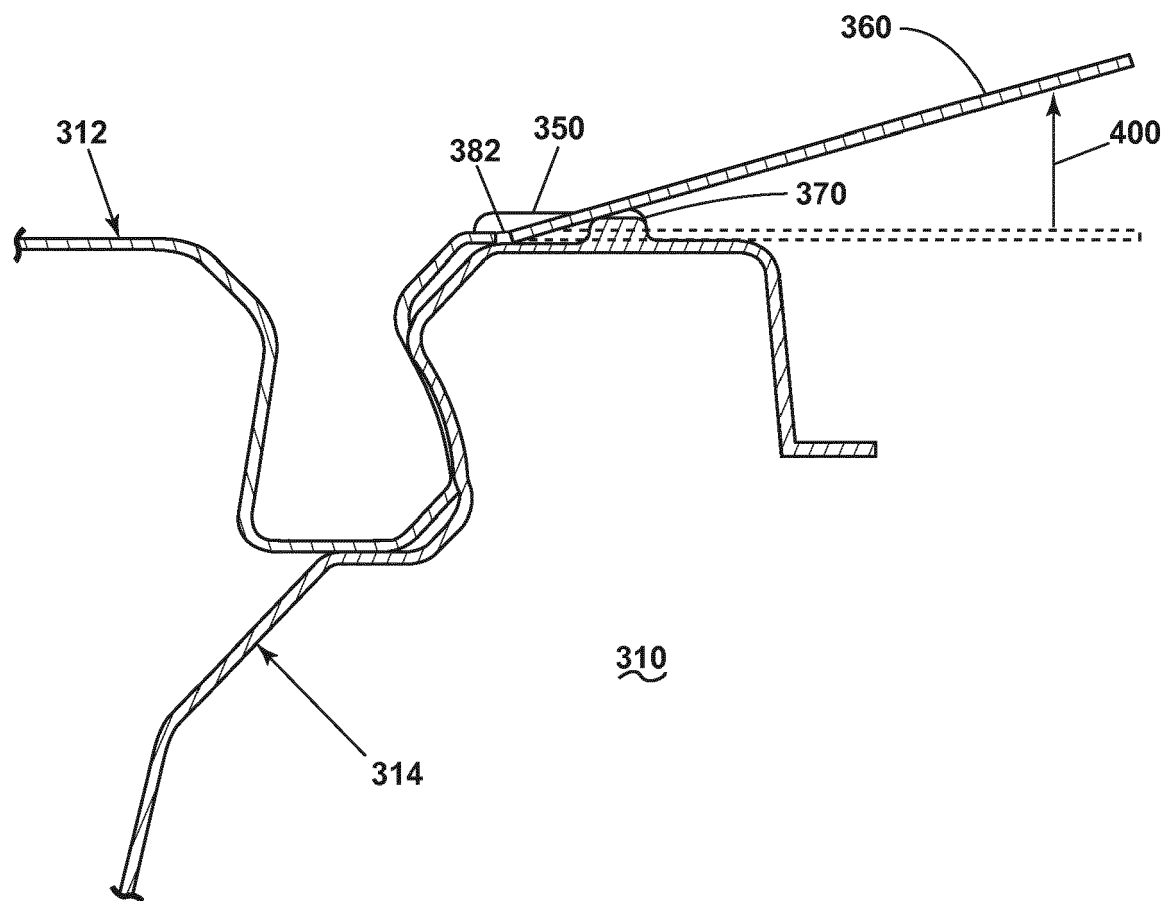


FIG.14



EUROPEAN SEARCH REPORT

Application Number
EP 17 15 6958

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	US 2013/168394 A1 (MESSIER PATRICK [CA]) 4 July 2013 (2013-07-04) * abstract; figures * * paragraphs [0015] - [0019] * -----	1-15	INV. B65D43/02 B65D43/16
A	US 2013/098914 A1 (PUDSELYKKE LARS [DK]) 25 April 2013 (2013-04-25) * abstract; figures * * paragraphs [0031], [0038], [0040] * -----	1-15	
A	US 2009/120937 A1 (VOVAN TERRY [US]) 14 May 2009 (2009-05-14) * abstract; figures * -----	1-15	
			TECHNICAL FIELDS SEARCHED (IPC)
			B65D
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 26 May 2017	Examiner Serrano Galarraga, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1
EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 17 15 6958

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-05-2017

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2013168394 A1	04-07-2013	CA 2804720 A1	19-01-2012
		US 2013168394 A1	04-07-2013
		WO 2012006739 A1	19-01-2012
US 2013098914 A1	25-04-2013	AU 2011204619 A1	02-08-2012
		CA 2786808 A1	14-07-2011
		DK 2523866 T3	30-06-2014
		EP 2523866 A1	21-11-2012
		ES 2472946 T3	03-07-2014
		MA 33990 B1	01-02-2013
		NZ 601237 A	29-11-2013
		PT 2523866 E	24-06-2014
		RU 2012133071 A	20-02-2014
		US 2013098914 A1	25-04-2013
		WO 2011083139 A1	14-07-2011
		ZA 201205618 B	24-04-2013
US 2009120937 A1	14-05-2009	NONE	