

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
27 January 2005 (27.01.2005)

PCT

(10) International Publication Number
WO 2005/007440 A1

(51) International Patent Classification⁷: **B60K 6/04**
(21) International Application Number:
PCT/JP2004/008694

(74) Agent: ITEC INTERNATIONAL PATENT FIRM;
Pola-Nagoya Bldg., 9-26, Sakae 2-chome, Naka-ku,
Nagoya-shi, Aichi 4600008 (JP).

(22) International Filing Date: 15 June 2004 (15.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003-200030 22 July 2003 (22.07.2003) JP

(71) Applicant (for all designated States except US): TOY-
OTA JIDOSHA KABUSHIKI KAISHA [JP/JP]; 1, Toy-
ota-cho, Toyota-shi, Aichi 471857 (JP).

(72) Inventors; and


(75) Inventors/Applicants (for US only): HOSHIBA, Takeshi
[JP/JP]; c/o Toyota Jidosha Kabushiki Kaisha, 1, Toyota-
cho, Toyota-shi, Aichi 471857 (JP). NADA, Mitsuhiro
[JP/JP]; c/o Toyota Jidosha Kabushiki Kaisha, 1, Toyota-
cho, Toyota-shi, Aichi 471857 (JP).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG,
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: POWER OUTPUT APPARATUS FOR HYBRID VEHICLE

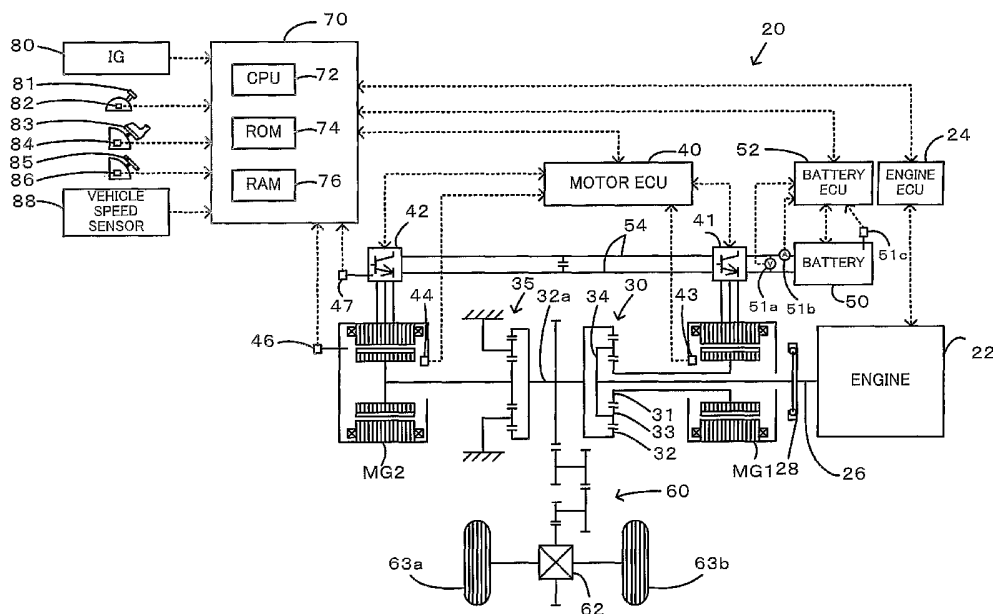

(57) Abstract: A hybrid vehicle of the invention has an engine, a planetary gear unit including a carrier linked with rankshaft of the engine and a ring gear linked with a drive shaft, a motor MG1 inputting and outputting power to and from a sun gear of the planetary gear unit, and a motor MG2 inputting and outputting power to and from the drive shaft. During a drive of the hybrid vehicle in a light load state and under a drive restriction of the motor MG2, the hybrid vehicle corrects a target revolution speed Ne^* of the engine to make a calculated average charge-discharge electric power W_{bave} of a battery equal to a charge-discharge electric power demand W_{b^*} , while keeping a torque of the engine unchanged (steps S300 to S330), and controls actuation of the engine and the motors MG1 and MG2.



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

DESCRIPTION

POWER OUTPUT APPARATUS FOR HYBRID VEHICLE

5 Technical Field

The present invention relates to a power output apparatus, an automobile, and methods of controlling the same.

Background Art

10 A proposed power output apparatus has an internal combustion engine, a planetary gear unit that includes a carrier linked with an output shaft of the internal combustion engine and a ring gear linked with a drive shaft, a generator that inputs and outputs power to and from a sun gear of the planetary gear unit, and a motor that inputs and outputs power to and from the drive shaft (see, for example, Japanese Patent Laid-Open Gazette No. H11-55810). In the case of heat generation in the generator or its driving circuit, this prior art apparatus decreases the output torque of the internal combustion engine and raises the revolution speed of the internal combustion engine, so as to reduce the load of the generator and prevent the heat generation in the generator while maintaining a power demand to be output from the internal combustion engine.

25 In the power output apparatus that independently drives the internal combustion engine and the drive shaft, in the case

of the occurrence of some disturbance like overheat of the generator, the drive point of the internal combustion engine is changed to respond to the disturbance while keeping the power demand to be output from the internal combustion engine unchanged. Keeping the power demand to be output from the internal combustion engine unchanged maintains the driving force to be output to the drive shaft. When the motor that outputs power to the drive shaft is under a drive restriction due to heat generation in the motor or its driving circuit, however, the technique of keeping the power demand to be output from the internal combustion engine unchanged may make the output from the internal combustion engine significantly greater than the output to the drive shaft and may cause an accumulator like a secondary battery to be excessively charged.

15

Disclosure of the Invention

The power output apparatus, the automobile, and their control methods of the invention aim to prevent an accumulator like a secondary battery from being excessively charged under a drive restriction of a motor that is capable of outputting power to a drive shaft. The power output apparatus, the automobile, and their control methods of the invention also aim to ensure output of a power in the range of the drive restriction to the drive shaft under the drive restriction of the motor. The power output apparatus, the automobile, and their control methods of the invention further aim to improve

20

25

the emission under the drive restriction of the motor.

In order to attain at least part of the above aims, the power output apparatus, the automobile, and their control methods are constructed as follows.

5 A first power output apparatus of the present invention is an apparatus that outputs power to a drive shaft, the power output apparatus including: an internal combustion engine; an electric power-mechanical power input-output module that is linked with an output shaft of the internal combustion engine
10 and with the drive shaft and outputs at least part of power from the internal combustion engine to the drive shaft through inputs and outputs of electric power and mechanical power; a motor that is capable of inputting and outputting power from and to the drive shaft; an accumulator that is capable of
15 supplying and receiving electric power to and from the electric power-mechanical power input-output module and the motor; a power demand setting module that sets a power demand required to the drive shaft, in response to an operator's manipulation; a target power setting module that sets a target power to be
20 output from the internal combustion engine, based on the setting of the power demand; a drive restriction effectuation module that, when a predetermined restricting condition is fulfilled, effects a drive restriction of the motor based on the predetermined restricting condition; a correction module
25 that corrects the setting of the target power based on the effected drive restriction, when the drive restriction of the

motor is effected by the drive restriction effectuation module;
and a control module that executes normal control of
controlling the internal combustion engine, the electric
power-mechanical power input-output module, and the motor in
5 the case of no effectuation of the drive restriction of the
motor by the drive restriction effectuation module to ensure
output of the target power from the internal combustion engine
and output of a power corresponding to the setting of the power
demand to the drive shaft, the control module executing
10 restriction control of controlling the internal combustion
engine, the electric power-mechanical power input-output
module, and the motor in the case of effectuation of the drive
restriction of the motor by the drive restriction effectuation
module to ensure output of the corrected target power from the
15 internal combustion engine and output of a power in a range
of the effected drive restriction from the motor.

Under no drive restriction of the motor, the first power
output apparatus of the invention controls the internal
combustion engine, the electric power-mechanical power
20 input-output module, and the motor to ensure output of the
target power from the internal combustion engine and output
of a power corresponding to the power demand to the drive shaft.
Under the drive restriction of the motor, on the other hand,
the first power output apparatus corrects the target power
25 based on the drive restriction and controls the internal
combustion engine, the electric power-mechanical power

input-output module, and the motor to ensure output of the corrected target power from the internal combustion engine and output of a power in the drive restriction from the motor. Namely, the target power is corrected to change the drive point
5 of the internal combustion engine under the drive restriction of the motor. The arrangement of the invention effectively prevents the accumulator from being excessively charged and ensures output of the power in the range of the drive restriction to the drive shaft. This desirably prevents
10 deterioration of the emission by output of a power corresponding to the power demand from the internal combustion engine under the drive restriction of the motor.

In one preferable embodiment of the invention, the first power output apparatus further includes a charge-discharge
15 electric power measurement module that measures a charge-discharge electric power used to charge the accumulator or obtained by discharging the accumulator; and an electric power demand setting module that sets an electric power demand for charging or discharging the accumulator, based on a
20 predetermined charge-discharge condition. The correction module corrects the target power to cancel a difference between the charge-discharge electric power measured by the charge-discharge electric power measurement module and the electric power demand set by the electric power demand setting
25 module. The electric power used to charge the accumulator or obtained by discharging the accumulator thus significantly

approaches to the electric power demand. This arrangement effectively prevents the accumulator from being excessively charged.

In one preferable application of the first power output
5 apparatus of the invention, the target power setting module specifies a target torque and a target revolution speed to set the target power, and the correction module varies the specified target revolution speed to correct the target power. The drive point of the internal combustion engine is thus
10 changed, while the torque output from the internal combustion engine is kept unchanged. This arrangement desirably reduces the effects of a varying output of the power to the drive shaft by the electric power-mechanical power input-output module with a variation in target power.

15 In another preferable application of the first power output apparatus of the invention, the control module executes the restriction control on a condition that the power demand is in a predetermined light load power range, when the drive restriction of the motor is effected by the drive restriction
20 effectuation module. Such control is restrictively executed in a light load state, while different control is adopted in a heavy load state. This arrangement ensures adequate control in response to the operator's requirement.

A second power output apparatus of the present invention
25 is an apparatus that outputs power to a drive shaft, the power output apparatus including: an internal combustion engine; an

electric power-mechanical power input-output module that is linked with an output shaft of the internal combustion engine and with the drive shaft and outputs at least part of power from the internal combustion engine to the drive shaft through
5 inputs and outputs of electric power and mechanical power; a motor that is capable of inputting and outputting power from and to the drive shaft; an accumulator that is capable of supplying and receiving electric power to and from the electric power-mechanical power input-output module and the motor; and
10 a control module that sets a power demand required to the drive shaft in response to an operator's manipulation and sets a target power to be output from the internal combustion engine based on the setting of the power demand, the control module controlling the internal combustion engine, the electric
15 power-mechanical power input-output module, and the motor in the case of no fulfillment of a predetermined restricting condition to ensure output of the target power from the internal combustion engine and output of a power corresponding to the power demand to the drive shaft, in the case of fulfillment
20 of the predetermined restricting condition, the control module effecting a drive restriction of the motor based on the predetermined restricting condition, correcting the setting of the target power based on the effected drive restriction, and controlling the internal combustion engine, the electric
25 power-mechanical power input-output module, and the motor to ensure output of the corrected target power from the internal

combustion engine and output of a power in a range of the effected drive restriction from the motor.

Under no drive restriction of the motor, the second power output apparatus of the invention controls the internal
5 combustion engine, the electric power-mechanical power input-output module, and the motor to ensure output of the target power from the internal combustion engine and output of a power corresponding to the power demand to the drive shaft. Under the drive restriction of the motor, on the other hand,
10 the second power output apparatus corrects the target power based on the drive restriction and controls the internal combustion engine, the electric power-mechanical power input-output module, and the motor to ensure output of the corrected target power from the internal combustion engine and
15 output of a power in the drive restriction from the motor. Namely, the target power is corrected to change the drive point of the internal combustion engine under the drive restriction of the motor. The arrangement of the invention effectively prevents the accumulator from being excessively charged and
20 ensures output of the power in the range of the drive restriction to the drive shaft. This desirably prevents deterioration of the emission by output of a power corresponding to the power demand from the internal combustion engine under the drive restriction of the motor.

25 In the first or the second power output apparatus discussed above, the electric power-mechanical power

input-output module may include: a three-shaft power input-output assembly that is connected with three shafts, that is, the output shaft of the internal combustion engine, the drive shaft, and a third shaft, and specifies input and output
5 of power from and to one residual shaft among the three shafts, based on powers input and output from and to two shafts among the three shafts; and a generator that inputs and outputs power from and to the third shaft. In the first or the second power output apparatus discussed above, the electric
10 power-mechanical power input-output module may include a pair-rotor generator having a first rotor, which is linked with the output shaft of the internal combustion engine, and a second rotor, which is linked with the drive shaft and rotates relative to the first rotor, the pair-rotor generator outputting at
15 least part of the power from the internal combustion engine to the drive shaft through input and output of electric power by electromagnetic interaction between the first rotor and the second rotor.

The power output apparatus of any application mentioned
20 above may be mounted on an automobile. Specifically, an automobile of the present invention includes: an internal combustion engine; an electric power-mechanical power input-output module that is linked with an output shaft of the internal combustion engine and with a drive shaft coupled with
25 an axle and outputs at least part of power from the internal combustion engine to the drive shaft through inputs and outputs

of electric power and mechanical power; a motor that is capable of inputting and outputting power from and to the drive shaft; an accumulator that is capable of supplying and receiving electric power to and from the electric power-mechanical power input-output module and the motor; a power demand setting module that sets a power demand required to the drive shaft, in response to an operator's manipulation; a target power setting module that sets a target power to be output from the internal combustion engine, based on the setting of the power demand; a drive restriction effectuation module that, when a predetermined restricting condition is fulfilled, effects a drive restriction of the motor based on the predetermined restricting condition; a correction module that corrects the setting of the target power based on the effected drive restriction, when the drive restriction of the motor is effected by the drive restriction effectuation module; and a control module that executes normal control of controlling the internal combustion engine, the electric power-mechanical power input-output module, and the motor in the case of no effectuation of the drive restriction of the motor by the drive restriction effectuation module to ensure output of the target power from the internal combustion engine and output of a power corresponding to the setting of the power demand to the drive shaft, the control module executing restriction control of controlling the internal combustion engine, the electric power-mechanical power input-output module, and the motor in

the case of effectuation of the drive restriction of the motor by the drive restriction effectuation module to ensure output of the corrected target power from the internal combustion engine and output of a power in a range of the effected drive
5 restriction from the motor. Another automobile of the present invention includes: an internal combustion engine; an electric power-mechanical power input-output module that is linked with an output shaft of the internal combustion engine and with the drive shaft coupled with an axle and outputs at least part of
10 power from the internal combustion engine to the drive shaft through inputs and outputs of electric power and mechanical power; a motor that is capable of inputting and outputting power from and to the drive shaft; an accumulator that is capable of supplying and receiving electric power to and from the
15 electric power-mechanical power input-output module and the motor; and a control module that sets a power demand required to the drive shaft in response to an operator's manipulation and sets a target power to be output from the internal combustion engine based on the setting of the power demand,
20 the control module controlling the internal combustion engine, the electric power-mechanical power input-output module, and the motor in the case of no fulfillment of a predetermined restricting condition to ensure output of the target power from the internal combustion engine and output of a power
25 corresponding to the power demand to the drive shaft, in the case of fulfillment of the predetermined restricting condition,

the control module effecting a drive restriction of the motor based on the predetermined restricting condition, correcting the setting of the target power based on the effected drive restriction, and controlling the internal combustion engine, the electric power-mechanical power input-output module, and the motor to ensure output of the corrected target power from the internal combustion engine and output of a power in a range of the effected drive restriction from the motor.

In one preferable embodiment of the invention, one of the automobiles discussed above further includes: a charge-discharge electric power measurement module that measures a charge-discharge electric power used to charge the accumulator or obtained by discharging the accumulator; and an electric power demand setting module that sets an electric power demand for charging or discharging the accumulator, based on a predetermined charge-discharge condition. The correction module corrects the setting of the target power to cancel a difference between the charge-discharge electric power measured by the charge-discharge electric power measurement module and the electric power demand set by the electric power demand setting module. In one preferable application of the automobiles discussed above, the target power setting module specifies a target torque and a target revolution speed to set the target power, and the correction module may vary the specified target revolution speed to correct the target power. In another preferable application

of the automobile discussed above, the control module executes the restriction control on a condition that the power demand is in a predetermined light load power range, when the drive restriction of the motor is effected by the drive restriction
5 effectuation module.

The technique of the power output apparatus and the automobile with the power output apparatus mounted thereon of the present invention is also applicable to a control method for a power output apparatus or for an automobile. A control
10 method of the present invention is a method for a power output apparatus or an automobile, that includes: an internal combustion engine; an electric power-mechanical power input-output module that is linked with an output shaft of the internal combustion engine and with a drive shaft and outputs
15 at least part of power from the internal combustion engine to the drive shaft through inputs and outputs of electric power and mechanical power; a motor that is capable of inputting and outputting power to and from the drive shaft; and an accumulator that is capable of supplying and receiving electric power to
20 and from the electric power-mechanical power input-output module and the motor, the control method including the steps of: (a) setting a power demand required to the drive shaft, in response to an operator's manipulation; (b) setting a target power to be output from the internal combustion engine, based
25 on the setting of the power demand; (c) when a predetermined restricting condition is fulfilled, effecting a drive

restriction of the motor based on the predetermined restricting condition; (d) correcting the setting of the target power based on the effected drive restriction, in the case of effectuation of the drive restriction of the motor; and (e) controlling the
5 internal combustion engine, the electric power-mechanical power input-output module, and the motor in the case of no effectuation of the drive restriction of the motor to ensure output of the target power from the internal combustion engine and output of a power corresponding to the setting of the power
10 demand to the drive shaft, while controlling the internal combustion engine, the electric power-mechanical power input-output module, and the motor in the case of effectuation of the drive restriction of the motor to ensure output of the corrected target power from the internal combustion engine and
15 output of a power in a range of the effected drive restriction from the motor.

In one preferable embodiment of the invention, the control method further includes, prior to the step (d), the steps of: (f) measuring a charge-discharge electric power used
20 to charge the accumulator or obtained by discharging the accumulator; and (g) setting an electric power demand for charging or discharging the accumulator, based on a predetermined charge-discharge condition. The step (d) corrects the target power to cancel a difference between the
25 observed charge-discharge electric power and the setting of the electric power demand.

Brief Description of the Drawings

Fig. 1 schematically illustrates the construction of a hybrid vehicle 20 in one embodiment of the invention; Fig. 2 is a flowchart showing a drive control routine executed by a hybrid electronic control unit 70; Fig. 3 shows an example of a torque demand setting map; Fig. 4 shows an example of a driving line of an engine 22 and a process of setting a target revolution speed N_e^* and a target torque T_e^* ; Fig. 5 is an alignment chart showing a dynamic relation with respect to a rotational elements in a power distribution integration mechanism 30; Fig. 6 is a flowchart showing a light load correction routine; Fig. 7 is a flowchart showing a heavy load correction routine; Fig. 8 shows a driving line of the engine 22 and a process of correcting a target drive point; Fig. 9 shows the relation between power of the engine 22 and power of a motor MG2 in an ordinary state and under drive restriction of the motor MG2; Fig. 10 shows a process of correcting the target drive point according to a heavy load driving line; Fig. 11 schematically illustrates the construction of a hybrid vehicle 120 in one modified embodiment; and Fig. 12 schematically illustrates the construction of a hybrid vehicle 220 in another modified embodiment.

Best Modes of Carrying Out the Invention

One mode of carrying out the invention is discussed below as a preferred embodiment. Fig. 1 schematically illustrates

the construction of a hybrid vehicle 20 with a power output apparatus mounted thereon in one embodiment of the invention. As illustrated, the hybrid vehicle 20 of the embodiment includes an engine 22, a three shaft-type power distribution
5 integration mechanism 30 that is linked with a crankshaft 26 functioning as an output shaft of the engine 22 via a damper 28, a motor MG1 that is linked with the power distribution integration mechanism 30 and is capable of generating electric power, a reduction gear 35 that is attached to a ring gear shaft
10 32a functioning as a drive shaft connected with the power distribution integration mechanism 30, another motor MG2 that is linked with the reduction gear 35, and a hybrid electronic control unit 70 that controls the whole power output apparatus.

The engine 22 is an internal combustion engine that
15 consumes a hydrocarbon fuel, such as gasoline or light oil, to output power and is under control of an engine electronic control unit (hereafter referred to as engine ECU) 24. The engine ECU 24 receives input signals from various sensors detecting the driving conditions of the engine 22 and carries
20 out operation control including fuel injection control, ignition control, and intake air flow regulation. The engine ECU 24 communicates with the hybrid electronic control unit 70 and receives control signals from the hybrid electronic control unit 70 to control the operations of the engine 22,
25 while outputting data regarding the driving conditions of the engine 22 to the hybrid electronic control unit 70 according

to the requirements.

The power distribution and integration mechanism 30 has a sun gear 31 that is an external gear, a ring gear 32 that is an internal gear and is arranged concentrically with the sun gear 31, multiple pinion gears 33 that engage with the sun gear 31 and with the ring gear 32, and a carrier 34 that holds the multiple pinion gears 33 in such a manner as to allow free revolution thereof and free rotation thereof on the respective axes. Namely the power distribution and integration mechanism 30 is constructed as a planetary gear mechanism that allows for differential motions of the sun gear 31, the ring gear 32, and the carrier 34 as rotational elements. The carrier 34, the sun gear 31, and the ring gear 32 in the power distribution and integration mechanism 30 are respectively coupled with the crankshaft 26 of the engine 22, the motor MG1, and the reduction gear 35 via the ring gear shaft 32a. While the motor MG1 functions as a generator, the power output from the engine 22 and input through the carrier 34 is distributed into the sun gear 31 and the ring gear 32 according to the gear ratio. While the motor MG1 functions as a motor, on the other hand, the power output from the engine 22 and input through the carrier 34 is combined with the power output from the motor MG1 and input through the sun gear 31 and the composite power is output to the ring gear 32. The power output to the ring gear 32 is finally transmitted to the driving wheels 63a, 63b via the gear mechanism 60 and differential gear 62 from ring gear shaft 32a.

Both of the motors MG1 and MG2 are constructed as known synchronous generator motors, which are driven as an electric generator as well as an electric motor. The motors MG1 and MG2 transmit electric power from and to a battery 50 via
5 inverters 41 and 42. A power line 54 connecting the inverters 41 and 42 with the battery 50 includes a positive terminal bus line and a negative terminal bus line shared by the two inverters 41 and 42. This arrangement enables the electric power generated by one of the motors MG1 and MG2 to be consumed
10 by the other motor. The battery 50 is charged with the excess electric power of the motor MG1 or the motor MG2 and is discharged to supplement the insufficient electric power of the motor MG1 or the motor MG2. The battery 50 is neither charged not discharged when there is an electric power balance
15 by the motors MG1 and MG2. The motors MG1 and MG2 are both driven and controlled by a motor electronic control unit (hereinafter referred to as motor ECU) 40. The motor ECU 40 receives signals required for driving and controlling the motors MG1 and MG2, for example, signals from rotational
20 position detection sensors 43 and 44 that detect the rotational positions of rotors in the motors MG1 and MG2 and values of phase electric currents supplied to the motors MG1 and MG2 and detected by non-illustrated electric current sensors. The motor ECU 40 outputs switching control signals to the inverters
25 41 and 42. The motor ECU 40 communicates with the hybrid electronic control unit 70 and drives and controls the motors

MG1 and MG2 in response to control signals from the hybrid electronic control unit 70 while outputting data regarding the driving conditions of the motors MG1 and MG2 to the hybrid electronic control unit 70 according to the requirements.

5 The battery 50 is controlled by a battery electronic control unit (hereinafter referred to as battery ECU) 52. The battery ECU 52 receives signals required for controlling the battery 50, for example, a value of inter-terminal voltage V_b measured by a voltage sensor 51a disposed between terminals
10 of the battery 50, a value of charge discharge electric current I_b measured by an electric current sensor 51b attached to the power line 54 connecting with an output terminal of the battery 50, and a battery temperature T_b measured by a temperature sensor 51c attached to the battery 50. The battery ECU 52
15 outputs data regarding the conditions of the battery 50 to the hybrid electronic control unit 70 via communication according to the requirements. The battery ECU 52 computes a state of charge (SOC) from an accumulated value of the charge discharge electric current I_b measured by the electric current sensor
20 51b for controlling the battery 50.

 The hybrid electronic control unit 70 is constructed as a microprocessor including a CPU 72, a ROM 74 that stores processing programs, a RAM 76 that temporarily stores data, and a non-illustrated input-output port, and a non-illustrated
25 communication port. The hybrid electronic control unit 70 receives various inputs via the input port: a motor temperature

T_m from a temperature sensor 46 attached to the motor MG2, an inverter temperature T_{inv} from a temperature sensor 47 attached to the inverter 42, an ignition signal from an ignition switch 80, a gearshift position SP from a gearshift position sensor 82 that detects the current position of a gearshift lever 81, an accelerator opening Acc from an accelerator pedal position sensor 84 that measures a step-on amount of an accelerator pedal 83, a brake pedal position BP from a brake pedal position sensor 86 that measures a step-on amount of a brake pedal 85, and a vehicle speed V from a vehicle speed sensor 88. The hybrid electronic control unit 70 communicates with the engine ECU 24, the motor ECU 40, and the battery ECU 52 via the communication port to transmit diverse control signals and data to and from the engine ECU 24, the motor ECU 40, and the battery ECU 52, as mentioned previously.

The hybrid vehicle 20 of the embodiment thus constructed calculates a required torque, which is to be output to the ring gear shaft 32a or the drive shaft, based on the accelerator opening Acc corresponding to the driver's step-on amount of the accelerator pedal 83 and the vehicle speed V. The engine 22 and the motors MG1 and MG2 are under operation control to enable power corresponding to the calculated required torque to be actually output to the ring gear shaft 32a. The operation control of the engine 22 and the motors MG1 and MG2 has multiple modes, a torque conversion drive mode, a charge-discharge drive mode, and a motor drive mode. In the torque conversion drive

mode, the engine 22 is under operation control to output a power equivalent to the required power. The motors MG1 and MG2 are driven and controlled to cause the total power output from the engine 22 to be subjected to the torque conversion by means of the power distribution and integration mechanism 30 and the motors MG1 and MG2 and to be output to the ring gear shaft 32a. In the charge-discharge drive mode, the engine 22 is under operation control to output a power equivalent to the sum of the required power and an electric power used for charging and discharging the battery 50. The motors MG1 and MG2 are driven and controlled to cause all or part of the power output from the engine 22 with a charge or a discharge of the battery 50 to be subjected to the torque conversion by means of the power distribution and integration mechanism 30 and the motors MG1 and MG2 and to be output as the required power to the ring gear shaft 32a. In the motor drive mode, the operation of the engine 22 is at a stop, while the motor MG2 is driven and controlled to output a power equivalent to the required power to the ring gear shaft 32a.

The following describes the operations of the hybrid vehicle 20 of the embodiment constructed as discussed above, especially the operation under a drive restriction of the motor MG2 due to a temperature rise of the motor MG2 or the inverter 42. Fig. 2 is a flowchart showing a drive control routine executed by the hybrid electronic control unit 70. This routine is carried out repeatedly at preset time intervals (for

example, at every 8 msec).

When the drive control routine starts, the CPU 72 of the hybrid electronic control unit 70 first inputs various data required for control, that is, the accelerator opening Acc from the accelerator pedal position sensor 84, the vehicle speed V from the vehicle speed sensor 88, revolution speeds Nm1 and Nm2 of the motors MG1 and MG2, and a drive limit Tlim of the motor MG2 (step S100). The procedure of this embodiment receives the revolution speeds Nm1 and Nm2 of the motors MG1 and MG2, which have been calculated according to rotational positions of rotors in the motors MG1 and MG2 detected by rotational position detection sensors 43 and 44, from the motor ECU 40 via communication. The procedure of this embodiment reads out and inputs the drive limit Tlim of the motor MG2, which has been set according to a non-illustrated drive limit setting routine based on the motor temperature Tm from the temperature sensor 46 attached to the motor MG2, the inverter temperature Tinv from the temperature sensor 47 attached to the inverter 42, and the revolution speed Nm2 of the motor MG2 and has been written at a specified address in the RAM 76. The drive limit Tlim is set, for example, as a value of 60% or 50% of a rated maximum torque of the motor MG2 at the revolution speed Nm2, when the motor temperature Tm or the inverter temperature Tinv is not lower than an upper limit motor temperature or an upper limit inverter temperature set as the upper threshold to ensure continuous actuation of the motor

MG2. In this embodiment, when the motor temperature T_m or the inverter temperature T_{inv} is lower than the upper limit motor temperature or the upper limit inverter temperature, a rated maximum torque of the motor MG2 at a revolution speed N_e is set to the drive limit T_{lim} . For the better understanding of explanation, the following description first regards the procedure without a drive restriction of the motor MG2 and the procedure under a drive restriction of the motor MG2.

After the input of these data, the CPU 72 sets a torque demand Tr^* to be output to the ring gear shaft 32a or the drive shaft linked with the drive wheels 63a and 63b as the torque required for the vehicle and a power demand Pe^* to be output from the engine 22, based on the inputs of the accelerator opening Acc and the vehicle speed V (step S110). In the structure of this embodiment, variations in torque demand Tr^* against the accelerator opening Acc and the vehicle speed V are specified in advance and stored as a torque demand setting map in the ROM 74. The procedure of the embodiment reads and sets the torque demand Tr^* corresponding to the given accelerator opening Acc and the given vehicle speed V from the stored torque demand setting map. Fig. 3 shows an example of the torque demand setting map. The power demand Pe^* is calculated as the sum of the product of the setting of the torque demand Tr^* and a revolution speed N_r of the ring gear shaft 32a, a charge-discharge power demand Pb^* of the battery 50, and a potential loss 'Loss'. The revolution speed N_r of the

ring gear shaft 32a may be obtained by multiplying the vehicle speed V by a conversion coefficient k or by dividing the revolution speed N_{m2} of the motor MG2 by a gear ratio Gr of the reduction gear 35.

5 After setting the torque demand Tr^* and the power demand Pe^* , a target revolution speed Ne^* and a target torque Te^* of the engine 22 are set according to the setting of the power demand Pe^* (step S120). Here the target revolution speed Ne^* and the target torque Te^* are set according to a driving line
10 for efficiently driving the engine 22 and the setting of the power demand Pe^* . An example of the driving line of the engine 22 and the process of setting the target revolution speed Ne^* and the target torque Te^* are shown in Fig. 4. As illustrated, the target revolution speed Ne^* and the target torque Te^* are
15 obtained as the intersection of the driving line and a curve of constant power demand Pe^* ($= Ne^* \times Te^*$).

 After setting the target revolution speed Ne^* and the target torque Te^* , it is determined whether the motor MG2 is under a drive restriction (step S130). The presence of the
20 drive restriction of the motor MG2 may be specified according to the value of the drive limit T_{lim} or according to the value of a flag, which may be set to effect the drive restriction of the motor MG2.

 The description first regards the case without a drive
25 restriction of the motor MG2. The routine thus gives a negative answer in this cycle at step S130 and goes to the processing

of and after step S170. The CPU 72 calculates a target revolution speed $Nm1^*$ of the motor MG1 from the setting of the target revolution speed Ne^* , the revolution speed Nr ($= Nm2/Gr$) of the ring gear shaft 32a, and a gear ratio ρ of the power distribution integration mechanism 30 according to Equation (1) given below, while calculating a torque command $Tm1^*$ of the motor MG1 from the calculated target revolution speed $Nm1^*$ and the current revolution speed $Nm1$ according to Equation (2) given below (step S170). Equation (1) shows a dynamic relation of the rotational elements in the power distribution integration mechanism 30. Fig. 5 is an alignment chart showing a dynamic relation between the revolution speed and the torque with respect to the rotational elements in the power distribution integration mechanism 30. An axis S shows the revolution speed of the sun gear 31 that is equal to the revolution speed $Nm1$ of the motor MG1. An axis C shows the revolution speed of the carrier 34 that is equal to the revolution speed Ne of the engine 22. An axis R shows the revolution speed Nr of the ring gear 32 that is obtained by multiplying the revolution speed $Nm2$ of the motor MG2 by the gear ratio Gr of the reduction gear 35. Equation (1) is easily derived from this alignment chart. Two thick arrows on the axis R respectively represent a torque acting on the ring gear shaft 32a as a torque Te^* output from the engine 22 is transmitted via the power distribution integration mechanism 30 while the engine 22 is steadily driven at a specific drive

point defined by the target torque T_e^* and the target revolution speed N_e^* , and a torque acting on the ring gear shaft 32a as a torque T_{m2}^* output from the motor MG2 is transmitted via the reduction gear 35. Equation (2) shows a relation in feedback control to rotate the motor MG1 at the target revolution speed N_{m1}^* . In Equation (2), 'k1' in the second term on the right side represents a gain of a proportional term and 'k2' in the third term on the right side represents a gain of an integral term.

10

$$N_{m1}^* = N_e^* \cdot (1+p)/p - N_{m2}/(Gr \cdot p) \quad (1)$$

$$T_{m1}^* = \text{Previous } T_{m1}^* + k1(N_{m1}^* - N_{m1}) + k2 \int (N_{m1}^* - N_{m1}) dt \quad (2)$$

After calculation of the target revolution speed N_{m1}^* , and the torque command T_{m1}^* of the motor MG1, the CPU 72 divides a difference between an output limit W_{out} of the battery 50 and a power consumption (generated power) of the motor MG1, which is the product of the calculated torque command T_{m1}^* of the motor MG1 and the current revolution speed N_{m1} of the motor MG1, by the current revolution speed N_{m2} of the motor MG2 according to Equation (3) given below to calculate a torque limit T_{max} as an upper limit torque output from the motor MG2 (step S180). The CPU 72 also calculates a tentative motor torque T_{m2tmp} as a torque to be output from the motor MG2 from the torque demand T_r^* , the torque command T_{m1}^* , and the gear ratio p of the power distribution integration mechanism 30

according to Equation (4) given below (step S190), and sets the smallest among the calculated torque limit T_{max} , the calculated tentative motor torque T_{m2tmp} , and the drive limit T_{lim} to a torque command T_{m2*} of the motor MG2 (step S200).

5 In this cycle of the routine, there is no drive restriction of the motor MG2. The rated maximum torque of the motor MG2 at the revolution speed N_e has accordingly been set to the drive limit T_{lim} . Setting the torque command T_{m2*} of the motor MG2 in this manner enables the torque demand T_r^* , which is to be
10 output to the ring gear shaft 32a or the drive shaft, to be set as a restricted torque in the range of the output limit of the battery 50 and by the rated maximum torque of the motor MG2. Equation (4) is easily derived from the alignment chart of Fig. 5 discussed above.

15

$$T_{max} = (W_{out} - T_{m1*} \cdot N_{m1}) / N_{m2} \quad (3)$$

$$T_{m2tmp} = (T_r^* + T_{m1*} / \rho) / G_r \quad (4)$$

After setting the target revolution speed N_e^* and the
20 target torque T_e^* of the engine 22 and the torque commands T_{m1*} and T_{m2*} of the motors MG1 and MG2, the CPU 72 sends the target revolution speed N_e^* and the target torque T_e^* of the engine 22 to the engine ECU 24 and the torque commands T_{m1*} and T_{m2*} of the motors MG1 and MG2 to the motor ECU 40 (step S210) and
25 exits from this drive control routine. The engine ECU 24 receives the target revolution speed N_e^* and the target torque

Te* and carries out fuel injection control and ignition control of the engine 22 to drive the engine 22 at a drive point defined by the target revolution speed Ne* and the target torque Te*. The motor ECU 40 receives the torque commands Tm1* and Tm2* and carries out switching control of switching elements in the inverters 41 and 42 to drive the motor MG1 with the torque command Tm1* and to drive the motor MG2 with the torque command Tm2*.

In the case with a drive restriction of the motor MG2, on the other hand, the routine gives an affirmative answer at step S130 and determines whether the input accelerator opening Acc is not greater than a preset reference opening Aref (step S140). The preset reference opening Aref is used to determine whether the driver requires a heavy load to the vehicle and is set equal to, for example, 30% or 40%. When the input accelerator opening Acc is not greater than the preset reference opening Aref, the CPU 72 specifies a light load state and executes a light load correction routine shown in the flowchart of Fig. 6 to correct a target drive point of the engine 22 defined by the target revolution speed Ne* and the target torque Te* (step S150). When the input accelerator opening Acc is greater than the preset reference opening Aref, on the contrary, the CPU 72 specifies a heavy load state and executes a heavy load correction routine shown in the flowchart of Fig. 7 to correct the target drive point of the engine 22 defined by the target revolution speed Ne* and the target torque Te*

(step S160).

The light load correction routine first reads observed charge-discharge electric powers W_b and a charge-discharge electric power demand W_b^* of the battery 50 (step S300) and
5 calculates an average charge-discharge electric power W_{bave} of the observed charge-discharge electric powers W_b read in a preset time period (for example, in 1 second) (step S310). Here the observed charge-discharge electric power W_b of the battery 50 is obtained as the product of a voltage V_b between
10 terminals of the battery 50 measured by a voltage sensor 51a and a charge-discharge current I_b measured by a current sensor 51b and is input from the battery ECU 52 via communication. The charge-discharge electric power demand W_b^* is obtained by conversion of the charge-discharge power demand P_b^* . The
15 routine then calculates a difference (electric power difference) ΔW between the charge-discharge electric power demand W_b^* and the calculated average charge-discharge electric power W_{bave} (step S320) and corrects the target revolution speed N_e^* of the engine 22 to cancel the electric
20 power difference ΔW (step S330). The procedure of this embodiment adds the product of the electric power difference ΔW and a proportional gain k_b to a previous value of the target revolution speed N_e^* set in the previous cycle, so as to correct the target revolution speed N_e^* . The light load correction
25 routine varies the target revolution speed N_e^* at the target drive point of the engine 22 to cancel the difference between

the charge-discharge electric power demand W_b^* and the calculated average charge-discharge electric power W_{ave} , that is, to make the observed charge-discharge electric power W_b of the battery 50 equal to the charge-discharge electric power demand W_b^* , while keeping the target torque T_e^* unchanged. Fig. 8 shows a driving line of the engine 22 and a process of correcting the target drive point of the engine 22. Fig. 9 shows the relation between the power of the engine 22 and the power of the motor MG2 in the ordinary state and under the drive restriction of the motor MG2. As shown in Fig. 8, the target drive point of the engine 22 is changed from a drive point DP1, which is the intersection of a driving line of the engine 22 and a curve of constant power demand P_e^* , to a drive point DP2 of a lower target revolution speed N_e^* . The power output from the engine 22 is thus equal to the product of the corrected target revolution speed N_e^* and the target torque T_e^* of the drive point DP2. The charge-discharge electric power W_b of the battery 50 under the drive restriction of the motor MG2 is thus equal to that in the ordinary state, as shown in Fig. 9.

The heavy load correction routine sets the target revolution speed N_e^* and the target torque T_e^* of the engine 22 as the intersection of a heavy load driving line and the curve of constant power demand P_e^* (step S400 in Fig. 7). Fig. 10 shows a process of correcting the target drive point according to a heavy load driving line. As illustrated, the

target drive point of the engine 22 is changed from a drive point DP1, which is the intersection of an ordinary state driving line and a curve of constant power demand Pe^* , to a drive point DP3, which is the intersection of a heavy load driving line and the curve of constant power demand Pe^* .
5 Changing the target drive point to increase the target torque Te^* in this manner enhances the torque $(Te^*/(1+\rho))$ transmitted to the ring gear shaft 32a among the torque to be output from the engine 22 (the target torque Te^*). A torque that is still
10 smaller than but is closer to the torque demand Tr^* can thus be output to the ring gear shaft 32a or the drive shaft under the drive restriction of the motor MG2.

On completion of the correction of the target drive point of the engine 22, the routine executes the processing of steps
15 S170 to S200 to set the torque commands $Tm1^*$ and $Tm2^*$ of the motors MG1 and MG2. In this cycle of the routine, there is a drive restriction of the motor MG2. The drive limit $Tlim$ has thus been set as 60% or 50% of the rated maximum torque of the motor MG2 at the revolution speed Ne . The processing
20 of step S200 sets the smallest among the torque limit $Tmax$, the tentative motor torque $Tm2tmp$, and the drive limit $Tlim$ to the torque command $Tm2^*$ of the motor MG2. The torque command $Tm2^*$ of the motor MG2 is accordingly set by restricting the torque demand Tr^* to be output to the ring gear shaft 32a or
25 the drive shaft in the range of the output limit of the battery 50 and in the drive restriction of the motor MG2.

The target revolution speed N_e^* and the target torque T_e^* of the engine 22 corrected as discussed above and the settings of the torque commands T_{m1}^* and T_{m2}^* of the motors MG1 and MG2 are respectively sent to the engine ECU 24 and the
5 motor ECU 40 (step S210). The engine ECU 24 and the motor ECU 40 control the engine 22 and the motors MG1 and MG2 to ensure output of the torque command T_{m1}^* from the motor MG1 and output of the torque command T_{m2}^* from the motor MG2 and thereby to drive the engine 22 at the target drive point defined by the
10 target revolution speed N_e^* and the target torque T_e^* .

As described above, the hybrid vehicle 20 of the embodiment corrects the target drive point of the engine 22 to make the observed charge-discharge electric power W_b of the battery 50 equal to the charge-discharge electric power demand
15 W_b^* , while keeping the torque of the engine 22 unchanged, during a drive in the light load state and under the drive restriction of the motor MG2. This arrangement effectively prevents the battery 50 from being excessively charged and deterioration of the emission. During a drive in the heavy load state and
20 under the drive restriction of the motor MG2, the hybrid vehicle 20 corrects the target drive point of the engine 22 to increase the target torque T_e^* . A torque that is still smaller than but is rather closer to the torque demand T_r^* can thus be output to the ring gear shaft 32a or the drive shaft. This arrangement
25 ensures output of a desired torque in response to the driver's manipulation even under the drive restriction of the motor MG2.

In the absence of a drive restriction of the motor MG2, the torque demand Tr^* is output to the ring gear shaft 32a or the drive shaft in the range of the output limit W_{out} of the battery 50 and in the range of the rated maximum torque.

5 The hybrid vehicle 20 of the embodiment effects the drive restriction of the motor MG2 when the temperature T_m of the motor MG2 or the temperature T_{inv} of the inverter 42 is not lower than the upper limit motor temperature or the upper limit inverter temperature. The drive restriction of the motor MG2
10 may be effected according to any suitable factor other than the temperature T_m of the motor MG2 or the temperature T_{inv} of the inverter 42.

 In the hybrid vehicle 20 of the embodiment, the drive limit T_{lim} of the motor MG2 is set as 60% or 50% of the rated
15 maximum torque of the motor MG2 at the revolution speed N_{m2} . The drive limit T_{lim} is not restricted to the value 60% or 50% but may be greater or smaller. The drive limit T_{lim} may be a variable that has a stricter restriction with an increase in temperature T_m of the motor MG2 or an increase in temperature
20 T_{inv} of the inverter 42.

 In the hybrid vehicle 20 of the embodiment, under the drive restriction of the motor MG2 and in the heavy load state, the target drive point of the engine 22 is changed to the drive point DP3, which is the intersection of the heavy load driving
25 line and the curve of constant power demand Pe^* . Another technique may alternatively be applied to set the target drive

point.

In the hybrid vehicle 20 of the embodiment, the power of the motor MG2 is subjected to gear change by the reduction gear 35 and is output to the ring gear shaft 32a. In one possible modification shown as a hybrid vehicle 120 of Fig. 11, the power of the motor MG2 may be output to another axle (that is, an axle linked with wheels 64a and 64b), which is different from an axle connected with the ring gear shaft 32a (that is, an axle linked with the wheels 63a and 63b).

In the hybrid vehicle 20 of the embodiment, the power of the engine 22 is output via the power distribution integration mechanism 30 to the ring gear shaft 32a functioning as the drive shaft linked with the drive wheels 63a and 63b. In another possible modification of Fig. 12, a hybrid vehicle 220 may have a pair-rotor motor 230, which has an inner rotor 232 connected with the crankshaft 26 of the engine 22 and an outer rotor 234 connected with the drive shaft for outputting the power to the drive wheels 63a, 63b and transmits part of the power output from the engine 22 to the drive shaft while converting the residual part of the power into electric power.

The embodiment discussed above is to be considered in all aspects as illustrative and not restrictive. There may be many modifications, changes, and alterations without departing from the scope or spirit of the main characteristics of the present invention. The scope and spirit of the present invention are indicated by the appended claims, rather than

by the foregoing description.

Industrial Applicability

The technique of the invention is applicable to the
5 automobile industry and the drive system manufacturing
industry.

CLAIMS

1. A power output apparatus that outputs power to a drive shaft, said power output apparatus comprising:

5 an internal combustion engine;

an electric power-mechanical power input-output module that is linked with an output shaft of said internal combustion engine and with said drive shaft and outputs at least part of power from said internal combustion engine to said drive shaft
10 through inputs and outputs of electric power and mechanical power;

a motor that is capable of inputting and outputting power from and to said drive shaft;

an accumulator that is capable of supplying and receiving
15 electric power to and from said electric power-mechanical power input-output module and said motor;

a power demand setting module that sets a power demand required to said drive shaft, in response to an operator's manipulation;

20 a target power setting module that sets a target power to be output from said internal combustion engine, based on the setting of the power demand;

a drive restriction effectuation module that, when a predetermined restricting condition is fulfilled, effects a
25 drive restriction of said motor based on the predetermined restricting condition;

a correction module that corrects the setting of the target power based on the effected drive restriction, when the drive restriction of said motor is effected by said drive restriction effectuation module; and

5 a control module that executes normal control of controlling said internal combustion engine, said electric power-mechanical power input-output module, and said motor in the case of no effectuation of the drive restriction of said motor by said drive restriction effectuation module to ensure
10 output of the target power from said internal combustion engine and output of a power corresponding to the setting of the power demand to said drive shaft, said control module executing restriction control of controlling said internal combustion engine, said electric power-mechanical power input-output
15 module, and said motor in the case of effectuation of the drive restriction of said motor by said drive restriction effectuation module to ensure output of the corrected target power from said internal combustion engine and output of a power in a range of the effected drive restriction from said motor.

20 2. A power output apparatus in accordance with claim 1, said power output apparatus further comprising:

a charge-discharge electric power measurement module that measures a charge-discharge electric power used to charge said accumulator or obtained by discharging said accumulator;
25 and

an electric power demand setting module that sets an

electric power demand for charging or discharging said accumulator, based on a predetermined charge-discharge condition,

wherein said correction module corrects the setting of
5 the target power to cancel a difference between the charge-discharge electric power measured by said charge-discharge electric power measurement module and the electric power demand set by said electric power demand setting module.

10 3. A power output apparatus in accordance with claim 1, wherein said target power setting module specifies a target torque and a target revolution speed to set the target power, and

said correction module varies the specified target
15 revolution speed to correct the target power.

4. A power output apparatus in accordance with claim 1, wherein said control module executes the restriction control on a condition that the power demand is in a predetermined light load power range, when the drive restriction of said motor is
20 effected by said drive restriction effectuation module.

5. A power output apparatus that outputs power to a drive shaft, said power output apparatus comprising:

an internal combustion engine;

an electric power-mechanical power input-output module
25 that is linked with an output shaft of said internal combustion engine and with said drive shaft and outputs at least part of

power from said internal combustion engine to said drive shaft through inputs and outputs of electric power and mechanical power;

a motor that is capable of inputting and outputting power
5 from and to said drive shaft;

an accumulator that is capable of supplying and receiving electric power to and from said electric power-mechanical power input-output module and said motor; and

a control module that sets a power demand required to
10 said drive shaft in response to an operator's manipulation and sets a target power to be output from said internal combustion engine based on the setting of the power demand, said control module controlling said internal combustion engine, said electric power-mechanical power input-output module, and said
15 motor in the case of no fulfillment of a predetermined restricting condition to ensure output of the target power from said internal combustion engine and output of a power corresponding to the power demand to said drive shaft, in the case of fulfillment of the predetermined restricting condition,
20 said control module effecting a drive restriction of said motor based on the predetermined restricting condition, correcting the setting of the target power based on the effected drive restriction, and controlling said internal combustion engine, said electric power-mechanical power input-output module, and
25 said motor to ensure output of the corrected target power from said internal combustion engine and output of a power in a range

of the effected drive restriction from said motor.

6. A power output apparatus in accordance with any one of claims 1 through 5, wherein said electric power-mechanical power input-output module comprises:

5 a three-shaft power input-output assembly that is connected with three shafts, that is, said output shaft of said internal combustion engine, said drive shaft, and a third shaft, and specifies input and output of power from and to one residual shaft among said three shafts, based on powers input and output
10 from and to two shafts among said three shafts; and

 a generator that inputs and outputs power from and to said third shaft.

7. A power output apparatus in accordance with any one of claims 1 through 5, wherein said electric power-mechanical
15 power input-output module comprises a pair-rotor generator having a first rotor, which is linked with the output shaft of said internal combustion engine, and a second rotor, which is linked with said drive shaft and rotates relative to the first rotor, said pair-rotor generator outputting at least part
20 of the power from said internal combustion engine to said drive shaft through input and output of electric power by electromagnetic interaction between the first rotor and the second rotor.

8. An automobile, comprising:

25 an internal combustion engine;

 an electric power-mechanical power input-output module

that is linked with an output shaft of said internal combustion engine and with a drive shaft coupled with an axle and outputs at least part of power from said internal combustion engine to said drive shaft through inputs and outputs of electric power and mechanical power;

a motor that is capable of inputting and outputting power from and to said drive shaft;

an accumulator that is capable of supplying and receiving electric power to and from said electric power-mechanical power input-output module and said motor;

a power demand setting module that sets a power demand required to said drive shaft, in response to an operator's manipulation;

a target power setting module that sets a target power to be output from said internal combustion engine, based on the setting of the power demand;

a drive restriction effectuation module that, when a predetermined restricting condition is fulfilled, effects a drive restriction of said motor based on the predetermined restricting condition;

a correction module that corrects the setting of the target power based on the effected drive restriction, when the drive restriction of said motor is effected by said drive restriction effectuation module; and

a control module that executes normal control of controlling said internal combustion engine, said electric

power-mechanical power input-output module, and said motor in the case of no effectuation of the drive restriction of said motor by said drive restriction effectuation module to ensure output of the target power from said internal combustion engine and output of a power corresponding to the setting of the power demand to said drive shaft, said control module executing restriction control of controlling said internal combustion engine, said electric power-mechanical power input-output module, and said motor in the case of effectuation of the drive restriction of said motor by said drive restriction effectuation module to ensure output of the corrected target power from said internal combustion engine and output of a power in a range of the effected drive restriction from said motor.

9. An automobile in accordance with claim 8, said automobile further comprising:

a charge-discharge electric power measurement module that measures a charge-discharge electric power used to charge said accumulator or obtained by discharging said accumulator; and

an electric power demand setting module that sets an electric power demand for charging or discharging said accumulator, based on a predetermined charge-discharge condition,

wherein said correction module corrects the setting of the target power to cancel a difference between the charge-discharge electric power measured by said

charge-discharge electric power measurement module and the electric power demand set by said electric power demand setting module.

10. An automobile in accordance with claim 8, wherein
5 said target power setting module specifies a target torque and a target revolution speed to set the target power, and

said correction module varies the specified target revolution speed to correct the target power.

11. An automobile in accordance with claim 8, wherein
10 said control module executes the restriction control on a condition that the power demand is in a predetermined light load power range, when the drive restriction of said motor is effected by said drive restriction effectuation module.

12. An automobile comprising:
15 an internal combustion engine;
an electric power-mechanical power input-output module that is linked with an output shaft of said internal combustion engine and with said drive shaft coupled with an axle and outputs at least part of power from said internal combustion
20 engine to said drive shaft through inputs and outputs of electric power and mechanical power;

a motor that is capable of inputting and outputting power from and to said drive shaft;

an accumulator that is capable of supplying and receiving
25 electric power to and from said electric power-mechanical power input-output module and said motor; and

a control module that sets a power demand required to said drive shaft in response to an operator's manipulation and sets a target power to be output from said internal combustion engine based on the setting of the power demand, said control
5 module controlling said internal combustion engine, said electric power-mechanical power input-output module, and said motor in the case of no fulfillment of a predetermined restricting condition to ensure output of the target power from said internal combustion engine and output of a power
10 corresponding to the power demand to said drive shaft, in the case of fulfillment of the predetermined restricting condition, said control module effecting a drive restriction of said motor based on the predetermined restricting condition, correcting the setting of the target power based on the effected drive
15 restriction, and controlling said internal combustion engine, said electric power-mechanical power input-output module, and said motor to ensure output of the corrected target power from said internal combustion engine and output of a power in a range of the effected drive restriction from said motor.

20 13. An automobile in accordance with any one of claims 8 through 12, wherein said electric power-mechanical power input-output module comprises:

a three-shaft power input-output assembly that is connected with three shafts, that is, said output shaft of said
25 internal combustion engine, said drive shaft, and a third shaft, and specifies input and output of power from and to one residual

shaft among said three shafts, based on powers input and output from and to two shafts among said three shafts; and

a generator that inputs and outputs power from and to said third shaft.

5 14. An automobile in accordance with any one of claims 8 through 12, wherein said electric power-mechanical power input-output module comprises a pair-rotor generator having a first rotor, which is linked with the output shaft of said internal combustion engine, and a second rotor, which is linked
10 with said drive shaft and rotates relative to the first rotor, said pair-rotor generator outputting at least part of the power from said internal combustion engine to said drive shaft through input and output of electric power by electromagnetic interaction between the first rotor and the second rotor.

15 15. A control method for a power output apparatus, which comprises: an internal combustion engine; an electric power-mechanical power input-output module that is linked with an output shaft of said internal combustion engine and with a drive shaft and outputs at least part of power from said
20 internal combustion engine to said drive shaft through inputs and outputs of electric power and mechanical power; a motor that is capable of inputting and outputting power to and from said drive shaft; and an accumulator that is capable of supplying and receiving electric power to and from said
25 electric power-mechanical power input-output module and said motor,

said control method comprising the steps of:

(a) setting a power demand required to said drive shaft,
in response to an operator's manipulation;

(b) setting a target power to be output from said internal
5 combustion engine, based on the setting of the power demand;

(c) when a predetermined restricting condition is
fulfilled, effecting a drive restriction of said motor based
on the predetermined restricting condition;

(d) correcting the setting of the target power based on
10 the effected drive restriction, in the case of effectuation
of the drive restriction of said motor; and

(e) controlling said internal combustion engine, said
electric power-mechanical power input-output module, and said
motor in the case of no effectuation of the drive restriction
15 of said motor to ensure output of the target power from said
internal combustion engine and output of a power corresponding
to the setting of the power demand to said drive shaft, while
controlling said internal combustion engine, said electric
power-mechanical power input-output module, and said motor in
20 the case of effectuation of the drive restriction of said motor
to ensure output of the corrected target power from said
internal combustion engine and output of a power in a range
of the effected drive restriction from said motor.

16. A control method in accordance with claim 15, said
25 control method further comprising, prior to said step (d), the
steps of:

(f) measuring a charge-discharge electric power used to charge said accumulator or obtained by discharging said accumulator; and

(g) setting an electric power demand for charging or
5 discharging said accumulator, based on a predetermined charge-discharge condition,

wherein said step (d) corrects the target power to cancel a difference between the observed charge-discharge electric power and the setting of the electric power demand.

10 17. A control method for an automobile, which comprises:
an internal combustion engine; an electric power-mechanical power input-output module that is linked with an output shaft of said internal combustion engine and with a drive shaft coupled with an axle and outputs at least part of power from
15 said internal combustion engine to said drive shaft through inputs and outputs of electric power and mechanical power; a motor that is capable of inputting and outputting power to and from said drive shaft; and an accumulator that is capable of supplying and receiving electric power to and from said
20 electric power-mechanical power input-output module and said motor,

said control method comprising the steps of:

(a) setting a power demand required to said drive shaft,
in response to an operator's manipulation;

25 (b) setting a target power to be output from said internal combustion engine, based on the setting of the power demand;

(c) when a predetermined restricting condition is fulfilled, effecting a drive restriction of said motor based on the predetermined restricting condition;

(d) correcting the setting of the target power based on
5 the effected drive restriction, in the case of effectuation of the drive restriction of said motor; and

(e) controlling said internal combustion engine, said electric power-mechanical power input-output module, and said motor in the case of no effectuation of the drive restriction
10 of said motor to ensure output of the target power from said internal combustion engine and output of a power corresponding to the setting of the power demand to said drive shaft, while controlling said internal combustion engine, said electric power-mechanical power input-output module, and said motor in
15 the case of effectuation of the drive restriction of said motor to ensure output of the corrected target power from said internal combustion engine and output of a power in a range of the effected drive restriction from said motor.

18. A control method in accordance with claim 17, said
20 control method further comprising, prior to said step (d), the steps of:


(f) measuring a charge-discharge electric power used to charge said accumulator or obtained by discharging said accumulator; and

25 (g) setting an electric power demand for charging or discharging said accumulator, based on a predetermined

charge-discharge condition,

wherein said step (d) corrects the target power to cancel a difference between the observed charge-discharge electric power and the setting of the electric power demand.

1/10
Fig. 1

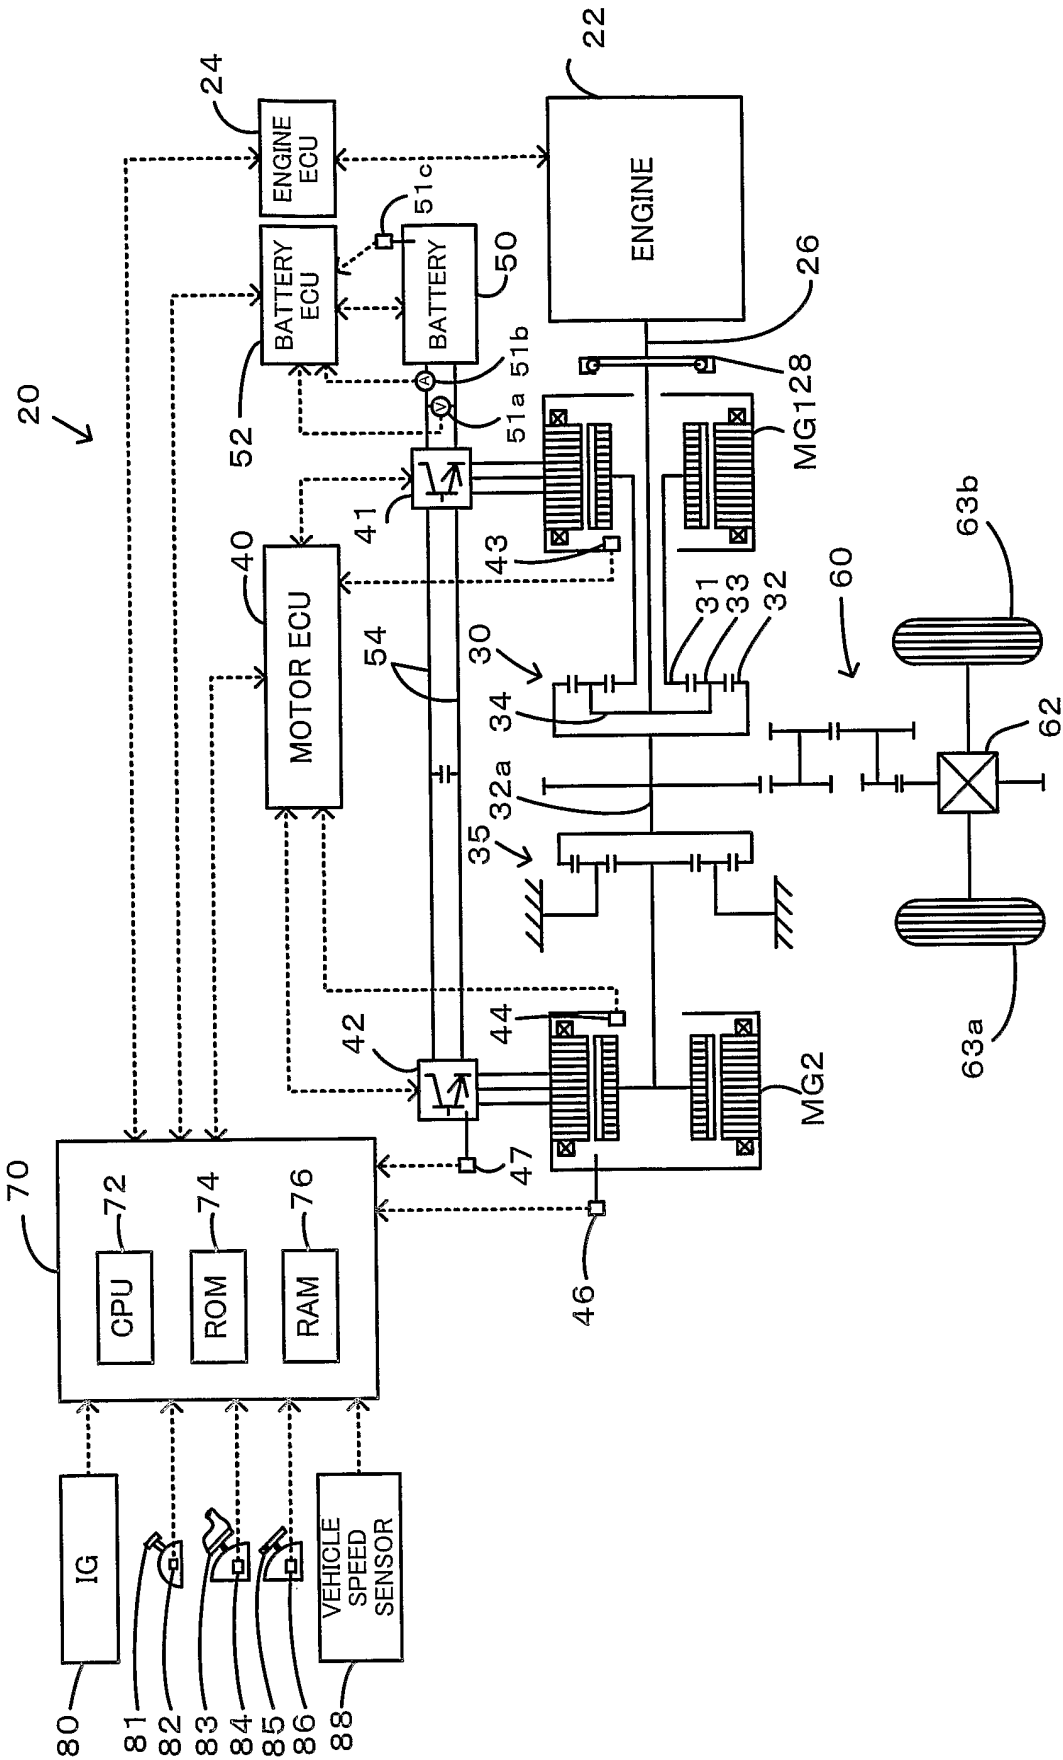

2/10

Fig. 2


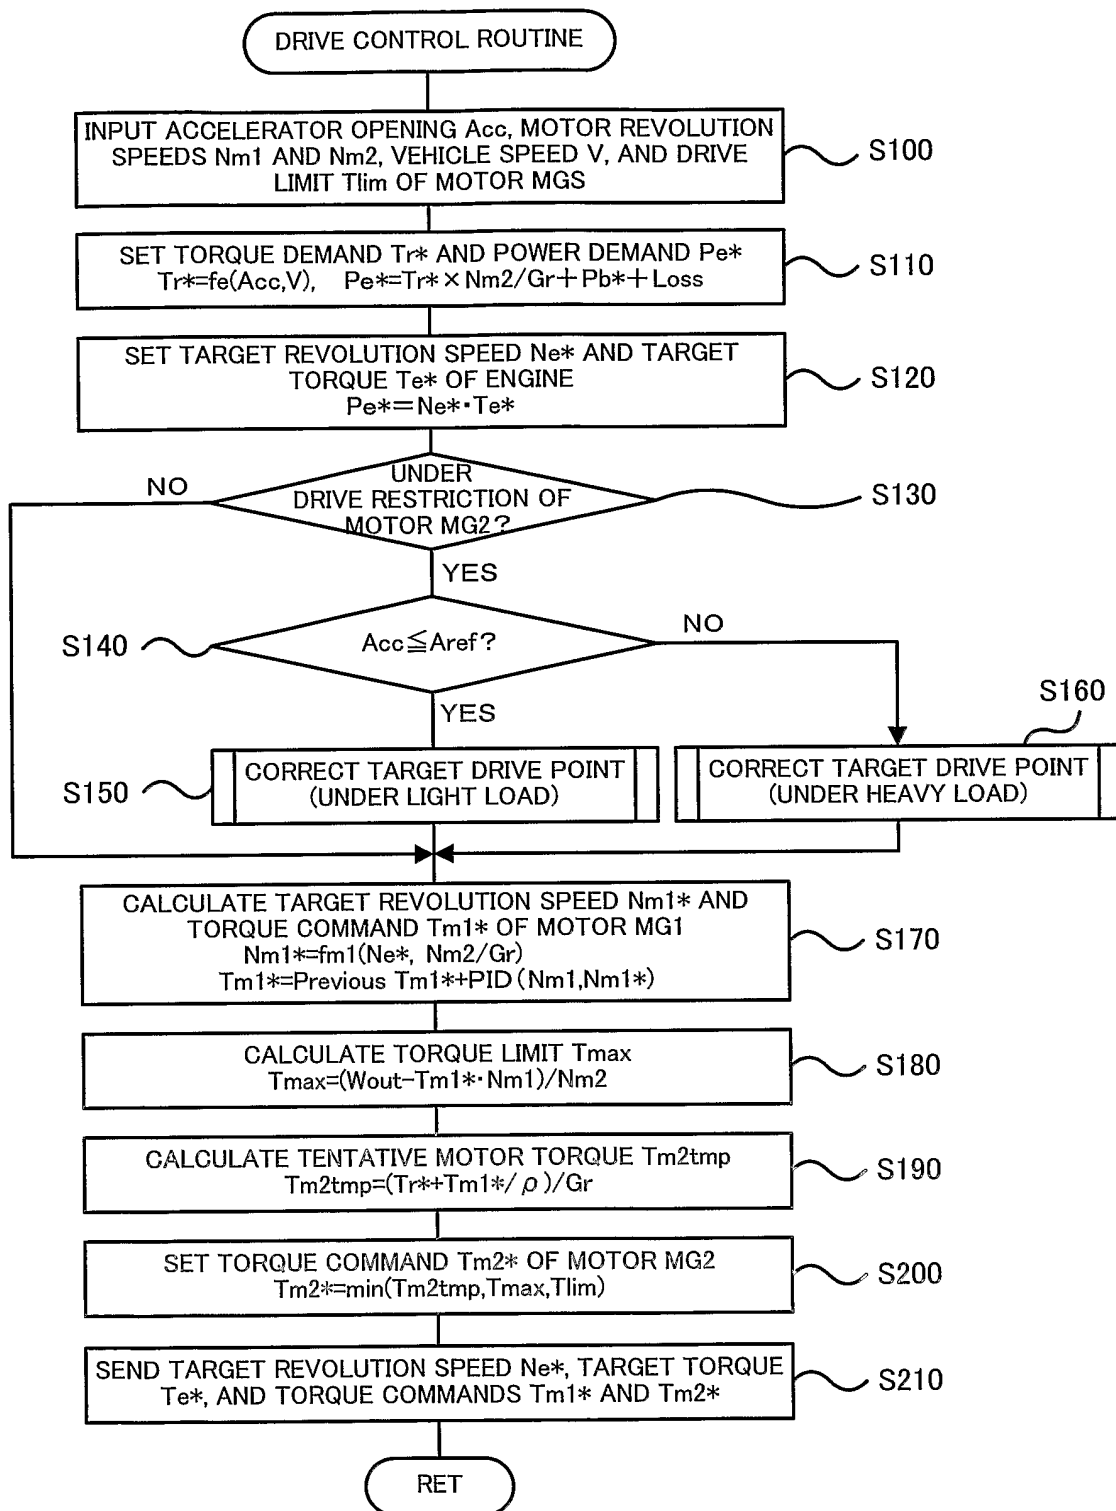


Fig. 3

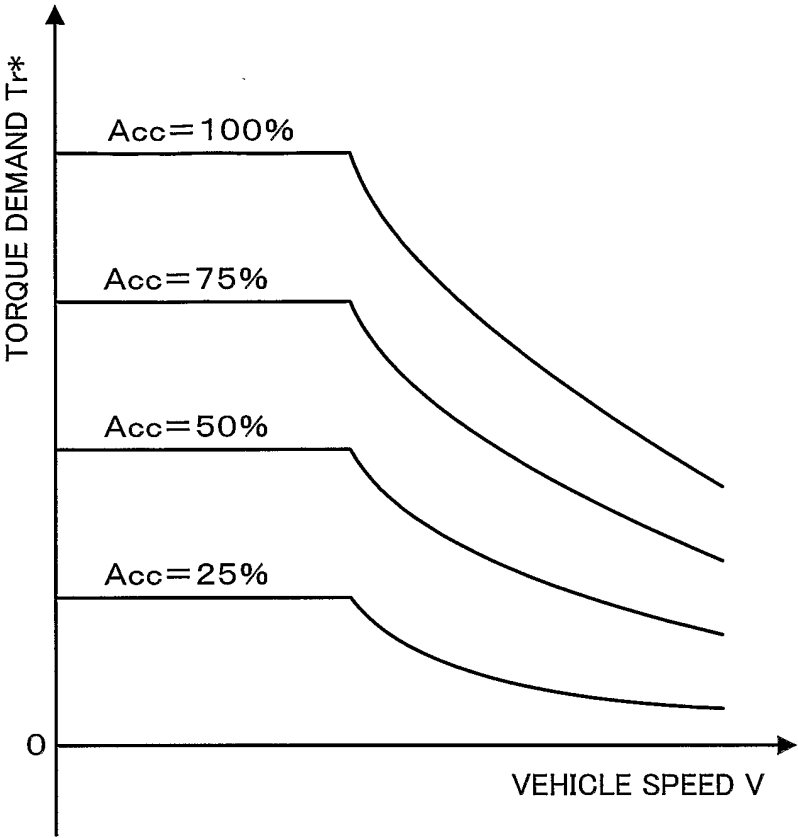

4/10

Fig. 4


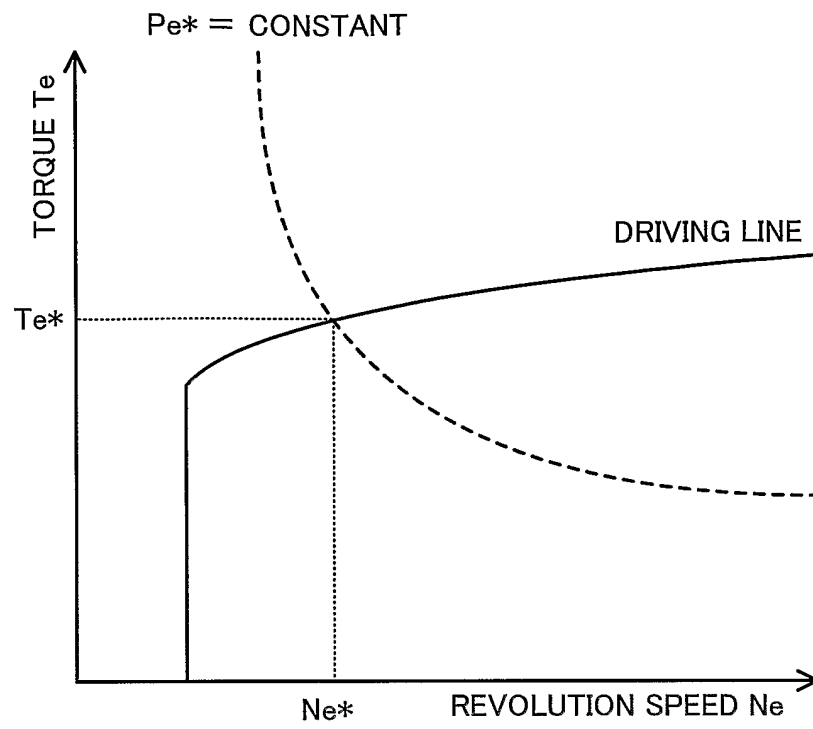


Fig. 5

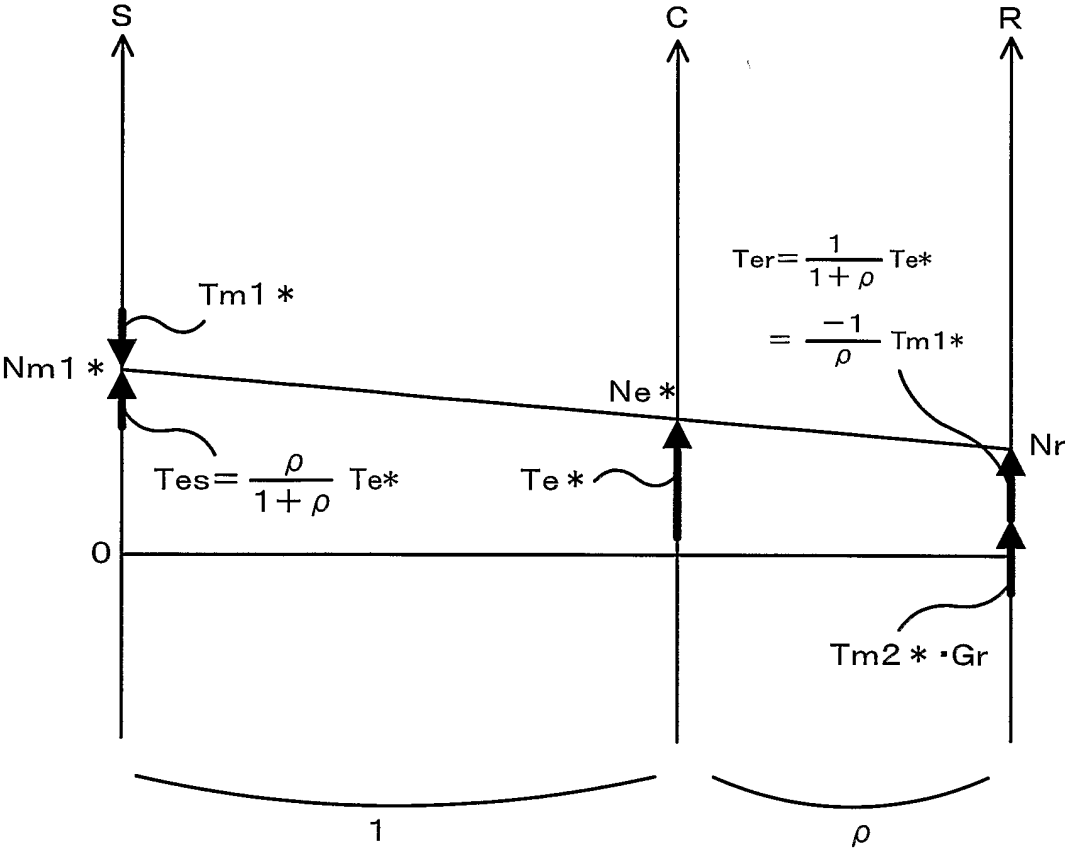

6/10

Fig. 6

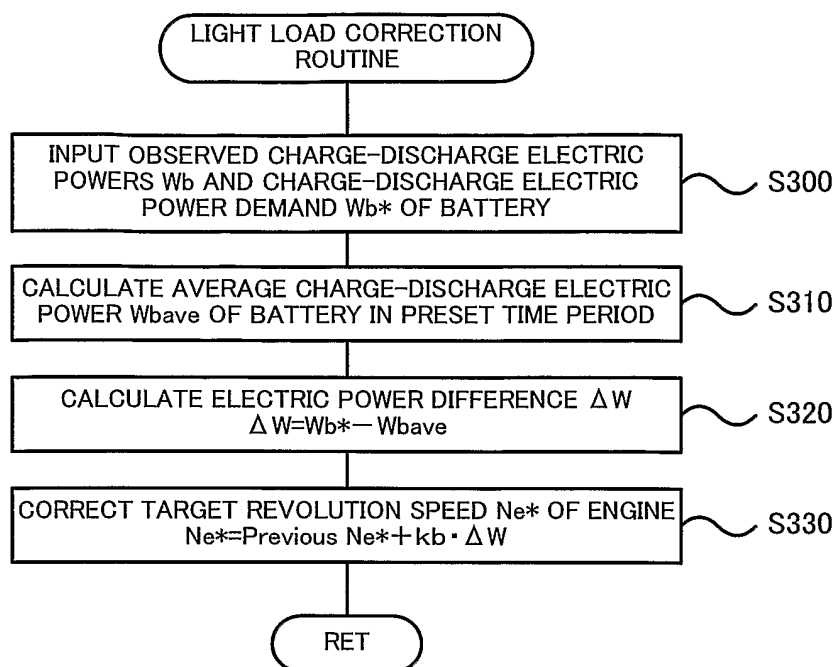


Fig. 7

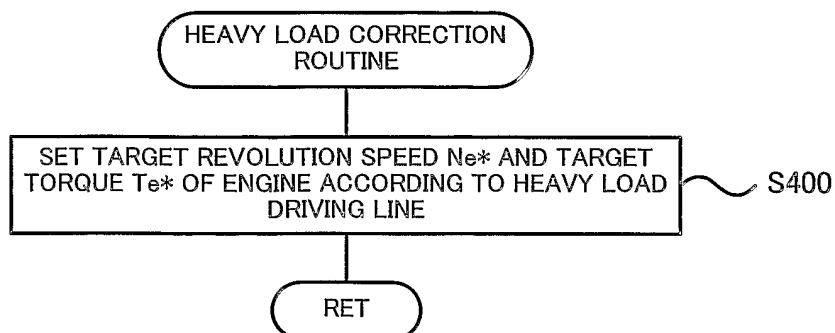


Fig. 8



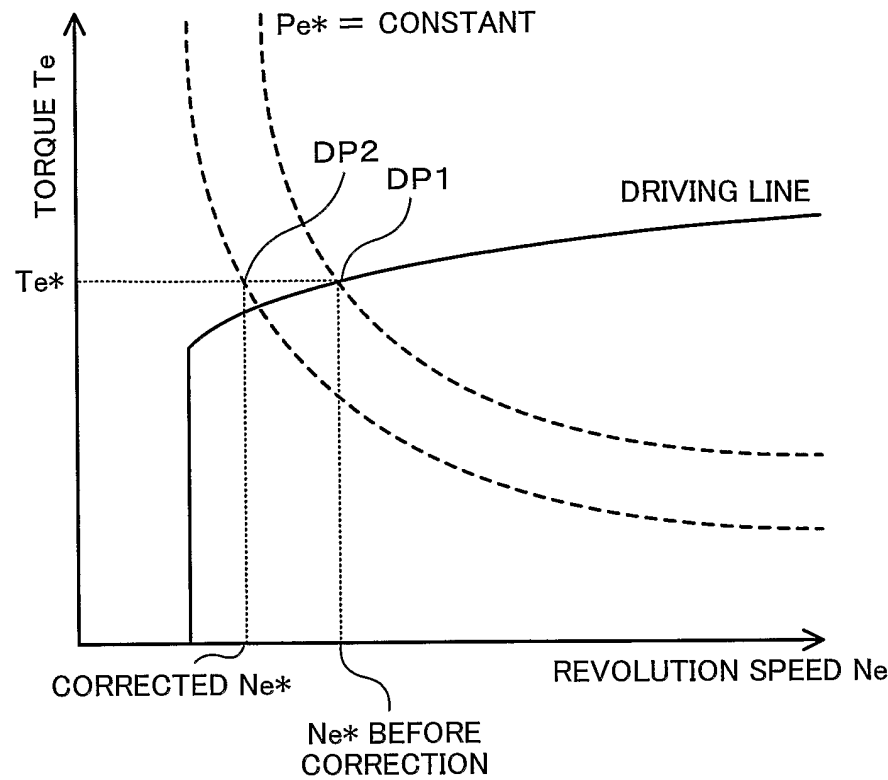


Fig. 9

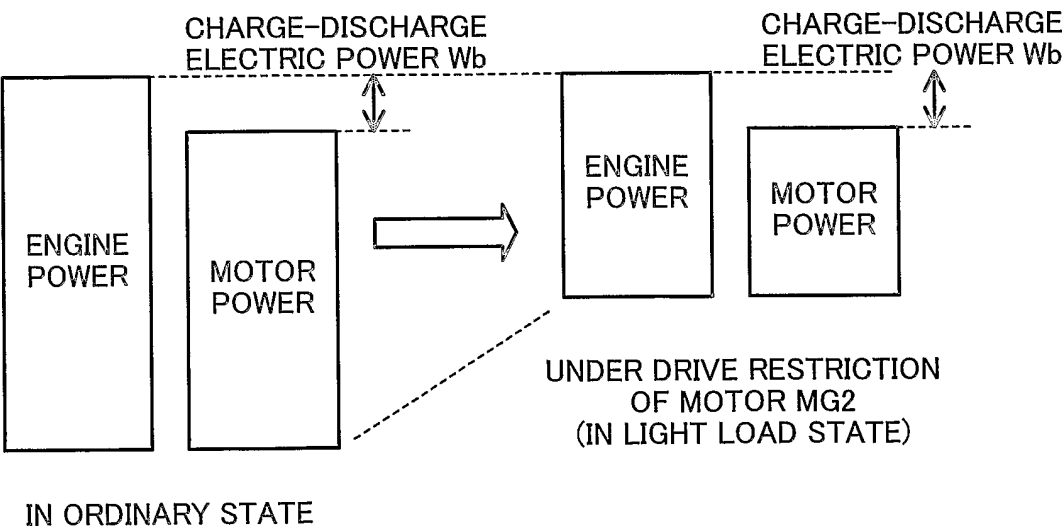


8/10

Fig. 10

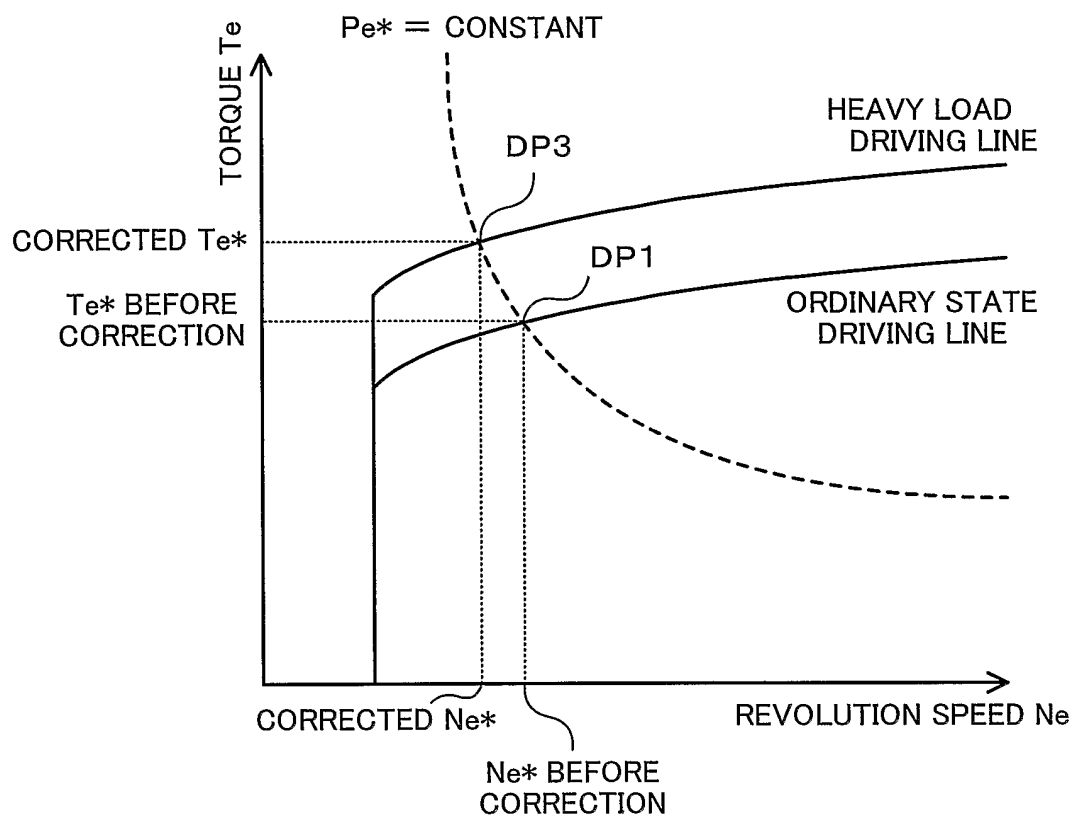

9/10

Fig. 11

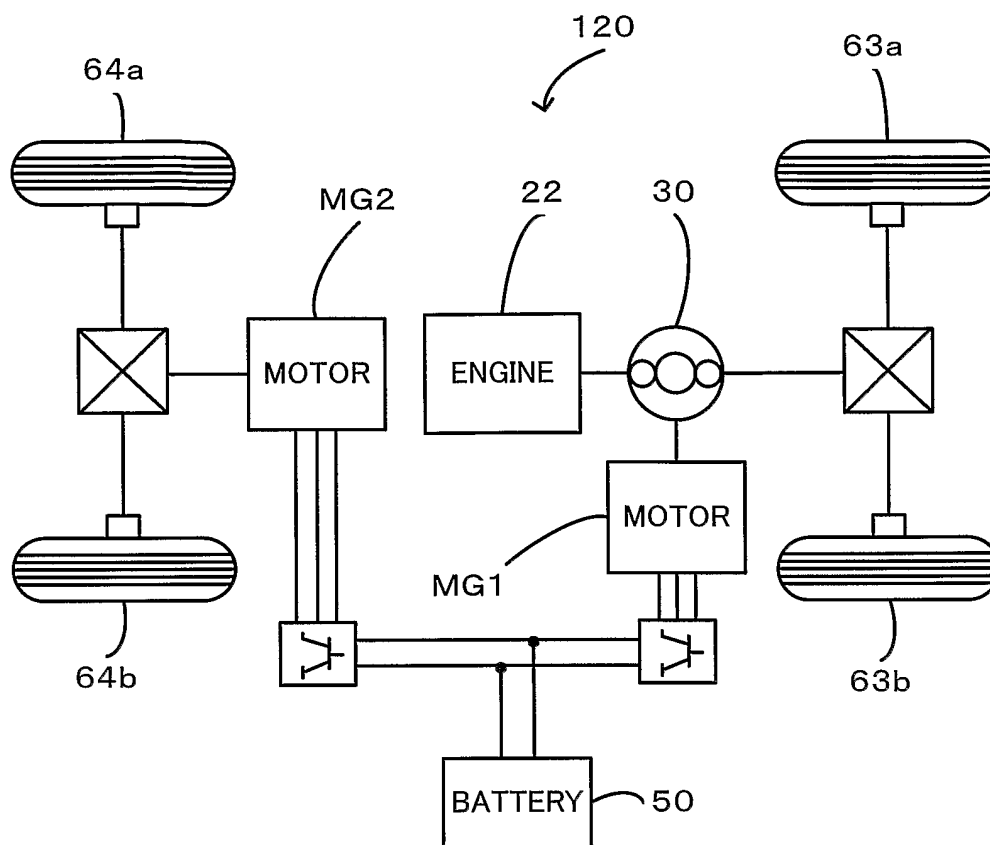

INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP2004/008694

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B60K6/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B60K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 903 259 A (HONDA MOTOR CO LTD) 24 March 1999 (1999-03-24) paragraph '0015! paragraph '0054! paragraph '0056! paragraph '0064! -----	1-3, 5-10, 12-18
A	EP 0 943 475 A (NISSAN MOTOR) 22 September 1999 (1999-09-22) the whole document -----	1-18
A	US 6 470 983 B1 (AMANO MASAHIKO ET AL) 29 October 2002 (2002-10-29) the whole document -----	1-8
A	EP 1 092 581 A (TOYOTA MOTOR CO LTD) 18 April 2001 (2001-04-18) the whole document -----	6,7,13, 14



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

28 September 2004

Date of mailing of the international search report

06/10/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Wisnicki, M

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP2004/008694

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0903259	A	24-03-1999	JP 3216082 B2	09-10-2001
			JP 11093722 A	06-04-1999
			CN 1211512 A ,B	24-03-1999
			DE 69812016 D1	17-04-2003
			DE 69812016 T2	02-10-2003
			EP 0903259 A2	24-03-1999
			US 5939848 A	17-08-1999
EP 0943475	A	22-09-1999	JP 3489475 B2	19-01-2004
			JP 11324751 A	26-11-1999
			DE 69909542 D1	21-08-2003
			DE 69909542 T2	29-01-2004
			EP 0943475 A2	22-09-1999
			US 6090007 A	18-07-2000
			US 6328671 B1	11-12-2001
US 6470983	B1	29-10-2002	JP 3395708 B2	14-04-2003
			JP 2000310131 A	07-11-2000
			US 2001017227 A1	30-08-2001
EP 1092581	A	18-04-2001	EP 1092581 A2	18-04-2001
			JP 2001213182 A	07-08-2001
			US 6656082 B1	02-12-2003