



- (51) International Patent Classification:
G01N 24/08 (2006.01) *E21B 49/00* (2006.01)
- (21) International Application Number:
PCT/US2013/073652
- (22) International Filing Date:
6 December 2013 (06.12.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/748,704 3 January 2013 (03.01.2013) US
13/958,820 5 August 2013 (05.08.2013) US
- (71) Applicant (for CA only): **SCHLUMBERGER CANADA LIMITED** [CA/CA]; 525-3rd Avenue Southwest, Calgary, Alberta T2P-0G4 (CA).
- (71) Applicant (for FR only): **SERVICES PETROLIERS SCHLUMBERGER** [FR/FR]; 42 rue Saint Dominique, 75007 Paris (FR).
- (71) Applicant (for GB, JP, NL only): **SCHLUMBERGER HOLDINGS LIMITED**; P.O. Box 71, Craigmuir Chambers, Road Town, Tortola, Virgin Islands, British, 1110 (VG).
- (71) Applicant (for all designated States except AE, AO, BH, CA, CN, FR, GB, GH, IN, JP, LY, MA, MZ, NA, NG, NL,

PH, SD, SY, US, VN): **SCHLUMBERGER TECHNOLOGY B.V.** [NL/NL]; Parkstraat 83-89m, NL-2514 JG The Hague (NL).

- (71) Applicant (for AE, AO, BF, BH, BJ, CF, CG, CI, CM, CN, GA, GH, GN, GQ, GW, IN, KM, LY, MA, ML, MR, MZ, NA, NE, NG, PH, SD, SN, SY, TD, TG, VN only): **PRAD RESEARCH AND DEVELOPMENT LIMITED**; P.O. Box 71, Craigmuir Chambers, Road Town, Tortola, Virgin Island, British, 1110 (VG).
- (71) Applicant (for US only): **SCHLUMBERGER TECHNOLOGY CORPORATION** [US/US]; 300 Schlumberger Drive, Sugar Land, Texas 77478 (US).
- (72) Inventors: **PAULSEN, Jeffrey L.**; 205 Kent St., #28, Brookline, Massachusetts 02446 (US). **SONG, Yi-Qiao**; 78 Ridge Avenue, Newton, Massachusetts 02459 (US).
- (74) Agents: **LIU, Kenneth** et al.; 10001 Richmond Avenue, IP Administration Center of Excellence, Room 4720, Houston, Texas 77042 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,

[Continued on next page]

(54) Title: METHOD FOR NUCLEAR MAGNETIC RESONANCE DIFFUSION MEASUREMENTS

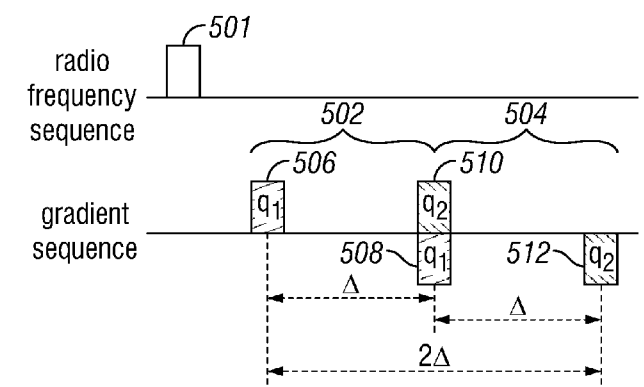


FIG. 5

(57) Abstract: A method and system for determining a property of a substance using nuclear magnetic resonance (NMR) is described herein. The method includes applying a NMR pulse sequence to the substance. The NMR pulse sequence includes a first set of pulses and a second set of pulses. The first set of pulses and the second set of pulses encode for overlapping diffusion times. By overlapping diffusion times, the NMR pulse sequence can be used to measure a diffusion coefficient for a first diffusion time, a diffusion coefficient for a second diffusion time, and a correlation between the two overlapping diffusion times. This information, in turn, can be used to differentiate between intrinsic bulk diffusivity of the substance and the reduced diffusivity of the substance caused by restricted diffusion.



MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

Published:

— *with international search report (Art. 21(3))*

METHOD FOR NUCLEAR MAGNETIC RESONANCE DIFFUSION MEASUREMENTS

TECHNICAL FIELD

[0001] This disclosure relates to nuclear magnetic resonance (NMR) and, in particular, NMR diffusion measurements.

BACKGROUND

[0002] Nuclear magnetic resonance (NMR) can be used to determine properties of a substance. An NMR method includes applying a static magnetic field to the substance. The static magnetic field generates an initial magnetization of atomic nuclei within the substance. Then, an oscillating magnetic field is applied at a particular frequency to the substance. The oscillating field is composed of a sequence of radio frequency (RF) pulses that tip the magnetization of the atomic nuclei away from the initial magnetization. The sequence of pulses can be arranged so that the pulses and the static field interact with the nuclei to produce a NMR signal composed of “echoes” within at least a portion of the substance. The NMR signal is detected and can be used to determine properties of the substance.

[0003] In the oil and gas field industry, NMR is used to investigate the properties of subterranean formations and fluids within the formations. The formation is a porous medium and the fluids (e.g., water, oil and/or gas) within formations are contained within pore volumes of the formation. At least three different NMR measurements can be used to determine properties of a porous medium and a fluid contained therein: (i) a measurement of the absolute signal intensity of the NMR signal, (ii) a measurement of NMR signal relaxation and (iii) a measurement of diffusion. The relaxation measurement measures an inherent signal decay produced by atomic nuclei, whereas a diffusion measurement measures an additional decay produced by movement of the atomic nuclei. The absolute signal intensity can be used to determine the porosity of the porous medium. The relaxation measurement and diffusion measurement can be used to determine the pore size distribution of the porous medium and fluid type contained within the porous medium. For example, estimates of bound water, oil composition, and oil viscosity can be determined using relaxation measurements

and diffusion measurements.

[0004] In particular, diffusion measurements are used to determine a diffusion coefficient of a fluid, which characterizes the distance that nuclei within the fluid will travel as a function of time. In an open or large volume, the diffusion coefficient of the fluid is known as a bulk diffusion coefficient. When the pore size within the formation is large, the measured diffusion coefficient will be similar to the bulk diffusion coefficient. However, in many cases, the pore size is small and this small pore size reduces the measured diffusion coefficient by impeding the movement of the nuclei within the fluid. Diffusion that is impeded by small pore size is known as restricted diffusion.

[0005] Diffusion measurements and relaxation measurements will both depend on the mobility of nuclei in a large bulk volume and the impediment caused by collisions with pore surfaces. For example, a fluid with high viscosity will have a smaller diffusion coefficient and a shorter relaxation time. Similarly, a porous medium with a small pore size will also shorten the diffusion coefficient and the relaxation time for a fluid. As explained above, however, diffusion and relaxation are affected by different mechanisms. Relaxation time is based on the inherent signal decay produced by atomic nuclei, whereas the diffusion coefficient is based on movement of atomic nuclei. So while these measurements are often correlated, each measurement can yield unique information. For instance, bound water will have a shortened T_2 relaxation time distribution. This shortened T_2 relaxation time distribution may intersect the T_2 relaxation time distribution of viscous oil in a large pore. However, an apparent diffusion coefficient (e.g., measured diffusion coefficient) of oil will still be orders of magnitude smaller than the apparent diffusion coefficient for water.

[0006] Nonetheless, diffusion measurements can be complicated when pore sizes are small and when two or more different fluids are located within pore volumes of a porous medium. Past diffusion measurement techniques yield limited or ambiguous information, especially in complex samples (e.g., porous media with different types of fluid). When characterizing oil composition, especially in emulsions or tight oil wet pores, differentiating the effects of composition and pore size is greatly complicated because bulk oil intrinsically has a broadened distribution of diffusion and relaxation times due to its varied composition.

For such reasons, past diffusion and relaxation measurement techniques cannot unambiguously differentiate between restricted diffusion and composition of the fluid.

[0007] One technique used in magnetic resonance imaging (MRI) to make diffusion measurements of fluids within porous medium is known as a pulsed field gradient (PFG). A PFG is a short, timed pulse with spatially dependent magnetic field intensity. A PFG method applies pulses of magnetic field gradients along multiple directions along with a corresponding NMR pulse sequence (with RF pulses) to achieve spatial resolution (e.g., often referred to as “encoding”). The PFG can be used to detect molecular diffusion in fluids and obtain diffusion coefficients. A PFG sequence includes a pair of PFG pulses of identical amplitude (g) and duration (δ). These two PFG pulses are separated by a time period (Δ) (referred to as diffusion time). Fig. 1 shows a prior art PFG pulse sequence **100** that can be applied to a fluid within a porous medium (e.g., a sample). The sequence **100** includes an excitation pulse **102** (e.g., single 90-degree RF pulse) to rotate the spin magnetization of the nuclei within the fluid to the transverse plane. The excitation pulse **102** excites the spins of the nuclei for encoding and detection. A first gradient pulse **104** encodes the initial position of the nuclei as a phase imprinting a wave of magnetization across the fluid. Afterwards, the nuclei move due to diffusion over a diffusion time (Δ), while retaining the initial encoded phase. A second gradient pulse **106** of negative amplitude re-encodes for the position of the nuclei, but with opposite phase such that the net signal phase of each nuclei is proportional to its displacement.

[0008] The pulse sequence can be modified to improve its application for various different samples. For example, Fig. 2 shows another prior art PFG pulse sequence **200**. The sequence **200** shown in Fig. 2 uses a spin echo RF sequence that has an excitation pulse **202** (a 90-degree pulse) for excitation and a refocusing pulse **204** (a 180-degree pulse) for refocusing to generate an echo. Because of the use of the refocusing pulse, the corresponding gradient pulses **206** and **208** are of the same sign (either positive or negative). The pulse sequences shown in Figs. 1 and 2 are often referred to as single-pulse field gradient (or s-PFG).

[0009] Each PFG pulse is defined by an area parameter (q), which is further defined in

units of reciprocal distance (e.g., mm^{-1}). This reciprocal distance corresponds to a wavelength of a wave vector imprinted across the sample by the first pulse and refocused by the second pulse. The area parameter (q) can be determined according to the following relationship:

$$q = \gamma g \delta, \quad (1)$$

where γ is the gyromagnetic ratio of the nuclei ($\text{s}^{-1}\text{G}^{-1}$), g is the amplitude of the gradient pulse (G/cm), and δ is the width (or duration) of the pulse (s).

[0010] The NMR signal that is generated by the PFG pulses exhibits a decay. This decay is represented by the following relationship:

$$E(q) = E(0) \exp(-D\Delta q^2), \quad (2)$$

where D is the diffusion coefficient of the fluid, Δ is the diffusion time, and E is NMR signal data obtained from the generated NMR signal (e.g., signal amplitude). According to equation 2, encoding for diffusion is characterized by the area parameter of the gradient pulses (q). To obtain a diffusion coefficient, a series of experiments with different values of area parameters (q) or diffusion times (Δ) can be performed and the NMR signal data obtained from the experiments (E) is analyzed using equation 2 above.

[0011] Fig. 3 shows another example of a prior art pulse sequence **300** that can be applied to a fluid within a porous medium. This pulse sequence **300** is often referred to as a double-pulsed-field-gradient (d-PFG). The d-PFG pulse sequence **300** includes an initial excitation pulse **302** that excites the spins of the nuclei within the fluid. The sequence **300** also includes two pairs of gradient pulses **304** (q_1) and **306** (q_2) that are separated by a mixing time (T_m). Each pair of gradient pulses **304**, **306** encode for displacement by imprinting and refocusing a wave-vector spatially across the sample, after which the NMR signal produced by the sequence is acquired. The d-PFG pulse sequence **300** uses two diffusion periods (Δ_1) and (Δ_2) to obtain correlation of the diffusive displacement during and between these two diffusion times. The d-PFG pulse sequences are applied a number of times while the area parameters (q_1) and (q_2) are held constant and a gradient angle (θ) between the pairs of gradient pulses is varied. In various embodiments, the first pair **304** is applied along a single direction (e.g., x-axis) and the second pair **306** is applied along a different direction (e.g., y axis). As the d-

PFG pulse sequences are applied, the second direction is varied and the gradient angle (θ) between the pairs thus also varies. A plot of the NMR signal for different values of the gradient angle (θ) can potentially show modulation due to time dependent diffusion and diffusion anisotropy. Although such d-PFG pulse sequences can potentially identify anisotropically shaped pores when the pores are distributed isotropically in a bulk porous medium, such d-PFG techniques are less effective for heterogeneous porous media.

[0012] In another example, the d-PFG pulse sequence can be applied to a fluid within a heterogeneous porous medium a number of times using a variable mixing time (T_m) between the two diffusion periods (Δ_1) and (Δ_2) to assess connectivity between different regions in the medium. The d-PFG pulse sequence **300** can be used to correlate diffusion over the first diffusion period (Δ_1) versus the second diffusion period (Δ_2). A two-dimensional Laplace inversion can be used to analyze the obtained NMR signal data (E) using the following relationship:

$$E(q_1, q_2) = E(0,0) \exp(-D_1 \Delta q_1^2 - D_2 \Delta q_2^2) \quad (3)$$

where D_1 is the diffusion coefficient during the first diffusion period (Δ_1) and D_2 is the diffusion coefficient during the second diffusion period (Δ_2). This method of varying mixing times (T_m) does not measure or consider the time-dependent diffusion in porous media. The method uses a very long mixing times (T_m) to obtain a valid result, which in turn is problematic because the signal produced by the initial pair of gradient pulses decays over long mixing times. When a d-PFG pulse sequence **300** is used with a short mixing time (T_m), there is not sufficient movement of nuclei between the two different regions of the porous media. Thus, when the mixing time (T_m) is short, the diffusion coefficient during the first diffusion period (Δ_1) and the diffusion coefficient during the second diffusion period (Δ_2) are approximately equal.

[0013] For the reasons stated above, past diffusion measurements have difficulty effectively and efficiently differentiating between intrinsic bulk diffusivity of a fluid within a porous medium and the reduced diffusivity of the fluid caused by restricted diffusion.

SUMMARY

[0014] Illustrative embodiments of the present disclosure are directed to a method for determining a property of a substance using nuclear magnetic resonance (NMR). The method includes applying a NMR pulse sequence to the substance. The NMR pulse sequence includes a first set of pulses and a second set of pulses that encode for overlapping diffusion times. A NMR signal produced by the NMR pulse sequence is detected to obtain NMR signal data. The property of the substance can be determined using the NMR signal data over each of the overlapping diffusion times. By overlapping diffusion times, the NMR pulse sequence can be used to measure a diffusion coefficient for a first diffusion time, a diffusion coefficient for a second diffusion time and a correlation between the overlapping diffusion times. This information, in turn, can be used to differentiate between intrinsic bulk diffusivity of the substance and the reduced diffusivity of the substance caused by restricted diffusion.

[0015] In another more specific embodiment, the first set of pulses includes two pulses that are each defined by a first area parameter and separated by a time period. Similarly, the second set of pulses includes two pulses that are each defined by a second area parameter and separated by the time period. The NMR pulse sequence is applied a number of times and each application of the NMR pulse sequence uses different values for the first area parameter and/or the second area parameter. The method further includes detecting NMR signals produced by each application of the NMR pulse sequence to obtain NMR signal data. A Laplace inversion is performed on the NMR signal data to obtain diffusion coefficients for the first diffusion time and the second diffusion time. A property of the substance can be determined using these diffusion coefficients, such as a bulk diffusion coefficient of the substance.

[0016] In a further specific embodiment, the first set of pulses and the second set of pulses include a portion of pulses that correspond to the first diffusion time and a complimentary portion of pulses that correspond to the second diffusion time. The values of the first area parameter and the second area parameter are varied according to the following relationships:

$$q_s = q_1 + q_2,$$

$$q_d = q_2 - q_1,$$

where q_1 is the first area parameter, q_2 is the second area parameter, q_s is an area parameter for the portion of pulses that correspond to the first diffusion time, and q_d is an area parameter for the complimentary portion of pulses that correspond to the second diffusion time.

[0017] Illustrative embodiments are also directed to a system for determining a property of a substance. The system includes an NMR system for applying NMR pulse sequences to a substance and detecting NMR signals generated by the substance to obtain NMR signal data. The system further includes a processor and a memory storing instructions executable by the processor to perform processes. Those processes include providing an NMR pulse sequence to the NMR system. The NMR pulse sequence includes a first set of pulses and a second set of pulses that encode for overlapping diffusion times. Furthermore, the processes include determining the property of the substance using the NMR signal data over each of the overlapping encoding times.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] Those skilled in the art should more fully appreciate advantages of various embodiments of the disclosure from the following “Description of Illustrative Embodiments,” discussed with reference to the drawings summarized immediately below.

[0019] Fig. 1 shows a prior art pulsed field gradient (PFG) sequence;

[0020] Fig. 2 shows another prior art PFG sequence;

[0021] Fig. 3 shows a prior art double-pulsed-field-gradient (d-PFG) sequence;

[0022] Fig. 4 shows a method for determining a property of a substance in accordance with one embodiment of the present disclosure;

[0023] Fig. 5 shows a nuclear magnetic resonance (NMR) pulse sequence in accordance with one embodiment of the present disclosure;

[0024] Fig. 6 shows a portion of pulses from the sequence in Fig. 5 that encode for a first diffusion time (2Δ) in accordance with one embodiment of the present disclosure;

[0025] Fig. 7 shows a complimentary portion of pulses from the sequence in Fig. 5 that encode for a second diffusion time (Δ) in accordance with one embodiment of the present disclosure;

[0026] Fig. 8 shows a plot of diffusion coefficients versus diffusion time;

[0027] Fig. 9 shows a diffusion path for a nucleus over two different diffusion times that overlap in accordance with one embodiment of the present disclosure;

[0028] Fig. 10 shows a diffusion path for a nucleus over different diffusion times that do not overlap;

[0029] Fig. 11 shows a pulse sequence with refocusing pulses in accordance with one embodiment of the present disclosure;

[0030] Fig. 12 shows a stimulated echo pulse sequence in accordance with one embodiment of the present disclosure;

[0031] Fig. 13 shows a pulse sequence with a short time period between the two sets of pulses in accordance with one embodiment of the present disclosure;

[0032] Fig. 14 shows a pulse sequence with multiple gradient axes pulses in accordance with one embodiment of the present disclosure;

[0033] Fig. 15 shows a pulse sequence with a Carr Purcell Meiboom Gill (CPMG) encoding in accordance with one embodiment of the present disclosure;

[0034] Fig. 16 shows a two-dimensional plot of diffusion coefficients at a first diffusion time (D_S) versus diffusion coefficients at the second diffusion time (D_D) in accordance with one embodiment of the present disclosure;

[0035] Fig. 17 shows an NMR pulse sequence that generates an effective pulsed field gradient using a constant background gradient in accordance with one embodiment of the present disclosure;

[0036] Fig. 18 shows an NMR pulse sequence that generates an effective pulsed field

gradient in accordance with another embodiment of the present disclosure;

[0037] Fig. 19 shows a method for determining a property of a substance in accordance with another embodiment of the present disclosure;

[0038] Fig. 20 shows an array of NMR signal data for a potato sample in accordance with one embodiment of the present disclosure;

[0039] Fig. 21 shows an array of NMR signal data for an avocado sample in accordance with one embodiment of the present disclosure;

[0040] Fig. 22 shows NMR signal data as a function of q_s and q_d for an avocado sample in accordance with one embodiment of the present disclosure;

[0041] Fig. 23 shows NMR signal data as a function of q_s and q_d for a water sample in accordance with one embodiment of the present disclosure;

[0042] Fig. 24 shows a two-dimensional plot of diffusion coefficients for the avocado sample in accordance with one embodiment of the present disclosure;

[0043] Fig. 25 shows a two-dimensional plot of diffusion coefficients for the water sample in accordance with one embodiment of the present disclosure;

[0044] Fig. 26 shows a rock core system for determining properties of a rock core sample in accordance with one embodiment of the present disclosure; and

[0045] Fig. 27 shows a wireline system for determining properties of an earth formation in accordance with one embodiment of the present disclosure.

DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

[0046] Illustrative embodiments of the present disclosure are directed to a method and system for determining a property of a substance using nuclear magnetic resonance (NMR). The method includes applying a NMR pulse sequence comprising a first set of pulses and a second set of pulses to the substance. The first set of pulses and the second set of pulses encode for a first diffusion time and a second diffusion time. These diffusion times overlap.

By overlapping diffusion times, the NMR pulse sequence can be used to measure a diffusion coefficient for the first diffusion time, a diffusion coefficient for the second diffusion time, and a correlation between the overlapping diffusion times. This information, in turn, can be used to differentiate between intrinsic bulk diffusivity of the substance and the reduced diffusivity of the substance caused by restricted diffusion. Details of various embodiments are discussed below.

[0047] Fig. 4 shows a method **400** for determining a property of a substance using NMR. Before the first process **402**, a sample, such as a rock core, is placed in an NMR system, such as an NMR rock core analyzer. Process **402** includes using the NMR system to apply a NMR pulse sequence to the substance. Fig. 5 shows one example of an NMR pulse sequence **500** that is applied to the substance. The NMR pulse sequence **500** includes a radio frequency excitation pulse **501** followed by at least a first set of pulses **502** and a second set of pulses **504**. The first set of pulses **502** and the second set of pulses **504** are gradient pulses that generate a pulsed field gradient. A pulsed field gradient is a short, timed pulse with spatially dependent magnetic field intensity. In other embodiments, the first set of pulses **502** and the second set of pulses **504** are radio frequency pulses that are used to generate an “effective” pulsed field gradient, as further described below with respect to Figs. 17 and 18. The sets of pulses may include one or more pulses. In this case, the first set of pulses **502** includes a first pulse **506** and a second pulse **508** that are each defined by a first area parameter (q_1) and separated by a time period (Δ). The second set of pulses **504** includes a first pulse **510** and a second pulse **512** that are each defined by a second area parameter (q_2) and separated by the time period (Δ). The area parameters are defined in units of reciprocal distance (e.g., mm^{-1}) and are defined by a pulse width (δ) and a pulse height (g), as shown in equation 1. The first pulse **506**, **510** and the second pulse **508**, **512** within each set include area parameters that cancel. To this end, in some embodiments, the pulses have opposite amplitudes, as shown in Fig. 5.

[0048] The first set of pulses **502** and the second set of pulses **504** encode for overlapping diffusion times. In this case, the first set of pulses **502** and the second set of pulses **504** encode for a first diffusion time (2Δ) and a second diffusion time (Δ). As shown in Fig. 5, the diffusion times overlap because at least part of the second diffusion time (Δ) is within the

boundaries of the first diffusion time (2Δ). The first set of pulses **502** and the second set of pulses **504** are applied consecutively to generate the overlapping diffusion times. More specifically, to generate the overlapping diffusion times, the first pulse **510** of the second set of pulses **504** is applied (i) simultaneously with the last pulse **508** of the first set **502**, (ii) as soon as the last pulse ends, or (iii) a short time period after the last pulse ends. The short time period is short enough so that the magnetizations produced by each of the first set of pulses **502** (q_1) and the second set of pulses **504** (q_2) interact with each other to form overlapping diffusion periods. Furthermore, this short time period is short enough so that negligible diffusive motion occurs during the short time period relative to the diffusion times Δ and 2Δ . The short time period will be less than a shortest encoded diffusion time (e.g., the second diffusion time (Δ)) and, in various embodiments, will be less than five times the pulse width (δ) of the pulses within the two sets to optimally preserve the overlapping diffusion times.

[0049] In some embodiments, the NMR pulse sequence **500** may include more than two sets of pulses that encode for more than two diffusion times.

[0050] The first set of pulses **502** and the second set of pulses **504** include a portion of pulses that correspond to the first diffusion time (2Δ) and a complimentary portion of pulses that correspond to the second diffusion time (Δ). Fig. 6 shows the portion of pulses **600** that are responsible for encoding the first diffusion time (2Δ). This portion of pulses **600** has an area parameter (q_s). Fig. 7 shows the complimentary portion of pulses **700** that is responsible for encoding the first diffusion time (2Δ) and also the second diffusion time (Δ). The complimentary portion of pulses **700** has an area parameter (q_d). The pulses **600**, **700** shown in Figs. 6 and 7 are portions of the first and second sets of pulses **502** (q_1) and **504** (q_2) in anti-symmetric (q_s) and symmetric (q_d) gradient waveforms. The area parameters for the portions **600**, **700** are defined according to the following relationships:

$$q_s = q_1 + q_2, \quad (4)$$

$$q_d = q_2 - q_1, \quad (5)$$

where q_1 is the first area parameter, q_2 is the second area parameter, q_s is the area parameter for the portion of pulses **600** that correspond to the first diffusion time (2Δ), and q_d is the area

parameter for the complimentary portion of pulses **700** that correspond to the second diffusion time (Δ).

[0051] Fig. 8 shows a plot **800** for a diffusion coefficient versus diffusion time. As shown in the plot **800**, when nuclei experience free diffusion (e.g., in an open environment), the diffusion coefficient is independent of the diffusion time and equivalent to the bulk diffusion coefficient. When nuclei experience restricted diffusion (e.g., in a porous medium), the diffusion coefficient varies with diffusion time. By encoding for two different diffusion times, the pulse sequences described herein can differentiate between restricted diffusion and bulk diffusion.

[0052] Fig. 9 shows a diffusion path **900** for a nucleus over two different diffusion times that overlap. Specifically, Fig. 9 shows how the portion of pulses (q_s) and complimentary portion of pulses (q_d) are sensitive to the movement of the nucleus over two different diffusion times. As shown in Fig. 9, the portion (q_s) is sensitive to displacement in directions **902** over the first diffusion time 2Δ . The complimentary portion of pulses (q_d) is sensitive to three displacements **902**, **904** and **906** over the second diffusion time period (Δ). Because the portion (q_s) and the complimentary portion (q_d) are applied over overlapping diffusion times, the portions encode for the movement of the nucleus simultaneously and encode for diffusion over both the first diffusion time (2Δ) and the second diffusion time (Δ). Thus, an observation of diffusion over the second diffusion time period (Δ) can be correlated to its corresponding values for diffusion over the first time period (2Δ). In contrast, Fig. 10 shows a diffusion path **1000** over a first diffusion time and a second diffusion time that do not overlap (e.g., in the case of past d-PFG pulse sequences). In particular, Fig. 10 shows how a first set of pulses (q_1) and second set of pulses (q_2) are sensitive to the movement of the nucleus. The first set of pulses (q_1) is sensitive to displacement **1002** of the nucleus during the first diffusion time (Δ_1) and the second set of pulses (q_2) is sensitive to displacement in direction **1004** during the second diffusion time period (Δ_2). In this case, the diffusion times do not overlap and thus the pulse sequences are not sensitive to total displacement **902**, as shown in Fig. 9. In the case of past d-PFG pulse sequences, when the first diffusion time (Δ_1) is equal to the second diffusion time (Δ_2), the pulse sequence and corresponding measurement are sensitive to diffusion over one time and, thus, cannot differentiate restricted diffusion from

a reduction in the diffusion coefficient due to encoding time. When the first diffusion time (Δ_1) is different from the second diffusion time (Δ_2), the pulse sequence and corresponding measurement measure diffusion over two diffusion times, but the corresponding measurement cannot differentiate between restricted diffusion and nuclei exchange between two different environments, such as movement between two pores of different sizes. This is because displacements **1002** and **1004** are disjointed and may traverse two different environments. In contrast, the overlapping diffusion periods correspond to total displacement **902** using q_s and its subdivisions **904**, **906** using q_d .

[0053] Illustrative embodiments of the present disclosure are not limited to the pulse sequence shown in Fig. 5. Other pulse sequences and additional pulse sequences can also be used to encode overlapping diffusion times. For example, Fig. 11 shows a pulse sequence **1100** with two sets of gradient pulses **1102**, **1104** and refocusing pulses **1106** that minimize effects of background gradients. The refocusing pulses **1106** are 180 degree pulses that reverse the phase of spins produced by an excitation pulse and compensate for a range of different resonant NMR frequencies due to, for example, the use of an imperfect magnet. In various embodiments, the amplitudes of some of the gradient pulses are flipped to account for the effect of the RF pulses on the gradient encoding. For example, a 180 refocusing pulse will change the encoding done by a prior gradient pulse as if the gradient pulse were originally applied with the opposite sign. Thus, any subsequent gradient pulses account for that effective sign of the gradient pulse.

[0054] Fig. 12 shows a stimulated echo pulse sequence **1200** with two sets of gradient pulses **1202**, **1204**. 90-degree pulses **1206** store and re-excite spins from their longitudinal axes during encoding times. This pulse sequence minimizes signal decay and is generally used to increase the range of practical encoding times.

[0055] Fig. 13 shows a pulse sequence **1300** with a short time period **1302** between the two sets of pulses **1302**, **1306**. In this embodiment, a short time period **1302** is included after the last pulse of the first set **1304** and before the first pulse of the second set **1306** (e.g., less than 50% of Δ). As explained above, the short time period **1302** will be less than Δ and, in various embodiments, will be no more than five times the pulse width (δ) to optimally

preserve the overlapping encoding. When there is no time period between the two sets of pulses **1304**, **1306**, q_s and q_d are independent. Longer time periods between the two sets of pulses will produce a dependency between q_s and q_d .

[0056] Fig. 14 shows a pulse sequence **1400** with multiple gradient axes pulses. Often pulse field gradient encoding is done with gradients along different spatial axes. In this case, the pulse sequence **1400** includes an excitation pulse followed by two sets of gradient pulses in the x-direction **1402**, y-direction **1404** and z-direction **1406**.

[0057] Fig. 15 shows a pulse sequence **1500** with an additional encoding. The two sets of gradient pulses described herein can precede or follow any other type of NMR encoding (e.g., relaxation encoding, or imaging encoding). In this example, the two sets of gradient pulses **1502**, **1504** are followed by a Carr Purcell Meiboom Gill (CPMG) acquisition **1506** to encode for T_2 relaxation.

[0058] Referring back to Fig. 4, at process **404**, a NMR signal produced by the NMR pulse sequence within the substance is detected to obtain NMR signal data over the first and second diffusion time periods. In some embodiments, at process **406**, the method ends when the NMR signal data over each of the overlapping diffusion times is then used to determine a diffusion coefficient of the substance. For example, if the diffusion coefficient at the first diffusion time (2Δ) is equal to the diffusion time at the second diffusion time (Δ), then the measured diffusion coefficient can be assumed to be the bulk diffusion coefficient.

[0059] In various other embodiments, processes **402** and **404** are repeated so that the NMR pulse sequence is applied to the substance a plurality of times using different values of area parameters for the portion of pulses (q_s) and the complimentary portion of pulses (q_d). The area parameters for the portions (q_s) and (q_d) can be varied by modifying the area parameters for the first and second sets of pulses (q_1) and (q_2) according to the relationships in equations 4 and 5. After each pulse sequence is applied, the generated NMR signal is detected to obtain an array of NMR signal data ordered according to q_s and q_d coordinates. In other embodiments, however, the area parameters for the first and second sets of pulses (q_1) and (q_2) are not varied according to the relationships in equations 4 and 5. Instead, each of

the area parameters for the first and second sets of pulses (q_1) and (q_2) is varied to obtain an array of NMR signal data ordered according to, for example, q_1 and q_2 coordinates

[0060] At process 406, the NMR signal data obtained from the repetitive application of the NMR pulse sequence to the substance is then used to determine a property of the substance. In particular, NMR signal data over each of the overlapping diffusion times is used to determine the property of the substance. The NMR signal produced by the NMR pulse sequence can be approximated by the following relationship:

$$\ln[E(q_1, q_2)] = -\Delta[q_1^2 D(\Delta) + q_2^2 D(\Delta) + 2q_1(D(2\Delta) - D(\Delta))q_2] \quad (6)$$

Equation 6 was derived by using an approximation of a d-PFG signal, such as the approximation described in Sune Norhoj Jespersen, Equivalence of Double and Single Wave Diffusion Contrast at Low Diffusion Weighting, NMR in Biomedicine (December 2, 2011). The approximation also assumed zero mixing time ($T_m = 0$) and identical encoding times ($\Delta = \Delta_1 = \Delta_2$). Accordingly, the generated NMR signal reflects the time dependence of diffusion over the times Δ and 2Δ . Using the variables established in equations 4 and 5, the signal equation above for d-PFG with zero mixing time can be written as the following relationship:

$$E(q_s, q_d) = \exp \left\{ -\frac{1}{2} \Delta [q_s^2 D(2\Delta) + q_d^2 (2D(\Delta) - D(2\Delta))] \right\} \quad (7)$$

In the framework of q_s and q_d , the contribution from q_s and q_d are separated and there are no cross-terms between q_s and q_d . The two terms independently encode for diffusion over different and overlapping times— $D(2\Delta)$ for q_s and $2D(\Delta) - D(2\Delta)$ for q_d . “ $D(2\Delta)$ ” and “ $2D(\Delta) - D(2\Delta)$ ” are referred to herein as D_s and D_d , respectively. In various embodiments, the second diffusion coefficient D_d can be approximated as $D(\Delta)$. The relationship disclosed in equation 7 can be used to analyze NMR signal data in order to determine a property of the substance, such as presence of restricted diffusion, by observing a difference in $D(2\Delta)$ and $D(\Delta)$ in the fit of equations 7 to the NMR signal data. In additional or other embodiments, a Laplace inversion is applied to the NMR signal data, as described below. The relationship defined by Equation 7 is different from the relationship defined by equation 6. The relationship defined by equation 6 exhibits a direct cross-term between q_1 and q_2 . As a result, the relationship in equation 2 produces an incorrect result when the mixing time (T_m) of the d-PFG pulse is short.

The new approach defined by equation 7 takes into consideration the relationship due to time-dependent diffusion and removes the cross-term.

[0061] For substances that contain a range of diffusion coefficients due to material mixture or pore size distribution, the relationship below can be used to approximate the NMR signal:

$$E(q_s, q_d) = \int dD f(D_s, D_d) \exp \left\{ -\frac{1}{2} \Delta (q_s^2 D_s + q_d^2 D_d) \right\} \quad (8)$$

where $f(D_s, D_d)$ is a distribution function for diffusion coefficients that correspond to the number of nuclei whose diffusion coefficients at Δ and 2Δ correspond to (D_s, D_d) . Equation 8 was derived by taking the integral of equation 7 over the distribution of diffusion coefficients. Accordingly, the NMR signal data obtained for independently selected values of q_s and q_d can be analyzed using equations 7 and 8 to obtain a two-dimensional plot of diffusion at the first diffusion time (D_s) versus diffusion at the second diffusion time (D_d).

[0062] Given the array of NMR signal data ordered according to q_s and q_d coordinates. The two-dimensional plot is obtained by using a Laplace inversion and solving for D_s and D_d in equation 8. Fig. 16 shows a two-dimensional plot **1600** of diffusion coefficients at the first diffusion time (D_s) versus diffusion coefficients at the second diffusion time (D_d). For bulk diffusion, the diffusion coefficient is independent of the encoding time. Accordingly, the first diffusion coefficient (D_s) is equal to the second diffusion coefficient (D_d) and both are equal to the bulk diffusion coefficient (D_0). In this case, the NMR signal will appear on a diagonal line (“on-diagonal”) **1602**, as shown by component **1604** in Fig. 16. If the NMR signal or components of the NMR signal appear away from the diagonal line **1602** (“off-diagonal”), such as component **1606** in Fig. 16, then the first diffusion coefficient (D_s) and the second diffusion coefficient (D_d) are different. The off-diagonal components unambiguously identify the presence of restricted diffusion. Such variations in the time dependence of the apparent diffusion coefficient (D) is characteristic of restricted diffusion and will not occur due to fluid composition.

[0063] The off-diagonal components of the NMR signal can yield further information about the porous medium and fluid within the pore volumes of the porous medium. For

example, the first coefficient (D_s) and the second diffusion coefficient (D_d) can be used to yield both pore size (e.g., a surface to volume ratio) and the bulk diffusion coefficient (D_0) of the fluid. The bulk diffusion coefficient (e.g., for fluid typing) and the pore size can be determined without knowing or assuming the specific fluid or pore size of the porous medium. For example, according to a short time diffusion approximation, restricted diffusion can be determined by the following relationship:

$$D_R(\Delta) \approx D_0 \left[1 - \left(\frac{4}{9\sqrt{\pi}} \right) \left(\frac{S}{V} \right) \sqrt{D_0 \Delta} \right] \quad (9)$$

where $D_R(\Delta)$ is the restricted diffusion over a time period Δ , D_0 is the bulk diffusion coefficient, S is the surface area of the pores within the porous medium, and V is the volume of the pores within the porous medium. A short diffusion limit approximation can be applied in cases when additional information about the porous medium is not used (e.g., tortuosity or bulk diffusion coefficient). The short time diffusion approximation is derived in Mitra et al., Short-Time Behavior of the Diffusion Coefficient as a Geometrical Probe of Porous Media, Physical Review B, Vol. 47, No. 14, p. 8565-8574 (April 1, 1993). The bulk diffusion coefficient can be determined according to the following relationship:

$$D_0 = \frac{\sqrt{2} D(\Delta) - D(2\Delta)}{\sqrt{2} - 1} \quad (10)$$

where $D(2\Delta)$ is the first diffusion coefficient (D_s) and $D(\Delta)$ is the combination $(1/2) * (D_d + D_s)$ of the second and first diffusion coefficient. The surface to volume ratio can be determined according to the following relationship:

$$\frac{S}{V} = \sqrt{\frac{(\sqrt{2}-1)\pi}{\Delta}} \frac{D(\Delta) - D(2\Delta)}{(\sqrt{2} D(\Delta) - D(2\Delta))^{3/2}} \quad (11)$$

Various other formulations for the time dependent diffusion coefficient can also be applied to interpret the two-dimensional plot of diffusion at the first diffusion time (D_s) versus diffusion at the second diffusion time (D_d). For example, the Pade approximation can be used to incorporate a long time diffusion approximation of the diffusion coefficient, which includes the effects of tortuosity.

[0064] Various embodiments of the present disclosure are also directed to selecting appropriate pulse sequence parameters (e.g., diffusion time (Δ and 2Δ)) to accurately determine the bulk diffusion coefficient and surface-to-volume ratio. In some cases, the NMR signal may be on-diagonal (within a certain error) even though the nuclei within the pore volumes experience restricted diffusion. This condition may happen when the ratio of (i) the distance the nuclei diffuse to (ii) the pore size is small. Pore size scales as the reciprocal of the surface to volume ratio. The diffusion distance to pore size ratio is defined by a dimensionless number, referred to as l_r , and the following relationship:

$$l_r = (S/V) \sqrt{D_0 \Delta} \quad (12)$$

Equation 12 and the dimensionless number characterizes a range of pore sizes that can be accurately investigated using particular diffusion times (Δ and 2Δ). By using equation 12, appropriate diffusion times can be selected for a particular pore size and fluid type. Otherwise, in some cases, the diffusion distance of the nuclei will be too short to detect significant restricted diffusion in large pores (e.g., small l_r). In another case, for a closed pore network, the diffusion distance of the nuclei will be too long (e.g., large l_r) for a small pore size and diffusion attenuation will not be significantly different between Δ and 2Δ . In yet another example, for an open pore network, the diffusion distance of the nuclei will be too long (e.g., large l_r) for a small pore size and diffusion attenuation will approach a tortuosity limit (e.g., where $D(\Delta)$ does not significantly change).

[0065] To ensure that a desired range of restriction sizes is observable, numerical limits on the diffusion distance to pore size ratio (l_r) can be determined in order to evaluate sequence parameters (Δ) for a given fluid type (D_0) and target restriction size. When pores are too large then l_r is small (e.g., l_r is less than 1) and the measurement will be limited by its ability to resolve small changes in the diffusion coefficient. The following relationship can be used to evaluate the change between the measured time dependent diffusion coefficients D_d and D_s at small l_r by calculating a ratio between D_d and D_s .

$$\frac{D_d}{D_s} = 2 \frac{1 - \kappa l_r}{1 - \sqrt{2\kappa l_r}} - 1, \kappa = \frac{4}{9\sqrt{\pi}}, \quad (13)$$

Thus, given a minimum desired contrast between D_d and D_s , a lower bound for l_r can be determined. For example, a 1% change between D_s and D_s (a ratio of 1/0.99) corresponds to a diffusion distance to pore size ratio (l_r) that is greater than 0.046.

[0066] An upper bound for the diffusion distance to pore size ratio (l_r) can also be estimated. For the upper bound, there are two cases to consider. In a first case, the sample includes a closed pore network (e.g., plant cells). In a second case, the sample includes, an open pore network (e.g., a rock core). For a closed pore network, at long diffusion times (Δ), the diffusion length will greatly exceed the pore size, but displacement of nuclei will be fixed by the pore size and, thus, the apparent diffusion coefficient will stop varying with diffusion time. An open pore network, at long diffusion times (Δ), will act as a free diffusion environment, but the apparent diffusion coefficient will be reduced from the true bulk value, as explained in Latour et al., Time-Dependent Diffusion Coefficient of Fluids in Porous Media as a Probe of Surface-to-Volume Ratio, Journal of Magnetic Resonance, Series A, Vol. 101, Issue 3, p. 342-346 (February 15, 1993). Thus, the apparent diffusion coefficient for the open pore network will also stop varying with diffusion time. The diffusion distance to pore size ratio (l_r) is selected so that the ratio is sufficiently small to avoid a point where the apparent diffusion coefficient will stop varying with diffusion time. In some embodiments, the diffusion distance to pore size ratio (l_r) is selected to be less than five (e.g., $l_r < 5$). For example, for sandstone rocks with large grains, the point where the apparent diffusion coefficient will stop varying with diffusion time is typically not reached because the NMR signal will decay before reaching large values of diffusion time (Δ). For carbonate rocks with fine grains, this point can be reached and thus the diffusion distance to pore size ratio (l_r) can be appropriately adjusted.

[0067] In various embodiments, the first set of pulses and the second set of pulses are pulsed field gradient pulses. For example, pulse sets **502** and **504** in Fig. 5 may be pulsed field gradient pulses. The pulsed field gradient pulses are applied to a substance using a gradient coil. In other embodiments, the pulse sets **502** and **504** can be radio frequency pulses that are applied to the substance using a constant field gradient produced by, for example, a permanent magnetic array. The radio frequency pulses in combination with the constant background gradient produce an “effective” pulsed field gradient within the substance. An

effective pulsed field gradient has an equivalent effect on spin magnetization as a pulsed field gradient applied with a gradient coil.

[0068] The effective pulsed field gradient can be produced by using pairs of pulses that encode the effective pulsed field gradient. Fig. 17 shows an NMR pulse sequence **1700** that generates an effective pulsed field gradient pattern **1701**. The pulse sequence **1700** includes a series **1702** of 90-degree radio frequency pulses. The series **1702** includes a first pair of pulses **1704** and a second pair of pulses **1706**. The first pulse **1708** within each pair rotates a spin magnetization of the nuclei to a transverse plane and begins gradient encoding. The second pulse **1710** in each pair rotates the spin magnetization back to a longitudinal axis and ends the gradient encoding. As shown in Fig. 17, the series of pulses **1702** effectively produce a corresponding effective gradient pattern **1701**. The second 90-degree pulse in the last pair of pulses **1712** is omitted so that the NMR signal produced by the sequence **1700** can be detected. In the example shown in Fig. 17, the area parameters q_1 and q_2 are defined by the following relationships:

$$q_1 = \gamma g \delta_1, \quad (14)$$

$$q_2 = \gamma g \delta_2 \quad (15)$$

where δ_1 and δ_2 are the time periods between the pulses, as shown in Fig. 17. Accordingly, encoding for q_s and q_d , as described above, can be accomplished by selecting δ_1 and δ_2 appropriately.

[0069] A number of refocusing pulses (e.g., 180-degree pulses) can follow the series of pulses and can be used to obtain T_2 relaxation time for the NMR signal. Fig. 18 shows a NMR pulse sequence **1800** with a series of pulses **1802** that generate an effective pulsed field gradient pattern followed by a CPMG sequence **1804**. As shown in the Fig. 18, a 180-degree refocusing pulse **1806** is applied after each signal echo **1808** with a detection echo time of $2T_{cp}$. The CPMG sequence **1804** is used to record the signal decay, in a similar manner to T_1 - T_2 and D- T_2 correlation techniques are applied. Such pulse sequences can be used in conjunction with NMR logging tools that employ permanent magnet arrays and produce field gradients that are constant in time.

[0070] Fig. 19 shows another method **1900** for determining a property of a substance using NMR. Before the first process **1902**, a sample is placed in an NMR system. The sample may be a rock core, a food sample or a biological tissue. The NMR system may be a NMR rock core analyzer, a clinical or animal MRI, a portable NMR device, or a high field NMR spectrometer used in, for example, chemical spectroscopy. Process **1902** includes using the NMR system to apply a NMR pulse sequence to the substance. As explained above, the NMR pulse sequence includes at least a first set of pulses and a second set of pulses that encode for overlapping diffusion times. In particular, the NMR pulse sequence encodes for a first diffusion time (2Δ) and a second diffusion time (Δ), such as the pulse sequence **500** shown in Fig. 5. These sets of pulses include “portions” that have area parameters referred to herein as q_s and q_d , as described above. The NMR signal data produced by the NMR pulse sequence is detected at process **1904**.

[0071] Processes **1902** and **1904** are repeated a number of times (e.g., one or more times) using different values of q_s and q_d to obtain an array of NMR signal data ordered according to q_s and q_d coordinates (**1905**). The values of q_s and q_d can be varied independently. For example, for each value of q_s , several values of q_d can be used. And vice versa, for each value of q_d , several values of q_s can be used. The values for q_s and q_d may be uniformly spaced, logarithmically spaced, or have some other non-uniform spacing. Also, in some embodiments, q_s and q_d are aligned along the same spatial orientation if the orientation is not varied (e.g., the sample may be anisotropic). The measurement may then be repeated for other orientations. In another embodiment, a full sampling of q_s and q_d of magnitude and orientation space (e.g., forming a grid in x,y,(z)) may be used to obtain a map for the directionality of the first diffusion coefficient (D_s) versus the second diffusion coefficient (D_d). As an example, the directionality of each of these terms can be approximated by a tensor of a type that is similar to the type used in diffusion tensor imaging (DTI), which is common in the medical MRI field. Other pulse sequences can also be used. For example, an inversion recovery for T_1 relaxation time can be added before the first set and second set of pulses. In another example, a CPMG sequence for determining T_2 relaxation time or an MRI imaging sequence can be added after the first and second sets of pulses.

[0072] In various embodiments, the array of NMR signal data can be used to determine

properties of the sample. For example, a faster decay along the q_d axis than the q_s axis indicates restricted diffusion. Fig. 20 shows an array of NMR signal data for a potato sample **2000**. As shown in Fig. 20, the potato sample exhibits a faster decay along the q_d axis than the q_s axis. Furthermore, a non-ellipsoidal shape, as shown in Fig. 20, indicates a wide range of restriction sizes. In comparison, Fig. 21 shows an elliptical decay for an avocado sample **2100**. Different pore sizes will produce different $D(\Delta)/D(2\Delta)$ ratios and ellipsoids of varying eccentricity. In further embodiments, the array of NMR signal data is fit to a curve to determine effective $D(\Delta)$ to $D(2\Delta)$ scalar values for the sample by fitting a 2-dimensional Gaussian. If the orientations, in addition to the magnitudes, of q_s and q_d were varied, a full effective tensor approximation for $D(\Delta)$ and $D(2\Delta)$ can be determined by fitting a multi-dimensional Gaussian. In some embodiments, a fit up to the fourth order is made to include Kurtosis at the first diffusion time (2Δ) and the second diffusion time (Δ) in addition to Gaussian diffusion. Other decay shapes can also be used, such as a stretched exponential (e.g., $d_{\alpha,\beta}(t)=\exp\{-\alpha t^\beta\}$). Such decay shapes can be further tailored to fit q_s and q_d . For example, given a one-dimensional stretched exponential $d_{\alpha,\beta}(|q|)$, a product $d_{s,\alpha,\beta}(|q_s|) d_{d,\alpha,\beta}(|q_d|)$ can be fit for $\alpha_s, \beta_s, \alpha_d, \beta_d$.

[0073] At process **1906**, the method includes applying an inverse Laplace transform to the NMR signal data to obtain diffusion coefficients at each of the overlapping diffusion times. In particular, a two-dimensional inverse Laplace transform is applied to the array of NMR signal data along q_s and q_d to determine a two-dimensional plot of diffusion at the first diffusion time (D_s) versus diffusion at the second diffusion time (D_d), such as the one shown in Fig. 16. The two-dimensional inverse Laplace transform can be repeated for other spatial axis of q_s and q_d gradients. Furthermore, in some embodiments, additional encoding axes may also be inverted or fit. For example, with a CPMG acquisition, the T_2 relaxation time can be fit as a third dimension to an exponential decay or inverted for a third inverse Laplace dimension as a T_2 relaxation axis.

[0074] At process **1908**, properties of the substance can be determined from the two-dimensional plot of diffusion coefficients at the first diffusion time (D_s) and diffusion coefficients at the second diffusion time (D_d). For example, the value of D_s and D_d (e.g., either a fit or a peak in the two-dimensional plot) can be used to characterize both the fluid type

(the bulk diffusivity D_0) and pore size (e.g., a surface-to-volume ratio) using relationships, such as those defined by equations 10 and 11. Furthermore, the two-dimensional plot can be analyzed to determine a distribution of bulk diffusivity D_0 and pore size. The signal from each plot element (e.g., at a particular D_s and D_d value) is projected onto a one-dimensional bulk diffusivity spectra (D_0) and onto a one-dimensional pore size spectra (e.g., surface-to-volume ratio). The diffusion time correlation plot may also be remapped for a two-dimensional plot of bulk diffusivity versus pore size. The diffusion time correlation plot can be used to separate out and identify different components of water and oil in different pore sizes. A diffusion time correlation plot could include additional dimensions, for example a T_2 coordinate for a D_s - D_d - T_2 plot.

[0075] The method described herein was performed on an avocado sample and a water sample. The avocado sample was cored from the edible portion (mesocarp) of a Haas avocado with a 2.5-mm inner diameter glass tube. This portion of the avocado includes cells averaging 60 μm in diameter, which contain 0.5 to 20 μm diameter oil droplets. The NMR signal of an avocado has multiple relaxation components corresponding to water and oil in different cellular environments. In this case, NMR signal data from water within vacuoles is used to analyze the avocado sample. The vacuole is the water storage compartment of a plant cell. Vacuolar water has the longest T_2 relaxation time (e.g., greater than 200 ms) of the other component fluids within the avocado. Thus, the NMR signal from other component fluids (e.g., oil) will have decayed away during the diffusion encoding time (e.g., 240 ms in total). As a fluid contained within a porous media, the vacuolar water signal should have components of both bulk diffusion and restricted diffusion.

[0076] An NMR pulse sequence, such as the one shown in Fig. 15, was applied to the avocado and water samples. The NMR pulse sequences included two sets of gradient pulses followed by a CPMG sequence. Additionally, a 180 degree refocusing pulse was spaced between the first pulse and second pulse within each set. The encoding parameters were: $\delta = 4.0\text{ms}$, $\Delta = 120\text{ ms}$, and $2\Delta = 240\text{ms}$. The NMR pulse sequence was repetitively applied with various different value of q_s and q_d . The values of q_s and q_d spanned between 0 and 82 cm^{-1} for an 11-by-11 sampling array. The q values were calibrated based on the water sample assuming a bulk diffusion constant of $2.2 \times 10^{-5}\text{ cm}^2/\text{s}$.

[0077] Fig. 22 shows the NMR signal data as a function of q_s and q_d for the avocado sample **2200**, while Fig. 23 shows the NMR signal data as a function of q_s and q_d for the water sample **2300**. For the water sample, the NMR signal data is radially symmetric in the q_s and q_d plane consistent with free diffusion and the absence of time-dependent diffusion. In contrast, the NMR signal shows a slower decay along the q_s axis than along the q_d axis. This indicates that the measured diffusion coefficient decreases with diffusion time, which indicates the presence of restricted diffusion. Furthermore, the pattern of the decay in the q_s and q_d plane shows that the principle axes are q_s and q_d confirming the form of equation 7. If these were not the principle axes, then the equation would not have this simple form and involve products of q_s with q_d (e.g., $q_s \times q_d$).

[0078] A two-dimensional Laplace inversion was applied to the NMR signal data from the avocado sample and the water sample to produce a two-dimensional plot of diffusion at a first diffusion time (D_s) and diffusion at a second diffusion time (D_d). Fig. 24 shows the two-dimensional plot of diffusion coefficients for the avocado sample **2400**, while Fig. 25 shows the two-dimensional plot of diffusion coefficients for the water sample **2500**. Fig. 24 shows off-diagonal components for the avocado sample and Fig. 25 shows that the NMR signal is on-diagonal for the water sample. These results are consistent with restricted and free diffusion for the respective samples. Furthermore, the NMR signal data directly overlays with a curved line corresponding to a restricted diffusion model for water, as defined by equation 9.

[0079] The linear mean values of D_s and D_d are (2.2; 2.2) and (0.63; 1.45) $\times 10^{-5}$ cm²/s for the water sample and avocado sample, respectively. Applying equations 10 and 11 to the NMR signal data a value of 2.02×10^{-5} cm²/s for the bulk diffusion coefficient (D_0) of vacuolar water and a value of 554 cm⁻¹ (or a 108 μ m spherical diameter) for the pores within the avocado sample are obtained. This diameter is slightly larger than the nominal size of the typical vacuoles of an avocado fruit. This overestimate happens for three reasons. Firstly, the diffusion length of the nuclei was 31 μ m (e.g., diffusion length = $\sqrt{2D_0(2\Delta)}$), which is a significant fraction of the pore size (e.g., small l_p). The diffusion time could be decreased to determine a better approximation of the pore size. Secondly, plant cells are rectangular in nature and diffusion is fully constrained within this compartment. Thus the measured surface-

to-volume ratio should correspond to a smaller length than that of a spherical cell. Overall, the properties obtained for the avocado and water sample agreed with the cellular geometry in an avocado fruit.

[0080] Fig. 26 shows a rock core system **2600** for determining properties of a rock core sample **2602**. The system **2600** includes a wireline tool string **2604** that is deployed in a well **2606** via a wireline truck **2608**. The wireline tool **2604** is a downhole tool adapted to remove the core sample **2602** from a formation **2610**. Once the core sample **2602** is obtained, the core is transported to a surface facility **2612**, which includes an NMR system **2614** and operator module **2616** for carrying out the methods and processes described herein, as well as other processing. According to some embodiments, the surface facility **2612** may be located in a location remote from the well **2606**.

[0081] The operator module **2616** includes a computer system (e.g., a processor and a memory) that supports a graphical user interface (GUI), such as a monitor, a touch screen, a mouse, a keyboard and/or a joystick. The GUI allows an operator to control and communicate with the NMR system **2614**. The NMR system **2614** may include a gradient element **2618** for applying pulsed field gradient pulses to the core sample **2602** (e.g., a gradient insert). In various embodiments, the gradient element **2618** is a metal wound coil. The NMR system **2614** includes a corresponding electrical power supply to inject electrical current into the coil. The gradient coil may be designed with a particular geometry so that the magnetic field produced by the coil spatially varies over the sample. The spatial variation may be designed to have a constant gradient along a particular direction. This direction is referred to herein as “a gradient direction.” In illustrative embodiments, three sets of such gradient coils are provided along three gradient directions (e.g., the Cartesian coordinates—x, y, and z) in order to provide imaging in three dimensions, such as in a medical MRI application. Other NMR systems may be equipped with one or two such gradient coil sets so that spatial resolution can be achieved along 1 or 2 directions.

[0082] In one specific embodiment, the rock core system **2600** is used to analyze a water flooded rock core sample (e.g., initially oil saturated) **2602**. The rock core sample **2602** is removed from the formation **2610** using the wireline tool **2604**. The rock core sample **2602** is

placed into the NMR system **2614**. In this case, the NMR system **2614** includes a single z-axis gradient coil. A pulse sequence is applied to the rock core sample **2602** using the NMR system **2614**. The pulse sequence includes two sets of gradient pulses followed by a CPMG acquisition to encode for T_2 relaxation time. The sequence is repeated and q_{sz} and q_{dz} are incremented over a two-dimensional q_s and q_d Cartesian array for each acquisition to obtain NMR signal data. A three-dimensional inverse Laplace transform is performed to convert the NMR data into a three-dimensional plot of D_s , D_d , and T_2 relaxation time. Peaks are identified within the three-dimensional plot (e.g., water, oil). In the case of light oils, water in small pores with a similar apparent diffusion coefficient and T_2 to the oil are now separated in the D_s and D_d plane. In some embodiments, the D_s and D_d plot can be converted into a bulk diffusion coefficient (D_0) and surface-to-volume ratio (S/V) plot by converting each D_s and D_d coordinate into D_0 and S/V coordinates via equations 10 and 11. As explained above, the equations use the short time diffusion approximation. Other alternative equations can also be used. Fluid type and pore size of the rock core sample **2602** may then be identified based on NMR signal position on these axes. The T_2 relaxation time may then identify spines in pores too small or large to be characterized by the D_s and D_d measurement.

[0083] In another example, the rock core system **2600** is used to analyze a cleaned brine saturated rock core sample **2602**. The rock core sample **2602** is analyzed to determine a three-dimensional plot of D_s , D_d , and T_2 relaxation time. The D_s and D_s axes can be converted into bulk diffusion coefficient (D_0) and surface-to-volume ratio (S/V) axes using equations 10 and 11, as explained above. This plot relates the values of the surface-to-volume ratio to respective values of T_2 relaxation time. The surface-to-volume ratio and the T_2 relaxation time values are related a surface relaxivity of the pores according to the following relationship.

$$\frac{1}{T_2} = \frac{1}{T_{2,bulk}} + \rho \frac{S}{V} \quad (16)$$

where T_2 is the measured T_2 relaxation time, $T_{2,bulk}$ is the T_2 relaxation time for the fluid in a bulk environment, and ρ is the surface relaxivity of the pores. The relationship between the surface-volume-ratio and the T_2 relaxation time can be determined by plotting the two values. A relationship that varies indicates that pores of different sizes have different pore surface

properties.

[0084] Fig. 27 shows a wireline system **2700** for determining properties of an earth formation. The wireline system **2700** is used to investigate, in situ, a substance **2702** within the earth formation **2704** surrounding a wellbore **2706** to determine a property of the substance. As shown in Fig. 27, a wireline tool **2708** is disposed within the wellbore **2706** and suspended on an armored cable **2710**. Although the wireline tool **2708** is shown as a single body in Fig. 27, the tool may alternatively include separate bodies. As shown in Fig. 27, the wireline tool **2708** includes an NMR logging module **2714** that is used to apply NMR pulse sequences to the formation **2704**. The NMR logging module **2714** includes an electro-magnetic device **2720** for applying a static magnetic field to a sensitivity zone **2722** within the earth formation **2704**. In some embodiments, the electro-magnetic device **2720** is a magnet or an array of magnets formed from a magnetic material. The NMR logging module **2714** also includes at least one coil **2724** and NMR electronics **2726** electronically coupled to the coil. The coil **2724** and NMR electronics **2726** apply an oscillating field to an area of interest **2728** within the earth formation **2704**. The area of interest **2702** is located within the sensitivity zone **2722** of the electro-magnetic device **2720**. In accordance with various embodiments of the present disclosure, the oscillating field applied to the earth formation **2704** includes the NMR pulse sequences described above. In various embodiments, the wireline tool **2708** does not include a gradient coil. In such embodiments, an effective pulsed field gradient is produced by the two sets of pulses. Fig. 18 shows an example of an NMR pulse sequence that produces an effective pulsed field gradient. The NMR pulse sequences are repeated for a selected range of q_s and q_d by choosing corresponding values of δ_1 and δ_2 , as described with respect to Figs. 17 and 18. The NMR signal data produced by the sequences is detected using the coil **2724** and used to analyze the formation using the methods and processes described above. The wireline system **2700** also includes surface equipment **2730** for supporting the wireline tool **2708** within the wellbore **2706**. In various embodiments, the surface equipment **2730** includes an operator interface for communicating with the NMR logging module **2714**. Such an operator interface has already been described with reference to Fig. 26. In some embodiments, the NMR logging module **2714** and operator module communicate through the armored cable **2710**.

[0085] The NMR systems and methods described herein are not limited to any device type or system. The NMR systems and methods described herein can be implemented in surface environments, such as a laboratory. The systems and methods described herein are also not limited to application in any type of particular field. For example, the systems and methods can be used to analyze biological tissues, such as bone tissue or brain tissue. Many biological tissues include porous media and characterization of the microstructure, the pore sizes, and the intrinsic diffusion coefficient of tissues is useful in the field of clinical medicine. The systems and methods described herein can be applied to the study such tissue structure and can be combined with MRI for clinical use.

[0086] With respect to wellbore applications, the NMR systems and methods described herein are not limited to wireline systems, such as the one shown in Fig. 27. For example, illustrative embodiments can also be used with any suitable means of conveyance, such coiled tubing. Various embodiments of the present disclosure may also be applied in logging-while-drilling (LWD) systems (e.g., a LWD tool) or measuring-while-drilling systems (e.g., MWD tools).

[0087] The processes described herein, such as (1) applying NMR pulse sequences to a substance, (2) acquiring an array of NMR signal data for q_s and q_d values, (3) determining properties of the substance using the array of NMR signal data, (4) performing an inverse Laplace transform on the array of NMR signal data to determine a plot diffusion coefficients, (5) identifying peaks within the plot, (6) determining a bulk diffusion coefficient of the substance using the plot, and (7) determining a surface-to-volume ratio of the substance using the plot, can be performed and implemented at least in part by a computer system.

[0088] The term “computer system” should not be construed to limit the embodiments disclosed herein to any particular device type or system. The computer system may be a laptop computer, a desktop computer, or a mainframe computer. The computer system may also include a computer processor (e.g., a microprocessor, microcontroller, digital signal processor or general purpose computer) for executing any of the methods and processes described above (e.g., processes (1)-(7)). The computer system may further include a memory such as a semiconductor memory device (e.g., a RAM, ROM, PROM, EEPROM, or

Flash-Programmable RAM), a magnetic memory device (e.g., a diskette or fixed disk), an optical memory device (e.g., a CD-ROM), a PC card (e.g., PCMCIA card), or other memory device. This memory may be used to store, for example, the NMR pulse sequences and acquired NMR signal data, as described above.

[0089] Any of the methods and processes described above, including processes (1)-(7) as listed above, can be implemented as computer program logic for use with the computer processor. The computer program logic may be embodied in various forms, including a source code form or a computer executable form. Source code may include a series of computer program instructions in a variety of programming languages (e.g., an object code, an assembly language or a high-level language such as C, C++ or JAVA). Such computer instructions can be stored in a non-transitory computer readable medium (e.g., memory) and executed by the computer processor. For example, the NMR pulse sequences described herein may be implemented as a series of computer instructions that define the characteristics of at least some of the NMR pulse sequences described herein (e.g., pulse amplitude, pulse phase, pulse duration, first area parameter, second area parameter, and diffusion times (Δ and 2Δ)). The computer instructions may be distributed in any form as a removable storage medium with accompanying printed or electronic documentation (e.g., shrink wrapped software), preloaded with a computer system (e.g., on system ROM or fixed disk), or distributed from a server or electronic bulletin board over a communication system (e.g., the Internet or World Wide Web).

[0090] Although several example embodiments have been described in detail above, those skilled in the art will readily appreciate that many modifications are possible in the example embodiments without materially departing from the scope of this disclosure. Accordingly, all such modifications are intended to be included within the scope of this disclosure.

CLAIMS

1. A method for determining a property of a substance using nuclear magnetic resonance (NMR), the method comprising:
 - applying a NMR pulse sequence comprising a first set of pulses and a second set of pulses to the substance, wherein the first set of pulses and the second set of pulses encode for overlapping diffusion times;
 - detecting a NMR signal produced by the NMR pulse sequence to obtain NMR signal data; and
 - determining the property of the substance using the NMR signal data over each of the overlapping diffusion times.
2. The method of claim 1, wherein
 - (i) the first set of pulses comprises two pulses that are each defined by a first area parameter and separated by a time period, and
 - (ii) the second set of pulses comprises two pulses that are each defined by a second area parameter and separated by the time period.
3. The method of claim 2, further comprising:
 - applying the NMR pulse sequence to the substance a plurality of times using different values for the first area parameter and the second area parameter;
 - detecting NMR signals produced by the NMR pulse sequence for the different values of the first area parameter and the second area parameter to obtain NMR signal data.
4. The method of claim 3, wherein
 - (i) the overlapping diffusion times comprise a first diffusion time and a second diffusion time, and
 - (ii) the first set of pulses and the second set of pulses comprise a portion of pulses that correspond to the first diffusion time and a complimentary portion of pulses that correspond to the second diffusion time.

5. The method of claim 4, wherein the values of the first area parameter and the second area parameter are varied according to the following relationships:

$$q_s = q_1 + q_2,$$

$$q_d = q_2 - q_1,$$

where q_1 is the first area parameter, q_2 is the second area parameter, q_s is an area parameter for the portion of pulses that correspond to the first diffusion time, and q_d is an area parameter for the complimentary portion of pulses that correspond to the second diffusion time.

6. The method of claim 5, further comprising:
performing a Laplace inversion on the NMR signal data to obtain diffusion coefficients for the first diffusion time and the second diffusion time.
7. The method of claim 1, wherein the substance is a porous medium containing a fluid.
8. The method of claim 7, wherein the substance is a rock core containing oil, water, or both.
9. The method of claim 8, further comprising:
removing the rock core from a formation.
10. The method of claim 7, wherein the property is (i) a bulk diffusion coefficient for the fluid, (ii) a surface-to-volume ratio for the porous medium, or (iii) both.
11. The method of claim 1, wherein the first set of pulses and the second set of pulses comprise pulsed field gradient pulses.
12. The method of claim 11, wherein the pulsed field gradient pulses are applied to the substance using a gradient coil.
13. The method of claim 1, wherein a constant field gradient is applied to the substance and the first set of pulses and the second set of pulses are radio frequency pulses that produce an effective pulsed field gradient within the substance.

14. The method of claim 2, wherein
 - (i) the two pulses within the first set of pulses include pulse areas that cancel, and
 - (ii) the two pulses within the second set of pulses include pulse areas that cancel.
15. The method of claim 1, wherein the substance is a fluid within an underground formation and the NMR sequence is applied to the fluid using a NMR logging tool.
16. The method of claim 1, wherein a time period between the first set of pulses and the second set of pulses is less than the two overlapping diffusion times.
17. A method for determining a property of a substance using nuclear magnetic resonance (NMR), the method comprising:
 - applying an NMR pulse sequence to the substance, wherein (i) the NMR pulse sequence comprises a first set of pulses and a second set of pulses, (ii) the first set of pulses and the second set of pulses encode for a first diffusion time and a second diffusion time, (iii) the first diffusion time and a second diffusion time overlap, (iv) the first set of pulses comprises two pulses that are each defined by a first area parameter and separated by a time period, and (v) the second set of pulses comprises two pulses that are each defined by a second area parameter and separated by the time period;
 - detecting a NMR signal produced by the NMR pulse sequence to obtain NMR signal data;
 - applying the NMR pulse sequence and detecting the NMR signal produced by the NMR pulse sequence a number of times using different values for at least one of the first area parameter and the second area parameter;
 - performing a Laplace inversion on the NMR signal data to obtain diffusion coefficients for the first diffusion time and the second diffusion time; and
 - determining the property of the substance using the diffusion coefficients.
18. The method of claim 17, wherein the property is a bulk diffusion coefficient, a surface-to-volume ratio, or both.

19. The method of claim 17, wherein the first set of pulses and the second set of pulses comprise a portion of pulses that correspond to the first diffusion time and a complimentary portion of pulses that correspond to the second diffusion time.

20. The method of claim 19, wherein the values of the first area parameter and the second area parameter are varied according to the following relationships:

$$q_s = q_1 + q_2,$$

$$q_d = q_2 - q_1,$$

where q_1 is the first area parameter, q_2 is the second area parameter, q_s is an area parameter for the portion of pulses that correspond to the first diffusion time, and q_d is an area parameter for the complimentary portion of pulses that correspond to the second diffusion time.

21. The method of claim 17, wherein a time period between the first set of pulses and the second set of pulses is less than the first diffusion time and the second diffusion time.

22. A system for determining a property of a substance, the system comprising:

a nuclear magnetic resonance (NMR) system for applying NMR pulse sequences to a substance and detecting NMR signals generated by the substance to obtain NMR signal data;
a processor; and
a memory storing instructions executable by the processor to perform processes that include:

providing an NMR pulse sequence to the NMR system, wherein the NMR pulse sequence comprises a first set of pulses and a second set of pulses that encode for overlapping diffusion times; and

determining the property of the substance using the NMR signal data over each of the overlapping diffusion times.

1/16

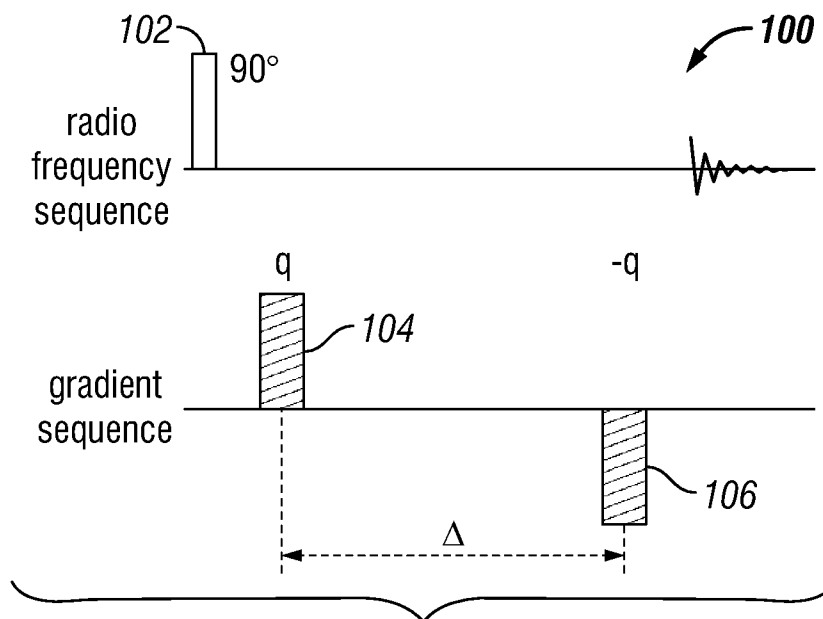


FIG. 1
(Prior Art)

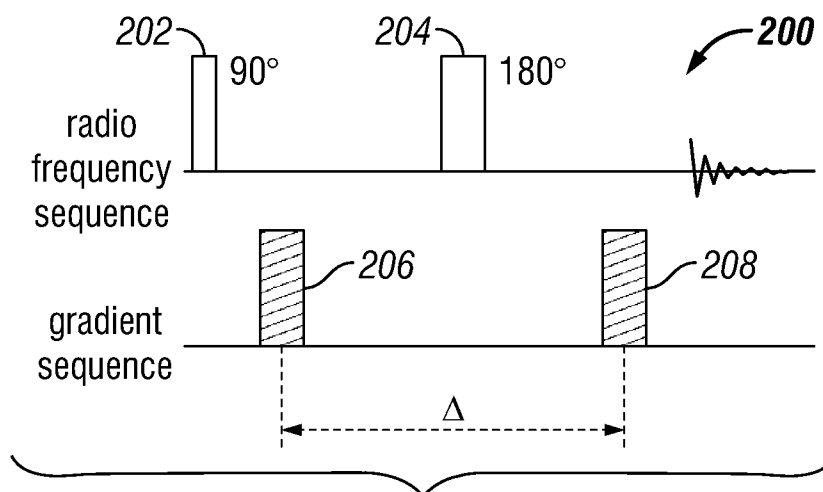


FIG. 2
(Prior Art)

2/16

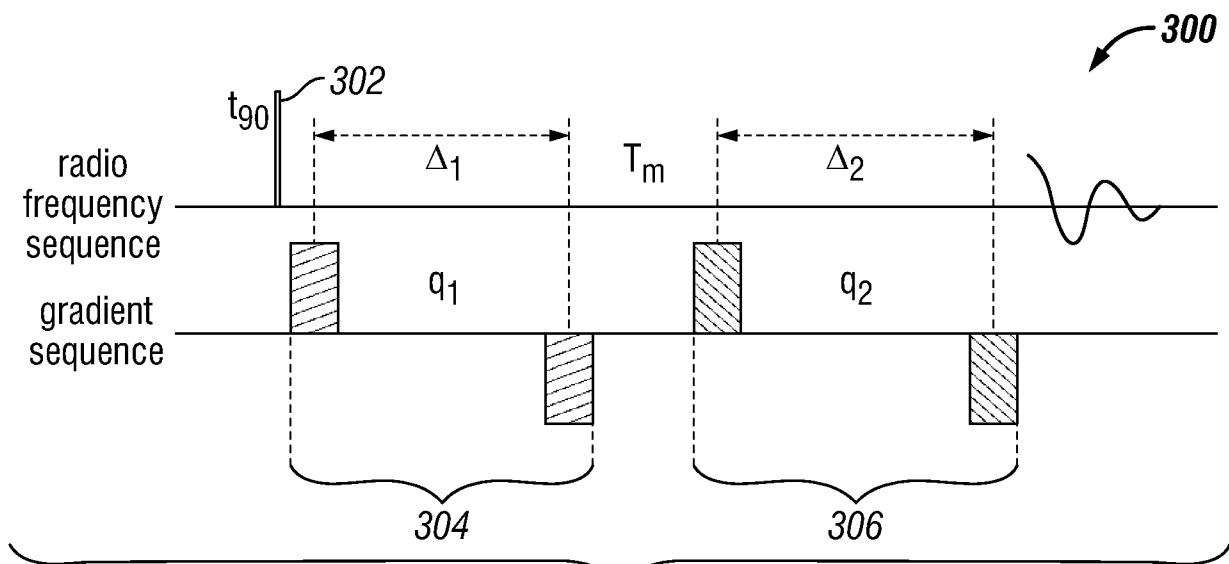


FIG. 3
(Prior Art)

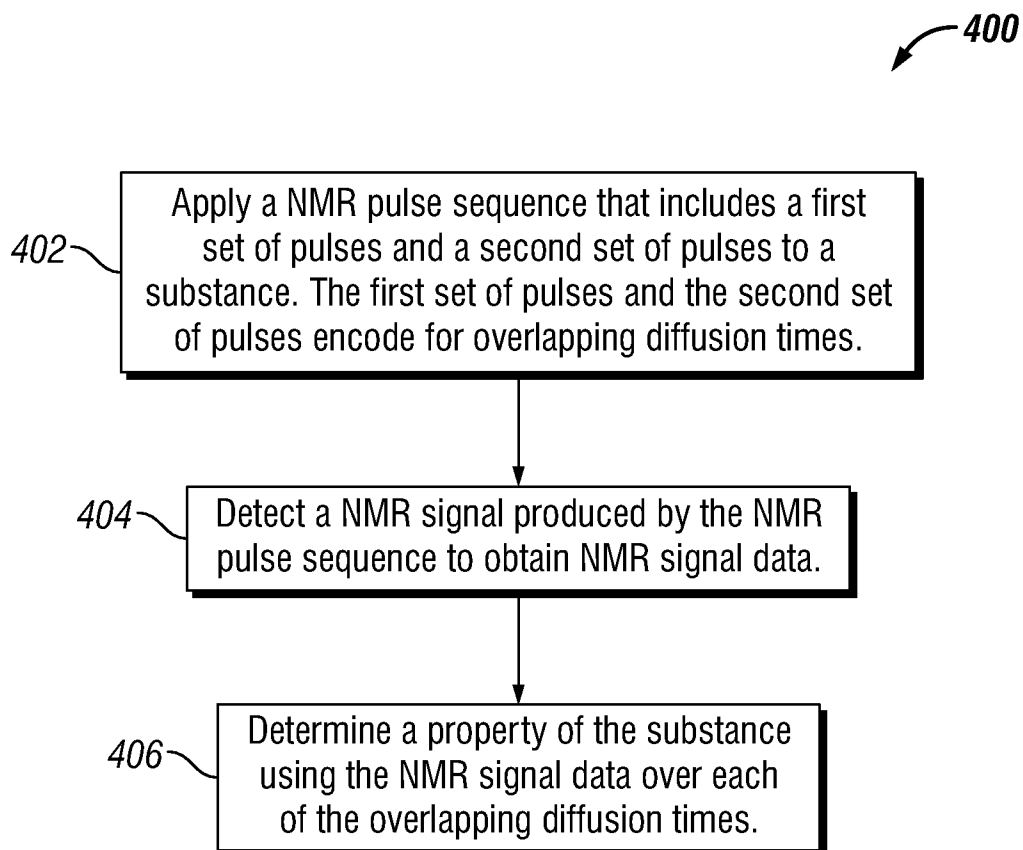
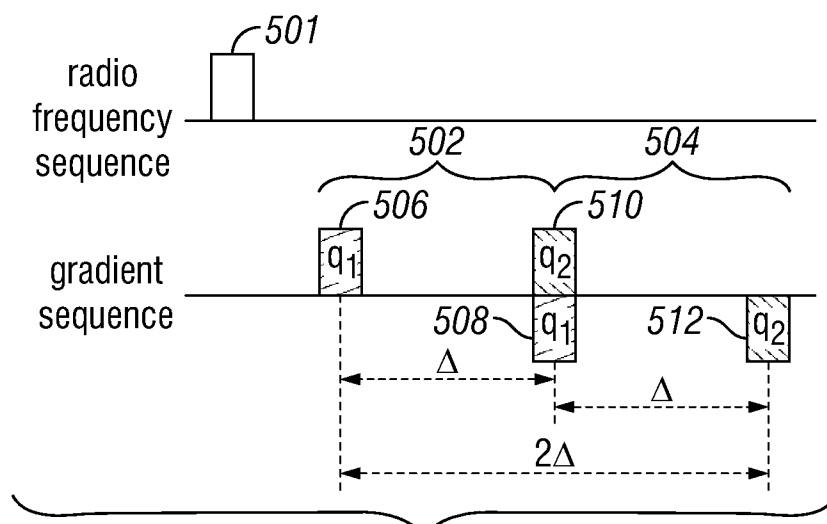
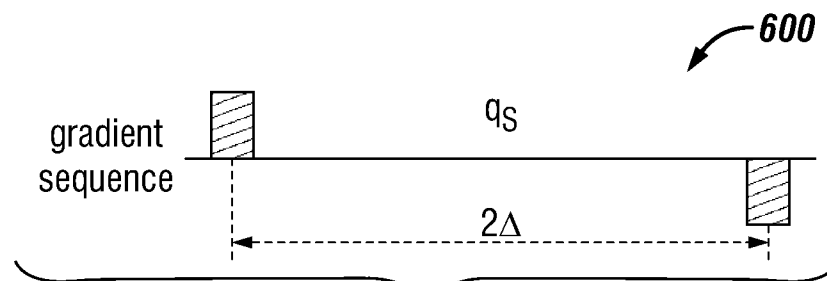
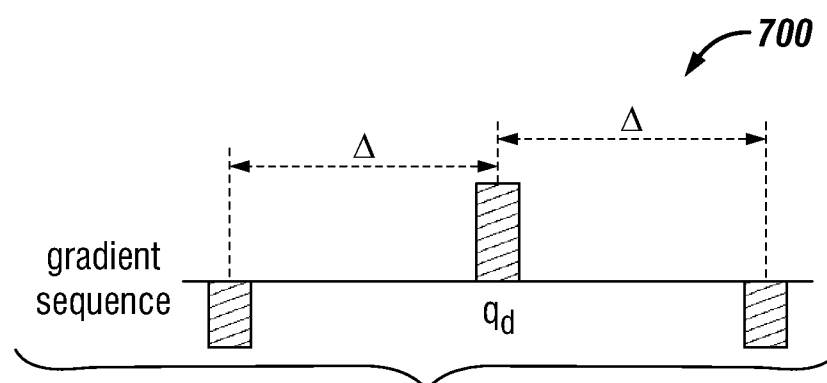


FIG. 4

3/16**FIG. 5****FIG. 6****FIG. 7**

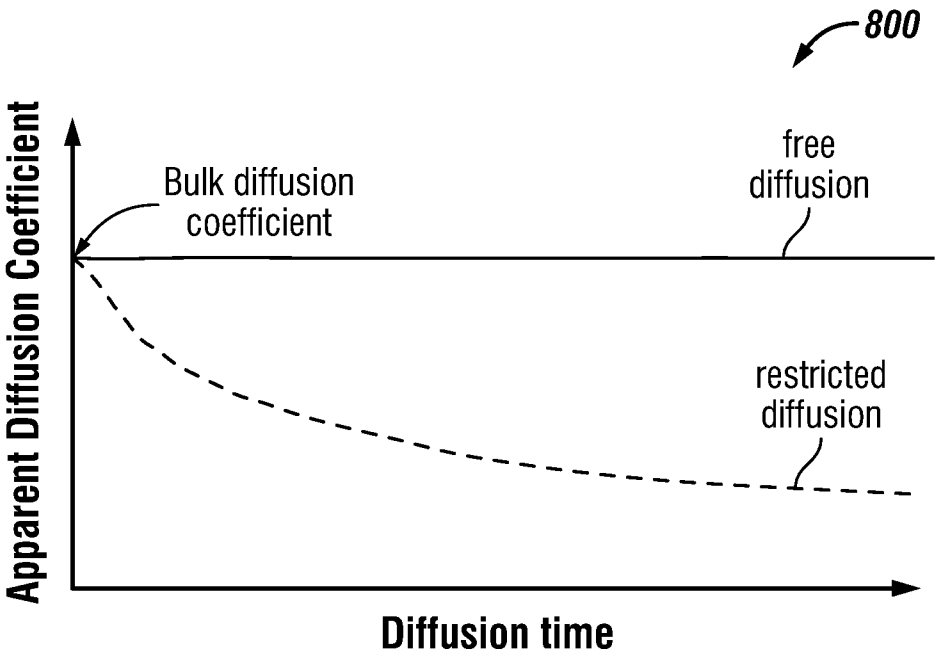


FIG. 8

5/16

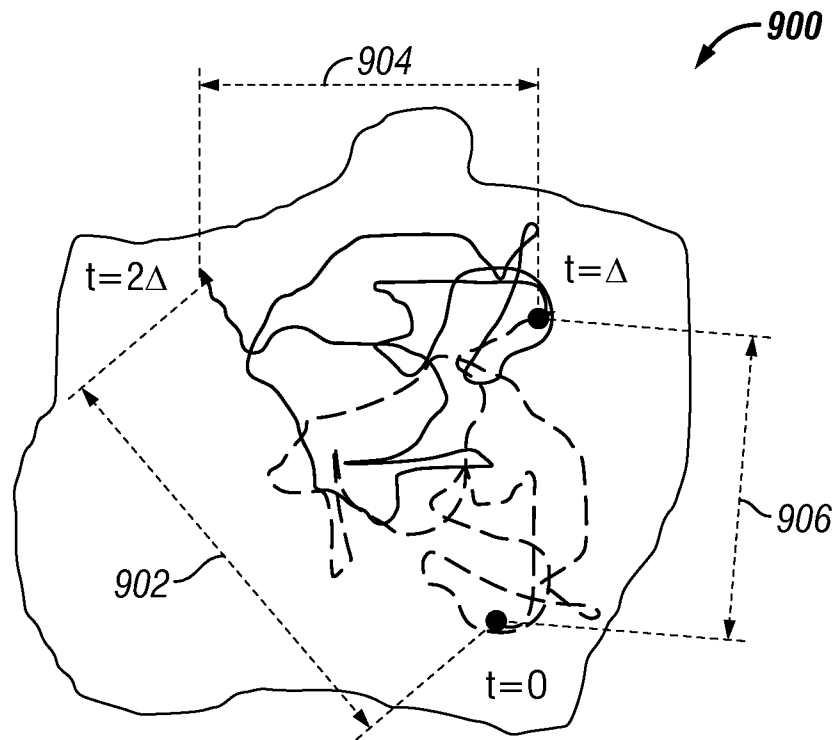


FIG. 9

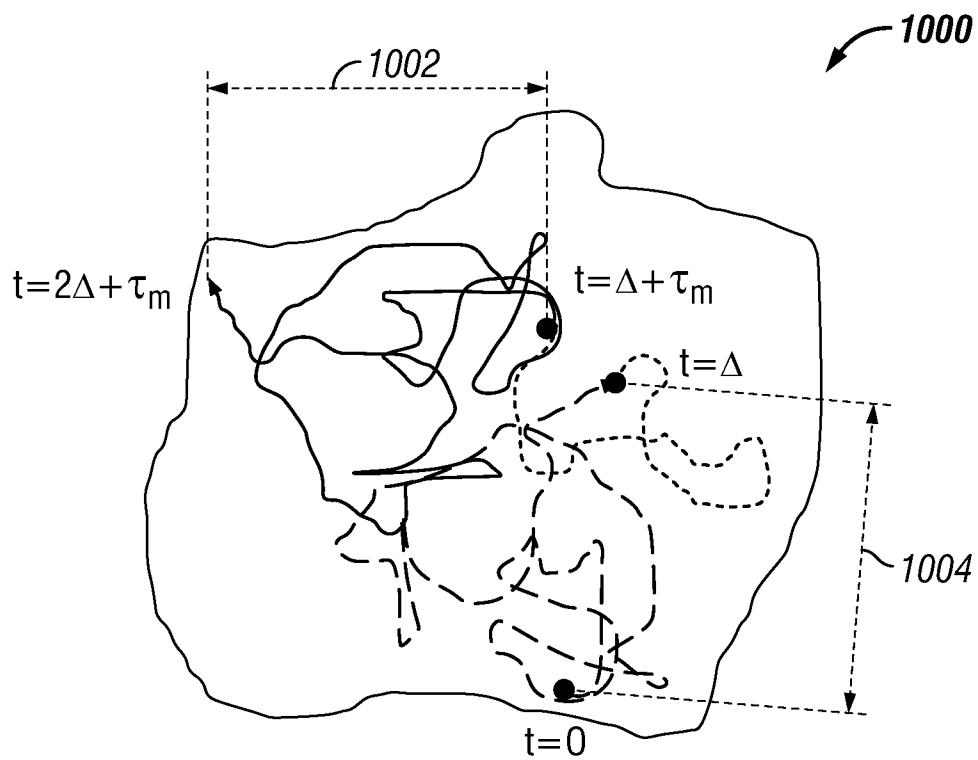
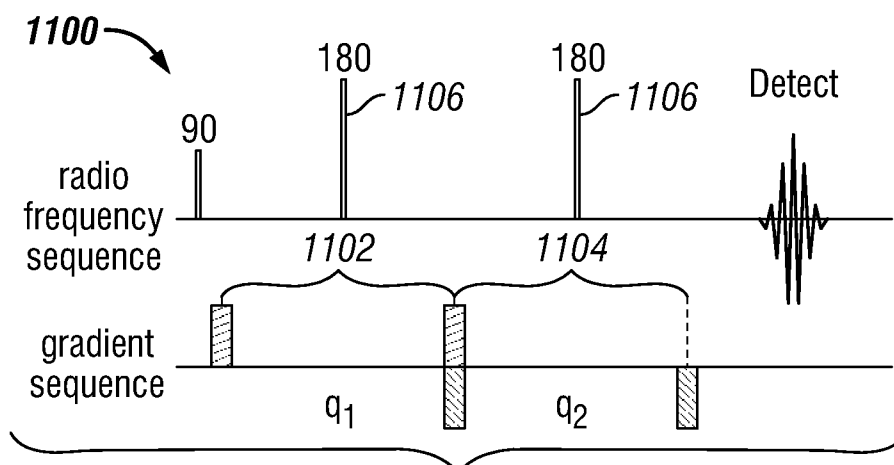
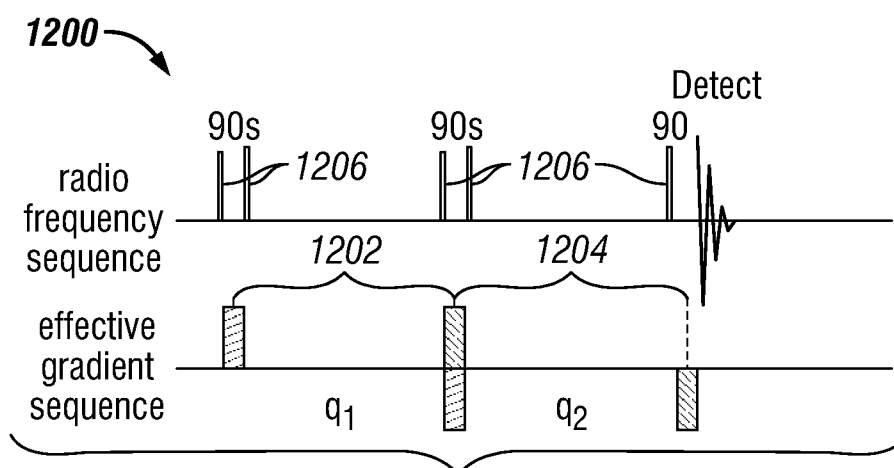
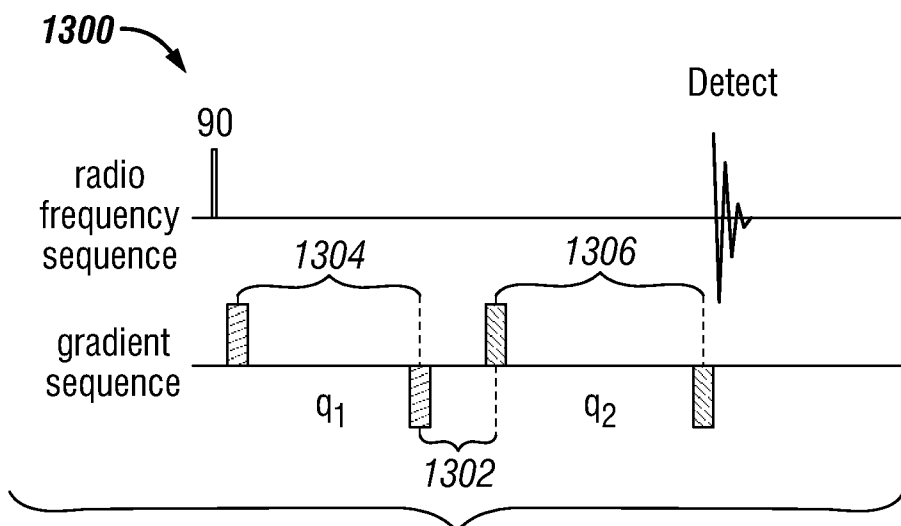


FIG. 10

6/16**FIG. 11****FIG. 12****FIG. 13**

7/16

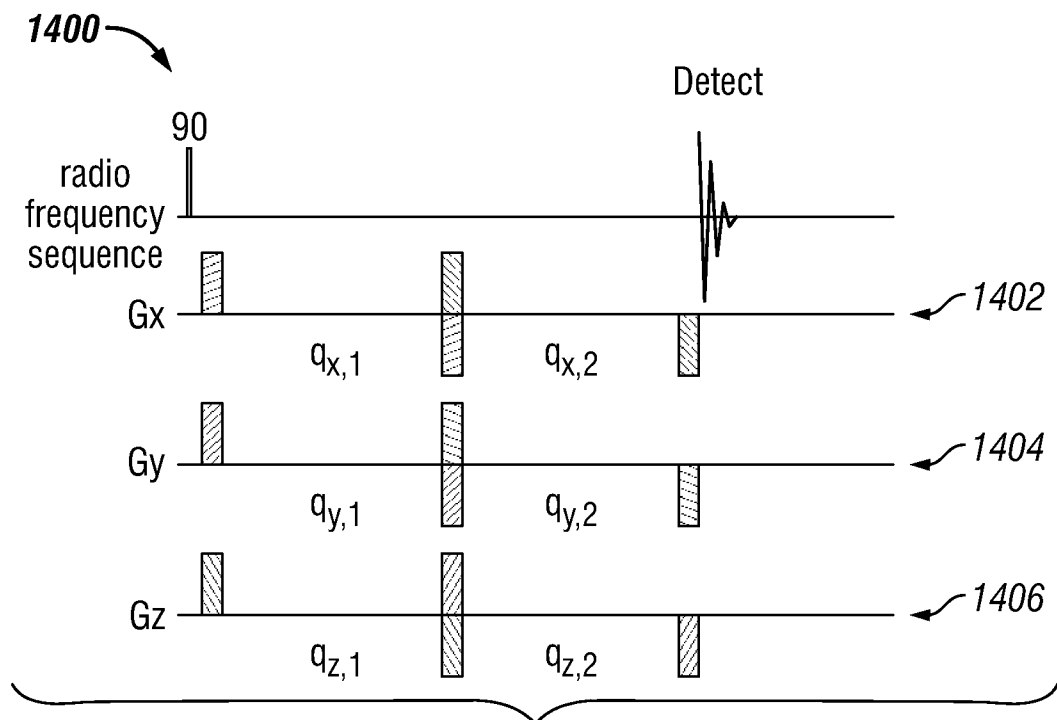


FIG. 14

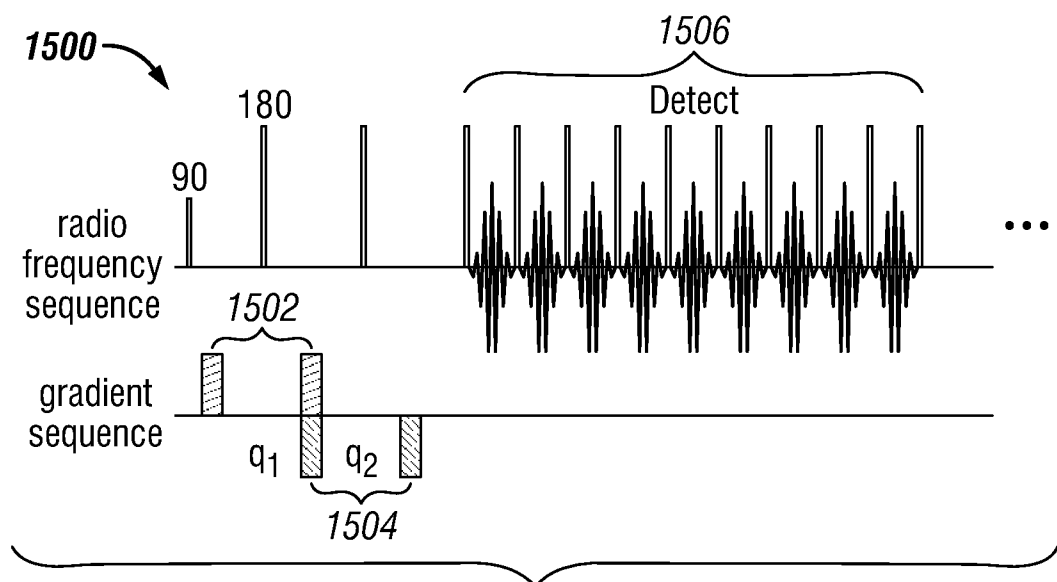


FIG. 15

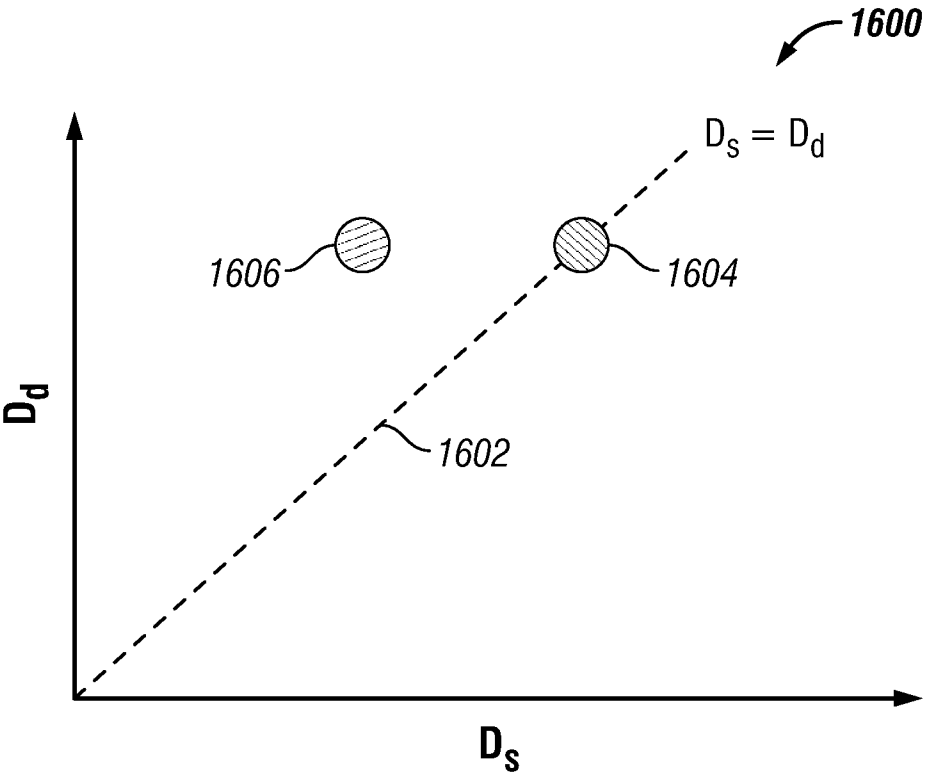


FIG. 16

9/16

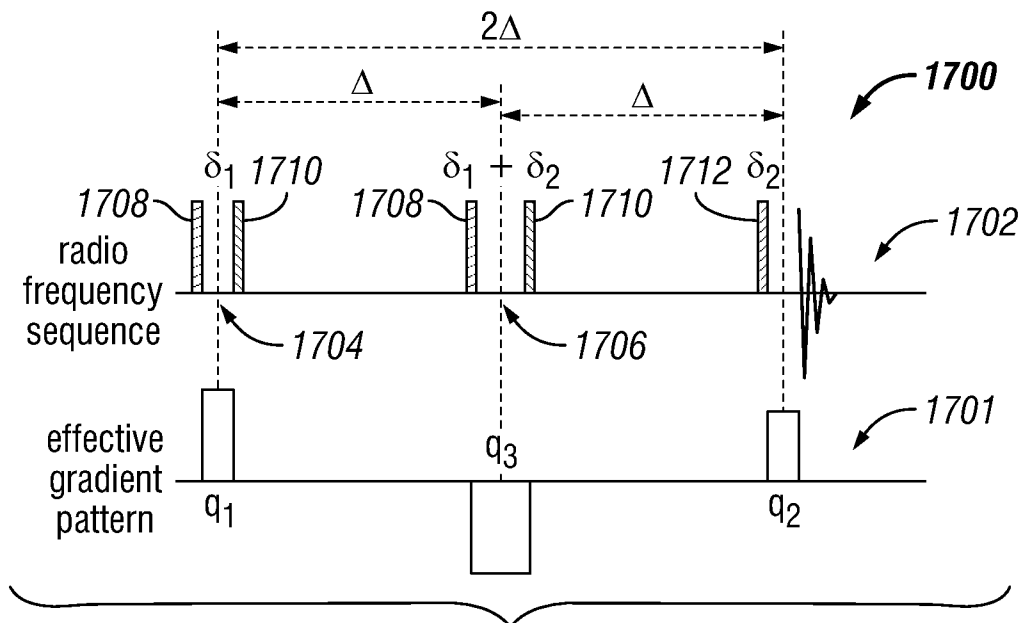


FIG. 17

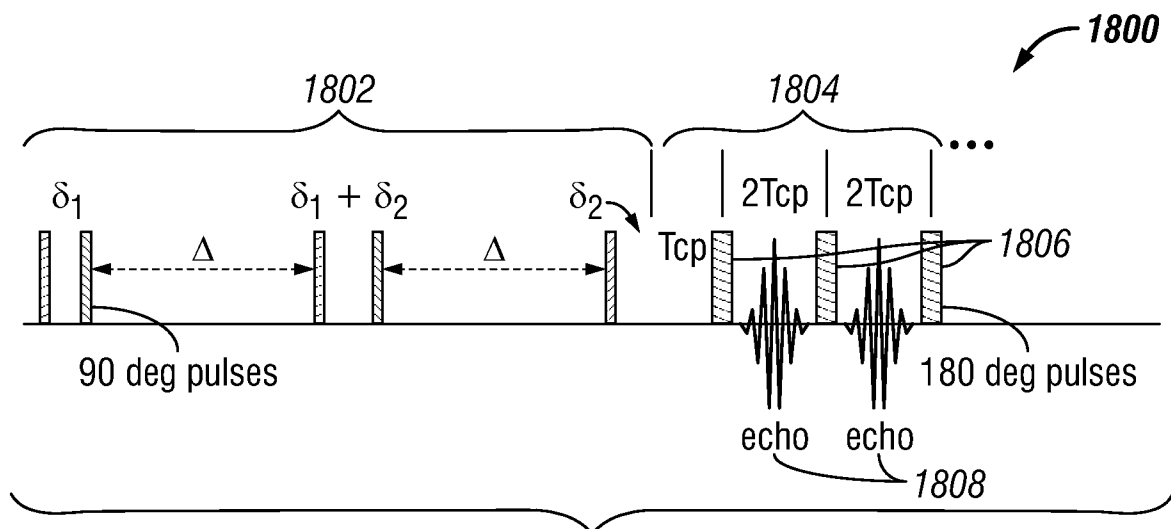
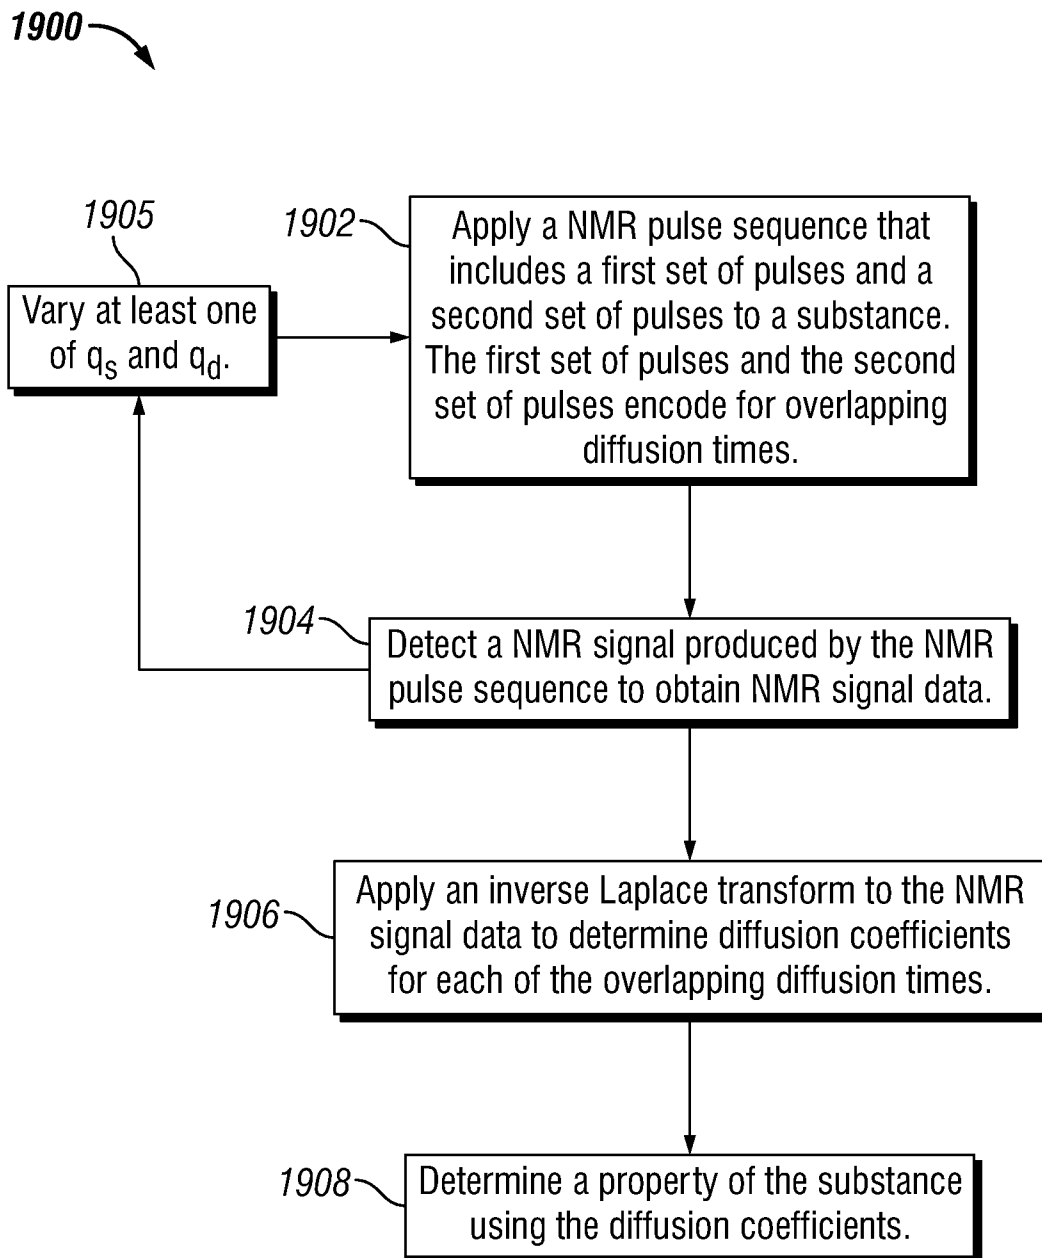


FIG. 18

10/16**FIG. 19**

11/16

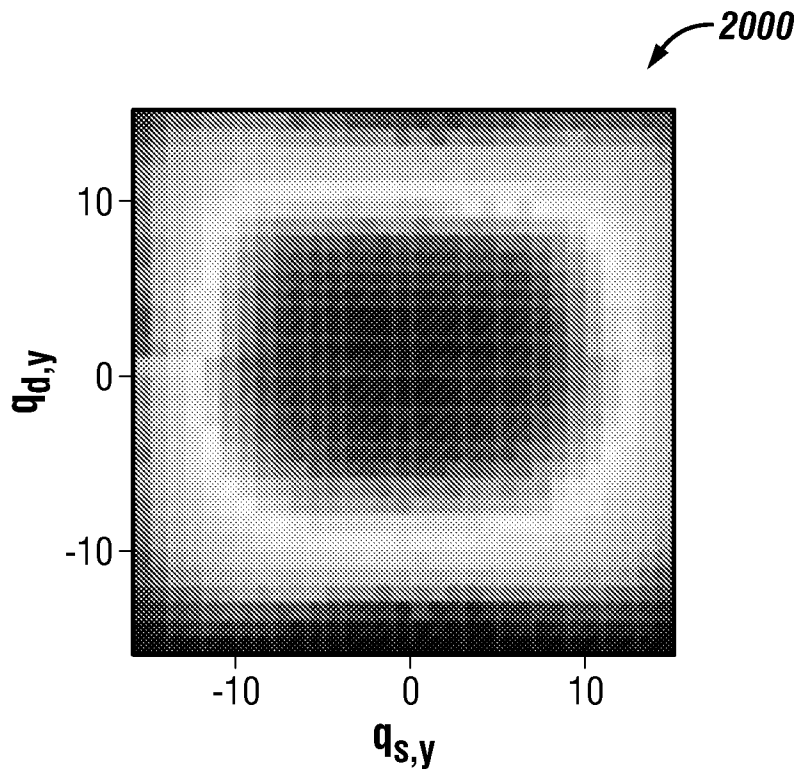


FIG. 20

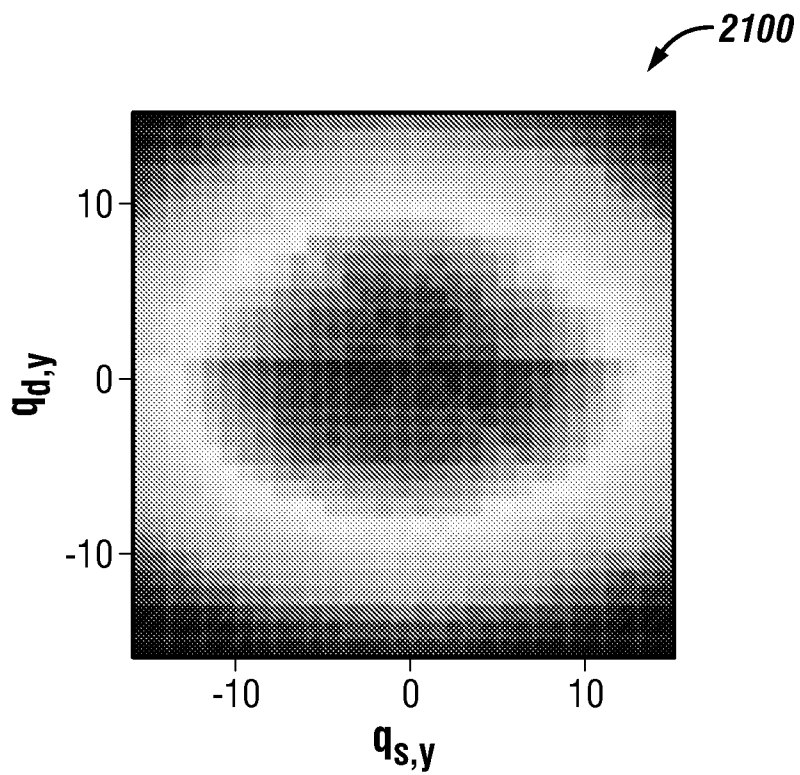


FIG. 21

12/16

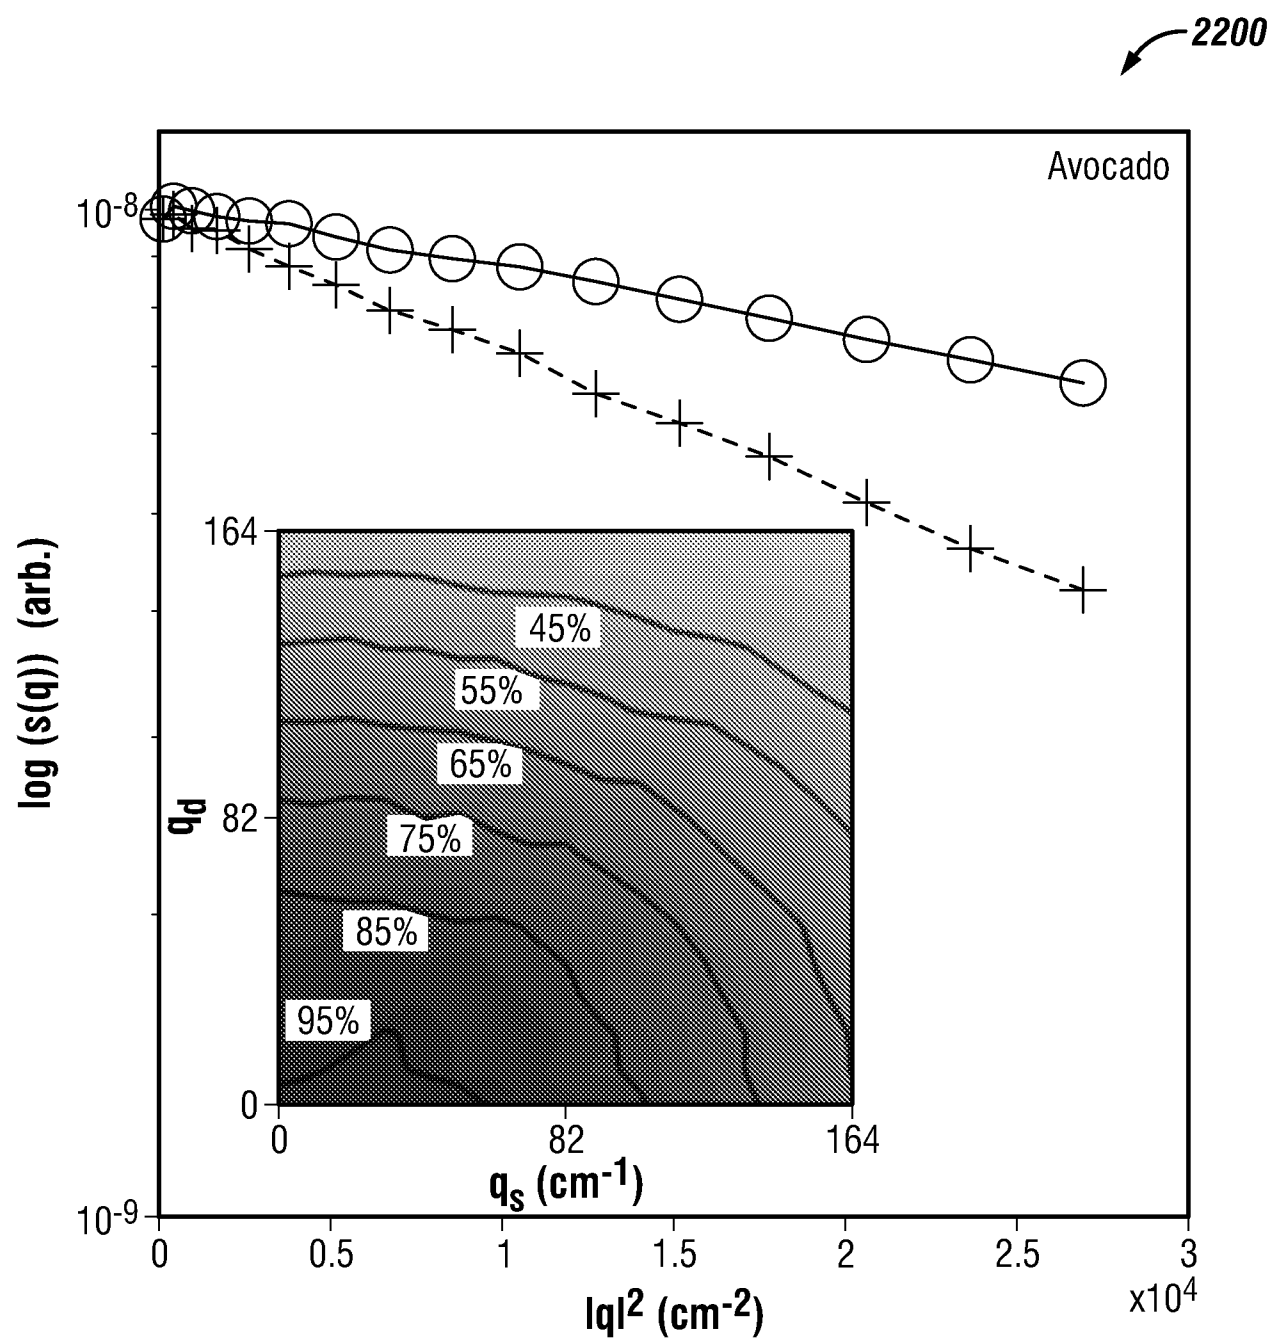


FIG. 22

13/16


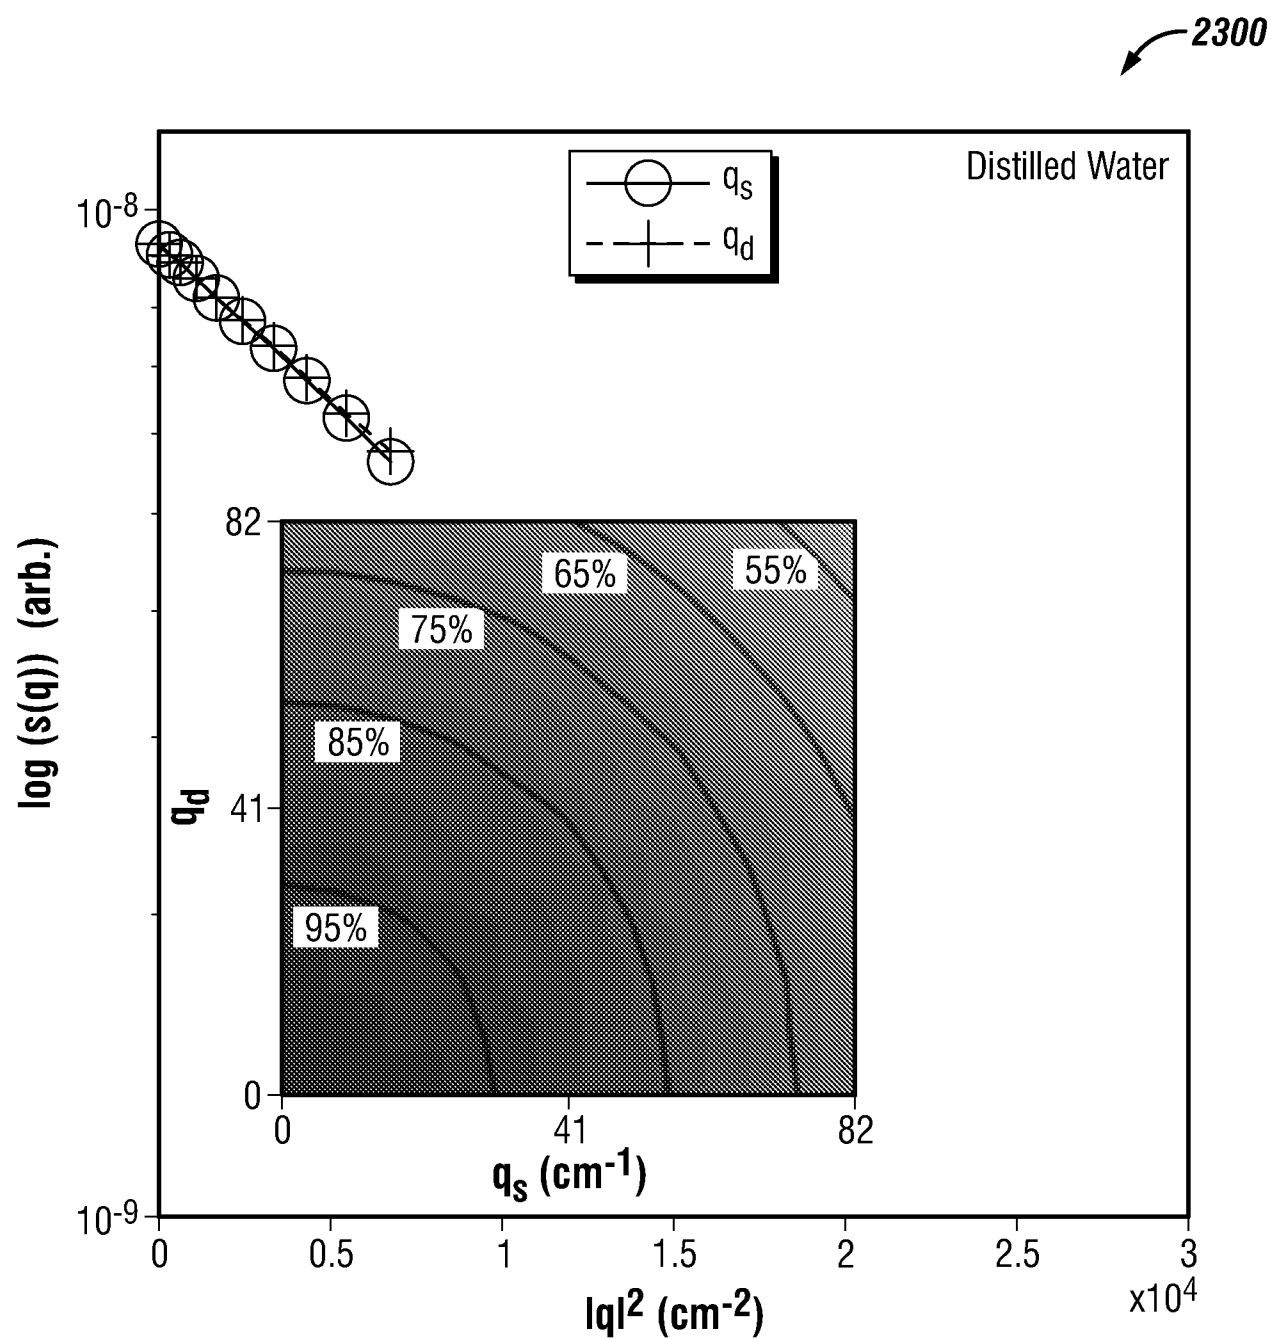


FIG. 23

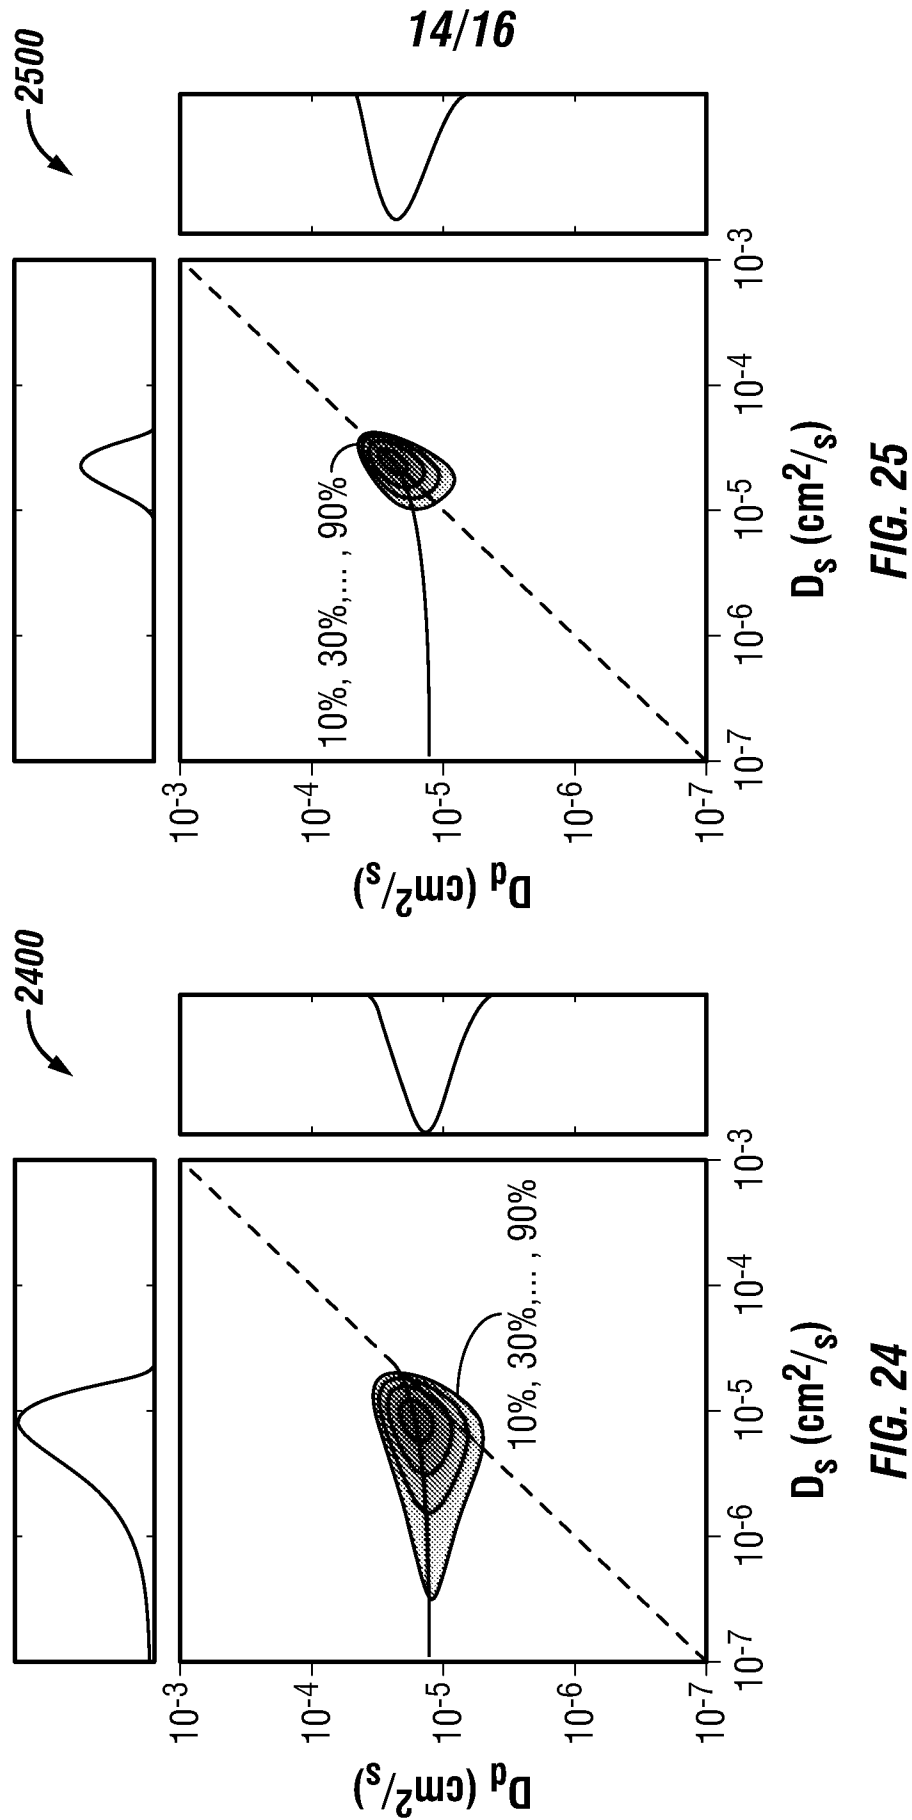

15/16

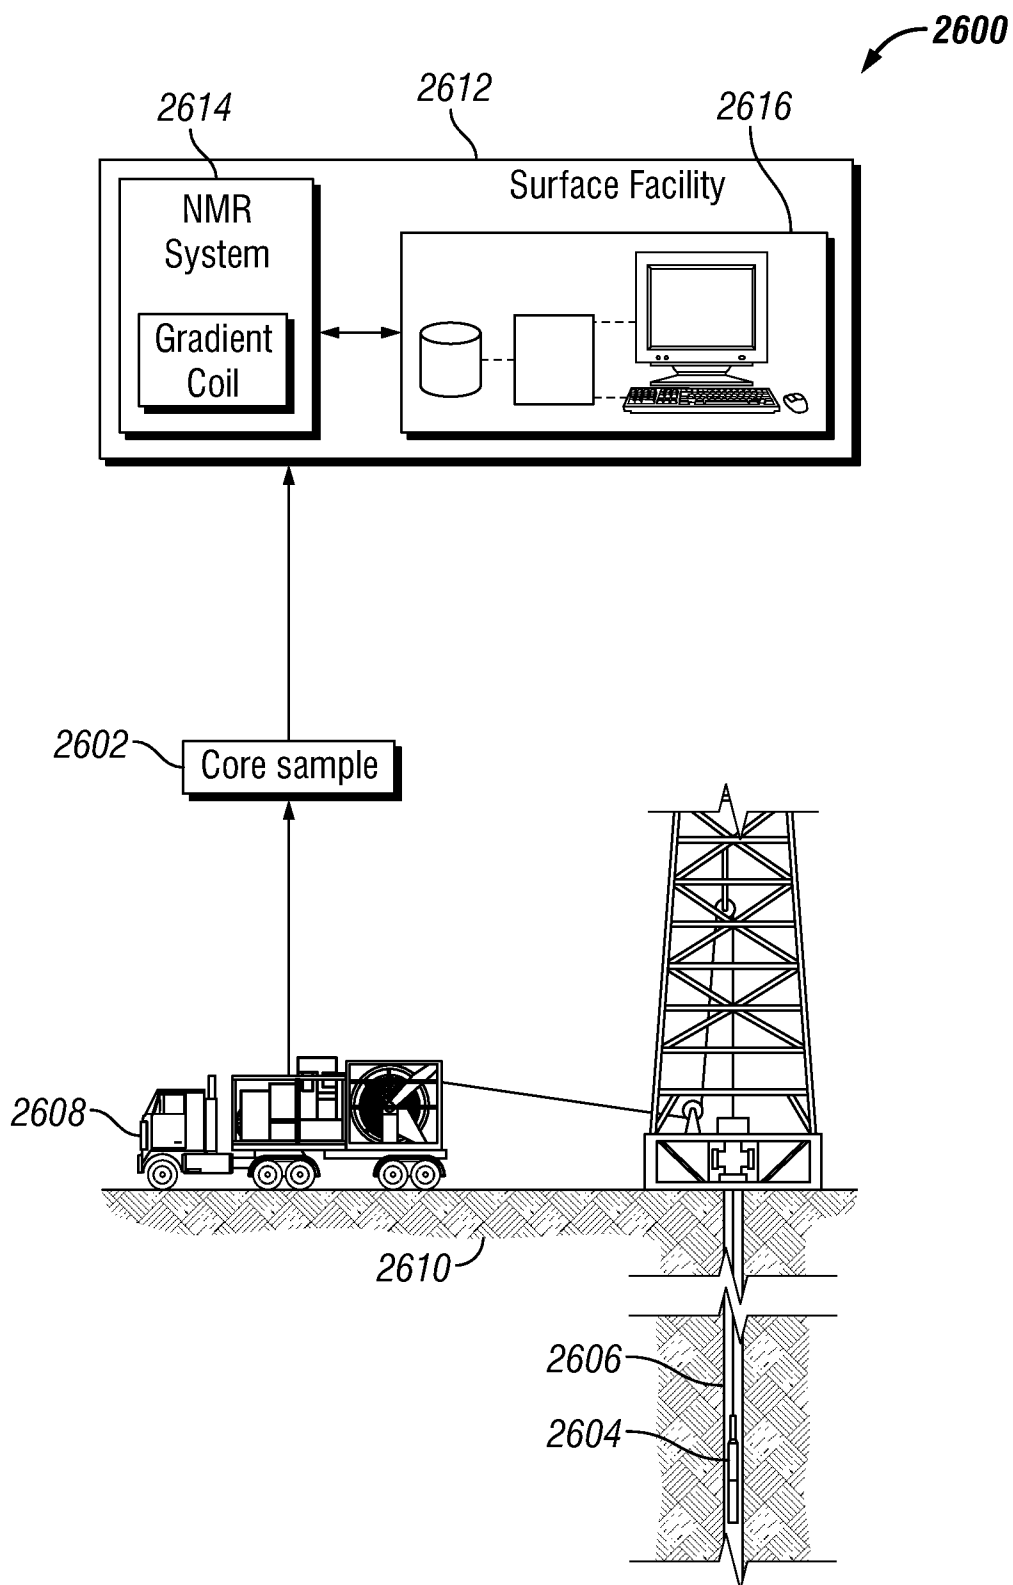


FIG. 26

16/16

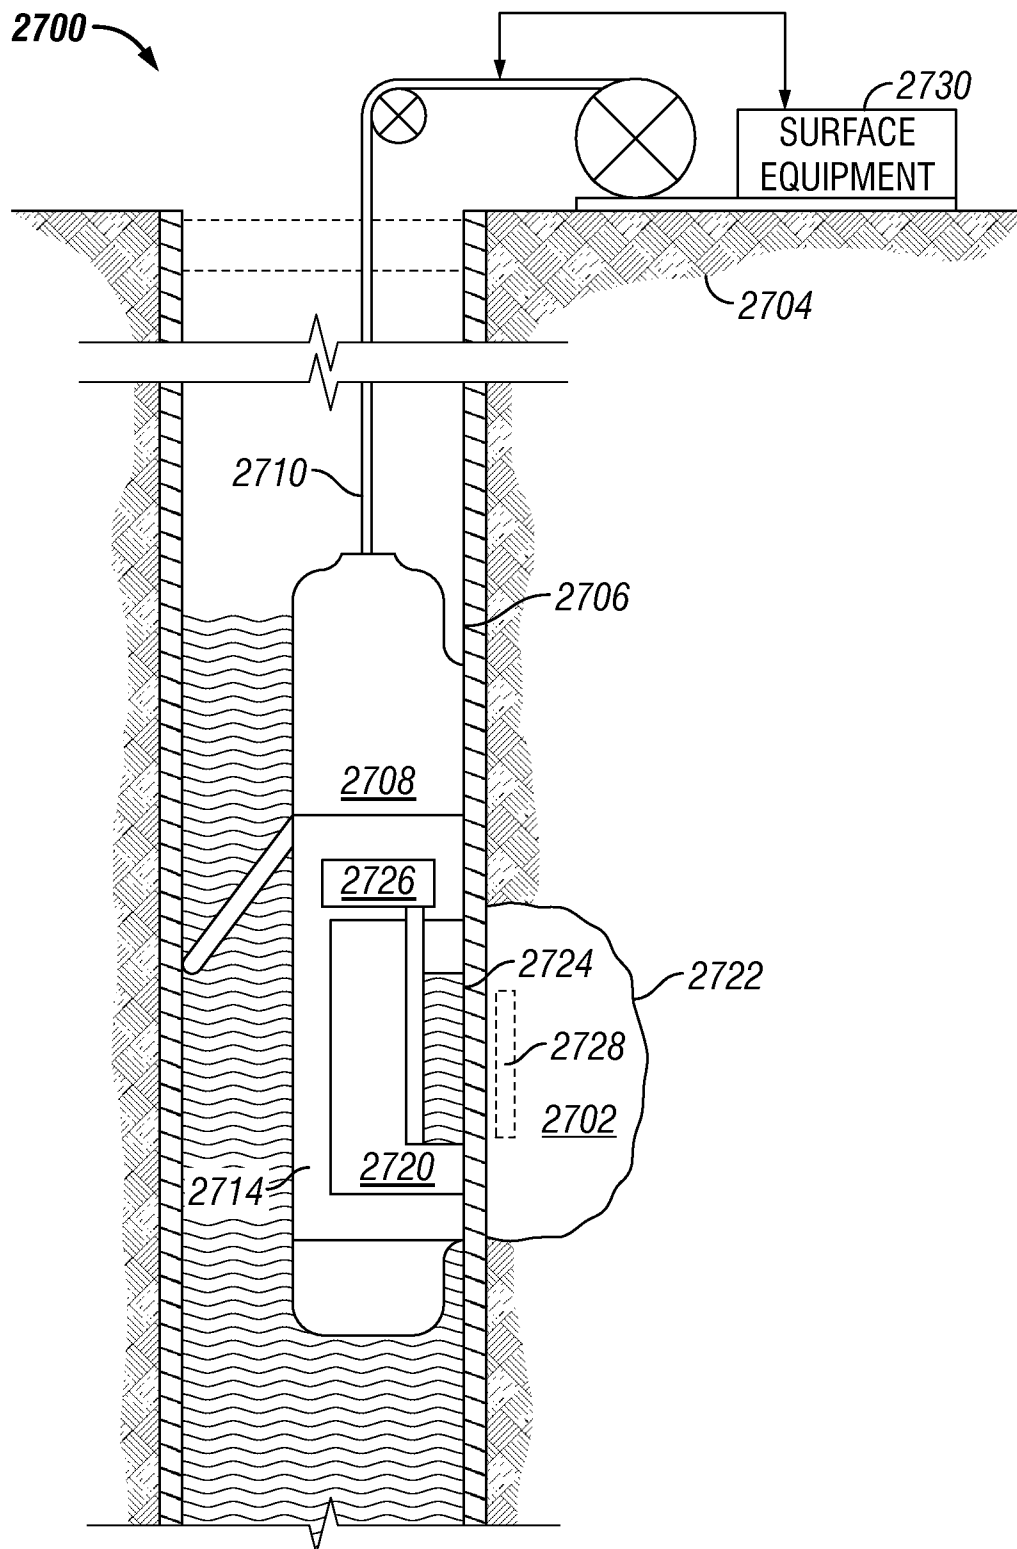


FIG. 27

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 2013/073652

A. CLASSIFICATION OF SUBJECT MATTER		
G01N 24/08 (2006.01) E21B 49/00 (2006.01) According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
G01V 3/00, 3/14, 3/18, 3/32, G01N 24/00, 24/08, G01R 33/00, 33/20, 33/28, 33/32, 33/36, 33/44-33/50, E21B 47/00, 49/00, A61B 5/00, 5/05, 5/055, A61B 6/00		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
PatSearch (RUPTO internal), USPTO, PAJ, Esp@cenet, DWPI, EAPATIS, PATENTSCOPE, Information Retrieval System of FIPS		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2007/087494 A2 (SERVICES PETROLIERS SCHLUMBERGER et al.) 02.08.2007, claims	1-22
A	US 2004/0189296 A1 (CHEVRON U.S.A. INC.) 30.09.2004	1-22
A	US 2010/0033182 A1 (THE UNITED STATES OF AMERICA AS REPRESENTED BY THE SECRETARY, DEPARTMENT OF HEALTH AND HUMAN SERVICE) 11.02.2010	1-22
A	US 2005/0007100 A1 (PETER J. BASSER et al.) 13.01.2005	1-22
A	WO 1992/009901 A (NUMAR CORPORATION) 11.06.1992	1-22
☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.		
* Special categories of cited documents: “A” document defining the general state of the art which is not considered to be of particular relevance “E” earlier document but published on or after the international filing date “L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) “O” document referring to an oral disclosure, use, exhibition or other means “P” document published prior to the international filing date but later than the priority date claimed “T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention “X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone “Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art “&” document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
12 March 2014 (12.03.2014)		10 April 2014 (10.04.2014)
Name and mailing address of the ISA/ FIPS Russia, 123995, Moscow, G-59, GSP-5, Berezhkovskaya nab., 30-1		Authorized officer
Facsimile No. +7 (499) 243-33-37		E. Iritsky
		Telephone No. 499-240-25-91