



US010816922B2

(12) **United States Patent**
Kaneko et al.

(10) **Patent No.:** **US 10,816,922 B2**

(45) **Date of Patent:** **Oct. 27, 2020**

(54) **IMAGE FORMING APPARATUS HAVING
FIXING DEVICE THAT RESPONDS TO
REQUEST WHEN USING DECOLORABLE
INK**

(52) **U.S. Cl.**
CPC **G03G 15/2039** (2013.01); **B41J 29/38**
(2013.01); **G03G 15/10** (2013.01);
(Continued)

(71) Applicants: **KABUSHIKI KAISHA TOSHIBA**,
Tokyo (JP); **TOSHIBA TEC**
KABUSHIKI KAISHA, Tokyo (JP)

(58) **Field of Classification Search**
CPC .. **G03G 15/2039**; **G03G 15/10**; **G03G 15/205**;
G03G 15/2032; **G03G 2215/20**; **B41J**
29/38
(Continued)

(72) Inventors: **Yoshiaki Kaneko**, Shizuoka (JP);
Minoru Yoshida, Tokyo (JP); **Osamu**
Takagi, Tokyo (JP); **Takahito Kabai**,
Shizuoka (JP); **Hiroyuki Taguchi**,
Shizuoka (JP); **Ken Iguchi**, Shizuoka
(JP)

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,833,488 A 5/1989 Mizutani et al.
5,394,231 A 2/1995 Sudo et al.

(Continued)

FOREIGN PATENT DOCUMENTS

JP H06095494 A 4/1994
JP H10088046 A 4/1998

(Continued)

Primary Examiner — Hoan H Tran

(74) Attorney, Agent, or Firm — Kim & Stewart LLP

(73) Assignees: **KABUSHIKI TOSHIBA**, Tokyo (JP);
TOSHIBA TEC KABUSHIKI
KAISHA, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **16/539,836**

(22) Filed: **Aug. 13, 2019**

(65) **Prior Publication Data**

US 2019/0369535 A1 Dec. 5, 2019

Related U.S. Application Data

(60) Continuation of application No. 16/018,192, filed on
Jun. 26, 2018, now Pat. No. 10,423,104, which is a
(Continued)


(51) **Int. Cl.**
G03G 15/20 (2006.01)
B41J 2/015 (2006.01)

(Continued)

(57) **ABSTRACT**

An image forming apparatus includes: a first image forming unit which forms a first image on a first recording medium with a first material that is not thermally decolorizable; a second image forming unit which forms a second image on a second recording medium with a second material that is thermally decolorizable; a fixing device which is on a common carrying path shared by the first recording medium and the second recording medium and fixes the first image to the first recording medium; and a controller which controls the fixing device so that a temperature of the fixing device is lower than a decolorizing temperature of the second material when the second recording medium reaches the fixing device.

9 Claims, 4 Drawing Sheets

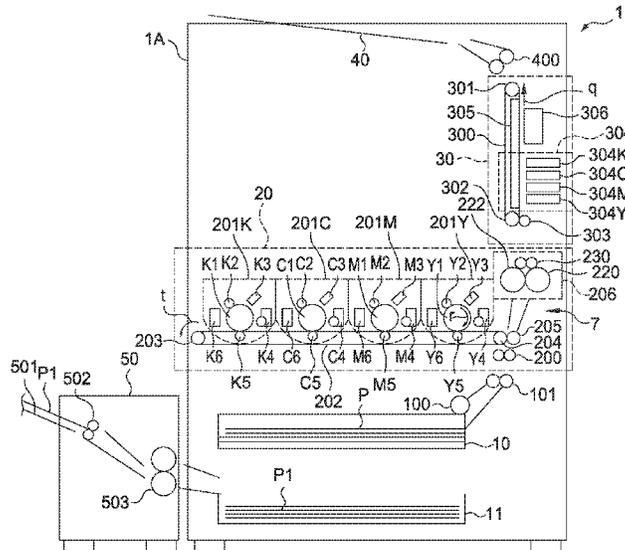

Related U.S. Application Data

- continuation of application No. 15/716,918, filed on Sep. 27, 2017, now Pat. No. 10,031,451, which is a division of application No. 15/092,750, filed on Apr. 7, 2016, now Pat. No. 9,804,543, which is a division of application No. 14/581,744, filed on Dec. 23, 2014, now Pat. No. 9,335,680, which is a continuation of application No. 13/627,640, filed on Sep. 26, 2012, now Pat. No. 8,953,965, which is a continuation-in-part of application No. 13/099,265, filed on May 2, 2011, now Pat. No. 8,290,386, which is a continuation of application No. 12/704,832, filed on Feb. 12, 2010, now Pat. No. 7,957,660.
- (60) Provisional application No. 61/153,207, filed on Feb. 17, 2009.
- (51) **Int. Cl.**
G03G 15/10 (2006.01)
B41J 29/38 (2006.01)
- (52) **U.S. Cl.**
 CPC *G03G 15/205* (2013.01); *G03G 15/2032* (2013.01); *G03G 2215/20* (2013.01)
- (58) **Field of Classification Search**
 USPC 399/38, 67-69, 107, 110, 122, 127; 347/5, 6, 20
- See application file for complete search history.

(56)

References Cited

U.S. PATENT DOCUMENTS

5,400,123 A	3/1995	Sato et al.	
5,572,311 A	11/1996	Abe et al.	
5,922,115 A	7/1999	Sano et al.	
6,017,386 A	1/2000	Sano et al.	
6,203,603 B1	3/2001	Takayama et al.	
6,596,669 B1	7/2003	Maruyama et al.	
7,278,704 B2 *	10/2007	Maeyama	B41J 3/60 250/559.01
7,567,767 B2	7/2009	Kikuchi	
8,075,127 B2 *	12/2011	Sugahara	C09D 11/101 347/102
8,097,389 B2	1/2012	Nakamura	
8,465,897 B2	6/2013	Aoki et al.	
8,615,177 B2	12/2013	Iguchi et al.	
10,031,451 B2	7/2018	Kaneko et al.	
2006/0269328 A1	11/2006	Ochiai	
2007/0072771 A1	3/2007	Gotanda et al.	
2007/0072773 A1	3/2007	Takayama et al.	
2008/0261143 A1	10/2008	Yamashita	
2011/0294052 A1	12/2011	Aoki et al.	
2012/0269548 A1	10/2012	Yamashita	

FOREIGN PATENT DOCUMENTS

JP	2007090704 A	4/2007
JP	2007212613 A	8/2007

* cited by examiner

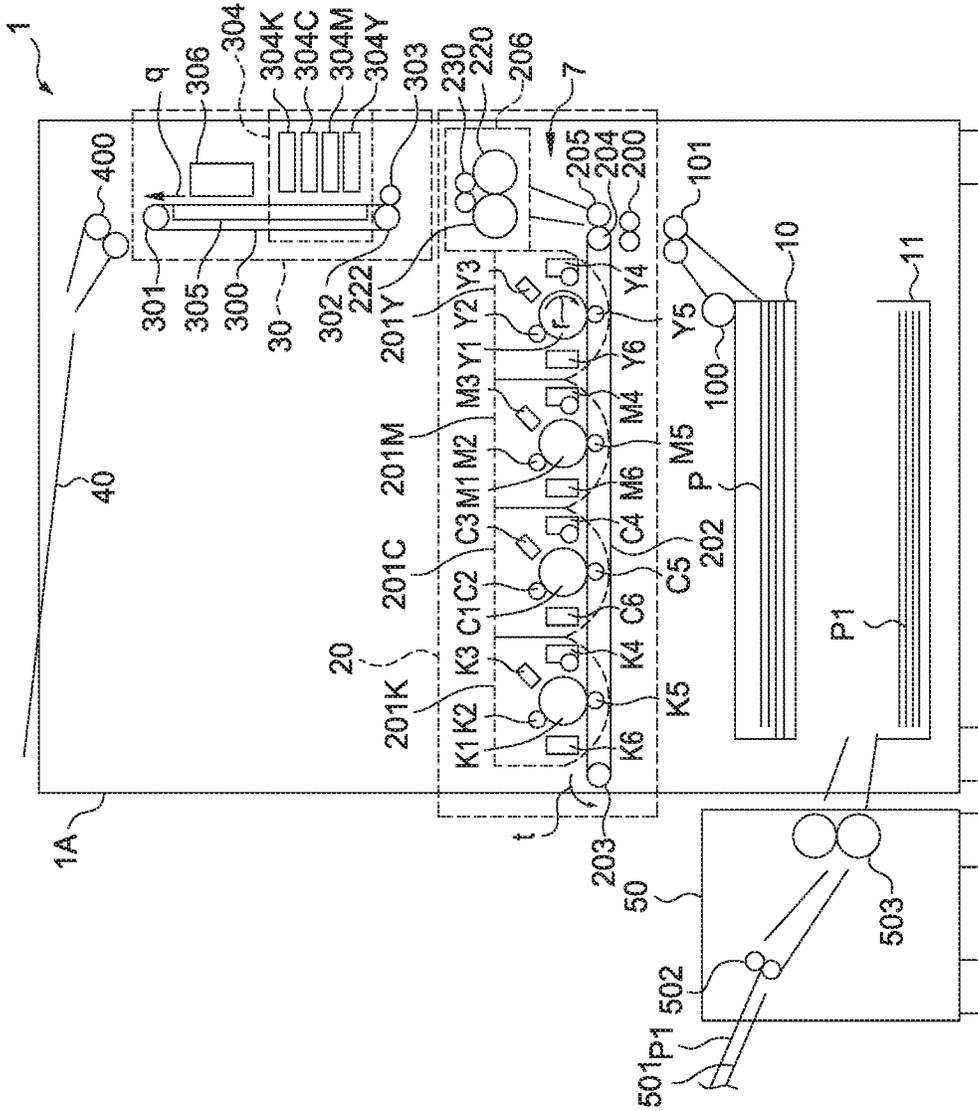


FIG. 1

FIG. 4

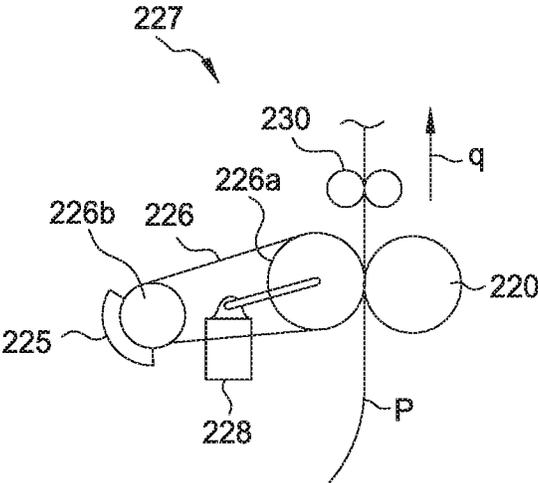
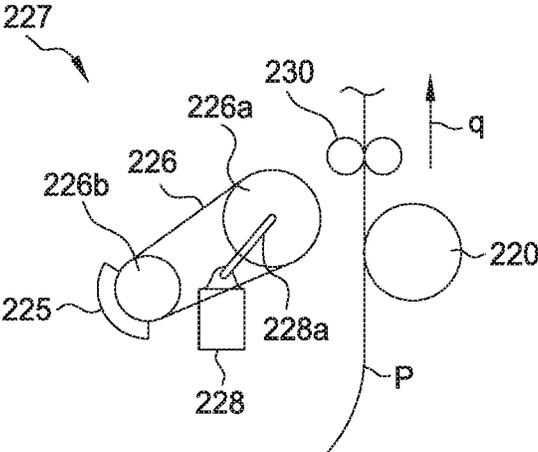


FIG. 5



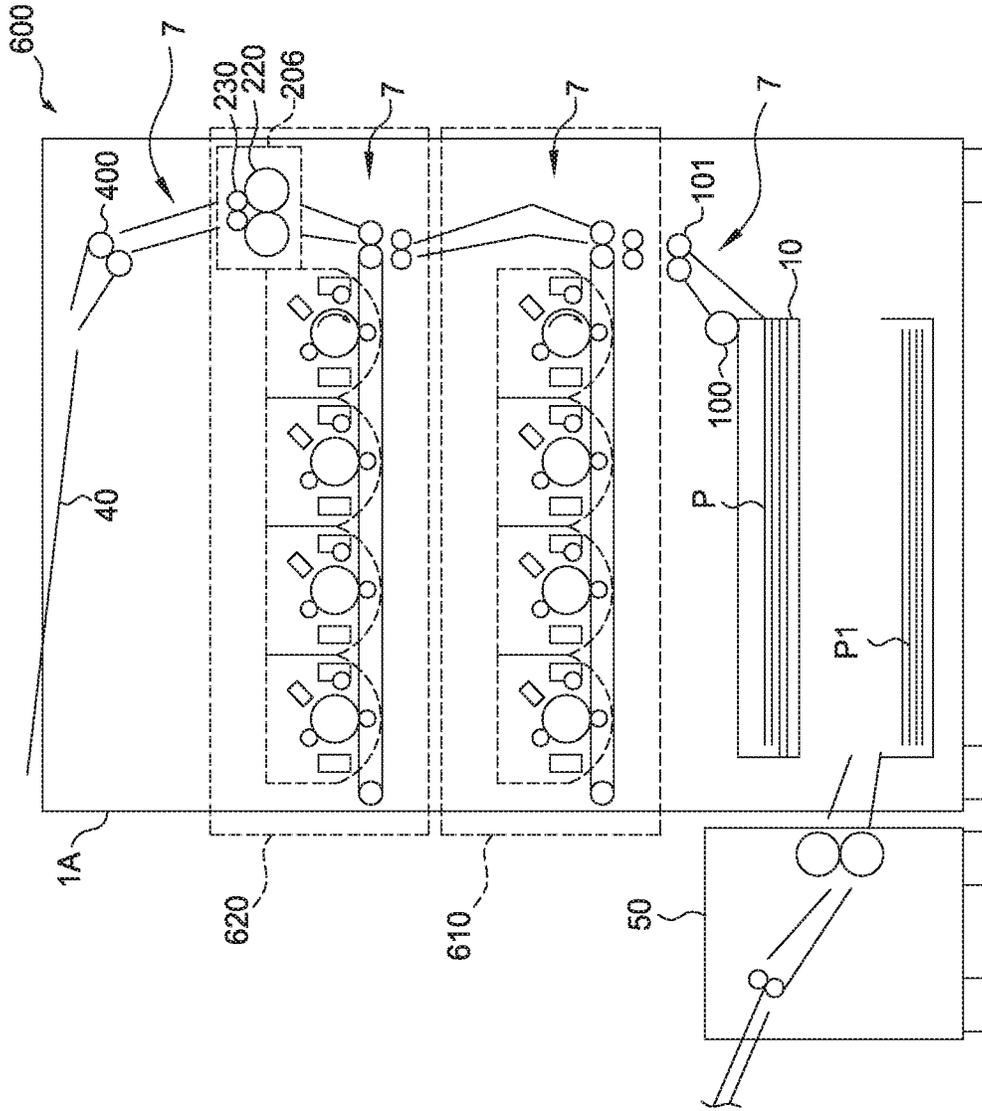


FIG. 6

**IMAGE FORMING APPARATUS HAVING
FIXING DEVICE THAT RESPONDS TO
REQUEST WHEN USING DECOLORABLE
INK**

CROSS-REFERENCE TO RELATED
APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 16/018,192 filed on Jun. 26, 2018, which is a continuation of U.S. patent application Ser. No. 15/716,918 filed on Sep. 27, 2017, now U.S. Pat. No. 10,031,451 issued on Jul. 24, 2018, which is a division of U.S. patent application Ser. No. 15/092,750 filed on Apr. 7, 2016, now U.S. Pat. No. 9,804,543 issued on Oct. 31, 2017, which is division of U.S. patent application Ser. No. 14/581,744 filed on Dec. 23, 2014, now U.S. Pat. No. 9,335,680 issued on May 10, 2016, which is a continuation of U.S. patent application Ser. No. 13/627,640 filed on Sep. 26, 2012, now U.S. Pat. No. 8,953,965 issued on Feb. 10, 2015, which is a continuation-in-part of U.S. patent application Ser. No. 13/099,265 filed on May 2, 2011, now U.S. Pat. No. 8,290,386 issued on Oct. 16, 2012, which is a continuation of U.S. patent application Ser. No. 12/704,832 filed on Feb. 12, 2010, now U.S. Pat. No. 7,957,660 issued on Jun. 7, 2011, which is based upon and claims the benefit of priority from Provisional U.S. application 61/153,207 filed on Feb. 17, 2009. The entire contents of the foregoing applications are incorporated herein by reference.

TECHNICAL FIELD

The present invention relates to an image forming apparatus having an image forming unit which forms a thermally non-decolorable image, and an image forming unit which forms a thermally decolorable image.

BACKGROUND

Recently, as an image forming apparatus that forms an image on a recording medium, there is an apparatus that thermally decolorizes an image formed on a sheet and then forms a new image on the same sheet, in order to reuse sheets, save paper resources and thus realize environment protection. For example, JP-A-10-88046 discloses a printer that includes an image forming unit using a decolorable ink and a decolorizing unit which decolorizes an image formed by the image forming unit, within the single apparatus. Moreover, as an image forming apparatus, there is an apparatus including an image forming function to form an image with a decolorable image forming material and an image forming function to form an image with a non-decolorable image forming material, within the single apparatus, in order to realize multiple functions. For example, JP-A-6-95494 discloses an image forming apparatus including a developing device which performs development with an ordinary toner and a developing device which performs development with an optically decolorable toner, within the same apparatus.

However, when an electrographic image forming function to heat and fix a toner image formed on a sheet by a fixing device and an ink jet image forming function using a decolorable ink that is thermally decolorable are provided within the same apparatus, it is necessary to prevent the decolorable ink from being affected by heat. As the sheet carrying path is divided between the electrographic system and the ink jet system in order to detour a sheet used in the

ink jet system so that the sheet does not pass through the fixing device, the carrying path becomes complex and may obstruct miniaturization.

Thus, it is desired that an image forming apparatus should be developed which has plural image forming functions within the same apparatus and in which an image formed with a decolorable image forming material is prevented from being affected by heat and the sheet carrying path can be simplified.

SUMMARY

According to an embodiment, an image forming apparatus includes: a first image forming unit which forms a first image on a first recording medium with a first material that is not thermally decolorizable; a second image forming unit which forms a second image on a second recording medium with a second material that is thermally decolorizable; a fixing device which is on a common carrying path shared by the first recording medium and the second recording medium and fixes the first image to the first recording medium; and a controller which controls the fixing device so that a temperature of the fixing device is lower than a decolorizing temperature of the second material when the second recording medium reaches the fixing device

DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic view of a configuration showing an image forming apparatus and a decolorization apparatus according to an embodiment;

FIG. 2 is a schematic view of a configuration showing pressurized contact between a heat roller and a press roller according to the embodiment;

FIG. 3 is a schematic view of a configuration showing separation of the heat roller from the press roller according to the embodiment;

FIG. 4 is a schematic view of a configuration showing pressurized contact between a heat belt and a press roller according to another example;

FIG. 5 is a schematic view of a configuration showing separation of the heat belt from the press roller according to the other example; and

FIG. 6 is a schematic view of a configuration showing an image forming apparatus and a decolorization apparatus according to another embodiment.

DETAILED DESCRIPTION

Hereinafter, an embodiment will be described. FIG. 1 is a schematic view of configuration showing an image forming apparatus 1 and a decolorization apparatus 50 according to the embodiment of the invention. The image forming apparatus 1 is of a hybrid type and has a first printer 20 as a first image forming unit and a second printer 30 as a second image forming unit, within a body 1A. The first printer 20 is an electrographic color printer and forms a first image using a toner as a first material which is not thermally decolorized. The second printer 30 is an ink jet color printer and forms a second image using a decolorable ink as a second material which is thermally decolorized.

The image forming apparatus 1 has a cassette 10 that supplies a sheet P as a first recording medium or a second recording medium. The first recording medium is a sheet on which an image is formed by the first printer 20. The second recording medium is a sheet on which an image is formed by the second printer 30. The image forming apparatus 1 has a

paper discharge roller pair **400** which discharges the sheet P passed through the first printer **20** and the second printer **30**, and a paper discharge tray **40**. In a carrying path **7** that is a common carrying path from the cassette **10** to the first printer **20** or the second printer **30** in the body **1A**, a pickup roller **100** which takes the sheet P out of the cassette **10**, a carrying roller pair **101** and a registration roller pair **200** are provided. The image forming apparatus **1** has, on the carrying path **7**, a fixing device **206** as a fixing unit which fixes a toner image formed by the first printer **20** to the sheet P. The image forming apparatus **1** has, below the cassette **10**, a box **11** which collects sheets **P1** for reuse carried from the decolorization apparatus **50**.

The decolorization apparatus **50** is a heat roller-type decolorization apparatus for heating and thus decolorizing an ink image formed once with a decolorable ink that is thermally decolorable. The decolorization apparatus **50** has a paper supply tray **501** on which a sheet **P1** having an ink image thereon is placed, a supply roller pair **502** which supplies the sheet **P1** on the paper supply tray **501**, and a decolorizing roller pair **503** which heats and guides the sheet **P1** to the box **11**. The decolorizing roller pair **503** holds a temperature equal to or higher than the decolorizing temperature of the decolorable ink, for example, 100° C.

The first printer **20** has four image forming stations **201Y**, **201M**, **201C** and **201K** for Y (yellow), M (magenta), C (cyan) and K (black) arranged in parallel along an intermediate transfer belt **202**. A driving roller **203** and a supporting roller **204** support the intermediate transfer belt **202**.

The yellow (Y) image forming station **201Y** of the first printer **20** has, around a photoconductive drum **Y1**, a charging roller **Y2** which uniformly charges the photoconductive drum **Y1**, an exposure device **Y3** which forms an electrostatic latent image on the photoconductive drum **Y1**, a developing device **Y4** which develops the electrostatic latent image on the photoconductive drum **Y1**, a primary transfer roller **Y5** which performs primary transfer of the toner image on the photoconductive drum **Y1** to the intermediate transfer belt **202**, and a photoconductor cleaner **Y6**. The image forming stations **201M**, **201C** and **201K** for magenta (M), cyan (C) and black (K) have the similar structure as that of the yellow (Y) image forming station **201Y** though the toner type is different. Therefore, the common parts of the structure are denoted by the same reference numerals as in the structure of the yellow (Y) image forming station **201Y** together with their respective color symbols, and will not be described further in detail.

The magenta (M) image forming station **201M** has, around a photoconductive drum **M1**, a charging roller **M2**, an exposure device **M3**, a developing device **M4**, a primary transfer roller **M5** and a photoconductor cleaner **M6**. The cyan (C) image forming station **201C** has, around a photoconductive drum **C1**, a charging roller **C2**, an exposure device **C3**, a developing device **C4**, a primary transfer roller **C5** and a photoconductor cleaner **C6**. The black (K) image forming station **201K** has, around a photoconductive drum **K1**, a charging roller **K2**, an exposure device **K3**, a developing device **K4**, a primary transfer roller **K5** and a photoconductor cleaner **K6**. The developing devices **Y4**, **M4**, **C4** and **K4** perform development using a thermally non-decolorable toner.

The first printer **20** has a secondary transfer roller **205** which transfers the toner images formed by the image forming stations **201Y**, **201M**, **201C** and **201K** and primary-transferred to the intermediate transfer belt **202**, simultaneously to the sheet P. The secondary transfer roller **205** is

separated from the intermediate transfer belt **202** at the time of printing by the second printer **30**.

Each of the image forming stations **201Y**, **201M**, **201C** and **201K** is formed as a unit and is integrally attachable to and removable from the body **1A** and thus replaceable, independently of each other. Moreover, the first printer **20** is formed as a unit and is integrally attached to and removed from the body **1A**. In the image forming apparatus **1**, the first printer **20** can be replaced with another unit, for example, a monochrome-only unit in response to a user's request.

The fixing device **206** has a movable heat roller **222** as a heat member, a fixed press roller **220** as a press member, and a relay roller pair **230** as a relay part.

The heat roller **222** has a heat lamp **221** inside, as shown in FIG. 2, and contacts a toner image on the sheet P. The heat lamp **221** provides the heat roller **222** with necessary heat for fixing the toner image. The heat roller **222** has, for example, an elastic rubber layer around a core metal containing the heat lamp **221** inside, and has a release layer on the surface. The press roller **220** has, for example, a solid rubber layer around a core metal and has a release layer on the surface. As the movable heat roller **222** pressurizes and contacts the press roller **220**, the surface of the heat roller **222** elastically deforms and a nip **60** having a predetermined contact width is formed between the heat roller **222** and the press roller **220**. As the sheet P passes through the nip **60**, the toner image on the sheet P is fixed by being heated and pressurized.

An arm **70** supporting the heat roller **222** slides the heat roller **222** when turning. A solenoid **71** turns the arm **70**. For example, when the solenoid **71** is turned on with positive polarity, the arm **70** is at the position shown in FIG. 2 and presses the heat roller **222** toward the press roller **220**. The press roller **220** and the heat roller **222** are pressurized and contact each other. When the solenoid **71** is turned off, the arm **70** is at the position indicated by the dotted line in FIG. 3 and the press roller **220** and the heat roller **222** lightly contact each other. When the solenoid **71** is turned on with negative polarity, the arm **70** is at the position indicated by the solid line in FIG. 3 and the heat roller **222** is separated from the press roller **220**.

A motor **72** rotates the heat roller **222** in the direction of arrow m. The press roller **220** follows the heat roller **222** and rotates in the direction of arrow n. A CPU **76** which controls the entire image forming apparatus **1** controls a drive control circuit **77** and a temperature control circuit **78**. The result of detection by a sensor **80** which detects the surface temperature of the heat roller **222** is inputted to the CPU **76**.

The drive control circuit **77** controls the solenoid **71** and the motor **72**. When there is no designation of printing, the drive control circuit **77** controls the solenoid to OFF-state. The operator uses a control panel **1B** to input whether printing is to be done by the first printer **20** or by the second printer **30**, to the image forming apparatus **1**. When the CPU **76** designates printing by the first printer **20** in accordance with the input on the control panel **1B**, the drive control circuit **77** controls the solenoid **71** to ON-state with positive polarity. When the CPU **76** designates printing by the second printer **30** in accordance with the input on the control panel **1B**, the drive control circuit **77** controls the solenoid **71** to ON-state with negative polarity.

The temperature control circuit **78** performs on-off control of the heat lamp **221** in accordance with the result of detection by the sensor **80**. At the time of fixing the toner image, the temperature control circuit **78** performs on-off control of the heat lamp **221** so that the surface temperature of the heat roller **222** is maintained to, for example, 120° C.

The second printer **30** has ink jet heads **304Y**, **304M**, **304C** and **304K** for Y (yellow), M (magenta), C (cyan) and K (black) arranged in parallel along a carrying belt **300**. A driving roller **301** and a driven roller **302** support the carrying belt **300**. The carrying belt **300** has holes at predetermined intervals on the surface. The carrying belt **300** holds a negative-pressure chamber **305** inside. The negative-pressure chamber **305** sucks the sheet P to the carrying belt **300** via the holes in the carrying belt **300**. The second printer **30** has a pressurizing roller **303** at the position facing the driven roller **302**. The pressurizing roller **303** presses the sheet P to the carrying belt **300** and thus prevents the sheet P from floating on the carrying belt **300**. The second printer **30** has a drier **306** which dries the ink image on the sheet P with warm air.

The ink jet heads **304Y**, **304M**, **304C** and **304K** eject color inks of Y (yellow), M (magenta), C (cyan) and K (black) that are decolorized by heat of, for example, 70°. In the yellow (Y) ink jet head **304Y**, plural nozzles are arrayed at predetermined intervals, for example, across the maximum recording width of the sheet P, that is, 297 mm. The ink jet heads **304M**, **304C** and **304K** for magenta (M), cyan (C) and black (K) have the similar structure to that of the yellow (Y) ink jet head **304Y**.

A decolorable ink that is thermally decolorable is disclosed, for example, in JP-A-2007-212613, JP-A-2007-90704 and so on. The decolorable ink contains, for example, a coloration compound such as a leuco dye, a color developer, a binder resin having a decolorizing effect, and so on. At a temperature below the decolorizing temperature, the color of the decolorable ink can be recognized since the action of the color developer causes the coloration compound to develop color. When the decolorable ink is heated to the decolorizing temperature or higher, the softening of the binder resin causes the color developer in the binder resin to shift to the surface and is then diffused on the sheet P. The color developer no longer has its effect on the coloration compound. The coloration compound decolorizes. Therefore, the color of the decolorable ink cannot be recognized. The decolorizing temperature of the decolorable ink is adjusted by the material design of the coloration compound, color developer, binder resin and the like.

As the coloration compound, it is preferable to use an electron-donating organic material, for example, a leuco auramine, diaryl phthalide, polyaryl carbinol, acyl auramine, aryl auramine, rhodamine B, lactam, indoline, spiropyran, or fluoran.

As the color developer, it is preferable to use, for example, a phenol, metal phenolate, metal carboxylate, benzophenone, sulfonic acid, sulfonate, phosphate, metal phosphate, acid phosphate, acid metal phosphate, phosphorous acid, metal phosphite or the like.

The ink jet heads **304Y**, **304M**, **304C** and **304K** form an integrated cartridge **304**, which is integrally attachable to and removable from the body **1A** and is thus replaceable. The second printer **30** is formed as a unit and is integrally attached to and removed from the body **1A**. The second printer **30** formed as a unit can be easily installed in the body **1A** as an optional part in response to the user's request.

(1) Case where there is no designation of printing in the image forming apparatus **1**

The image forming apparatus **1** is ready and the drive control circuit **77** turns off the solenoid **71**. The press roller **220** and the heat roller **222** lightly contact each other. The heat roller **222** is held at a ready temperature.

(2) Case where printing is carried out by the first printer **20**

At the start of printing, the drive control circuit **77** turns on the solenoid **71** with positive polarity in order to fix the toner image to the sheet by heating and pressurizing. The arm **70** is turned in the direction of arrow s. The heat roller **222** is pressed toward the press roller **220**.

In the yellow (Y) image forming station **201Y**, the photoconductive drum **Y1** rotates in the direction of arrow r. The charging roller **Y2** uniformly charges the photoconductive drum **Y1**. The exposure device **Y3** casts exposure light corresponding to image information to the photoconductive drum **Y1** and thus forms an electrostatic latent image on the photoconductive drum **Y1**. The developing device **Y4** develops the electrostatic latent image with a thermally non-erasable ordinary toner and thus forms a yellow (Y) toner image as a first image that is not thermally erasable, on the photoconductive drum **Y1**. The primary transfer roller **Y5** performs primary transfer of the toner image on the photoconductive drum **Y1** to the transfer belt **202** turning in the direction of arrow t. After the primary transfer is finished, the photoconductor cleaner **Y6** cleans the residual toner on the photoconductive drum **Y1**.

The magenta (M), cyan (C) and black (K) image forming stations **201M**, **201C** and **201K** perform multiple transfer of magenta (M), cyan (C) and black (K) toner images onto the intermediate transfer belt **202**, similarly to the yellow (Y) image forming station **201Y**, and thus form a thermally non-decolorable color toner image.

The pickup roller **100** takes out the sheet P from the cassette **10**. The carrying roller pair **101** and the registration roller pair **200** carry the sheet P to the secondary transfer roller **205** synchronously with the arrival of the color toner image on the intermediate transfer belt **202** at the secondary transfer roller **205**. The secondary transfer roller **205** performs simultaneous secondary transfer of the color toner image on the intermediate transfer belt **202** to the sheet P. After that, as the sheet P reaches the fixing device **206**, the heat roller **222** keeping the surface temperature of 120° C. and the press roller **220** nip and carry the sheet P within the nip **60** in the direction of arrow q and fix the color toner image to the sheet P by heating and pressurizing.

The relay roller pair **230**, the carrying belt **300** and the paper discharge roller pair **400** carry the sheet P on which the fixed toner image is completed, in the direction of the arrow q, and discharge the sheet P to the paper discharge tray **40**.

(3-1) Case where printing by the second printer **30** is carried out, for example, on a normal paper or thin paper with a weight of 40 to 180 g

At the start of printing, the drive control circuit **77** turns on the solenoid **71** with negative polarity and separates the heat roller **222** from the press roller **220**.

The pickup roller **100** takes out the sheet P from the cassette **10**. The carrying roller pair **101** and the registration roller pair **200** carry the sheet P in the direction of the fixing device **206** through the gap between the intermediate transfer belt **202** and the secondary transfer roller **205**. In the fixing device **206**, the heat roller **222** slides away from the press roller **220** and is away from the carrying path **7** of the sheet P. In the fixing device **206**, the sheet P carried by the registration roller pair **200** is carried in the direction of the second printer **30** by the relay rollers **230**. While passing through the fixing device **206**, the sheet P does not contact the heat roller **222**. Therefore, the amount of heat transmitted from the heat roller **222** to the sheet P is small and the temperature of the sheet P is maintained below the decolorizing temperature of 70° C.

In the second printer **30**, the pressurizing roller **303** presses the sheet P to the carrying belt **300**. The sheet P is

sucked to the carrying belt **300** in the negative-pressure chamber **305**. The sheet P is thus carried in the direction of the arrow q by the carrying belt **300**. The ink jet heads **304Y**, **304M**, **304C** and **304K** print ink images as second images that correspond to image information and thermally decolorize, in a superimposing manner on the sheet P traveling in the direction of the arrow q, and thus form a color ink image on the sheet P. At this time, the sheet P is maintained below 70° C. and therefore the ink image formed on the sheet P does not decolorize.

After that, the drier **306** dries, with warm air, the color ink image on the sheet P sucked to the carrying belt **300** and thus traveling in the direction of the arrow q. The paper discharge roller pair **400** discharges the sheet P on which the ink image is completed, to the paper discharge tray **40**.

(3-2) Case where printing by the second printer **30** is carried out on a thick paper that is thicker than a normal paper

At the start of printing, the drive control circuit **77** turns off the solenoid **71** and thus the press roller **220** and the heat roller **222** light contact each other.

A sheet P taken out of the cassette **10** passes through the carrying roller pair **101**, the registration roller pair **200** and the space between the intermediate transfer belt **202** and the secondary transfer roller **205** and reaches the fixing device **206**. In the fixing device **206**, the sheet P passes between the heat roller **222** and the press roller **220**, which lightly contact each other. The relay rollers **230** carry the sheet P in the direction of the second printer **30**. While passing through the fixing device **206**, the sheet P contacts the heat roller **222**. However, since the sheet P is not pressurized by the heat roller **222** and press roller **220**, the amount of heat transmitted to the sheet P is small. Also, the sheet P is a thick paper and has a large heat capacity. Therefore, the temperature of the sheet P is maintained below the decolorizing temperature of 70° C.

While printing is carried out in the image forming apparatus **1**, the decolorization apparatus **50** decolorizes an ink image on the sheet P1 passing through the decolorizing roller pair **503**. The decolorizing roller pair **503** heats the sheet P1 to 100° C. and thus decolorizes the ink image. The sheet P1 with its ink image decolorized is collected in the box **11**. The operator reuses the sheet P1 collected in the box **11**.

When, for example, the user does not need the second printer **30** at the time of installation, the image forming apparatus **1** may have the first printer **20** alone. The second printer **30** may be provided as an option when necessary.

According to this embodiment, at the time of printing by the first printer **20**, the heat roller **222** is pressed toward the press roller **220** and a thermally non-decolorable color toner image is heated and pressurized and thus securely fixed to the sheet P passing through the nip **60**. At the time of printing by the second printer **30**, when a normal paper is handled, the heat roller **222** is separated away from the press roller **220** and the temperature of the sheet P passing through the fixing device **206** is maintained below the decolorizing temperature. The ink image formed with a decolorable ink can be securely prevented from decolorizing. Meanwhile, at the time of printing by the second printer **30**, when a thick paper is handled, the heat roller **222** and the press roller **220** are made to lightly contact each other and the temperature of the sheet P passing through the fixing device **206** is maintained below the decolorizing temperature. The ink image formed with a decolorable ink can be securely prevented from decolorizing. Thus, the carrying path **7** can be shared by the first printer **20** which forms a thermally non-decol-

orable toner image and the second printer **30** which forms a thermally decolorable ink image. The structure of the image forming apparatus **1** can be simplified and a hybrid-type image forming apparatus which has a printer using an ordinary toner and a printer using a decolorable ink can be easily realized as a practical product.

The invention is not limited to the above embodiment and various changes and modifications can be made without departing from the scope of the invention. For example, the fixing temperature of the thermally non-decolorable toner or the decolorizing temperature of thermally decolorable ink is not limited. Also, in the embodiment, the position of the heat roller with respect to the press roller needs not be switched in three stages. The position of the heat roller with respect to the press roller may be switched in two stages, that is, the position where the heat roller pressurizes and contacts the press roller and the position where the heat roller moves away from the press roller.

The structure of the fixing device is not limited, either. For example, as shown in the other example of FIG. **4** and FIG. **5**, a belt fixing device **227** may be used to fix a thermally non-decolorable toner image. The belt fixing device **227** heats a heat belt **226** as a heat member to a fixing temperature, using an induction heating heater (IH heater) **225**. For example, the heat belt **226** includes an electrically conductive thin metal base material with its surface covered with an elastic rubber layer, and a release layer covering the surface. The IH heater **225** adjusts the output of an induction coil and heats the heat belt **226** to the fixing temperature. In this other example, for example, an arm **228a** supporting a driving roller **226a** is turned by a solenoid **228** and the heat belt **226** is moved in contact with or away from the press roller **220**. For example, in the case of printing a thermally non-decolorable toner image, the solenoid **228** is turned on and the heat belt **226** is pressed toward the press roller **220** as shown in FIG. **4**, thus causing the heat belt **226** and the press roller **220** to pressurize and contact each other. In the case of printing a thermally decolorable ink image, the solenoid **228** is turned off and the heat belt **226** is separated away from the press roller **220** as shown in FIG. **5**, thus reducing the amount of heat transmitted to the sheet passing through the belt fixing device **227**. Also in the belt fixing device **227** of this other example, the sheet carrying path can be shared by the printer using an ordinary toner and the printer using a decolorable ink, and the sheet carrying path in the hybrid-type image forming apparatus can be simplified.

Some embodiments employ a hybrid image-forming apparatus including a first electrographic image-forming unit that forms a thermally non-decolorable image and a second electrographic image-forming unit that forms a thermally decolorable image, each of the electrographic image-forming units being disposed on a common carrying path of the image-forming apparatus. One such embodiment is illustrated in FIG. **6**, which is a schematic view of an image-forming apparatus **600** having a first image-forming unit **610**, a second image-forming unit **620**, and fixing device **206**, each of which is disposed on carrying path **7** as shown. First image-forming unit **610** is an electrographic printer substantially similar to first printer **20** in FIG. **1**, and is configured to form a non-decolorable color toner image on sheet P and/or a monochrome-only non-decolorable image on sheet P. Sheet P is taken out of cassette **10** by carrying roller pair **101** and transferred to first image-forming unit **610** and a non-decolorable image can be formed by first image-forming unit **610**, as described above for first printer **20** in FIG. **1**. Second image-forming unit **620** is an electrographic printer substantially similar to first image-forming

unit **610**, except that second image-forming unit **620** is configured to form a decolorable color toner image on sheet P and/or a monochrome-only decolorable image on sheet P. The decolorable image can be formed by second image-forming unit **620** using one or more erasable image-forming materials known in the art. In the embodiment illustrated in FIG. 6, second image-forming unit **620** is disposed on carrying path **7** between first image-forming unit **610** and fixing device **206**. In other embodiments, first image-forming unit **610** may be disposed on carrying path **7** between second image-forming unit **620** and fixing device **206**. In either configuration, fixing device **206** is used to fix images deposited on a sheet P by either first image-forming unit **610** or second image-forming unit **620**. Fixing of color or monochromatic images on sheet P by fixing device **206** is carried out as described above in conjunction with FIG. 1.

An erasable image-forming material used by second image-forming unit **620** may include a color former containing crystal violet lactone, a developer, a first binder resin of styrene-butadiene copolymer, and a second binder resin of a styrene-based resin containing α -methylstyrene, where the first and second binder resins are in a compatible state. The color former may contain only crystal violet lactone, or may contain a second leuco dye in addition to the crystal violet lactone. A suitable second leuco dye is a fluorine-based leuco dye. Particularly suitable examples of black leuco dye include 2-anilino-6-(N-alkyl-N-alkylamino)-3-methylfluorane and derivatives thereof. Numerous other examples of suitable second leuco dyes are described in U.S. Patent Application Publication No. 2007/0072773, filed Sep. 18, 2006, which is incorporated by reference herein. Examples of the developer includes phenols, metal phenolates, carboxylic acids, metal carboxylates, benzophenones, sulfonic acids, metal sulfonates, phosphoric acids, metal phosphates, acidic phosphoric esters, acidic phosphoric ester metal salts, phosphorous acids, and metal phosphites. These developers can be used alone or in a combination of two or more species. The styrene-butadiene copolymer constituting the first binder resin preferably has a butadiene ratio of 5 to 15 wt %, and suitable examples of a styrene-based resin containing α -methylstyrene and constituting the second binder resin include:

- α -methylstyrene resin,
- α -methylstyrene-styrene copolymer,
- α -methylstyrene-aliphatic copolymer,
- α -methylstyrene-alicyclic copolymer,
- α -methylstyrene-styrene-aliphatic terpolymer, and
- α -methylstyrene-styrene-alicyclic copolymer.

Alternatively, an erasable image-forming material used by second image-forming unit **620** may include a color former, a developer, a binder resin and 0.5 wt % or less of a plasticizer. Examples of suitable materials for the color former include electron-donating organic compounds such as leucoauramines, diaryl phthalides, polyaryl carbinols, acyl auramines, aryl auramines, rhodamine B lactams, indolines, spiropyran and fluorans. Examples of the developer include phenols, metal phenolates, metal carboxylates, benzophenones, sulfonic acids, sulfonates, phosphoric acids, metal phosphorates, acidic phosphates, metal acidic phosphates, phosphorous acids and metal phosphites. These may be used alone or in a mixture of two or more species. Examples of the plasticizer include phthalic acid derivatives, adipic acid derivatives, azelaic acid derivatives, sebacic acid derivatives, maleic acid derivatives, fumaric acid derivatives, trimellitic acid derivatives, citric acid derivatives, oleic acid derivatives, ricinoleic acid derivatives, sulfonic acid derivatives, phosphoric acid derivatives, glycerin derivatives, par-

affin derivatives and diphenyl derivatives. Numerous additional examples of suitable materials for use as the color former, the developer, and the plasticizer are described in U.S. Patent Application Publication No. 2007/0072771, filed Sep. 18, 2006, which is incorporated by reference herein.

Images deposited on sheet P by either first image-forming unit **610** or second image-forming unit **620** are fixed thermally and with applied pressure using fixing device **206**. In order to prevent decolorizable images formed by second image-forming unit **620** from being decolorized when sheet P passes through fixing device **206**, an erasable image-forming material used by second image-forming unit **620** may be selected that has a decolorizing temperature that is significantly higher than the fixing temperature of images formed by first image-forming unit **610**. For example, when the fixing temperature generated by fixing device **206** is 90-110° C., the erasable image-forming material selected for use by second image-forming unit **620** preferably has a decolorizing temperature of 130° C. to 140° C. In this way, decolorizable images formed by second image-forming unit **620** may be fixed by fixing device **206** without being decolorized.

In some cases, selection of erasable image-forming materials that have a decolorizing temperature greater than the fixing temperature of images formed by first image-forming unit **610** can be problematic. Consequently, in one embodiment, fixing device **206** is configured to fix images deposited by first image-forming unit **610** at a suitable fixing temperature, and to fix images deposited by second image-forming unit **620**, which are decolorizable, at a lower temperature. Said lower temperature is specifically selected to be lower than the decolorizing temperature of the erasable image-forming material used by second image-forming unit **620** and higher than the fixing temperature of said erasable image-forming material. For example, in some embodiments, a selected erasable image-forming material has a fixing temperature of approximately 90-110° C. and a decolorizing temperature of approximately 120-140° C. In such embodiments, fixing device **206** is configured to fix images deposited on sheet P by second image-forming unit **620** at a fixing temperature of approximately 110° C., and to fix images deposited on sheet P by first image-forming unit **610** at the suitable temperature for such images, for example 120° C. or higher. In this way, a single fixing device **206** can be used to fix images non-decolorizable images deposited by first image-forming unit **610** and decolorizable images deposited by second image-forming unit **620**. Furthermore, first image-forming unit **610**, second image-forming unit **620**, and fixing device **206** can be arranged on common carrying path **7** without endangering decolorizable images deposited by second image-forming unit **620**.

In some embodiments, fixing device **206** is controlled by temperature control circuit **78** (shown in FIG. 2) to provide the different desired temperature, depending on which of first image-forming unit **610** or second image-forming unit **620** has been selected to form an image. In other respects, temperature control circuit **78** and fixing device **206** generally operate as described above in conjunction with FIG. 1.

While the foregoing is directed to embodiments of the present invention, other and further embodiments of the invention may be devised without departing from the basic scope thereof, and the scope thereof is determined by the claims that follow.

11

What is claimed is:

- 1. An inkjet printer, comprising:
 - a yellow inkjet printer head configured to form an image on a recording medium with a yellow ink including thermally decolorizable material;
 - a magenta inkjet printer head configured to form an image on the recording medium with a magenta ink including thermally decolorizable material;
 - a cyan inkjet printer head configured to form an image on the recording medium with a cyan ink including thermally decolorizable material; and
 - a black inkjet printer head configured to form an image on a recording medium with a black ink including thermally decolorizable material, wherein the yellow inkjet printer head, the magenta inkjet printer head, the cyan inkjet printer head, and the black inkjet printer head are arranged in a conveyance direction of the recording medium, and the black inkjet printer head is after the yellow inkjet printer head, the magenta inkjet printer head, and the cyan inkjet printer head along the conveyance direction.
- 2. The inkjet printer according to claim 1, further comprising:
 - a cartridge integrating the yellow inkjet printer head, the magenta inkjet printer head, the cyan inkjet printer head, and the black inkjet printer head.
- 3. The inkjet printer according to claim 2, the cartridge is attachable to and removable from a main body of the inkjet printer.
- 4. The inkjet printer according to claim 1, wherein the yellow inkjet printer head, the magenta inkjet printer head, the cyan inkjet printer head, and the black inkjet printer head each have the same structure excepting for an ink stored therein.
- 5. An inkjet printer, comprising:
 - a yellow inkjet printer head configured to form an image on a recording medium with a yellow ink including thermally decolorizable material;
 - a magenta inkjet printer head configured to form an image on the recording medium with a magenta ink including thermally decolorizable material;
 - a cyan inkjet printer head configured to form an image on the recording medium with a cyan ink including thermally decolorizable material;
 - a black inkjet printer head configured to form an image on a recording medium with a black ink including thermally decolorizable material; and

12

- a cartridge integrating the yellow inkjet printer head, the magenta inkjet printer head, the cyan inkjet printer head, and the black inkjet printer head, wherein the yellow inkjet printer head, the magenta inkjet printer head, and the cyan inkjet printer head, the black inkjet printer head are arranged in a conveyance direction of the recording medium.
- 6. The inkjet printer according to claim 5, wherein the cartridge is attachable to and removable from a main body of the inkjet printer.
- 7. The inkjet printer according to claim 5 wherein the yellow inkjet printer head, the magenta inkjet printer head, the cyan inkjet printer head, and the black inkjet printer head each have the same structure excepting for an ink stored therein.
- 8. The inkjet printer according to claim 5, wherein the black inkjet printer head is after the yellow inkjet printer head, the magenta inkjet printer head, and the cyan inkjet printer head along the conveyance direction.
- 9. An inkjet printer, comprising:
 - a main body;
 - a cartridge attachable to and removable from the main body, wherein the cartridge integrates a yellow inkjet printer head, a magenta inkjet printer head, a cyan inkjet printer head, and a black inkjet printer head, the yellow inkjet printer head is configured to form an image on a recording medium with a yellow ink including thermally decolorizable material, the magenta inkjet printer head is configured to form an image on the recording medium with a magenta ink including thermally decolorizable material, the cyan printer head is configured to form an image on the recording medium with a cyan ink including thermally decolorizable material, the black inkjet printer head is configured to form an image on a recording medium with a black ink including thermally decolorizable material, the yellow inkjet printer head, the magenta inkjet printer head, the cyan inkjet printer head, and the black inkjet printer head are arranged in a conveyance direction of the recording medium, and the black inkjet printer head is after the yellow inkjet printer head, the magenta inkjet printer head, and the cyan printer head along the conveyance direction.

* * * * *