

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
24 February 2005 (24.02.2005)

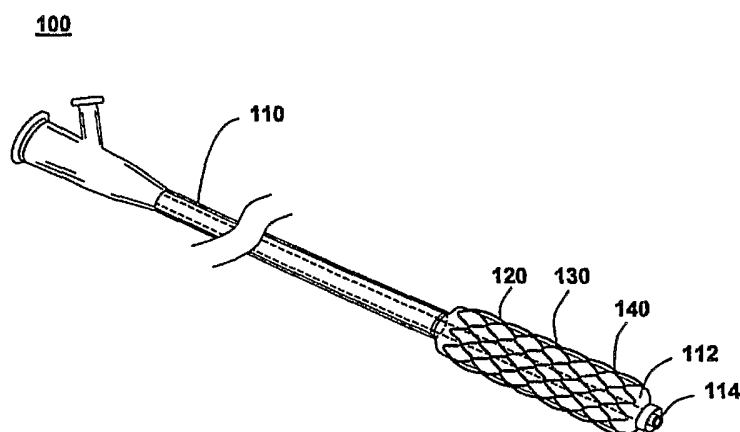
PCT

(10) International Publication Number
WO 2005/016187 A1

- (51) International Patent Classification⁷: **A61F 2/06**
- (21) International Application Number:
PCT/US2004/022139
- (22) International Filing Date: 8 July 2004 (08.07.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/485,766 9 July 2003 (09.07.2003) US
- (71) Applicant: **MEDTRONIC VASCULAR INC.** [US/US];
IP Legal Department, 3576 Unocal Place, Santa Rosa, CA
95403 (US).
- (72) Inventor: **THORNTON, Ronan**; Parkmore Business
Park West, Galway (IE).
- (74) Agent: **MARESH, Catherine**; IP Legal Department, 3576
Unocal Place, Santa Rosa, CA 95403 (US).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.
- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: LAMINATED DRUG-POLYMER COATED STENT AND METHOD THEREOF



(57) Abstract: The present invention provides a method of applying a drug-polymer coating on a stent. A stent framework is dipped into a first polymeric solution including a first polymer, a first therapeutic agent, and a first solvent. The polymeric solution is dried to form a thin drug-polymer layer on the stent framework. The stent framework with the thin drug-polymer layer, which is insoluble in the second polymeric solution, is dipped into a second polymeric solution including a second polymer and a second solvent and is dried to form a thin barrier layer on the thin drug-polymer layer. The steps of dipping the stent framework into the first polymeric solution, drying the first polymeric solution, dipping the stent framework into the second polymeric solution, and drying the second polymeric solution are repeated until a target drug-polymer coating thickness is disposed on the stent framework. A method of treating a vascular condition and a drug-polymer coated stent including a stent framework and a laminated drug-polymer coating are also disclosed.

WO 2005/016187 A1



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

LAMINATED DRUG-POLYMER COATED STENT AND METHOD THEREOF

5

FIELD OF THE INVENTION

This invention relates generally to biomedical stents. More specifically, the invention relates to a laminated drug-polymer coating disposed on an endovascular stent for *in vivo*, time-release drug delivery, and methods of coating thereof.

10

BACKGROUND OF THE INVENTION

Endovascular stents have become increasingly important in medical procedures to restore the function of bodily lumens. With generally open tubular structures, the stents typically have apertured or lattice-like walls of a metallic or polymeric base, and can be either balloon expandable or self-expanding. A stent is typically deployed by mounting the stent on a balloon portion of a balloon catheter, positioning the stent in a body lumen, and expanding the stent by inflating the balloon. The balloon is then deflated and removed, leaving the stent in place. Stents help reduce the probability and degree of vessel blockage from restenosis.

15

20

An increasing number of stents for treating vascular conditions are being coated with protective materials and bioactive drugs. A variety of stent coatings and compositions have been proposed to provide localized therapeutic pharmacological agents and treatment of a vessel at the site being supported by the stent. Stent coatings with various families of drug polymer chemistries have been used to increase the effectiveness of stenting procedures and to control drug-elution properties. For example, polymeric coatings can be made from polyurethane, polyester, polylactic acid, polyamino acid, polyorthoester, polyphosphate ester, and the like. Examples of drug or bioactive agents include antirestenotic and anti-inflammatory compounds.

25

30

Medical research indicates a greater effectiveness of vascular stents when stents are coated with pharmaceutical drugs that help prevent or treat medical conditions such as restenosis and thrombosis. These drugs may be released from a coating while in the body, delivering their patent effects at the site where they are most needed. The localized levels of the medications can be elevated, and are therefore potentially more effective than orally or intravenously delivered drugs. Furthermore, drugs released from tailored stent coatings can have controlled, timed-release qualities, eluting their bioactive agents over hours, weeks or even months. Stent coatings typically have a drug or active agent, which has been dissolved or dispersed throughout the polymeric material and physically constrained within the polymer. The sustained release of drugs generally relies upon either degradation of the polymer or diffusion through the polymer to control the elution of the compounds.

Drug polymer coatings on medical devices such as stents and catheters need to be mechanically pliant because the devices undergo significant flexion or expansion during the delivery and deployment. A stent deployed by self-expansion or balloon expansion is accompanied by a high level of bending at portions of the stent framework, which can cause cracking, flaking, peeling, or delaminating of many candidate drug polymers when the stent diameter is increased by threefold or more during expansion. In addition, any step within the process for coating a pre-deployed stent should not cause a drug-polymer to fall off, crystallize or melt. Chudzik and others disclose a flexible coating composition to address the need for pliancy in "Bioactive Agent Release Coating", U.S. Patent Number 6,344,035 issued February 5, 2002. The bioactive agent or drug is in combination with a mixture of polymers such as poly(butyl methacrylate) and poly(ethylene-co-vinyl acetate). Polymers for use as stent coatings need to demonstrate characteristics of biocompatibility, good drug release as well as flexibility.

In selecting polymers for drug delivery and applying drug coatings to stents, certain criteria must be met: polymer biocompatibility, satisfactory mechanical properties such as durability and integrity during roll down and expansion of the stent, and correct release profiles for the drugs. Candidate chemistries for drug polymers may result in excessively rapid elution of an incorporated drug. When a drug is eluted too quickly, it may be ineffective and may fail to achieve the desired effect in the surrounding tissue bed. If a drug is eluted too slowly, the pharmaceutical intent may remain unfulfilled. Furthermore, incorporation of more than one drug in the same coating can result in a much faster elution rate than a second drug in the same drug polymer, making the controlled delivery of multiple drugs difficult. Even pharmaceutical compounds with nearly the same pharmaceutical effect can have dramatically different elution rates in the same coating chemistry, depending on the formation of the compounds.

Stents can be coated with a polymer or combination of a polymer and a pharmaceutical agent or drug by application techniques such as dipping, spraying, painting, and brushing. In many of the current medical device or stent coating methods, a composition of a drug and a polymer in a solvent is applied to a device to form a substantially uniform layer of drug and polymer. A common solvent for the polymers and drugs employed is usually required, and techniques have been developed to micronize the drugs into small particles so that the drugs can be suspended in the polymer solution. Micronization can be time consuming, and may result in a degradation or loss of desired therapeutic properties of the drug. A method of using micronized drugs and layering a drug-coated stent using pharmacological and polymeric agents is described by Guruwaiya and others in U.S. Patent Number 6,251,136 issued June 26, 2001. A pharmacological agent is applied to a stent in dry, micronized form over a sticky base coating. A membrane-forming polymer, selected for its ability to allow the diffusion of the pharmacological agent therethrough, is applied over the

entire stent. More specifically, a stent, typically a metal stent, has a layer of a sticky material applied to selected surfaces of the stent. A pharmacological agent is layered on the sticky material and a membrane forming a polymer coating is applied over the pharmacological agent. The membrane is formed from a polymer that permits diffusion of the pharmacological agent over a predetermined time period.

A method of applying drug-release polymer coatings that uses solvents is described in "Method of Applying Drug-Release Coatings", Ding et al., U.S. Patent Number 5,980,972 issued November 9, 1999. A polymer is dissolved in one solvent and a drug is dissolved or suspended in a similar or different type of solvent. The solutions are applied either sequentially or simultaneously onto the devices by spraying or dipping to form a substantially homogenous composite layer of the polymer and the biologically active material.

Many of the drug-coated stents in recent years have been sprayed with rather than dipped in a drug-polymer solution. Spray coating, a currently preferred method for coating stents, can result in a significant amount of spray lost during the process and when expensive drugs are used in these coatings, the use of spray coating may be costly.

Dip coating was used with early stents and other medical-device designs that were of relatively open construction fabricated from wires or from ribbons. Dipped coatings with relatively low coating weights, for example, coatings with about 4% polymer, were used with some occurrences of bridging or webbing of the coating in the open spaces or slots between the structural members of the device. Such coating was performed by manually dipping the stent in a liquid, and then removing the stent and drying it. The dipping process requires care to avoid excess liquid on the stent framework or inconsistent drying of the liquid, otherwise the apertures can become blocked unnecessarily. Applying a thick coating tends to exacerbate webbing and bridging problems, and increasing the

solids content of the coating solution also increases webbing and bridging between the struts. Any coating method needs to avoid webbing, as well as control the weight and thickness of a coating.

5 Problems of webbing and having excess coating material on stent struts are recognized by those skilled in the art of manufacturing stents. For example, a manual-dipping process step that blows excess material off the open framework of a tubular stent is disclosed in "Coating" by Taylor et al., U.S. Patent Number 6,214,115 issued April 10, 2001. The process addresses
10 the problems of inconsistent drying and blockage of openings. Another dipping process that addresses the issues of blockage and bridging between the stent struts is disclosed by Hossainy and others in "Process for Coating Stents", U.S. Patent Number 6,153,252 issued November 28, 2000. Flow or movement of the coating fluid through the openings in the perforated medical
15 device is used to avoid the formation of blockages or bridges. The flow system may use a perforated manifold inserted in the stent to circulate the coating fluid, or may place the stent on a mandrel or in a small tube that is moved relative to the stent during the coating process.

 Newer stents that are of less open construction, such as catheter-
20 deployed, self-expanding stents are more difficult to coat evenly using a dipping method. Nevertheless, one advantage of dip coating is the ability to process a greater number of stents in a more efficient manufacturing process.

 A stent with a single coating of least one therapeutic agent is described by Sirhan and Yan in "Delivery of Therapeutic Capable Agents", U.S. Patent
25 Application Number 20020082679 published June 27, 2002. Barry and others describe another polymer composition that can be used for delivering substantially water-insoluble drugs in "Loading and Release of Water-Insoluble Drugs", U.S. Patent Number 6,306,166 issued October 23, 2001. A medical device is coated with one or more layers of a volatile organic solution
30 comprising a polyvinyl aromatic polymer and an antineoplastic chemotherapy drug such as

paclitaxel. In the descriptions of the forementioned coatings, dipping is given as one of the methods for applying the drug-polymer coating to the device, although the disclosures do not address the potential problem of webbing or
5 bridging in the open areas of stent structures, particularly when multiple coats are applied.

Jayaraman proposes a solution to the webbing or bridging issue in "Process for Coating a Surface of a Stent", U.S. Patent Number 6,517,889 issued February 11, 2003. The coating process includes inserting a thread
10 through the lumen of the stent and producing relative motion between the stent and the thread to remove coating material located within the openings of the stent.

Multiple dips can be used to build up the weight and thickness of the coating, but each subsequent dip may affect the coating already deposited. A
15 coating can re-dissolve in a second coating solution, causing some loss of the first layer of coating. Also, applications of multiple dip coats from low concentration solutions can have the effect of reaching a limiting loading level as equilibrium is reached between the solution concentration and the amount of coating with or without a pharmaceutical agent. One such method that
20 applies a plurality of relatively thin coatings on an open-lattice stent is disclosed in "Drug Release Stent Coating", Ding et al., U.S. Patent Number 6,358,556 issued March 19, 2002. The stents are coated by dipping or preferably spraying the stent with a solvent mixture of uncured polymeric silicone material with a crosslinker and a finely divided biologically active
25 species. The method includes a step for sterilizing with an inert argon gas plasma and exposure to gamma radiation. Potential problems with bridging or webbing in the lattice framework are not addressed.

Accordingly, what is needed is a more efficient manufacturing method for coating medical devices such as stents that can apply drug-polymer
30 coatings without creating undesirable bridging or webbing. An improved process provides coatings that are well adhered and flexible, as well as controls coating properties such as thickness, porosity, and smoothness. An improved stent with one or more drug-polymer coatings maintains mechanical

integrity during its deployment, provides a desired elution rate for one or more drugs, and overcomes the deficiencies and limitations described above.

SUMMARY OF THE INVENTION

5 One aspect of the invention provides a method of applying a drug-polymer coating on a stent. A stent framework is dipped into a first polymeric solution comprising a first polymer, a first therapeutic agent, and a first solvent. The first polymeric solution is dried to form a thin drug-polymer layer on the stent framework. The stent framework including the thin drug-polymer
10 layer is dipped into a second polymeric solution comprising a second polymer and a second solvent. The second polymeric solution is dried to form a thin barrier layer on the thin drug-polymer layer. The thin drug-polymer layer is insoluble in the second polymeric solution. The dipping and drying steps are repeated until a target drug-polymer coating thickness is disposed on the
15 stent framework.

 Another aspect of the invention provides a drug-polymer coated stent including a stent framework and a laminated drug-polymer coating disposed on the stent framework. The laminated drug-polymer coating includes a plurality of thin drug-polymer layers positioned between thin barrier layers.
20 The thin drug-polymer layers include a first therapeutic agent and a first polymer. The thin barrier layers include a second polymer.

 Another aspect of the invention is a system for treating a vascular condition, including a catheter and a coated stent coupled to the catheter. The coated stent includes a stent framework and a laminated drug-polymer
25 coating disposed on the stent framework. The laminated drug-polymer coating has a plurality of thin drug-polymer layers including a first therapeutic agent and a first polymer positioned between thin barrier layers that include a second polymer.

 Another aspect of the invention is a method of treating a vascular
30 condition. A drug-polymer coated stent, which is inserted within a vessel of a body, includes a laminated drug-polymer coating having thin drug-polymer layers with a therapeutic agent and a first polymer, and thin barrier layers with a second polymer. At least one therapeutic agent is eluted from the laminated drug-polymer coating into the body.

The present invention is illustrated by the accompanying drawings of various embodiments and the detailed description given below. The drawings should not be taken to limit the invention to the specific embodiments, but are for explanation and understanding. The detailed description and drawings are
5 merely illustrative of the invention rather than limiting, the scope of the invention being defined by the appended claims and equivalents thereof. The foregoing aspects and other attendant advantages of the present invention will become more readily appreciated by the detailed description taken in conjunction with the accompanying drawings.

10

BRIEF DESCRIPTION OF THE DRAWINGS

Various embodiments of the present invention are illustrated by the accompanying figures, wherein:

FIG. 1 is an illustration of a system for treating a vascular condition including a drug-polymer coated stent coupled to a catheter, in accordance
15 with one embodiment of the current invention;

FIG. 2 is a cross-sectional perspective view of a drug-polymer coated stent, in accordance with one embodiment of the current invention;

FIG. 3 is an illustration of a system for applying a drug-polymer coating
20 on a stent, in accordance with one embodiment of the current invention;

FIG. 4 is a graph of drug concentration in a laminated drug-polymer coated stent, in accordance with one embodiment of the current invention;

FIG. 5 is a graph of drug elution rate from a drug-polymer coated stent, in accordance with one embodiment of the current invention;

FIG. 6 is a flow diagram of a method of applying a drug-polymer coating on a stent, in accordance with one embodiment of the current
25 invention; and

FIG. 7 is a flow diagram of a method for treating a vascular condition, in accordance with one embodiment of the current invention.

30

DETAILED DESCRIPTION OF THE
PRESENTLY PREFERRED EMBODIMENTS

FIG. 1 shows an illustration of a system for treating a vascular
5 condition, comprising a drug-polymer coated stent coupled to a catheter, in
accordance with one embodiment of the present invention at **100**. Coated
stent with catheter **100** includes a drug-polymer coated stent **120** coupled to a
delivery catheter **110**. Drug-polymer coated stent **120** includes a stent
framework **130** and a laminated drug-polymer coating **140** disposed on the
10 stent framework. Laminated drug-polymer coating **140** includes a plurality of
thin drug-polymer layers positioned between thin barrier layers. The drug-
polymer layers include a therapeutic agent and a first polymer. The barrier
layers include a second polymer.

Insertion of coated stent **120** into a vessel in the body helps treat, for
15 example, heart disease, various cardiovascular ailments, and other vascular
conditions. Catheter-deployed coated stent **120** typically is used to treat one
or more blockages, occlusions, stenoses, or diseased regions in the coronary
artery, femoral artery, peripheral arteries, and other arteries in the body.
Treatment of vascular conditions may include the prevention or correction of
20 various ailments and deficiencies associated with the cardiovascular system,
the cerebrovascular system, urinogenital systems, biliary conduits, abdominal
passageways and other biological vessels within the body.

An exemplary laminated drug-polymer coating **140** includes or
encapsulates one or more therapeutic agents. Laminated drug-polymer
25 coating **140** may comprise one or more therapeutic agents dispersed within or
encased by drug-polymer layers or barrier layers on coated stent **120**, which
are eluted from coated stent **120** with controlled time delivery after
deployment of coated stent **120** into the body. A therapeutic agent is capable
of producing a beneficial effect against one or more conditions including
30 coronary restenosis, cardiovascular restenosis, angiographic restenosis,
arteriosclerosis, hyperplasia, and other diseases or conditions. For example,
the therapeutic agent can be

selected to inhibit or prevent vascular restenosis, a condition corresponding to a narrowing or constriction of the diameter of the bodily lumen where the stent is placed. Laminated drug-polymer coating **140** may comprise, for example, 5 an antirestenotic agent such as rapamycin, a rapamycin analogue, or a rapamycin derivative to prevent or reduce the recurrence of narrowing and blockage of the bodily vessel. Laminated drug-polymer coating **140** may comprise an anti-cancer drug such as camptothecin or other topoisomerase inhibitors, an antisense agent, an antineoplastic agent, an antiproliferative 10 agent, an antithrombogenic agent, an anticoagulant, an antiplatelet agent, an antibiotic, an anti-inflammatory agent, a steroid, a gene therapy agent, an organic drug, a pharmaceutical compound, a recombinant DNA product, a recombinant RNA product, a collagen, a collagenic derivative, a protein, a protein analog, a saccharide, a saccharide derivative, a bioactive agent, a 15 pharmaceutical drug, a therapeutic substance, or a combination thereof.

The elution rates of the therapeutic agents and total drug eluted into the body and the tissue bed surrounding the stent framework are based on the target thickness of laminated drug-polymer coating **140**, the constituency and individual layer thicknesses of laminated drug-polymer coating **140**, the 20 nature and concentration of the therapeutic agents, the thickness and composition of any cap coat, and other factors. Laminated drug-polymer coating **140** may include and elute multiple therapeutic agents to achieve the desired therapeutic effect. Laminated drug-polymer coating **140** can be tailored to control the elution of one or more therapeutic agents primarily by 25 diffusion processes. In some cases, a portion of the polymeric coating is absorbed into the body, releasing therapeutic agents from within the coating. The barrier layers can be selected to provide a diffusion barrier to the therapeutic agents and slow drug elution.

Incorporation of a drug or other therapeutic agent into laminated drug-polymer coating **140** allows, for example, the rapid delivery of a pharmacologically active drug or bioactive agent within twenty-four hours following the deployment of a stent, with a slower, steady delivery of a second bioactive agent over the next three to six months. For example, a first therapeutic agent may comprise an antirestenotic drug such as rapamycin, a rapamycin analogue, or a rapamycin derivative. The second therapeutic agent may comprise, for example, an anti-cancer drug such as camptothecin or other topoisomerase inhibitors. The therapeutic agent constituency in the drug-polymer layers may be, for example, between 0.1 percent and 50 percent of the drug-polymer layer by weight.

Catheter **110** of an exemplary embodiment of the present invention includes a balloon **112** that expands and deploys the stent within a vessel of the body. After positioning coated stent **120** within the vessel with the assistance of a guide wire traversing through a guidewire lumen **114** inside catheter **110**, balloon **112** is inflated by pressurizing a fluid such as a contrast fluid that fills a tube inside catheter **110** and balloon **112**. Coated stent **120** is expanded until a desired diameter is reached, and then the contrast fluid is depressurized or pumped out, separating balloon **112** from coated stent **120** and leaving coated stent **120** deployed in the vessel of the body. Alternately, catheter **110** may include a sheath that retracts to allow expansion of a self-expanding version of coated stent **120**.

FIG. 2 shows a cross-sectional perspective view of a drug-polymer coated stent, in accordance with one embodiment of the present invention at **200**. A drug-polymer coated stent **220** includes a stent framework **230** with a laminated drug-polymer coating **240** disposed on stent framework **230**. Laminated drug-polymer coating **240** includes a plurality of thin drug-polymer layers **242** and **246** that are positioned between thin barrier layers **244** and **248**. Drug-polymer layers **242** and **246** include a combination or mixture of a first therapeutic agent and a first polymer, and barrier layers **244** and **248** include a second polymer.

Although illustrated with two sets of drug-polymer layers and barrier layers, multiple sets of coating layers may be disposed on stent framework **230**. For example, ten sets of layers, each layer on the order of 0.1 micrometers thick, can be alternately disposed on stent framework **230** to produce a two-micrometer thick coating. In another example, 20 sets of layers, each layer on the order of 0.5 micrometers thick, can be alternately disposed on stent framework **230** to produce a twenty-micrometer thick coating. The drug-polymer layers and the barrier layers need not be the same thickness, and the thickness of each may be varied throughout laminated drug-polymer coating **240**. Alternately, the first coating layer may be a barrier layer, and the final coating layer may comprise, for example, a thick cap coat.

Stent framework **230** comprises a metallic base or a polymeric base, such as stainless steel, nitinol, tantalum, MP35N alloy, platinum, titanium, a chromium-based alloy, a suitable biocompatible alloy, a suitable biocompatible material, a biocompatible polymer, or a combination thereof. The polymeric base material may comprise any suitable polymer for biomedical stent applications, as is known in the art.

In one embodiment, drug-polymer layers **242** and **246** comprise a first polymer such as poly(ethylene-vinyl acetate) (PEVA) and a first therapeutic agent such as camptothecin, rapamycin, a rapamycin derivative, or a rapamycin analogue. Barrier layers **244** and **248** comprise a second polymer such as polyurethane, polycaprolactone, or a blended polymer of polyurethane and polycaprolactone that can be selected based on a predetermined elution rate. For example, tailoring the fraction of the two polymers, the thickness of the drug-polymer layers and the barrier layers, or the concentration of the therapeutic agents controls the elution rate of one or more therapeutic agents dispersed within or encased by laminated drug-polymer coating **240**. Drug elution refers to the transfer of a therapeutic agent from laminated drug-polymer coating **240** to the surrounding area in a body. The amount of drug eluted is determined as the

total amount of therapeutic agent excreted out of laminated drug-polymer coating **240**, typically measured in units of weight such as micrograms, or in weight per peripheral area of the stent. In another embodiment, barrier layers **244** and **248** include a second therapeutic agent such as camptothecin. In another embodiment, the concentration of the therapeutic agents in either drug-polymer layers **242** and **246** or barrier layers **244** and **248** are modulated to provide a predetermined drug-release profile. The concentration of the second therapeutic agent in barrier layers **244** and **248** may be between, for example, 0.1 percent and 20 percent by weight.

FIG. 3 shows an illustration of a system for applying a drug-polymer coating on a stent, in accordance with one embodiment of the current invention at **300**. Drug-polymer coating system **300** includes a first polymeric solution **350** in a first tank **352**, a second polymeric solution **360** in a second tank **362**, and a mechanism **322** such as a mandrel, a clamp, or a tether for holding and transporting stents in and out of a tank either manually or automatically. Multiple stent frameworks **330** are readily accommodated for dipping and drying in a batch or continuous batch process.

First polymeric solution **350** includes a first polymer **354**, a first therapeutic agent **356**, and a first solvent **358**. A stent framework **330** can be dipped into first polymeric solution **350** and dried, for example, by positioning the dipped stent framework **330** in air or in an oven and evaporating first solvent **358** to form a thin drug-polymer layer. Minimizing the solids content of first polymeric solution **350** can lower the viscosity, so that uniform coating and minimal or no bridging occurs across the apertures of stent framework **330**.

Second polymeric solution **360** includes a second polymer **364** and a second solvent **368**. Stent framework **330** with the first laminated drug-polymer layer can be dipped into a second polymeric solution **360** and dried, for example, by positioning dipped stent framework **330** in an oven or in air for high throughput and evaporating second solvent **368** to form a thin barrier layer. Second polymeric solution **360** may include a second therapeutic agent **366** dissolved into second solvent **368**. Low viscosity for minimizing bridging

and webbing across the apertures of stent framework **330** can be obtained by minimizing the solids content of second polymeric solution **360**.

A third polymeric solution **370** in a third tank **372** with a third polymer **374** and a third solvent **378** may be included with drug-polymer coating system **300**. Third polymeric solution **370** may include a third therapeutic agent **376** dissolved in third solvent **378**. In one example, third polymer **374** is the same as first polymer **354**, third solvent **378** is the same as first solvent **358**, and a third therapeutic agent **376** is the same as first therapeutic agent **356**, though at a higher or a lower concentration than first therapeutic agent **356** in first polymeric solution **350**. In this case, the concentration of third therapeutic agent **376** disposed on stent framework **330** can be higher or lower than previously dipped and dried drug-polymer layers. The concentration of first therapeutic agent **356** in the drug-polymer layers can be modulated to provide a predetermined drug-release profile.

In another example, third polymer **374** is the same as second polymer **364**, third solvent **378** the same as second solvent **368**, and a third therapeutic agent **376** is the same as second therapeutic agent **366** though at a higher or a lower concentration than second therapeutic agent **366** in second polymeric solution **360**. The concentration of third therapeutic agent **376** disposed on stent framework **330** can be higher or lower than previously dipped and dried barrier layers, so that the concentration of second therapeutic agent **366** in the barrier layers can be modulated to provide a predetermined drug-release profile for second therapeutic agent **366** from a coated stent when deployed in a body.

In other examples, the concentrations of third polymer **374** in third polymeric solution **370** can be varied to adjust the viscosity, solids content, and subsequent thickness of drug-polymer layers or barrier layers within a drug-polymer coated stent, so that a predetermined drug-release profile of one or more therapeutic agents in the drug-polymer layers or the barrier layers can be provided.

FIG. 4 shows a graph of drug concentration in a laminated drug-polymer coated stent, in accordance with one embodiment of the present invention at **400**. An exemplary coated stent has a laminated drug-polymer coating with a plurality of thin drug-polymer layers positioned between thin

barrier layers. The drug-polymer layers include a therapeutic agent and a first polymer, and the barrier layers include a second polymer. The barrier layers may include a second therapeutic agent.

5 The laminated drug-polymer coatings on the coated stent elute at least one therapeutic agent. Alternatively, the laminated drug-polymer coating may include and elute multiple therapeutic agents. The thickness of the individual layers, the types of polymers selected, and the concentration of the therapeutic agents, among other factors, can be tailored to control the elution of one or more therapeutic agents from the coated stent. Elution of
10 therapeutic agents occurs primarily by diffusion processes. In some cases, a portion of the laminated drug-polymer coating is absorbed into the body to release the therapeutic agents. In other cases, a portion of polymeric coating erodes away to release the therapeutic agents.

In this exemplary embodiment, a plurality of drug-polymer layers **480**,
15 **482** and **484** include a first therapeutic agent with a modulated concentration to provide a predetermined drug-release profile, and a plurality of thin barrier layers **490**, **492** and **494** include a second therapeutic agent with a modulated concentration. Drug-polymer layers close to the stent framework, in this example, have a higher concentration of the first therapeutic agent than drug-polymer layers near the outside of the laminated drug-polymer coating.
20 Barrier layers close to the stent framework have a lower concentration of the second therapeutic agent than barrier layers near the outside of the laminated drug-polymer coating. In another embodiment, the barrier layers contain no therapeutic agents. In other embodiments, the concentrations of the first
25 therapeutic agents and the second therapeutics along with the thickness of the drug-polymer layers and the barrier layers are varied to achieve a predetermined drug-release profile for each of the therapeutic agents.

FIG. 5 shows a graph of drug elution rate from a drug-polymer coated stent, in accordance with one embodiment of the present invention at **500**.
30 Drug elution rate graph **500** shows a characteristic curve **586** representing the elution of a first therapeutic agent into the body after the coated stent is deployed. After deployment into the body, the first therapeutic agent is eluted from the laminated drug-polymer coating in a predetermined profile, with a small amount of the first therapeutic agent released within the first several

days, and increasing to a higher delivery rate in a following period of weeks or months until the therapeutic agent is completely eluted. The elution rate may be determined from a graph that represents the total drug eluted by taking the derivative with respect to time, or by dividing the amount of drug eluted over a
5 specified time interval by the elapsed time.

Drug elution rate graph **500** also shows a characteristic curve **596** representing the elution of a second therapeutic agent into the body. After deployment into the body, the second therapeutic agent is eluted from the laminated drug-polymer coating in a predetermined profile, with a large
10 amount of the second therapeutic agent released within the first few hours and days, and then the rate of release rapidly falling off after that.

An elution rate for each therapeutic agent can be predetermined by a careful selection of the concentration of each therapeutic agent in the thin drug-polymer layers and the thin barrier layers; the thickness of the individual
15 drug-polymer layers and the barrier layers; the polymers and polymeric blend in the drug-polymer layers and the barrier layers; and the total number of layers.

FIG. 6 shows a flow diagram of a method of applying a drug-polymer coating on a stent, in accordance with one embodiment of the present
20 invention at **600**. Drug-polymer application method **600** includes various steps to form a laminated drug-polymer coating on a stent framework, and to provide a predetermined drug-release profile when the coated stent is deployed in the body.

A stent framework is cleaned, as seen at block **605**. The stent
25 framework may be cleaned, for example, by inserting the stent framework into various solvents, degreasers and cleansers to remove any debris, residues, or unwanted materials from the surface of the stent framework. The stent framework is dried, and generally inspected at this point in the process.

After cleaning, a primer coating may be disposed on the stent
30 framework, particularly to metallic stent frameworks such as stainless steel, assisting in the adhesion of the laminated drug-polymer coating to the stent framework. The primer coating may include, for example, the application of a suitable primer layer such as parylene, polyurethane, phenoxy, epoxy, polyimide, polysulfone, or pellathane. The primer coating may be applied to

the stent framework by dipping, spraying, painting, brushing, or other suitable methods. The primer coating is dried and cured or cross-linked as needed for eliminating or removing any volatile components. Excess liquid may be blown off prior to drying the primer coating, which may be done at room temperature or elevated temperatures under a dry nitrogen or other suitable environments including a vacuum environment.

The stent framework is dipped into a first polymeric solution, as seen at block 610. The first polymeric solution comprises a first polymer, a first therapeutic agent, and a first solvent. One or more therapeutic agents may be mixed with the first polymeric solution prior to its application onto the stent framework. The mixture can be created by adding the therapeutic agents directly into the first polymeric solution. Alternatively, the mixtures can be created by dissolving the therapeutic agents in a therapeutic agent solution comprising a suitable solvent, and then adding and mixing them with the polymeric solution. For example, the first polymer of poly(ethylene-vinyl acetate) (PEVA), and the first therapeutic agent of camptothecin are dissolved in a first solvent that includes a mixture of chloroform and methanol. The camptothecin is dissolvable in other solvents such as a mixture of ethanol, chloroform and methanol. The first polymeric solution may comprise, for example, between 0.05% and 1.0% or more total solids by weight of the first polymer, selected to provide a low-viscosity solution so that very thin layers of the polymer and therapeutic agent may be disposed on the stent framework that can avoid webbing and bridging between the openings in the stent framework. In another example, the first therapeutic agent comprises rapamycin, a rapamycin derivative, or a rapamycin analogue. In a currently preferred embodiment, the solvent has a chloroform concentration between 80 percent and 90 percent, with methanol comprising the balance. The rapamycin and associated compounds are soluble in other solvents, such as acetones, heptanes, methyl tertiary-butyl ether (MTBE), methylene chloride (MEC), tetrahydrofuran (THF), and isopropyl alcohol.

The first polymeric solution is dried to form a thin drug-polymer layer on the stent framework, as seen at block **615**. The dipped stent framework may be dried, for example, by positioning the dipped stent framework in air after
5 dipping the stent framework into the first polymeric solution, and evaporating the first solvent prior to dipping the stent framework in the next polymeric solution. The first polymeric solution is generally dried after application by evaporating off the solvent at room temperature and under ambient conditions. A nitrogen environment or other controlled environment may also
10 be used for drying. Alternatively, the first polymeric solution can be dried by evaporating the majority of the solvent at room temperature, and then further dried in a vacuum environment between, for example, a room temperature of about 25 degrees centigrade and 45 degrees centigrade or higher to extract any pockets of solvent buried within the drug-polymer layer.

15 The stent framework including the drug-polymer layer is dipped into a second polymeric solution, as seen at block **620**. The second polymeric solution includes a second polymer and a second solvent, the second solvent selected so that the drug-polymer layer dried on the stent framework is insoluble in the second polymeric solution. The polymers and therapeutic
20 agents in the drug-polymer layers and the thin barrier layers may be selected to be marginally soluble or insoluble in the respective solvents that are used.

The second polymer may be selected, for example, with a low glass temperature and a low affinity for the drugs or therapeutic agents in the drug-polymer layer. The second polymeric solution may comprise, for example,
25 between 0.05% and 1.0% or more total solids by weight of the second polymer, selected to provide a low-viscosity solution so that thin barrier layers of the second polymer may be disposed on the stent framework. The stent framework with the first drug-polymer layer can be dipped into the second polymer solution without impacting the content of the initial layer. In one
30 example, the second polymer comprises polyurethane. In another example, the second polymer

comprises polycaprolactone. In another example, the second polymer comprises a blended polymer of polyurethane and polycaprolactone. The second solvent comprises, for example, tetrahydrofuran. The second
5 polymeric solution may comprise a second therapeutic agent such as camptothecin mixed into or added to the second polymeric solution.

The second polymeric solution is dried to form a thin barrier layer on the stent framework, as seen at block **625**. The barrier layer is substantially insoluble in the first polymeric solution, so that when subsequent layers of
10 drug-polymer layers are formed on the stent framework, underlying barrier layers are neither dissolved nor eroded away. The barrier layer may be selected to provide a diffusion barrier to the drug in the drug-polymer layer and slow down drug elution.

After the stent framework has been dipped into the second polymeric
15 solution, the second polymeric solution may be dried, for example, in an oven at an elevated temperature, or by positioning the dipped stent framework in air at room temperature, and evaporating the second solvent prior to dipping the framework into the next polymeric solution.

The steps of dipping the stent framework into the first polymeric
20 solution, drying the first polymeric solution, dipping the stent framework into the second polymeric solution, and drying the second polymeric solution are repeated until a target drug-polymer coating thickness is disposed on the stent framework, as seen at block **630**. Multiple dipping and drying steps are used to provide an appropriate coating weight and avoid webbing or bridging
25 of the apertures between the struts in the stent framework. Repeatedly applying thin drug-barrier layers and thin barrier layers allows for uniform, defect-free dip-coated items. The concentration of the first therapeutic agent in the first polymeric solution may be changed between the dipping and drying steps to modulate the concentration of the first therapeutic agent in the drug-
30 polymer layers and provide a predetermined drug-release profile. The concentration of the second therapeutic

agent in the second polymeric solution, when used, may also be changed between dipping and drying steps, providing a different concentration of the second therapeutic agent in the barrier layers and providing a predetermined drug-release profile. Different drug concentrations in the drug-polymer layers can be selected to provide a tailored elution curve, and the barrier layers may help to preserve and prolong the elution of the drugs. The chosen composition of the thin barrier layers can be highly permeable to one or more of the therapeutic agents. For example, a second polymer with a lower or higher glass transition temperature than the first polymer may be selected to control the elution rate.

The coated stent with the laminated drug-polymer coating may be cross-linked and sterilized as needed, as seen at block 635. Cross-linking may be done by providing additional drying cycles in air, or by heating the coated stent above a curing temperature in an oven with a controlled ambient such as vacuum, nitrogen, or air. Sterilization may employ, for example, gamma-ray irradiation, e-beam radiation, ethylene oxide gas, or hydrogen peroxide gas plasma sterilization techniques. With appropriate selection of the barrier layer polymer, for example, selective cross-linking of the barrier layer polymer may occur during sterilization while the drug-polymer layer remains unaffected. The coated stent may be packaged, shipped, and stored in a suitable package until it is used.

A delivery catheter may be coupled to the coated stent, as seen at block 640. The delivery catheter may include an inflatable balloon that is positioned between the coated stent and the catheter and used for deploying the coated stent in the body. Alternatively, the delivery catheter may include a sheath that retracts to deploy a self-expanding version of the coated stent.

In one exemplary method, fully processed coated stents are reduced in diameter and placed into the distal end of the catheter to form an interference fit, which secures the stent onto the catheter. The catheter with the stent may be placed in a catheter package and sterilized prior to shipping and storing. Before clinical use, the stent is sterilized by any appropriate or medically conventional means.

Alternative ordering of process steps or variants of the method for applying a drug-polymer coating on a stent can be employed. For example, a barrier layer can be applied to the stent framework before a drug-polymer layer by dipping the framework into the second polymeric solution before
5 dipping it into the first polymeric solution, which contains one or more of the therapeutic agents. Other embodiments of the present invention include switching the order of the drug-polymer layers and the barrier layers, dipping multiple times into the same bath to thicken the layer, dipping the coated stent into additional baths with adjusted concentrations of therapeutic agents to
10 achieve a desired elution profile, and adjusting the temperature of each bath.

FIG. 7 shows a flow diagram of a method for treating a vascular condition, in accordance with one embodiment of the present invention at **700**. Vascular condition treatment method **700** includes steps to insert a drug-polymer coated stent within a vessel of a body and to elute at least one
15 therapeutic agent from the drug-polymer coated stent into the body. One or more therapeutic agents are included or interdispersed within thin drug-polymer layers and thin barrier layers of the laminated drug-polymer stent coating.

The first and second polymers and their respective concentrations are
20 selected based on a predetermined elution rate of each therapeutic agent, as seen at block **710**. The solvents and concentrations of polymers and therapeutic agents are also selected to prevent dissolution of dried polymers and drugs of previously applied layers with subsequent dipping and drying of additional drug-polymer layers and barrier layers. The fractional
25 constituencies of the polymers and therapeutic agents are selected to achieve an intended pharmaceutical intent, such as a predetermined elution rate for one or more therapeutic agents within the laminated drug-polymer coating. One or more therapeutic agents are included in the drug-polymer layers, and one or more therapeutic agents may be included in the barrier layers. The
30 laminated drug-polymer layers and barrier layers are selected to control the elution rate of each therapeutic agent and the total quantity of each drug delivered.

A coated stent with a laminated drug-polymer coating is fabricated by using selected polymers, therapeutic agents, solvents and concentrations

thereof, as seen at block **720**. The laminated drug-polymer coating has a plurality of thin drug-polymer layers positioned between thin barrier layers. The drug-polymer layers include a therapeutic agent and a first polymer, and the thin barrier layers include a second polymer. A primer coating may be
5 included to improve the adhesion between the stent framework and the coating layers.

When ready for deployment, the drug-polymer coated stent with the selected polymers, therapeutic agents, solvents and concentrations is inserted into a vessel of the body, as seen at block **730**. The drug-polymer
10 coated stent is inserted typically in a controlled environment such as a catheter lab or hospital. A delivery catheter, which helps position the drug-polymer coated stent in a vessel of the body, is typically inserted through a small incision of the leg and into the femoral artery, and directed through the vascular system to a desired place in the vessel. Guide wires threaded
15 through an inner lumen of the delivery catheter assist in positioning and orienting the drug-polymer coated stent. The position of the drug-polymer coated stent may be monitored, for example, with a fluoroscopic imaging system or an x-ray viewing system in conjunction with radiopaque markers on the coated stent, radiopaque markers on the delivery catheter, or contrast
20 fluid injected into an inner lumen of the delivery catheter and into an inflatable catheter balloon that is coupled to the drug-polymer coated stent. The stent is deployed, for example, by expanding the stent with a balloon or by extracting a sheath that allows a self-expandable stent to enlarge after positioning the stent at a desired location within the body. Prior to deployment, sterilization of
25 the stent using conventional means is completed before clinical use.

Once deployed, the therapeutic agents in the laminated drug-polymer coating are eluted, as seen at block **740**. The elution rates of the selected therapeutic agents into the body and the tissue bed surrounding the stent framework are based on the polymers, thickness of the drug-polymer layers
30 and barrier layers, and the concentration of the therapeutic agents contained therein, among other factors.

Although the present invention applies to cardiovascular and endovascular stents with timed-release therapeutic agents, the use of laminated drug-polymer coatings may be applied to other implantable and

blood-contacting biomedical devices such as coated pacemaker leads, microdelivery pumps, feeding and delivery catheters, heart valves, artificial livers and other artificial organs.

While the embodiments of the invention disclosed herein are presently
5 considered to be preferred, various changes and modifications can be made without departing from the spirit and scope of the invention. The scope of the invention is indicated in the appended claims, and all changes that come within the meaning and range of equivalents are intended to be embraced therein.

10

CLAIMS

What is claimed is:

1. A method of applying a drug-polymer coating on a stent, comprising:
dipping a stent framework into a first polymeric solution, wherein the first polymeric solution comprises a first polymer, a first therapeutic agent, and a first solvent;
drying the first polymeric solution to form a thin drug-polymer layer on the stent framework;
dipping the stent framework including the thin drug-polymer layer into a second polymeric solution, wherein the second polymeric solution comprises a second polymer and a second solvent, and wherein the thin drug-polymer layer is insoluble in the second polymeric solution;
drying the second polymeric solution to form a thin barrier layer on the first thin drug-polymer layer; and
repeating the steps of dipping the stent framework into the first polymeric solution, drying the first polymeric solution, dipping the stent framework into the second polymeric solution, and drying the second polymeric solution until a target drug-polymer coating thickness is disposed on the stent framework.
2. The method of claim 1 wherein the first polymer comprises poly(ethylene-vinyl acetate).
3. The method of claim 1 wherein the first polymeric solution comprises between 0.05% and 1.0% total solids by weight of the first polymer.
4. The method of claim 1 wherein the first therapeutic agent comprises camptothecin.
5. The method of claim 1 wherein the first therapeutic agent comprises one of rapamycin, a rapamycin derivative, or a rapamycin analogue.

6. The method of claim 1 wherein the first solvent comprises a mixture of chloroform and methanol.
7. The method of claim 6 wherein the first solvent comprises chloroform with a concentration between 80 percent and 90 percent.
8. The method of claim 1 wherein the second polymer comprises one of polyurethane, polycaprolactone, or a blended polymer of polyurethane and polycaprolactone.
9. The method of claim 1 wherein the second solvent comprises tetrahydrofuran.
10. The method of claim 1 wherein the second polymeric solution comprises a second therapeutic agent.
11. The method of claim 10 wherein the second therapeutic agent comprises camptothecin.
12. The method of claim 1 wherein the thin barrier layer is insoluble in the first polymeric solution.
13. The method of claim 1 wherein drying the first polymeric solution comprises positioning the dipped stent framework in air after dipping the stent framework into the first polymeric solution, and evaporating the first solvent.
14. The method of claim 1 wherein drying the second polymeric solution comprises positioning the dipped stent framework in air after dipping the stent framework into the second polymeric solution, and evaporating the second solvent

15. The method of claim 1 further comprising:
modulating a concentration of the first therapeutic agent in the thin drug-polymer layers to provide a predetermined drug-release profile.
16. A drug-polymer coated stent, comprising:
a stent framework; and
a laminated drug-polymer coating disposed on the stent framework, the laminated drug-polymer coating including a plurality of thin drug-polymer layers positioned between thin barrier layers, wherein the thin drug-polymer layers include a first therapeutic agent and a first polymer, and wherein the thin barrier layers include a second polymer.
17. The stent of claim 16 wherein the stent framework comprises one of a metallic base or a polymeric base.
18. The stent of claim 16 wherein the stent framework comprises a material selected from the group consisting of stainless steel, nitinol, tantalum, MP35N alloy, platinum, titanium, a chromium-based alloy, a suitable biocompatible alloy, a suitable biocompatible material, a biocompatible polymer, and a combination thereof.
19. The stent of claim 16 wherein the first polymer comprises poly(ethylene-vinyl acetate).
20. The stent of claim 16 wherein the first therapeutic agent is selected from the group consisting of camptothecin, rapamycin, a rapamycin derivative, and a rapamycin analogue.
21. The stent of claim 16 wherein the second polymer comprises one of polyurethane, polycaprolactone, or a blended polymer of polyurethane and polycaprolactone.
22. The stent of claim 16, wherein the thin barrier layers include a second therapeutic agent.

23. The stent of claim 22, wherein the second therapeutic agent comprises camptothecin.
24. The stent of claim 16, wherein a concentration of the first therapeutic agent is modulated to provide a predetermined drug-release profile.
25. A system for treating a vascular condition, comprising:
a catheter; and
a coated stent coupled to the catheter, the coated stent including a stent framework and a laminated drug-polymer coating disposed on the stent framework, the laminated drug-polymer coating having a plurality of thin drug-polymer layers positioned between thin barrier layers, wherein the thin drug-polymer layers include a first therapeutic agent and a first polymer, and wherein the thin barrier layers include a second polymer.
26. The system of claim 25 wherein the catheter includes a balloon to expand the stent.
27. The system of claim 25, wherein the catheter includes a sheath that retracts to allow expansion of the stent.
28. The system of claim 25 wherein the stent framework comprises one of a metallic base or a polymeric base.
29. The system of claim 25 wherein the stent framework comprises a material selected from the group consisting of stainless steel, nitinol, tantalum, MP35N alloy, platinum, titanium, a chromium-based alloy, a suitable biocompatible alloy, a suitable biocompatible material, a biocompatible polymer, and a combination thereof.
30. The system of claim 25 wherein the first polymer comprises poly(ethylene-vinyl acetate).

31. The system of claim 25 wherein the first therapeutic agent is selected from the group consisting of camptothecin, rapamycin, a rapamycin derivative, and a rapamycin analogue.

32. The system of claim 25 wherein the second polymer comprises one of polyurethane, polycaprolactone, or a blended polymer of polyurethane and polycaprolactone.

33. The system of claim 25, wherein the thin barrier layers include a second therapeutic agent.

34. The system of claim 25, wherein the second therapeutic agent comprises camptothecin.

35. The system of claim 25, wherein a concentration of the first therapeutic agent is modulated to provide a predetermined drug-release profile.

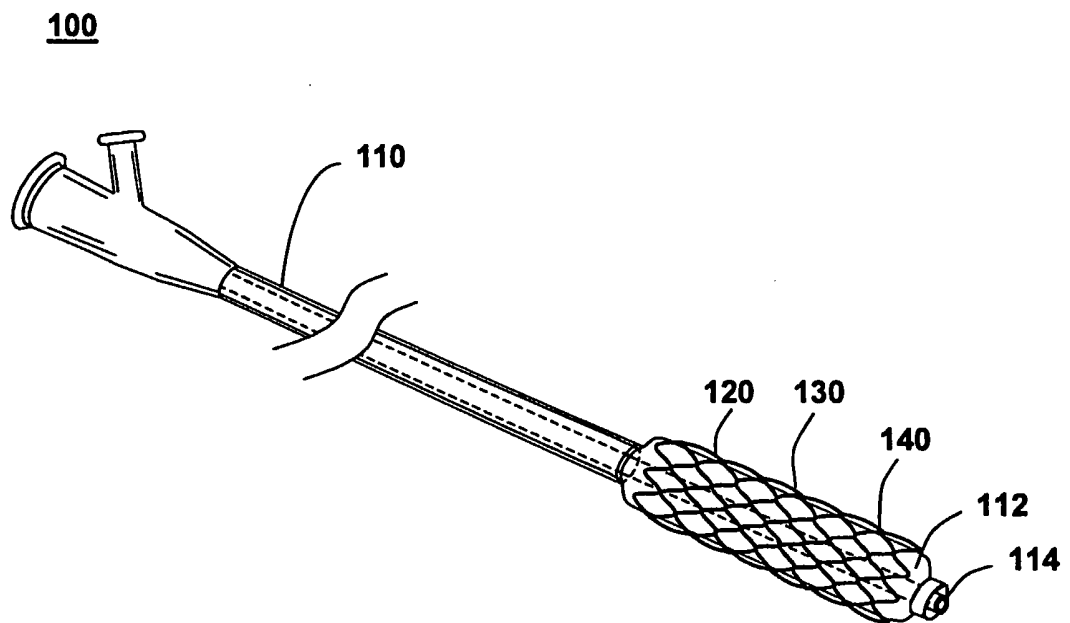
36. A method of treating a vascular condition, comprising:
inserting a drug-polymer coated stent within a vessel of a body, the drug-polymer coated stent including a laminated drug-polymer coating having a plurality of thin drug-polymer layers positioned between thin barrier layers, wherein the thin drug-polymer layers include a therapeutic agent and a first polymer, and wherein the thin barrier layers include a second polymer; and
eluting at least one therapeutic agent from the laminated drug-polymer coating into the body.

37. The method of claim 36 wherein the thin barrier layers control an elution rate of each therapeutic agent.

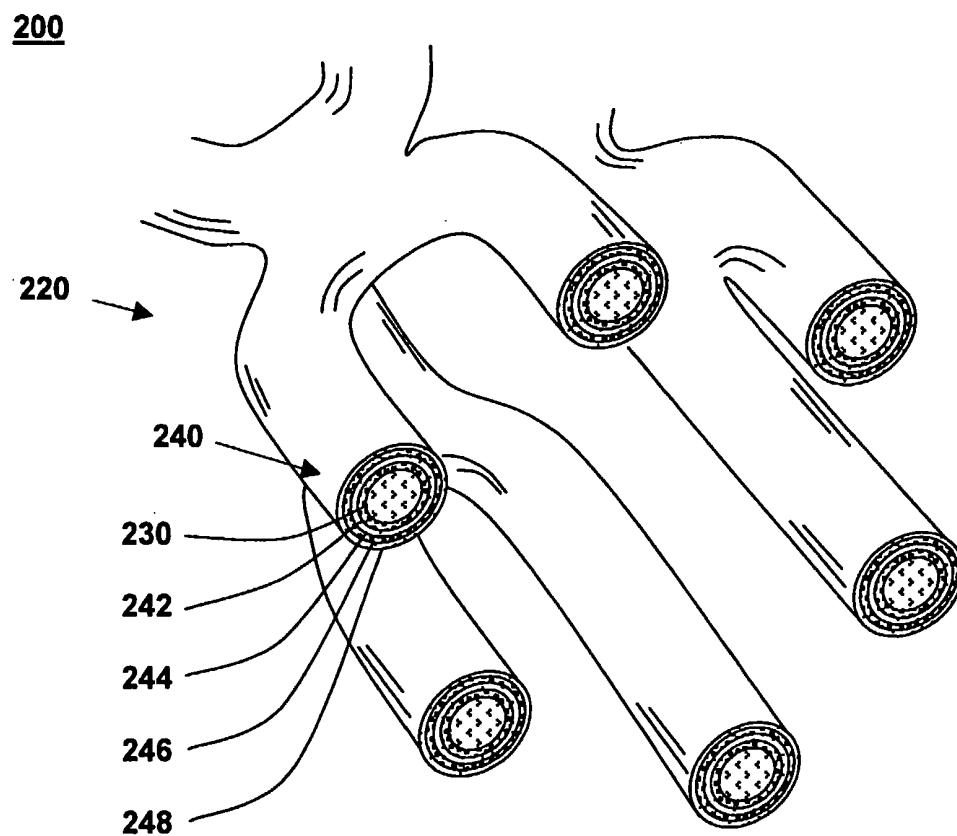
38. The method of claim 36 further comprising:
selecting the first polymer and the second polymer based on a predetermined elution rate of each therapeutic agent.

1/7

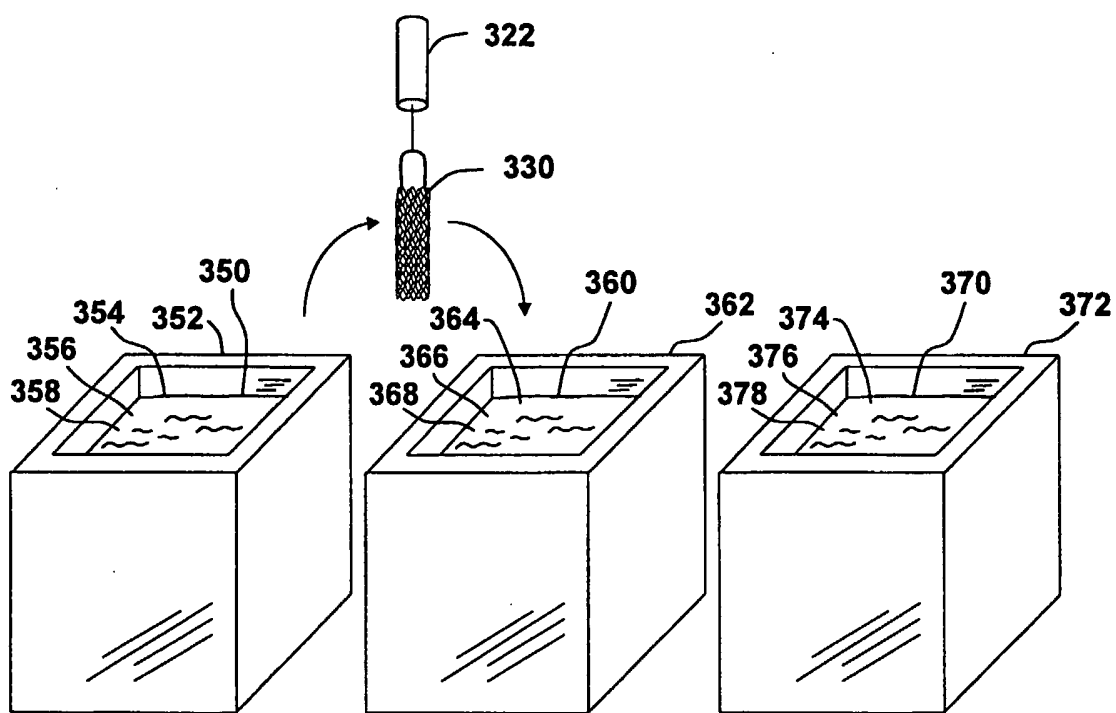
FIG. 1



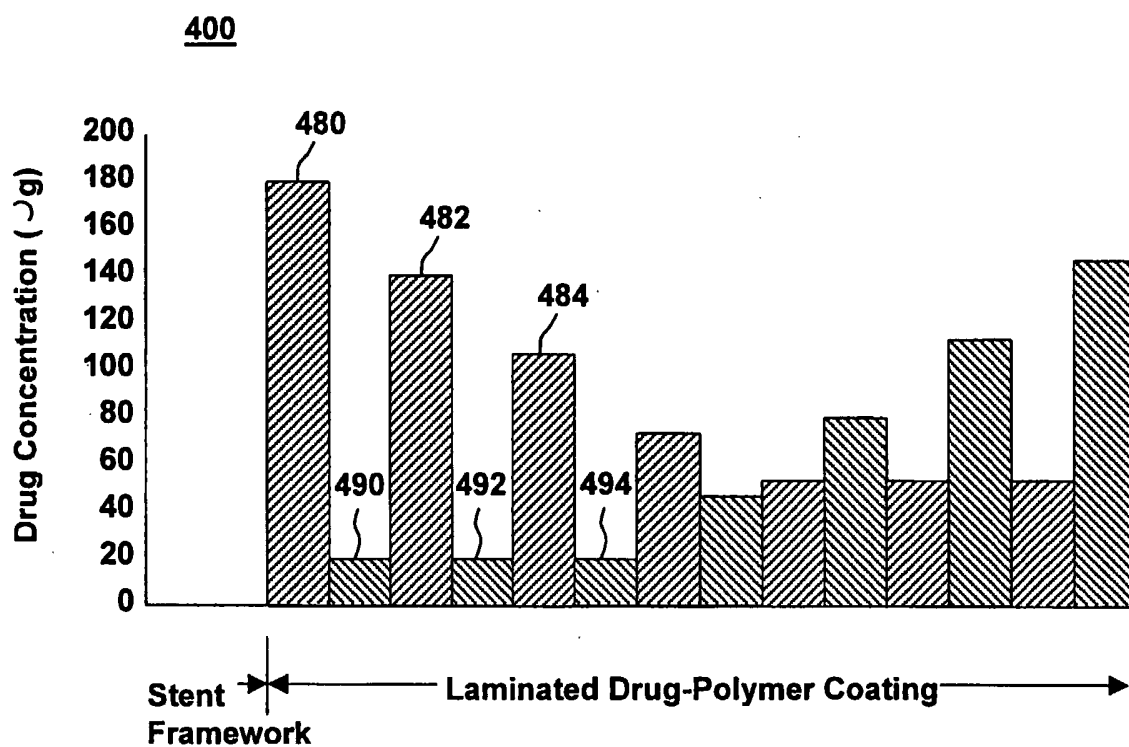
2/7

FIG. 2

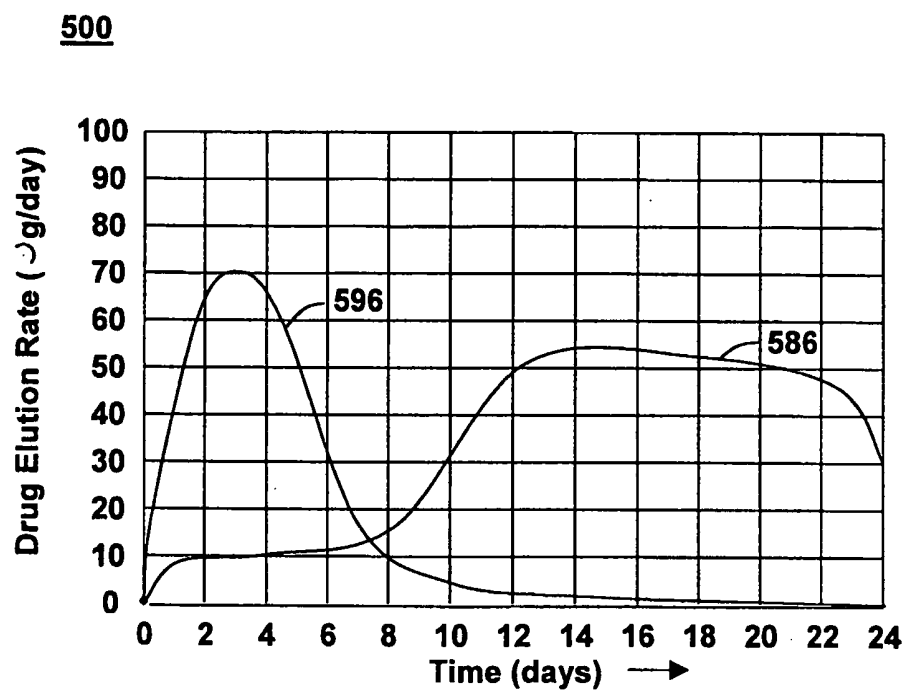
3/7

FIG. 3**300**

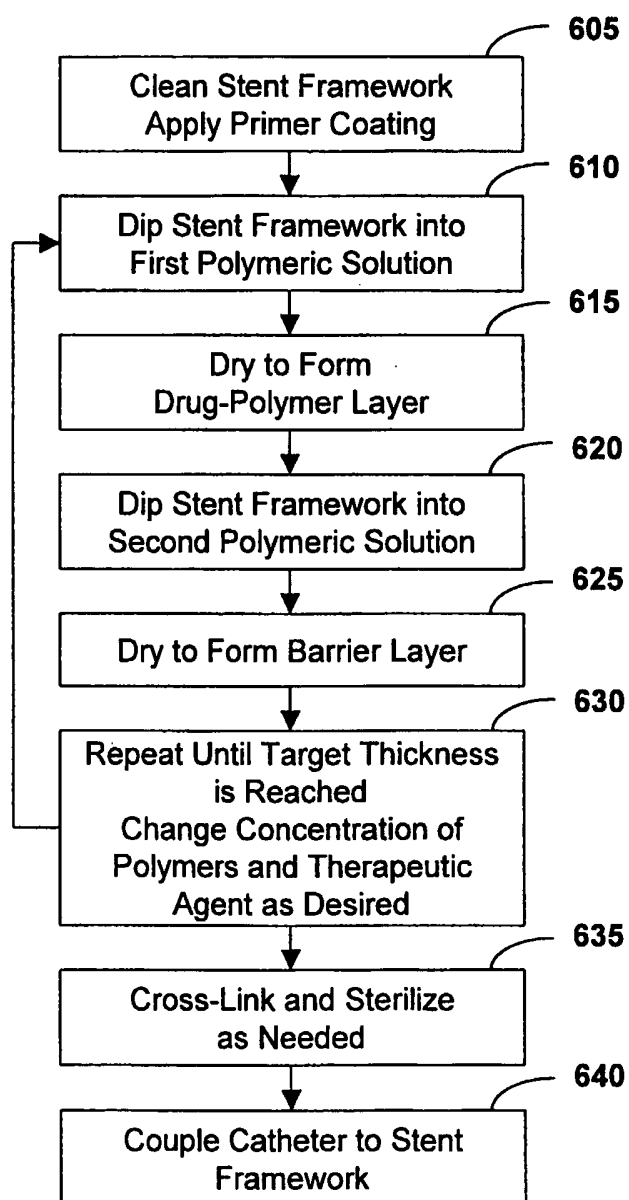
4/7

FIG. 4

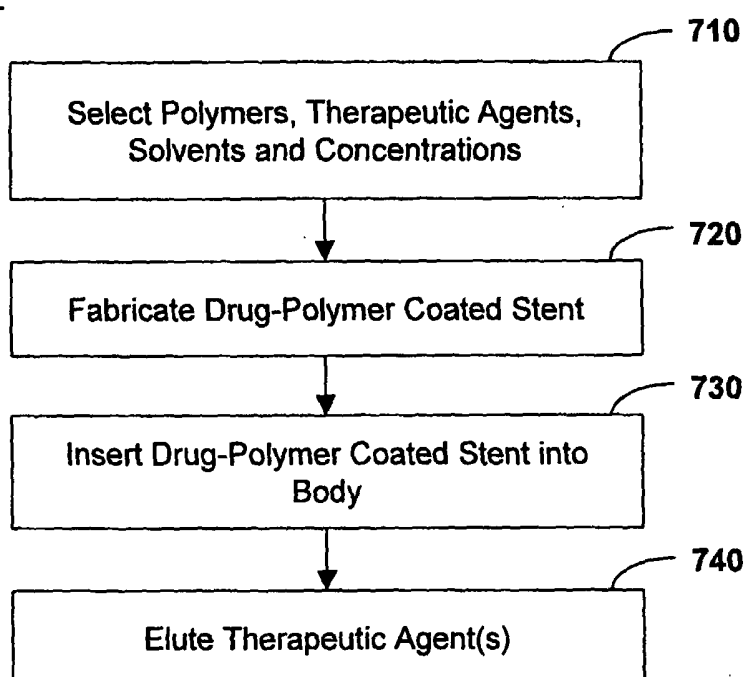
5/7

FIG. 5

6/7

FIG. 6**600**

7/7

FIG. 7700

INTERNATIONAL SEARCH REPORT

In **national** Application No
PCT/US2004/022139

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 A61F2/06		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) IPC 7 A61F		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No
A	WO 03/047636 A2 (C.R. BARD, INC; TERRY, RICHARD, N) 12 June 2003 (2003-06-12) page 9, paragraph 3 page 10, paragraph 3 page 11, paragraph 3 -----	1, 16, 25
A	EP 0 701 802 A1 (MEDTRONIC, INC) 20 March 1996 (1996-03-20) page 3, line 7 - line 13 -----	1
A	WO 02/074194 A2 (STS BIOPOLYMERS, INC; WHITBOURNE, RICHARD, J; CHAMBERLAIN, ALEXANDRA,) 26 September 2002 (2002-09-26) page 4, line 3 - line 21 page 6, line 14 - line 16 page 6, line 26 - line 29 page 19, line 13 - page 20, line 26 -----	1
☐ Further documents are listed in the continuation of box C ☒ Patent family members are listed in annex		
° Special categories of cited documents		
A document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art * & * document member of the same patent family		
Date of the actual completion of the international search 26 January 2005		Date of mailing of the international search report 03/02/2005
Name and mailing address of the ISA European Patent Office, P B 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel (+31-70) 340-2040, Tx. 31 651 epo nl, Fax (+31-70) 340-3016		Authorized officer Amaro, H

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2004/022139

Box II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 36-38
because they relate to subject matter not required to be searched by this Authority, namely:
Rule 39.1(iv) PCT - Method for treatment of the human or animal body by surgery
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2004/022139

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 03047636	A2	12-06-2003	AU 2002357050 A1 17-06-2003 CA 2468780 A1 12-06-2003 EP 1450866 A2 01-09-2004
EP 0701802	A1	20-03-1996	US 5599352 A 04-02-1997 DE 69527900 D1 02-10-2002 DE 69527900 T2 27-03-2003 JP 8089585 A 09-04-1996 US 5591227 A 07-01-1997 US 5697967 A 16-12-1997
WO 02074194	A2	26-09-2002	EP 1399094 A2 24-03-2004 JP 2004526499 T 02-09-2004 US 2004117007 A1 17-06-2004