



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 561 694 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art. 158(3) EPC

(43) Date of publication:

10.08.2005 Bulletin 2005/32

(51) Int Cl.7: **B65D 17/28, B65D 17/40**

(21) Application number: **03704707.3**

(86) International application number:

PCT/ES2003/000006

(22) Date of filing: **09.01.2003**

(87) International publication number:

WO 2004/041666 (21.05.2004 Gazette 2004/21)

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT SE SI SK TR**

Designated Extension States:

AL LT LV MK RO

(72) Inventor: **MARTINEZ GOMEZ, Estanislao**
30565 Murcia (ES)

(74) Representative:

Primo de Rivera y Urquijo, Jose Antonio
General Martinez Campos, 51
28010 Madrid (ES)

(30) Priority: **07.11.2002 ES 200202554**

(71) Applicant: **Mivisa Envases, S.A.U.**
30007 Murcia (ES)

(54) **EASY-OPENING LID**

(57) Easy-open lids applicable to lids (1), provided with a cut line (3) parallel and close to its contour, on which line a punch-tear away ring tab (4) attached to the lid (1) by means of a rivet (9) and provided with a punch vertex (6) acting on the cut line (3) acts, entail arranging a cut line (3) in correspondence with the theoretical actuation point (10) on the line for the punch vertex (6) of

the ring tab (4), an arcuate segment (8) with a curvature center (9) coinciding with the imaginary axis of the rivet (4), such that after an accidental rotation of the ring tab (4) during the manufacturing process thereof or during handling of the container in which it is integrated, its punch vertex (6) is kept in place facing the cut line (3), ensuring optimal tearing conditions for the lid in spite of the incorrect position of the ring tab (4).

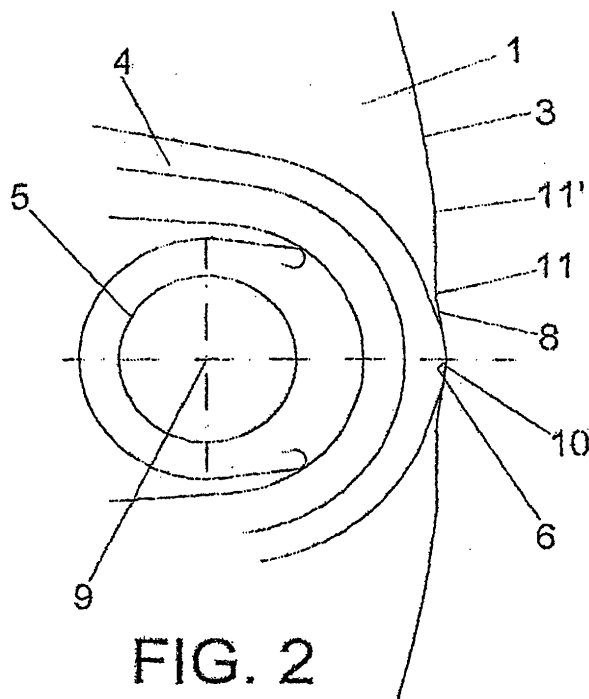


FIG. 2

EP 1 561 694 A1

Description

OBJECT OF THE INVENTION

[0001] The present invention, an easy-open lid, applies to the field of metal containers, specifically of those containers used for food commercialization, such as tins, cans, etc., and specifically focuses on the opening means of the lid thereof, commonly called "easy-open".

[0002] The invention is specifically related to the classic groove or cut which are provided on lids of this type of containers, for facilitating the opening thereof by means of a punch-tear away ring tab.

BACKGROUND OF THE INVENTION

[0003] In the preferred scope of practical application of the invention, sealed food packaging, metal containers are conventionally used, the lid of which is provided with a perimetral groove or cut line, as well as a ring tab provided with a punch vertex overlapping said cut line, such that in normal conditions, the ring tab is parallel and adjacent to the lid, whereas during the opening maneuver, it swings thereon such that initially, and through its punch vertex, it causes the start of the tearing of the lid, and then it causes the complete tearing away thereof by pulling on said ring tab.

[0004] This solution, perfectly valid from the theoretical point of view, presents drawbacks in practice derived from an incorrect positioning of the ring tab. In this aspect, it happens quite frequently that, during the ring tab manufacturing process, or in the subsequent sealing, filling, sterilization, handling processes, etc., of the container, said ring tab undergoes a slight rotation, causing a modification of the theoretical position provided for its punch vertex with regard to the cut of the lid, since the ring tab rotates about the point where it is attached to the lid, noticeably eccentric with regard to the latter, whereas the cut line defines a path parallel and close to the contour of said lid, therefore more or less spacing occurs between the punch vertex of the ring tab and the cut of the lid, causing a significant increase of the force necessary to begin the opening operation, i.e. for causing the punching or breaking of the cut line, after which the lid is subsequently torn away.

[0005] This increase of force contributes to significantly increasing the number of lids in which the ring tab cannot overcome the cut and does not open the lid, even occasionally causing the ring tab to break since the hole which connects the ring tab to the lid by means of a rivet, becomes deformed, with the subsequent release of the ring tab and inability to use the container opening mechanism.

[0006] US patent US3,762,596-B discloses a can lid having means on it which prevent the rotation of the ring tab, said means consisting of respective outward projections on both sides of the ring tab. It also has a cut line the path of which in the ring tab operation area is

different from that of the rest of said cut line. Specifically, the cut line in that initial breakage area is elliptical in order to space the cut line from the edge of the can and to facilitate the manufacturing process of the can. The devices used for preventing the rotation of the ring tab do not ensure that, during the handling of the can in the different manufacturing processes thereof, it will not slightly rotate, although it does reduce said rotation. Due to the elliptical configuration of the cut line in its initial breakage area, a minimum rotation of the ring tab will prevent the punch vertex thereof from acting on said initial breakage area, therefore originating the aforementioned drawbacks in opening the can.

DESCRIPTION OF THE INVENTION

[0007] The improvements proposed by the invention satisfactorily solve the drawback explained above, ensuring a proper operation of the punch ring tab, even when said ring tab is significantly rotated with regard to its theoretical correct position.

[0008] Therefore more specifically, the invention entails changing the path of the cut line, specifically in the segment thereof facing the punch ring tab, such that by said cut line maintaining a general path parallel and close to the contour of the lid, in said area facing the ring tab it undergoes two symmetrical inflections with regard to the theoretical punch point, which frame an intermediate segment in which the path of the cut is arcuate, specifically with a curvature center arranged in correspondence with the rivet of the ring tab, such that after a rotation of the ring tab, its punch vertex remains in place on said cut.

[0009] The amplitude of said arcuate segment with a curvature in the rivet of the ring tab will vary according to different constructive criteria, this amplitude necessarily being greater than 1°, although it is convenient for said arcuate segment to not exceed 80°.

[0010] Said arcuate segment will be join the rest of the cut through also rounded inflections which "smooth" the path of said cut and which, accordingly, favor tearing away the lid.

[0011] Evidently the improvements of the invention are applicable both to circular and elliptical or rectangular lids, which are the three conventional configurations in this type of metal containers.

[0012] In any case and according to the described structure, it is achieved that, even due to a significant rotation of the ring tab, which can reach 10° to the right or left, said ring tab keeps its punch vertex on the cut line, causing the proper punching thereof with a minimum force.

DESCRIPTION OF THE DRAWINGS

[0013] To complement the description that is being made and for the purpose of aiding to better understand the features of the invention according to a preferred

practical embodiment thereof, a set of drawings is attached to said description as an integral part thereof which, with an illustrative and nonlimiting character, show the following:

Figure 1 shows a schematic plan view of an easy-open lid for metal containers provided with the improvements object of the present invention.

Figure 2 shows an enlarged detail view of the lid of the previous figure, in the area thereof in which said improvements are made.

Figure 3 shows, according to a view similar to figure 1, another type of conventional easy-open lid, also provided with the improvements of the invention.

PREFERRED EMBODIMENT OF THE INVENTION

[0014] In view of the figures, and more specifically of figure 1, it can be seen how the improvements of the invention are applicable to a lid made of a laminar body (1), in this case having a circumferential contour, as this lid is intended for a cylindrical container, provided with a marginal strip (2) through which, by seaming or by any other means, the body (1) is attached to the opening of the container, not shown, and is provided inside said marginal strip with a cut or perimetral groove (3) which is intended for tearing away the lid (1) during the container opening maneuver, opening which is carried out with the collaboration of a ring tab (4) attached to the body (1) of the lid with the collaboration of a rivet (5), and provided with, in opposition to the ring tab (4) itself, a punch vertex (6) which must be located on the cut line (3) on which it acts when the ring tab (4) is manually swung on the rivet (5) which fixes the ring tab to the body (1) of the lid. The lid (1) can adopt the circular configuration of figure 1, the rectangular configuration with rounded vertices of figure 3, or any other configuration conventional in this type of containers, such as an elliptical configuration, also normally being provided with deep-draws (7) which stiffen its structure.

[0015] Therefore, from this basic and conventional structure, according already to the invention, the cut line (3), in its area where it faces the ring tab (4), undergoes a variation in its path, defining a breakage segment (8) in a circumference arc shape, having a curvature center (9) arranged in correspondence with the center of the rivet (5), as can particularly be seen in figure 2, such that the mid-point of this arcuate breakage segment (8) is located in correspondence with the theoretical point (10) provided for operating the punch vertex (6) of the ring tab (4) when the latter is correctly located in the context of the lid (1).

[0016] As previously mentioned, this results in that, after an accidental rotation of the ring tab (4) at any time throughout the container handling process, its punch vertex (6) is kept perfectly in place facing the cut line (3), specifically along this breakage segment (8), thereby ensuring that the tearing conditions are optimal.

[0017] As was also mentioned above, the amplitude of said breakage segment (8) with a curvature center (9) coinciding with the axis of the rivet (5), can range between 1° and 80°, the amplitude of said arc preferably being 20°, 10° on each side of the theoretical point (10) provided for operating the punch vertex (6) of the ring tab (4) when the latter is correctly located in the context of the lid (1), and said breakage segment (8) will join the rest of the cut line (3) by means of double, offsetting and arcuate inflections (11-11'), which facilitate tearing away the lid (1), preventing the existence of sharp bendings in said cut line (3) which could negatively affect tearing away the lid.

Claims

1. An easy-open lid, specifically applicable in lids (1) which, with a circular, elliptical or rectangular configuration with rounded vertices, incorporate a cut line (3), parallel and close to their perimeter for opening the lid with the collaboration of a punch-tear away ring tab (4) attached to the body (1) of the lid by means of a rivet (5) and provided with a punching vertex (6) acting on said cut line (3), **characterized in that** said cut line (3) is provided with a breakage segment (8) with a curved path, having a curvature center (9) coinciding with the rivet (5) for attaching the ring tab (4) to the body (1) of the lid, such that said punch vertex (6) is kept in place on the breakage segment (8) after an accidental rotation of said ring tab (4) throughout the process of handling the lid (1) itself and the container which it is associated to.
2. An easy-open lid according to claim 1, **characterized in that** the amplitude of the arcuate breakage segment (8) of the cut line (3) is greater than 1°.
3. An easy-open lid according to claim 1, **characterized in that** the amplitude of the arcuate breakage segment (8) of the cut line (3) ranges between 1° and 80°.
4. An easy-open lid according to previous claims, **characterized in that** the amplitude of the arcuate breakage segment (8) of the cut line (3) is 20°.
5. An easy-open lid according to previous claims, **characterized in that** the breakage segment (8) on the cut line (3) is symmetrical with regard to the imaginary axis formed by the theoretical actuation point (10) of the punch vertex (6) of the ring tab (4), coinciding with the mid-point of the breakage segment (8), and the rivet (5) for attaching the ring tab (4).
6. An easy-open lid according to claim 5, **character-**

ized in that amplitude the arcuate breakage segment (8) of the cut line (3) is 10° on each side of the theoretical actuation point (10) of the punch vertex (6) of the ring tab (4).

5

7. An easy-open lid according to previous claims, **characterized in that** the arcuate breakage segment (10) of the cut line (3), with a curvature center (9) on the rivet (5), is joined the rest of the cut line (3) by means of double, arcuate and counteropposing inflections (11-11') for facilitating the tearing along said line.

10

15

20

25

30



35

40

45

50

55

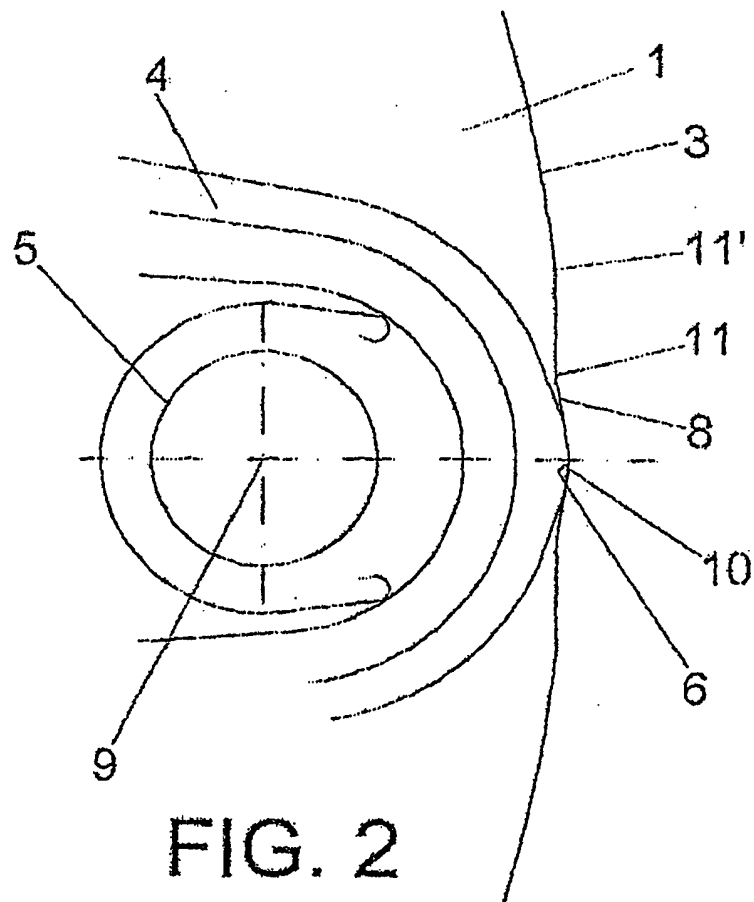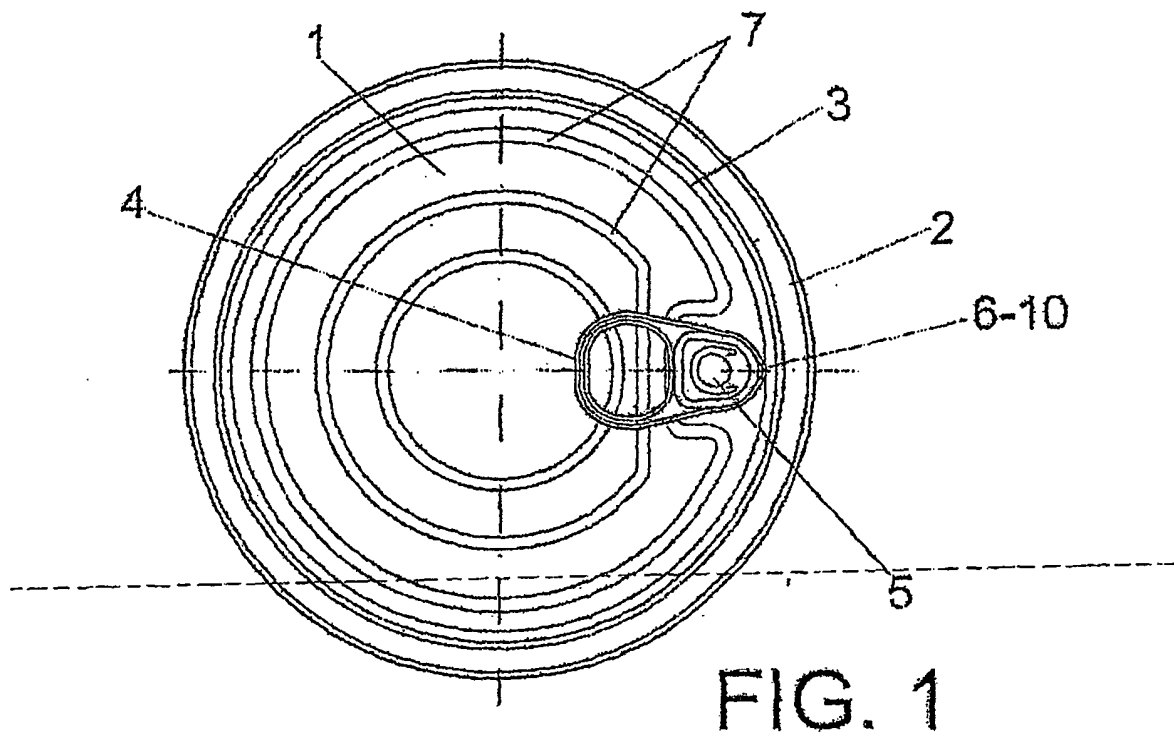

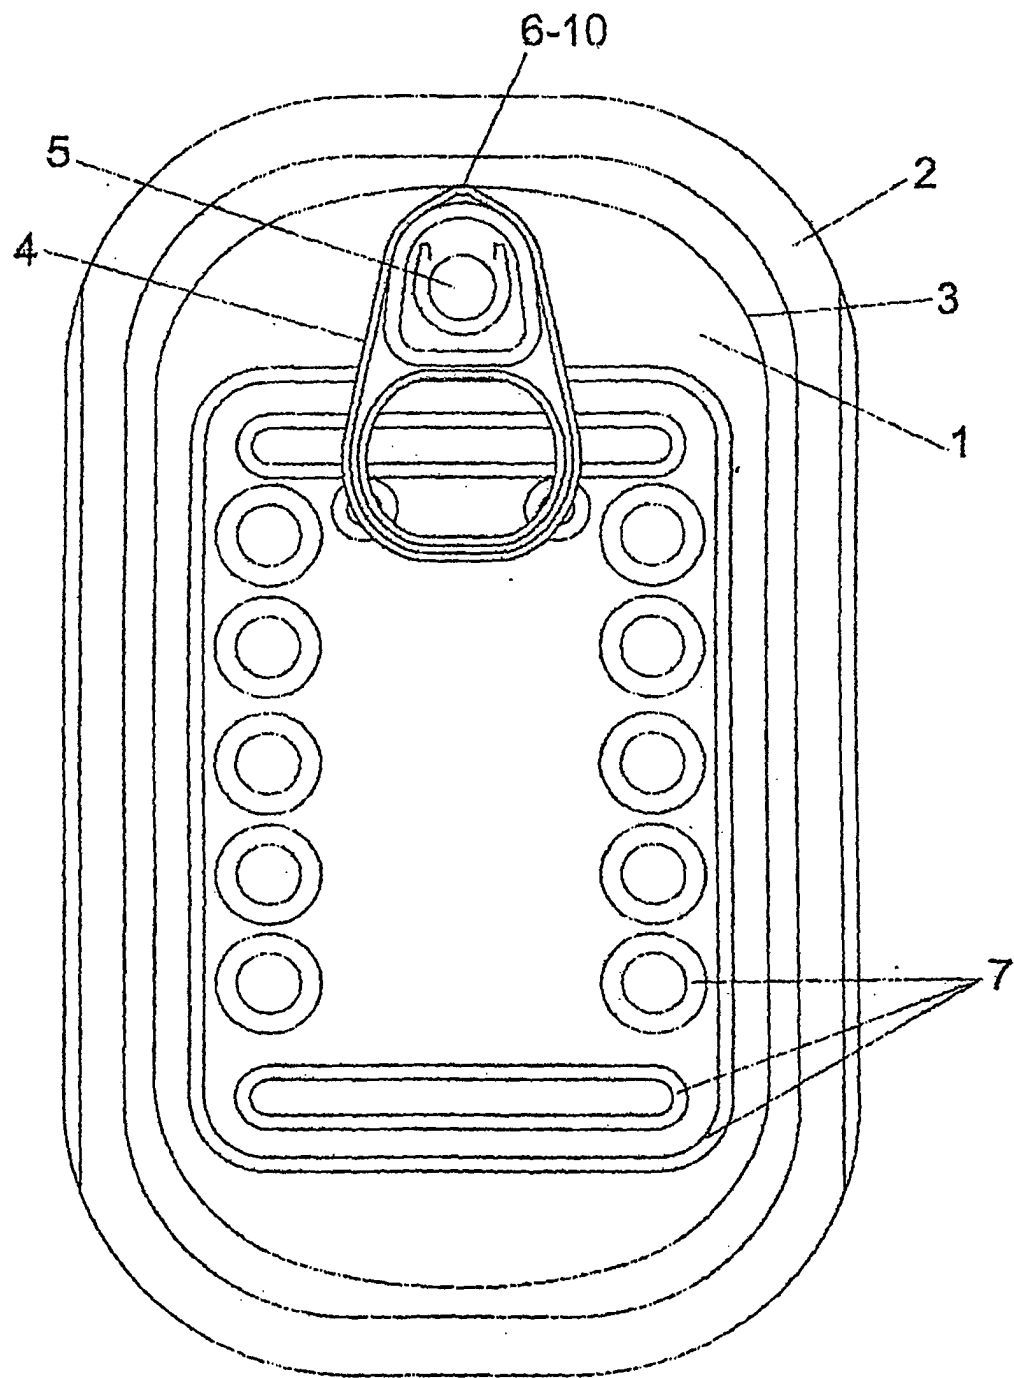


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No.
PCT/ES03/00006

A. CLASSIFICATION OF SUBJECT MATTER		
Int.Cl.7 B65D 17/28, 17/40 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
Int.Cl.7 B65D		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
ES		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3762596 A (HENNING) 02.10.1973, column 3, line 48 - column 4, line 32; figures	1
A	ES 0152778 U (CEBAL, G.P.) 17.07.1968, page 1, line 5 - page 6, line 13; figures 1-3	1
A	US 3967754 A (OSTREM) 06.07.1976, column 1, lines 6-22; figures	1
A	US 4394927 A (ZYSSET) 26.07.1983, column 1, lines 9-38; figures	1
A	US 3869063 A (HIMSTEDT) 04.03.1975, column 1, line 3 - column 2, line 17; figures	1
A	US 4826037 A (LA CROCE) 02.05.1989, column 1, lines 11-66; figures	1
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
4 March 2003 (04.03.04)		7 March 2003 (07.03.03)
Name and mailing address of the ISA/ SPTO		Authorized officer
Facsimile No.		Telephone No.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/ ES03/00006

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3762596 A	02.10.1973	CA 936112 A	30.10.1973
		AR 209569 A	13.05.1977
ES 0152778 U	17.07.1968	ES 0152778 Y	01.05.1971
		FR 1545647 A	15.11.1968
		BE 718290 A	20.01.1969
		NL 6810155 A	21.01.1969
		FR 93139 E	14.02.1968
		CH 468283 A	15.02.1969
		LU 56525 A	21.05.1969
		OA 2853 A	15.12.1970
		DE 1782111 A	02.03.1972
US 3967754 A	06.07.1976	ZA 7506962 A	29.06.1977
		CA 1047951 A	06.02.1979
US 4394927 A	26.07.1983	US 4455114 A	19.06.1984
US 3869063 A	04.03.1975	FR 2187621 A	18.01.1974
		GB 1428441 A	17.03.1976
		CA 994689 A	10.08.1976
US 4826037 A	02.05.1989	none	

Form PCT/ISA/210 (patent family annex) (July 1992)