



- (51) International Patent Classification:
B29D 30/06 (2006.01) *B29C 33/00* (2006.01)
- (21) International Application Number:
PCT/US2015/035363
- (22) International Filing Date:
11 June 2015 (11.06.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicants: **COMPAGNIE GENERALE DES ETABLISSEMENTS MICHELIN** [FR/FR]; 12 Cours Sablon, F-63000 Clermont-Ferrand (FR). **MICHELIN RECHERCHE ET TECHNIQUE S.A.** [CH/CH]; Route Louis Braille 10, CH-1763 Granges-Paccot (CH).
- (72) Inventors; and
- (71) Applicants (*for US only*): **JENKINS, Brian** [US/US]; c/o Michelin North America, Inc., Intellectual Property Dept, 515 Michelin Road, Greenville, SC 29605 (US). **LAZAR, Constantin** [US/US]; c/o Michelin North America, Inc., Intellectual Property Dept, 515 Michelin Road, Greenville, SC 29605 (US).
- (74) Agent: **CAMPIGOTTO, Frank J.**; Michelin North America, Inc., Intellectual Property Dept., 515 Michelin Road, Greenville, SC 29605 (US).

- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

(54) Title: SET OF MOLDING ELEMENTS AND MOLD

FIG. 4

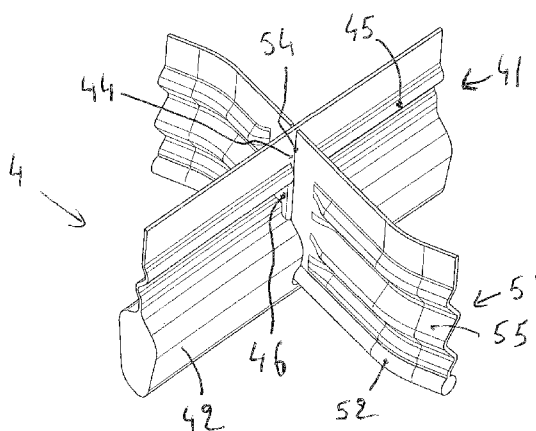

(57) Abstract: The invention provides for a set of molding elements (4, 5) adapted to be attached in a mold for molding tires, each molding element being able to mold a cut in a tire tread, wherein the set of molding elements comprises complex shaped molding elements, each molding element being able to connect to another molding element from the set of molding elements along a generally straight interface (54) defined between connecting molding elements. The invention also provides for a mold for molding tires, said mold comprising a set of molding elements as described above attached to a main cast aluminum body.



SET OF MOLDING ELEMENTS AND MOLD

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates to a set of molding elements for forming a network of molding elements adapted for molding cuts in a tire tread. The invention also relates to a mold including such a set of molding elements.

Description of the Related Art

[0002] Document WO2010076521 discloses a method for manufacturing a tire tread molding assembly comprising a network of molding elements in the form of blades and bars, each bar overmolding at least an edge of a blade. One step of the method consists in using wax in order to build a temporary network. The wax is later melted during the final molding step.

[0003] Document EP0868955 discloses a method for manufacturing a tire mold using laser sintering. Laser sintering allows manufacturing intricate shapes, for instance shapes that may be useful for molding tires but are impossible (or too expensive) to machine or cast.

[0004] Document US2011304082 discloses an integral network including molding elements like bars and blades, the network being manufactured by laser sintering as a single piece and then attached to a tire mold main body, for instance by screws. Such a network may be of great size as it can span across the whole tread width.

[0005] When those networks of molding elements are obtained by laser sintering as in US2011304082, they are subjected to thermal deformations and can warp and finally fall outside the acceptable manufacturing tolerances. In addition, in order to manufacture such a network, it is necessary to provide a large enough laser sintering machine having in particular a large sized bed on which to hold the network. Further, the molding elements being

manufactured in the form of an integral network, if one molding element is showing a manufacturing defect, the entire network must be scrapped.

[0006] More generally in the tire industry, there is a strong tendency to create more complex tread patterns using an increasing number of undulated sipes in an effort to improve both the grip and the wear resistance performances of tires.

[0007] There is therefore a need to find a solution that makes it possible to obtain a set of complex shaped molding elements with good mechanical integrity, that conforms to the manufacturing tolerances and that is simple and practical to manufacture.

DEFINITIONS

[0008] A “tire” means any type of tire whether or not it is subjected to an internal pressure when in use.

[0009] A “tread” of a tire means a quantity of rubber material delimited by lateral surfaces and by two main surfaces, one of which is intended to come into contact with a roadway when the tire is being used on and the other of which is oriented towards the inside of the tire.

[0010] A “cut” in a tread means either a fine cut also referred to as a sipe or a wide cut also referred to as a groove.

[0011] A “molding element” means an element placed in a mold able to produce cuts in the tread of a tire.

SUMMARY OF THE INVENTION

[0012] The invention provides for a set of molding elements adapted to be attached in a mold for molding tires, each molding element being able to mold a cut in a tire tread, wherein the set of molding elements comprises complex shaped molding elements, each

molding element being able to connect to another molding element from the set of molding elements along a generally straight interface defined between connecting molding elements.

[0013] In a particular embodiment, molding elements comprise undulated blades having generally straight blade edges for connection to other molding elements.

[0014] In another particular embodiment, molding elements comprise generally straight receiving zones arranged on a lateral wall of said molding elements, wherein the receiving zones are slots arranged in a protruding part from the lateral wall of the molding elements.

[0015] In another particular embodiment, the protruding parts are forming posts extending along a full molding height of the lateral wall.

[0016] In another particular embodiment, voids are arranged in a bar portion of molding elements, said voids being able to receive a bar portion from a connecting molding element.

[0017] In another particular embodiment, some or even all molding elements are obtained by a laser sintering process.

[0018] The invention provides for a mold for molding tires, said mold comprising a set of molding elements as described above attached to a main cast aluminum body.

[0019] In this way a mold comprising a network of complex molding elements can be obtained in a very effective way and be very robust in the same time.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] Further features and advantages of the invention will become apparent from the following description given by way of non-limiting example with reference to the attached drawings in which:

- Figure 1 is a perspective view of a portion of a tire mold according to an embodiment of the invention,
- Figure 2 is a perspective view of a set of molding elements according to an embodiment of the invention,
- Figure 3 is a perspective view of a set of molding elements according to another embodiment of the invention,
- Figure 4 is a perspective view of an assembled set of molding elements similar to Figure 3,
- Figure 5 is a perspective view of an assembled set of molding elements according to another embodiment, and
- Figure 6 is a perspective view of two molding elements according to Figure 5 in a disassembled situation.

DETAILED DESCRIPTION OF A PARTICULAR EMBODIMENT

[0021] Reference will now be made in detail to embodiments of the invention, examples of which are illustrated in the drawings. Those examples are provided by way of explanation of the invention. In the description that follows, elements that are substantially identical or similar will be denoted by identical references.

[0022] Fig. 1 shows a portion of a tire mold 1. This portion includes five individual mold segments 2 stacked in the circumferential direction of the mold. When the mold is operated, these 5 mold segments may be held together in a common mold sector (not shown). The main body of each mold segment 2 is from cast aluminum. Each mold segment includes a number of finer molding elements that are attached to the aluminum main body to create detailed and complex features of the tire tread. There are generally circumferential molding elements 4 and generally transverse molding elements 5.

[0023] In the present embodiment there are three sets 31, 32, 33 of those molding elements. Each set is assembled from individual molding elements that connect together and are held in the cast aluminum segment main bodies. Here, the bases of all of the molding elements are buried in the main body and the edges of some of the molding elements are buried in solid cast aluminum circumferential ridges 21 that will mold main circumferential grooves in the tire tread.

[0024] Despite their small size, the molding elements must resist great forces during the molding and unmolding steps of the tire manufacturing process. The molding elements are preferably made out of steel and preferably obtained by a 3-D printing process using laser sintering.

[0025] As shown in more detail on Figure 2, circumferential molding elements 4 and transverse molding elements 5 may combine a blade region 41 or 51 and a bar 42 or 52. As is well known in the art, blades will be molding sipes and bars will be molding hidden grooves or channels in the tire tread. Small bars like bar 52 on the transverse elements may typically be used to make the blade edges stronger and also to prevent cracks to initiate at the bottom of the tire sipes. Bigger bars like bar 42 on the circumferential elements may typically be used to mold grooves that can receive and convey water out of the tire contact patch. The connection between connecting molding elements uses a generally straight interface despite the complex shape of the molding elements.

[0026] Fig. 3 partially represents a pair of such molding elements in even greater detail and in its unassembled state, that is to say connected neither to other molding elements nor to the aluminum body of a segment 2. Fig. 3 thus shows portions of the molding elements that are simply not visible when they are in place in a mold that is ready to operate.

[0027] The left side part of Fig. 3 shows an exemplary structure of an undulated transverse molding element 5 that demonstrates how the parts may be connected. The dotted line CL illustrates the aluminum casting boundary. The portion 53 of the molding element that is above the dotted line CL is an anchoring portion that will be buried into the aluminum casting. Conversely, the portion of the molding element that is below the dotted line will be protruding from the aluminum surface of the mold. In comparison, Fig. 2 is showing only the portions that are protruding from the aluminum casting. The blade edge 54 is generally straight despite the undulations 55 of the blade. The edge is flattened and cut generally straight.

[0028] The right side part of Fig. 3 shows an exemplary structure of a circumferential element intended to be connected to the above described transverse element 5. The dotted line CL also illustrates the aluminum casting boundary. This circumferential element includes an important bar portion 42 intended to mold a hidden groove in the tire tread as better visible from Fig. 1. The bar portion 42 includes a void 47 for receiving the smaller bar portion 52 of the transverse element 5. The circumferential molding element 4 also includes longitudinal undulations 45 in its blade portion 41. A slot 44 on the lateral wall of this circumferential molding element 4 is adapted to receive the edge 54 of the transverse element 5. A generally straight interface is thus defined between the two molding elements. Because of the undulations of the blade of the circumferential element, the slot is arranged between protruding parts 46 that are provided mainly where undulations are pushing the lateral wall away from the blade edge 54.

[0029] The width of the slot is slightly greater than the thickness of the edge that will be received in this slot, so as to allow a necessary clearance for assembling the two molding elements.

[0030] Comparing again Fig. 3 and Fig. 2, it is clear that a straight interface can also be defined without a slot but more simply by having a flat receiving zone 46 arranged where the edge 54 is received.

[0031] Fig. 4 shows a set of molding elements in the assembled state and with their buried portions omitted. This set is similar to that of Fig. 3 except for the fact that the two transverse elements 5 are connected on each side of the circumferential element 4 at the same circumferential location instead of being offset as in Fig. 3.

[0032] Fig. 5 shows a set of molding elements in the assembled state. This set is similar to that of Fig. 4 except for the fact that the protruding parts 46 which house the slots 44 constitute posts 48 going up into the cast aluminum body. The posts are therefore extending along a full molding height of the lateral wall.

[0033] Fig. 6 shows two molding elements having the exact same design as in Fig. 5, the transverse elements 5 being disconnected from the side of the circumferential element 4.

[0034] The molding elements are preferably manufactured from steel in a 3-D printing process using laser sintering. Obtaining a large network by manufacturing much smaller individual molding elements allows for a much more effective laser sintering process.

[0035] As an alternative, these individual molding elements can be manufactured by any other suitable manufacturing method such as stamping, casting or machining.

[0036] The straight interface between elements allows for small relative movements that make assembling the networks more simple and less subject to warping under thermal expansion and stresses during the subsequent aluminum casting process.

CLAIMS

What is claimed is:

1. A set of molding elements adapted to be attached in a mold (1) for molding tires, each molding element (4, 5) being able to mold a cut in a tire tread, characterized in that the set of molding elements comprises complex shaped molding elements, each molding element (4) being able to connect to another molding element (5) from the set of molding elements along a generally straight interface (54, 44) defined between connecting molding elements.
2. A set of molding elements according to Claim 1, wherein molding elements comprise undulated blades (51) having generally straight blade edges (54) for connection to other molding elements.
3. A set of molding elements according to Claim 1 or 2, wherein molding elements (4) comprise generally straight receiving zones (44) arranged on a lateral wall of said molding elements.
4. A set of molding elements according to claim 3 wherein the receiving zones are slots arranged in a protruding part (46) from the lateral wall of the molding elements.
5. A set of molding elements according to claim 4 wherein protruding parts (46) are forming posts (48) extending along a full molding height of the lateral wall.
6. A set of molding elements according to any of the preceding claims wherein voids (47) are arranged in a bar portions (42) of molding elements, said voids being able to receive a bar portion (52) from a connecting molding element.
7. A set of molding elements according to any of the preceding claims wherein molding elements are obtained by a laser sintering process.
8. A set of molding elements according to claim 7 wherein all molding elements are obtained by a laser sintering process.
9. A mold for molding tires, said mold (1) comprising a set of molding elements according to any of the preceding claims attached to a main cast aluminum body.

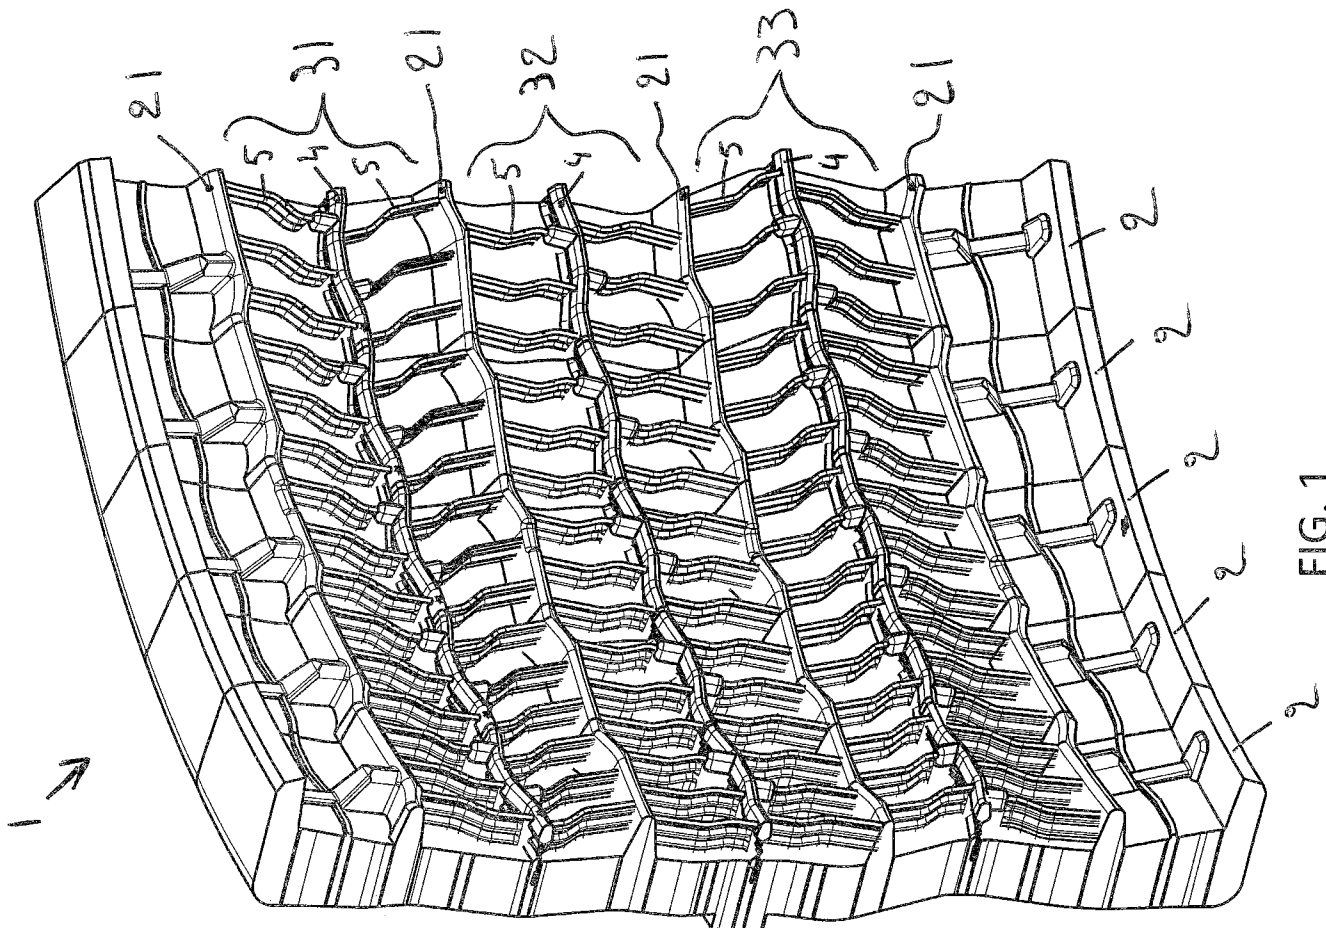


FIG. 1

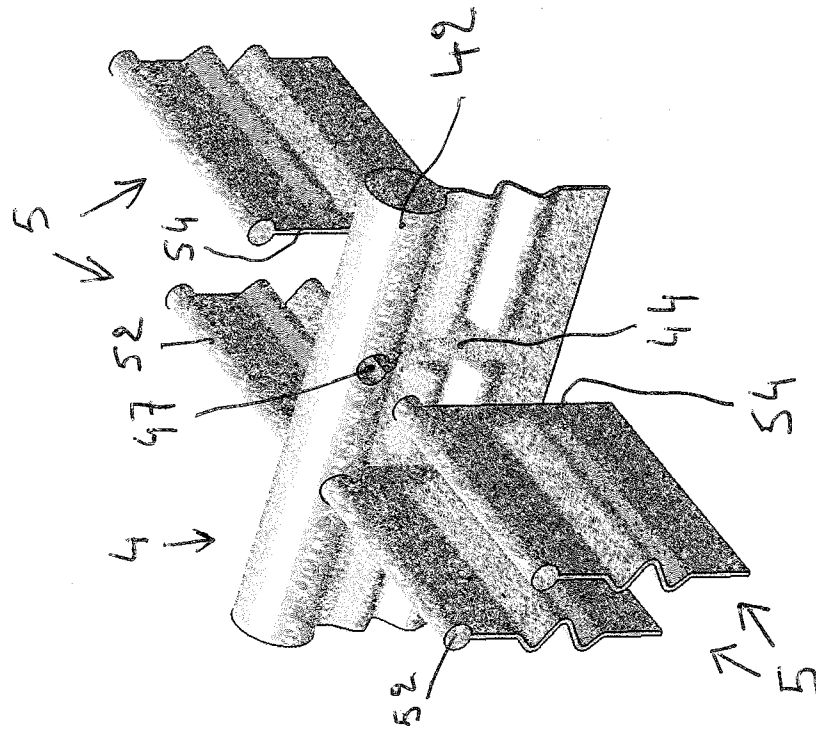


FIG. 2

FIG. 3

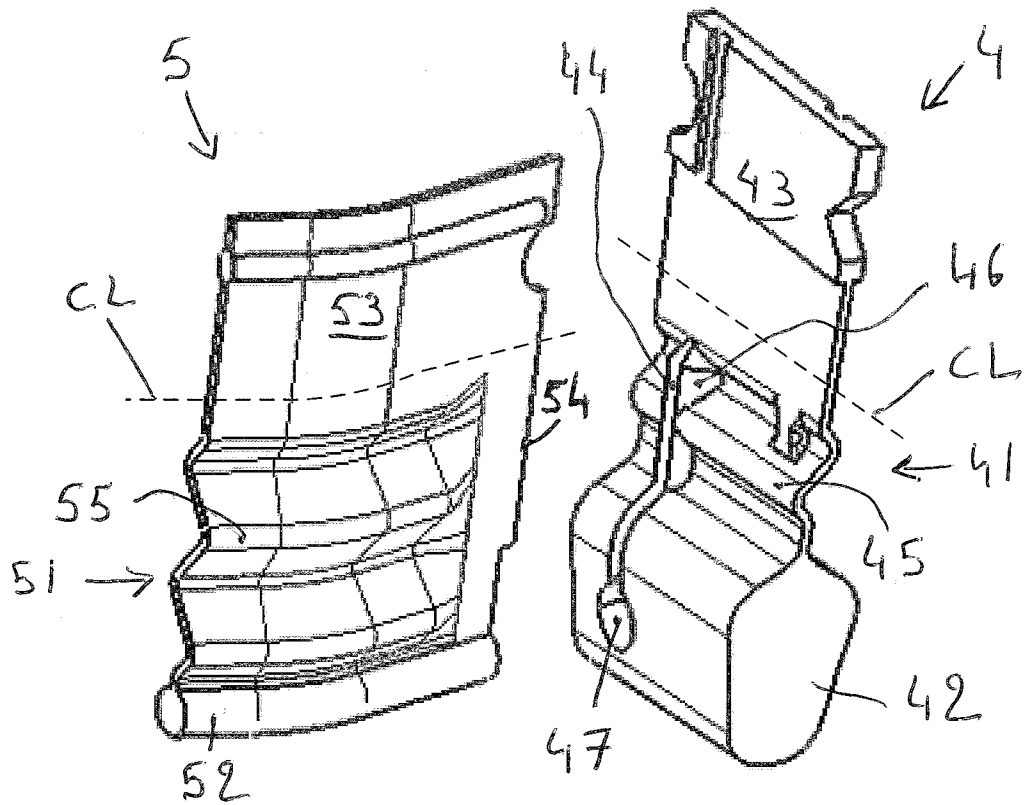


FIG. 4

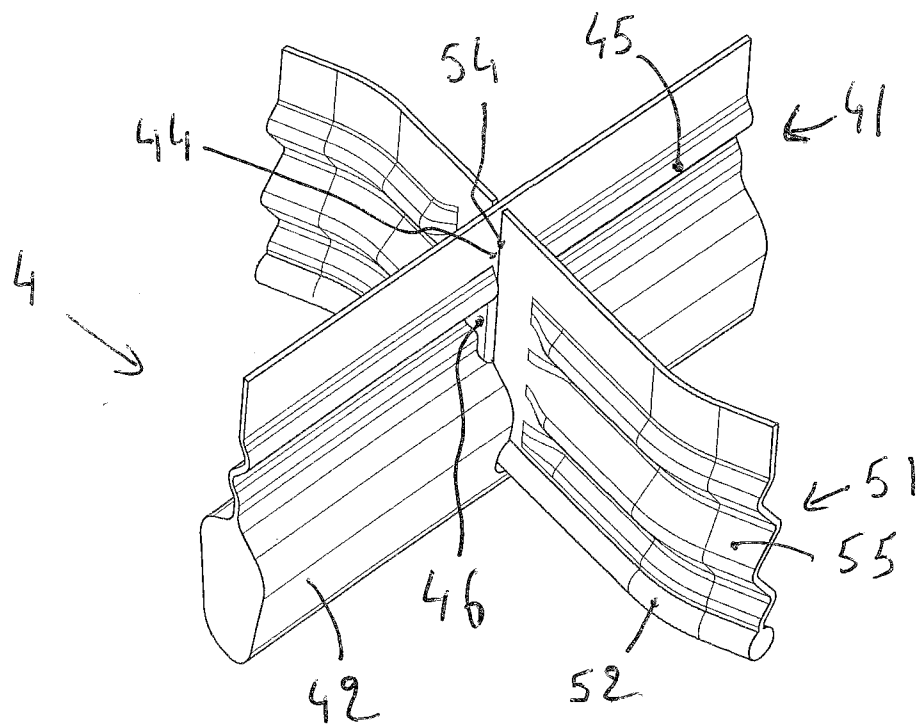


FIG. 5


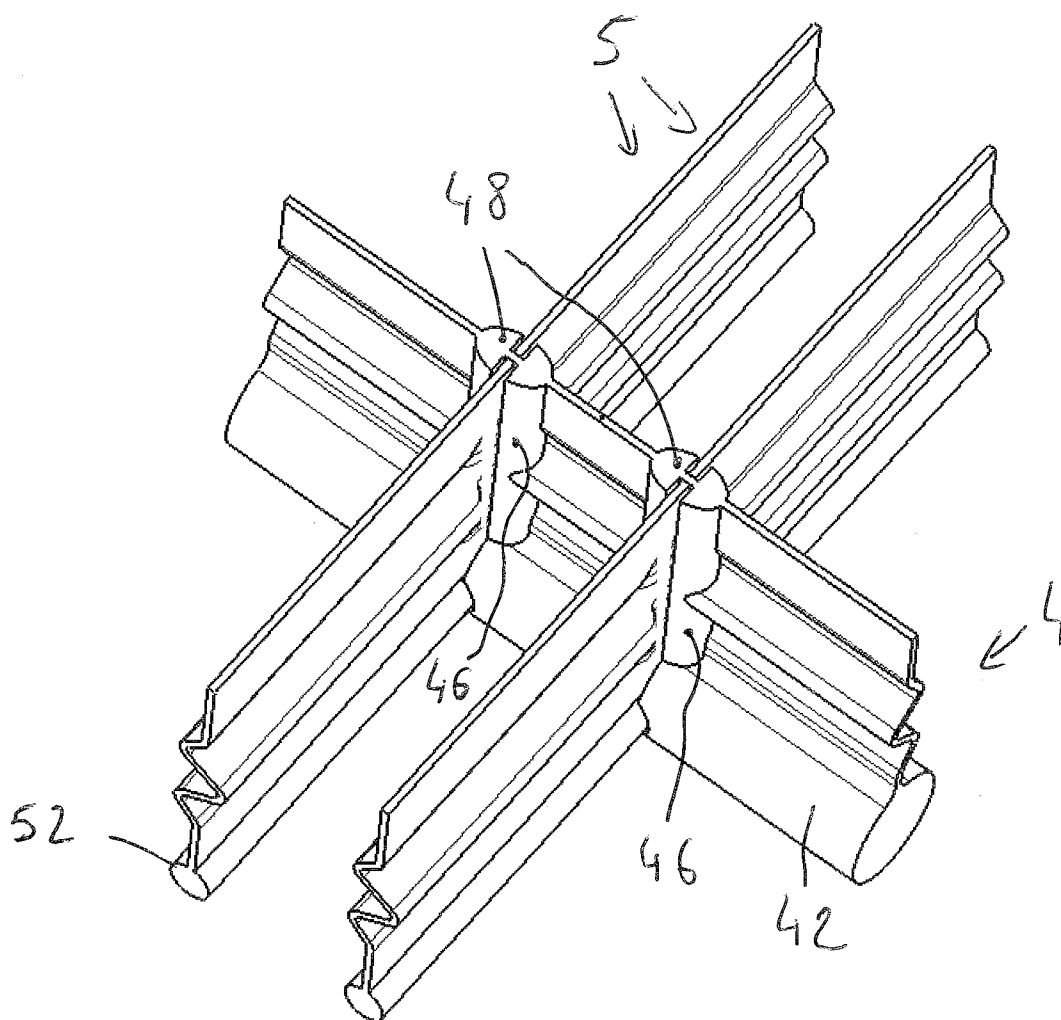


FIG. 6

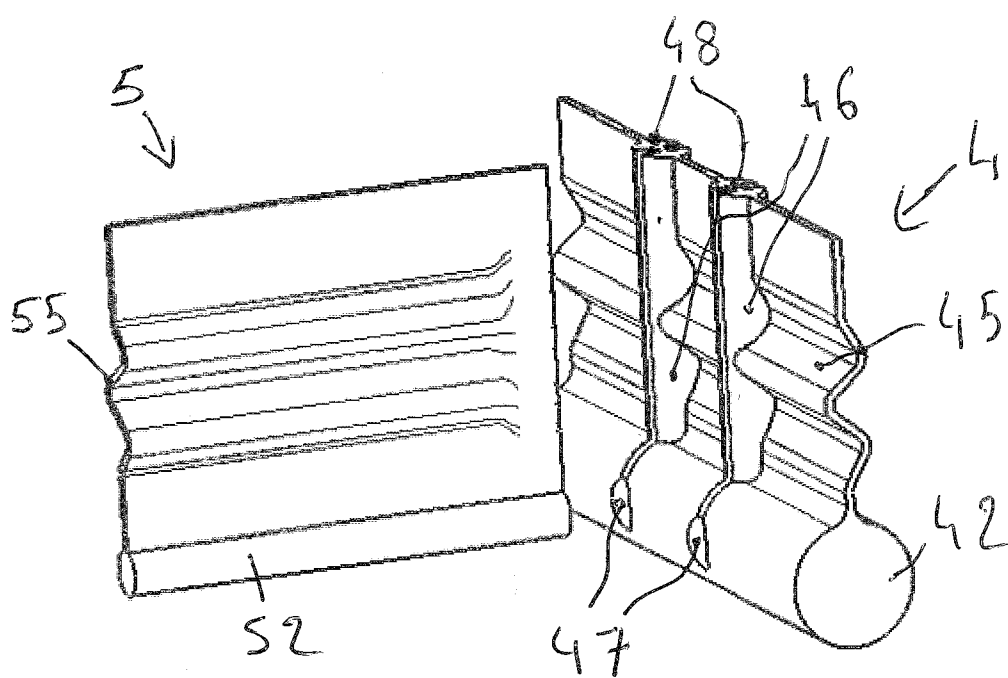

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2015/035363

A. CLASSIFICATION OF SUBJECT MATTER
INV. B29D30/06 B29C33/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B29D B29C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2007/084534 A1 (BYRNE FRANCIS J [US]) 19 April 2007 (2007-04-19)	1-3,9
Y	paragraphs [0004], [0030], [0036] - [0041]; claim 11; figures 2A-C, 3	7,8
X	JP 3 145139 B2 (TOYO TIRE & RUBBER CO) 12 March 2001 (2001-03-12)	1,3-5,9
Y	paragraphs [0002] - [0004]; figures 1, 5, 6	7,8
X	EP 1 103 362 A1 (MICHELIN SOC TECH [FR]; MICHELIN RECH TECH [CH]) 30 May 2001 (2001-05-30) abstract; figure 1	1,3,4,9
X	JP H11 58386 A (BRIDGESTONE CORP) 2 March 1999 (1999-03-02) abstract; figures 2-7	1,3,9
	-/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

29 January 2016

Date of mailing of the international search report

08/02/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Vetter, Christoph

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2015/035363

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 2000 238514 A (BRIDGESTONE CORP) 5 September 2000 (2000-09-05) abstract; figures 5, 7, 8 -----	1,3,9
X	JP H03 90317 A (OHTSU TIRE & RUBBER CO LTD) 16 April 1991 (1991-04-16) abstract; figures 1-3 -----	1,3,9
Y	US 2011/304082 A1 (DUSSEAU JEAN-RAYMOND [FR] ET AL) 15 December 2011 (2011-12-15) cited in the application paragraphs [0007] - [0012], [0022]; claims 1, 6; figure 1 -----	7,8
E	WO 2015/086974 A1 (MICHELIN & CIE [FR]; MICHELIN RECH TECH [CH]) 18 June 2015 (2015-06-18) page 5, line 32 - page 6, line 32; claim 1; figures 1, 3, 4 page 7, line 20 - line 21 -----	1-9
A	US 2007/295434 A1 (NGUYEN GIA VAN [FR] ET AL) 27 December 2007 (2007-12-27) paragraphs [0029], [0037]; figure 3 -----	1-9

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2015/035363

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2007084534 A1	19-04-2007	EP 1937496 A1	02-07-2008
		US 2007084534 A1	19-04-2007
		WO 2007047658 A1	26-04-2007
JP 3145139 B2	12-03-2001	JP 3145139 B2	12-03-2001
		JP H04353431 A	08-12-1992
EP 1103362 A1	30-05-2001	AT 278524 T	15-10-2004
		BR 0005545 A	07-08-2001
		CA 2326656 A1	25-05-2001
		CN 1320510 A	07-11-2001
		DE 60014552 D1	11-11-2004
		DE 60014552 T2	13-10-2005
		EP 1103362 A1	30-05-2001
		FR 2801531 A1	01-06-2001
		JP 4913944 B2	11-04-2012
		JP 2001353725 A	25-12-2001
		KR 20010051863 A	25-06-2001
		US 6461135 B1	08-10-2002
JP H1158386 A	02-03-1999	NONE	
JP 2000238514 A	05-09-2000	NONE	
JP H0390317 A	16-04-1991	NONE	
US 2011304082 A1	15-12-2011	BR PI0922712 A2	05-01-2016
		CN 102256776 A	23-11-2011
		EP 2379317 A1	26-10-2011
		FR 2939712 A1	18-06-2010
		JP 5587334 B2	10-09-2014
		JP 2012512071 A	31-05-2012
		US 2011304082 A1	15-12-2011
		WO 2010076504 A1	08-07-2010
WO 2015086974 A1	18-06-2015	FR 3014734 A1	19-06-2015
		WO 2015086974 A1	18-06-2015
US 2007295434 A1	27-12-2007	BR PI0702957 A	19-02-2008
		CN 101096172 A	02-01-2008
		JP 2008007102 A	17-01-2008
		KR 20070122401 A	31-12-2007
		US 2007295434 A1	27-12-2007