



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2215672 C 2005/01/04

(11)(21) **2 215 672**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(22) Date de dépôt/Filing Date: 1997/09/12

(41) Mise à la disp. pub./Open to Public Insp.: 1999/03/12

(45) Date de délivrance/Issue Date: 2005/01/04

(51) Cl.Int.⁶/Int.Cl.⁶ B01D 71/02

(72) Inventeurs/Inventors:
MAZANEC, TERRY J., US;
CABLE, THOMAS L., US

(73) Propriétaire/Owner:
THE STANDARD OIL COMPANY, US


(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : MEMBRANES AVEC REVETEMENT

(54) Title: COATED MEMBRANES

(57) **Abrégé/Abstract:**

The invention relates to novel membranes, formed from perovskitic or multi-phase structures, with a chemically active coating which demonstrate exceptionally high rates of fluid flux. One application is the separation of oxygen from oxygen-containing feeds at elevated temperatures. The membranes are conductors of oxygen ions and electrons, and are substantially stable in air over the temperature range of 25°C to the operating temperature of the membrane.

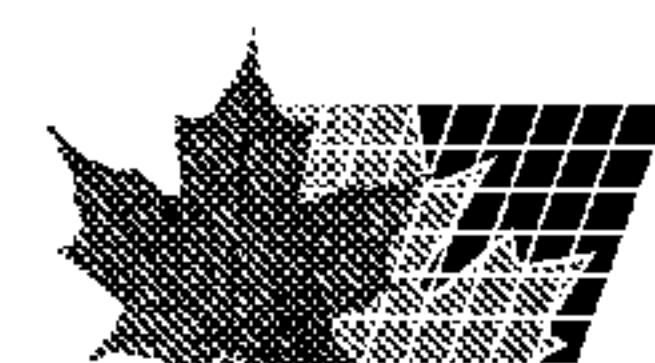

ABSTRACT

The invention relates to novel membranes, formed from perovskitic or multi-phase structures, with a chemically
5 active coating which demonstrate exceptionally high rates of fluid flux. One application is the separation of oxygen from oxygen-containing feeds at elevated temperatures. The membranes are conductors of oxygen ions and electrons, and are substantially stable in air over the temperature range of 25°C
10 to the operating temperature of the membrane.

TECHNICAL FIELD OF THE INVENTION

Applicants have discovered solid state compositions with
5 enhanced product flux, and processes which exploit this
property. Membranes, formed from perovskitic or multi-phase
structures, with a chemically active coating have demonstrated
exceptionally high rates of fluid flux. One application is the
separation of oxygen from oxygen-containing feeds at elevated
10 temperatures. The membranes are conductors of oxygen ions and
electrons, and are substantially stable in air over the
temperature range of 25°C to the operating temperature of the
membrane.

15

BACKGROUND OF THE INVENTION

Solid state membranes formed from ion conducting
20 materials are beginning to show promise for use in commercial
processes for separating, purifying and converting industrial
fluids, notably for oxygen separation and purification.
Envisioned applications range from small scale oxygen pumps
for medical use to large gas generation and purification
25 plants. Conversion processes are numerous, and include
catalytic oxidation, catalytic reduction, thermal treating,
distillation, extraction, and the like. Fluid separation
technology encompasses two distinctly different membrane
materials, solid electrolytes and mixed conductors. Membranes

formed from mixed conductors are preferred over solid electrolytes in processes for fluid separations because mixed conductors conduct ions of the desired product fluid as well as electrons, and can be operated without external circuitry such as electrodes, interconnects and power-supplies. In contrast, solid electrolytes conduct only product fluid ions, and external circuitry is needed to maintain the flow of electrons to maintain the membrane ionization/deionization process. Such circuitry can add to unit cost, as well as complicate cell geometry.

Membranes formed from solid electrolytes and mixed conducting oxides can be designed to be selective towards specified product fluids, such as oxygen, nitrogen, argon, and the like, and can transport product fluid ions through dynamically formed anion vacancies in the solid lattice when operated at elevated temperatures, typically above about 500°C. Examples of solid electrolytes include yttria-stabilized zirconia (YSZ) and bismuth oxide for oxygen separation. Examples of mixed conductors include titania-doped YSZ, praseodymia-modified YSZ, and, more importantly, various mixed metal oxides some of which possess the perovskite structure. Japanese Patent Application No. 61-21717 discloses membranes formed from multicomponent metallic oxides having the perovskite structure represented by the formula $\text{La}_{1-x}\text{Sr}_x\text{Co}_{1-y}\text{Fe}_y\text{O}_{3-d}$ wherein x ranges from 0.1 to 1.0, y ranges from 0.05 to 1.0 and d ranges from 0.5 to 0. Some other pertinent perovskite structures have been described in copending application, Ser. No. 08/311,295, owned by the

Assignee of record herein.

5 Membranes formed from mixed conducting oxides which are
operated at elevated temperatures can be used to selectively
separate product fluids from a feedstock when a difference in
product fluid partial pressures exists on opposite sides of
the membrane. For example, oxygen transport occurs as
10 molecular oxygen is dissociated into oxygen ions, which ions
migrate to the low oxygen partial pressure side of the
membrane where the ions recombine to form oxygen molecules, or
react with a reactive fluid, and electrons migrate through the
membrane in a direction opposite the oxygen ions to conserve
15 charge.

The rate at which product fluid ions permeate through a
membrane is mainly controlled by three factors. They are (a)
the kinetic rate of the feed side interfacial product fluid
20 ion exchange, i.e., the rate at which product fluid molecules
in the feed are converted to mobile ions at the surface of the
feed side of the membrane; (b) the diffusion rates of product
fluid ions and electrons within the membrane; and (c) the
kinetic rate of the permeate side interfacial product fluid
25 exchange, i.e., the rate at which product fluid ions in the
membrane are converted back to product fluid molecules and
released on the permeate side of the membrane, or react with a
reactive fluid, such as hydrogen, methane, carbon monoxide,

C₁-C₅ saturated and unsaturated hydrocarbons, ammonia, and the like.

U.S. Patent No. 5,240,480 to Thorogood, et al,
5 addressed the kinetic rate of the feed side interfacial gas exchange by controlling the pore size of the porous structure supporting a non-porous dense layer. Numerous references, such as U.S. Patent 4,330,633 to Yoshisato et al, Japanese Kokai No. 56[1981]-
10 92,103 to Yamaji, et al, and the article by Teraoka and coworkers, Chem. Letters, The Chem. Soc. of Japan, pp. 503-506 (1988) describe materials with enhanced ionic and electronic conductive properties.

15 U.S. Patents 4,791,079 and 4,827,071 to Hazbun, addressed the kinetic rate of the permeate side interfacial gas exchange by utilizing a two-layer membrane in which one layer was an impervious mixed ion and electron conducting ceramic associated with a porous
20 layer containing a selective hydrocarbon oxidation catalyst.

Typical of metal oxide membrane references is Japanese Patent Application 61-21717, described above. When an oxygen-containing gaseous mixture at a high oxygen partial pressure
25 is applied to one side of a membrane having a dense layer formed from the enumerated oxide, oxygen will adsorb and dissociate on the membrane surface, become ionized and diffuse through the solid and deionize, associate and desorb as an

oxygen gas stream at a lower oxygen partial pressure on the other side of the membrane.

The necessary circuit of electrons to supply this
5 ionization/deionization process is maintained internally in the oxide via its electronic conductivity. This type of separation process is described as particularly suitable for separating oxygen from a gas stream containing a relatively high partial pressure of oxygen, i.e., greater than or equal
10 to 0.2 atm. Multicomponent metallic oxides which demonstrate both oxygen ionic conductivity and electronic conductivity typically demonstrate an oxygen ionic conductivity ranging from 0.01 $\text{ohm}^{-1}\text{cm}^{-1}$ to 100 $\text{ohm}^{-1}\text{cm}^{-1}$ and an electronic conductivity ranging from about 1 $\text{ohm}^{-1}\text{cm}^{-1}$ to 100 $\text{ohm}^{-1}\text{cm}^{-1}$
15 under operating conditions.

Some multicomponent metallic oxides are primarily or solely oxygen ionic conductors at elevated temperatures. An example is $(\text{Y}_2\text{O}_3)_{0.1}(\text{Zr}_2\text{O}_3)_{0.9}$ which has an oxygen ionic
20 conductivity of about 0.06 $\text{ohm}^{-1}\text{cm}^{-1}$ at 1000°C and an ionic transport number (the ratio of the ionic conductivity to the total conductivity) close to 1. European Patent Application EP 0399833A1 describes a membrane formed from a composite of this oxide with a separate electronically conducting phase,
25 such as platinum or another noble metal. The electronic conducting phase will provide the return supply of electrons through the structure allowing oxygen to be ionically conducted through the composite membrane under a partial pressure gradient driving force.

Another category of multicomponent metallic oxides exhibit primarily or solely electronic conductivity at elevated temperatures and their ionic transport numbers are close to zero. An example is $\text{Pr}_x\text{In}_y\text{O}_z$ which is described in European Patent Application EP 0,399,833 A1. Such materials may be used in a composite membrane with a separate oxygen ionic conducting phase such as a stabilized ZrO_2 . A membrane constructed from a composite of this type may also be used to separate oxygen from an oxygen-containing stream, such as air, by applying an oxygen partial pressure gradient as the driving force. Typically, the multicomponent oxide electronic conductor is placed in intimate contact with an oxygen ionic conductor.

Organic polymeric membranes may also be used for fluid separation. However, membranes formed from mixed conducting oxides offer substantially superior selectivity for such key products as oxygen when compared to polymeric membranes. The value of such improved selectivity must be weighed against the higher costs associated with building and operating plants employing membranes formed from mixed conducting oxides which plants require heat exchangers, high temperature seals and other costly equipment. Typical prior art membranes formed from mixed conducting oxides do not exhibit sufficient permeance (defined as a ratio of permeability to thickness) to justify their use in commercial fluid separation applications.

Oxygen permeance through solid state membranes is known to increase proportionally with decreasing membrane thickness, and mechanically stable, relatively thin membrane structures have been widely studied.

5

A second article by Teraoka et al, Jour. Ceram. Soc. Japan. International Ed, Vol 97, pp. 458-462, (1989) and J. Ceram. Soc. Japan, International Ed, Vol 97, pp. 523-529, (1989), for example, describes solid state gas separation
10 membranes formed by depositing a dense, nonporous mixed conducting oxide layer, referred to as "the dense layer", onto a porous mixed conducting support. The relatively thick porous mixed conducting support provides mechanical stability for the thin, relatively fragile dense, nonporous mixed
15 conducting layer. Structural failures due to thermo-mechanical stresses experienced by the membranes during fabrication and use were substantially minimized due to the chemical compatibility of the respective membrane layers. Based upon considerations limited to dense layer thickness,
20 Teraoka and coworkers expected the oxygen flux to increase by a factor of 10 for a membrane having a mixed conducting porous layer and a thin mixed conducting dense layer compared to a standard single layered dense, sintered mixed conducting disk. However, they obtained an increase of less than a factor of
25 two.

Perovskitic structures include true perovskites that have a three dimensional cubic array of small diameter metal ion

octahedra, as well as structures that incorporate a perovskite-like layers or layer, i.e., a two dimensional array of small diameter metal ion octahedra arranged in a two dimensional square array. These perovskite-like arrays are charge stabilized by larger diameter metal ions, or other charged layers. Examples of perovskitic structures include cubic perovskites, brownmillerites, Aurivillius phases, and the like. A description of the relation between perovskites and some of the various perovskitic phases is presented in L. Katz and R. Ward, *Inorg. Chem.* 3, 205-211, (1964).

These layered structures can accommodate vacancies of oxygen ions, and the ordering of these vacancies can lead to structural variations, such as the brownmillerite phase. Brownmillerites are perovskites that have one sixth of the oxygen ions missing with the resulting oxygen ion vacancies ordered into continuous lines within the crystal. An example is SrFeO_{3-x} , as described by S. Shin, M. Yonemura, and H. Ikawa in *Mater Res Bull* 13, 1017-1021 (1978). Under conditions where $x = 0$, the structure is a regular, cubic perovskite structure. As conditions of temperature and pressure are varied so that x increases, the oxygen vacancies that are introduced are at first randomly scattered throughout the crystal, or "disordered". However, as x approaches 0.5 the vacancies can become "ordered", i.e., the vacancies form a regular pattern throughout the crystal. When exactly one

5 Aurivillius phases, sometimes called lamellar
perovskites, consist of layers of perovskite wherein the
larger diameter metal cations have, in part or in toto, been
replace by layers of another oxide, commonly $(\text{Bi}_2\text{O}_2)^{2+}$, as
described in *Catalysis Letters* 16, p 203-210 (1992) by J.
10 Barrault, C. Grosset, M. Dion, M. Ganne and M. Tournoux.
Their general formula is $[\text{Bi}_2\text{O}_2][\text{A}_{n-1}\text{B}_n\text{O}_{3n+1}]$, where "A"
designates the larger diameter metal ions, and "B" designates
the smaller diameter metal ions. Wide latitude of
substitution is possible for the A and B metals in the
15 perovskite layer, and for Bi in the interleaving layers of
 Bi_2O_2 , as described by A. Castro, P. Millan, M. J. Martinez-
Lope and J. B. Torrance in *Solid State Ionics* 63-65, p 897-901
(1993). The so-called
superconductors, such as $\text{YBa}_2\text{Cu}_3\text{O}_{7-x}$, are also perovskitic
20 structures, with another type of ordered vacancies, as
described in W. Carrillo-Cabrera, H-D Wiemhofer and W. Gopel,
Solid State Ionics, 32/33, p 1172-1178 (1989).

25 Researchers are continuing their search for solid state
conductive membranes which exhibit superior flux without

sacrificing mechanical and physical compatibility of the composite membrane.

5 BRIEF SUMMARY OF THE INVENTION

The present invention relates to novel mixed conductor membranes which are capable of separating industrial fluid streams. The membranes have a chemically active coating and a
10 structure and composition that forms a substantially perovskitic structure, substantially stable in air over the temperature range of 25°C to the operating temperature of the membrane, such that enhanced flux is observed compared to prior art solid state membranes. The upper range of membrane
15 operating temperature would be about 400°C for partial oxidation of C₂-C₄ hydrocarbons and oxygen production processes; about 700°C for selected partial oxidation and oxygen production processes, as well as processes for the removal of oxygen from industrial gases and industrial fluids;
20 and about 850°C for previously mentioned processes under certain circumstances, as well as for partial oxidation of methane and natural gases.


While membranes are known which comprise a mixed
25 conducting oxide layer, the fluid impermeable membranes of the present invention have a composition that forms a substantially perovskitic structure. Such structures exhibit enhanced flux, particularly of oxygen. A porous coating of metal or metal oxide increases the kinetic rate of the feed

side interfacial fluid exchange, the kinetic rate of the permeate side interfacial fluid exchange, or both. Membranes fabricated from such material and in such manner display increased flux.


5

The fluid impermeable membranes according to the invention are formed from a mixture of at least two different metal oxides wherein the multicomponent metallic oxide form a perovskitic structure which demonstrates electron conductivity as well as product fluid ion conductivity at temperatures greater than about 400°C. These materials are commonly referred to as mixed conducting oxides.

Suitable mixed conducting oxides are represented by the structure

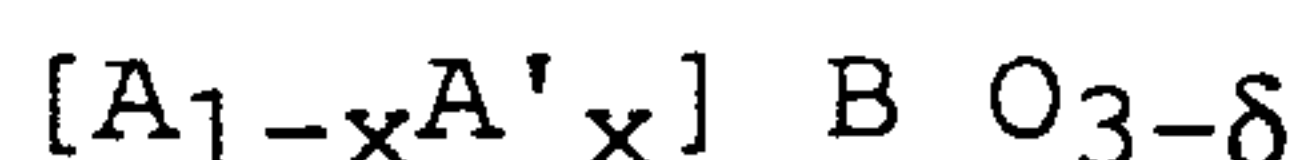

or

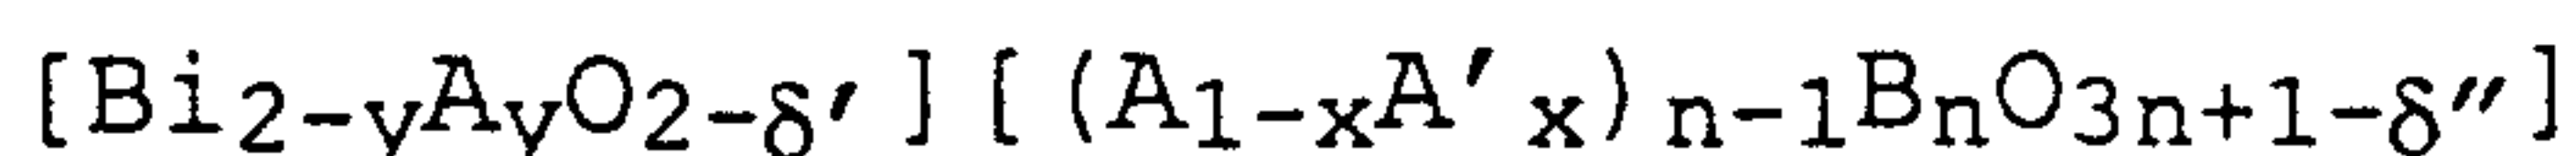

20

wherein A is chosen from the group consisting of Ca, Sr, Ba, Bi, Pb, Ca, K, Sb, Te, Na and mixtures thereof; A' is chosen from the group consisting of La, Y, Ce, Pr, Nd, Pm, Sm, Eu, Gd, Tb, Dy, Ho, Er, Tm, Yb, Lu, Th, U, and mixtures thereof; B is chosen from the group consisting of Fe, Mg, Cr, V, Ti, Ni, Ta, Mn, Co, V, Cu, and mixtures thereof; x is not greater than 0.9, preferably not greater than about 0.6, more preferably not greater than 0.4, most preferably not greater than 0.25; y

is an integer from 0 to 2; n is an integer from 1 to 7; and δ , δ' and δ'' are determined by the valence of the metals.

The mixed conducting oxides are formed into fluid
impermeable membranes. At least one surface of the fluid
impermeable membrane is coated with a porous layer of metal or
metal oxide. The coating acts as a chemically active site
which enhances the kinetic rate of the interfacial fluid
exchange at the fluid impermeable membrane surface.

The current invention is directed towards a solid state
membrane, comprising a structure selected from the group
consisting of substantially perovskitic material, an intimate,
gas-impervious, multi-phase mixture of an
electronically-conductive phase and an oxygen ionconductive
phase, and combinations thereof; and a porous coating selected
from the group consisting of metals, metal oxides and
combinations thereof.

The current invention is also directed towards the use of
one or more membranes formed from the coated mixed conductors
described. Suitable uses of such membranes include processes
for the partial oxidation of C₁-C₄ hydrocarbons, and oxygen
separation, production and removal from oxygen-containing
fluids, particularly air, or air diluted with other fluids.

DETAILED DESCRIPTION OF THE INVENTION

The present invention relates perovskitic membranes with a chemically active coating, and processes employing such membranes. One such process is separating oxygen from oxygen-containing feeds at elevated temperatures. The membranes are conductors of product fluid ions and electrons, and are of a composition that forms a substantially perovskitic structure. Specific compositions stabilize a perovskitic structure in the mixed conducting fluid impermeable membrane. Membranes fabricated from such material display increased flux. More particularly, a mixed conductor membrane wherein the fluid impermeable membrane has the composition

$$[A_{1-x}A'_x] B O_{3-\delta} \quad \text{Equation 1}$$

or

$$[Bi_{2-y}A_yO_{2-\delta'}] [(A_{1-x}A'_x)_{n-1}B_nO_{3n+1-\delta''}] \quad \text{Equation 2}$$

20

wherein A is chosen from the group consisting of Ca, Sr, Ba, Bi, Pb, Ca, K, Sb, Te, Na and mixtures thereof; A' is chosen from the group consisting of La, Y, Ce, Pr, Nd, Pm, Sm, Eu, Gd, Tb, Dy, Ho, Er, Tm, Yb, Lu, Th, U, and mixtures thereof; B is chosen from the group consisting of Fe, Mg, Cr, V, Ti, Ni, Ta, Mn, Co, V, Cu, and mixtures thereof; x is not greater than 0.9; y is an integer from 0 to 2; n is an integer from 1 to 7; and δ , δ' , and δ'' are determined by the valence of the metals; wherein the perovskitic phase is substantially stable in air

over the temperature range of 25-950°C; and coated with a porous layer of metal or metal oxide selected from the group consisting of platinum, silver, palladium, lead, cobalt, nickel, copper, bismuth, samarium, indium, tin, praseodymium, their oxides, and combinations of the same, has been shown to exhibit unexpectedly high fluid transport fluxes, particularly transport fluxes of oxygen.

Applicants' discovery can be more fully understood by developing an understanding of the mechanism by which product fluids are ionically transported through the mixed conducting oxide membrane. Typical product fluids include industrial gases, such as oxygen, nitrogen, argon, hydrogen, helium, neon, air, carbon monoxide, carbon dioxide, synthesis gases (mixtures of CO and H₂), and the like. The product fluid flux observed by conventional mixed conductor membranes is controlled by surface kinetic limitations and bulk diffusion limitations. Surface kinetic limitations are constraints to product fluid flux caused by one or more of the many steps involved in converting a feed fluid molecule on the feed side of the mixed conductor membrane into mobile ions and converting the ions back to product fluid molecules, or reacting the ions with a reactant fluid molecule, on the permeate side of the mixed conductor membrane. Bulk diffusion limitations are constraints on fluid flux relating to the diffusivity of product fluid ions through the fluid impermeable membrane material.

Membranes composed substantially of perovskitic phase materials exhibit high overall product fluid flux. However, the perovskitic phase is not formed in all mixed conducting oxide materials or, if formed, is not stable over the required
5 range of fabricating and operating conditions. For instance, membranes formed from hexagonal phase materials exhibit little, if any, oxygen flux. To produce an effective oxygen membrane, therefore, the membrane composition must maintain a substantially high fraction of stable perovskitic phase in the
10 membrane at operating conditions.

To complement the enhanced bulk diffusion rate through the fluid impermeable membrane, the kinetic rates of interfacial fluid exchange must be examined. If the rate at
15 which the feed fluid is converted to mobile ions on the feed side of the fluid impermeable membrane, or the rate at which the mobile ions in the fluid impermeable membrane are converted back to product fluid molecules, is slower than the fluid impermeable membrane bulk diffusion rate, the overall
20 product permeation rate will be limited to the slowest of the three processes.

Applicants have discovered a novel composition which stabilizes the perovskitic phase in fluid impermeable
25 membranes with compositions previously unable to sustain a stable perovskitic phase over the range from ambient temperature and pressure in air to the conditions used for product fluid separation. In particular, specific compositions stabilize a substantially cubic perovskite layer

in a substantially perovskitic structure in ABO materials.

Porous coatings on one or more surface of the cubic perovskite material increases the rate of fluid adsorption, ionization, recombination or desorption, as well as increasing the overall
5 fluid flux rate.

The present invention provides coated membranes, and permits the fabrication of mixed conductor oxide structures that are substantially perovskitic phase. Membranes made from
10 such material and in such manner exhibit relatively high overall bulk diffusion rates.

The claimed membranes comprise the composition described in Equation 1 and Equation 2, having no connected
15 through porosity, a substantially stable perovskitic structure in air at 25-950°C, coated with a porous layer of metal, metal oxides, or mixtures of metals and metal oxides, and the capability of conducting electrons and product fluid ions at operating temperatures.

20

Multicomponent metallic oxides suitable for practicing the present invention are referred to as "mixed" conducting oxides because such multicomponent metallic oxides conduct electrons as well as product fluid ions at elevated
25 temperatures. Suitable mixed conducting oxides are represented by the compositions of Equation 1 and 2, which yield a substantially stable cubic perovskite structure in air at 25°C to the operating point of material. Materials

described in the prior art exhibit significantly lower product fluid fluxes.

The thickness of the material can be varied to ensure
5 sufficient mechanical strength of the membrane. As discussed
previously, thinner membranes increase the overall bulk
diffusion rate for a given membrane material. To exploit this
phenomena, thinner membranes may be supported by one or more
porous supports. The minimum thickness of unsupported mixed
10 conductor membranes of Applicants' invention is about 0.01 mm,
preferably about 0.05 mm, most preferably about 0.1 mm. The
maximum thickness of unsupported mixed conductor membranes of
Applicants' invention is about 10 mm, preferably about 2 mm,
most preferably about 1 mm.

15

The minimum thickness of supported mixed conductor
membranes of Applicants' invention is about 0.0005 mm,
preferably about 0.001 mm, most preferably about 0.01 mm. The
maximum thickness of supported mixed conductor membranes of
20 Applicants' invention is about 2 mm, preferably about 1 mm,
most preferably about 0.1 mm.

In addition to the increased product fluid flux, the
membranes of the present invention exhibit stability over a
25 temperature range from 25°C to the operating temperature of
the membrane and an oxygen partial pressure range from 1 to
about 1×10^{-6} atmosphere (absolute) without undergoing phase
transitions. Substantially stable perovskitic structures
include all structures with no less than 90% perovskitic phase

material, preferably no less than 95% perovskitic phase .
material, and most preferably no less than 98% perovskitic
phase material, which do not exhibit permanent phase
transitions over a temperature range from 25°C to 950°C and an
5 oxygen partial pressure range from 1 to about 1×10^{-6}
atmosphere (absolute).

Applicants' invention also includes chemically-active
10 coated membranes of an intimate, fluid-impervious, multi-phase
mixture of any electronically-conducting material with any
product fluid ion-conducting material and/or a gas impervious
"single phase" mixed metal oxide having a perovskite structure
and having both electron-conductive and product fluid
15 ion-conductive properties. The phrase "fluid-impervious" is
defined herein to mean "substantially fluid-impervious or
gas-tight" in that the mixture does not permit a substantial
amount of fluid to pass through the membrane (i.e., the
membrane is non-porous, rather than porous, with respect to
20 the relevant fluids). In some cases, a minor degree of
perviousness to fluids might be acceptable or unavoidable,
such as when hydrogen gas is present.

The term "mixtures" in relation to the solid multi-
25 component membrane includes materials comprised of two or more
solid phases, and single-phase materials in which the atoms of
the various elements are intermingled in the same solid phase,
such as in yttria-stabilized zirconia. The phrase

"multi-phase mixture" refers to a composition which contains two or more solid phases interspersed without forming a single phase solution.

5 In other words, the multi-phase mixture is "multiphase", because the electronically-conductive material and the product fluid ion-conductive material are present as at least two solid phases in the fluid impervious solid membrane, such that the atoms of the various components of the multi-component
10 membrane are, for the most part, not intermingled in the same solid phase.

 The multi-phase solid membrane of the present invention differs substantially from "doped" materials known in the art.
15 A typical doping procedure involves adding small amounts of an element, or its oxide (i.e., dopant), to a large amount of a composition (i.e., host material), such that the atoms of the dopant become permanently intermingled with the atoms of the host material during the doping process, whereby the material
20 forms a single phase. The multi-phase solid membrane of the present invention, on the other hand, comprises a product fluid ion conductive material and an electronically conductive material that are not present in the dopant/host material relationship described above, but are present in substantially
25 discrete phases. Hence, the solid membrane of the present invention, rather than being a doped material, may be referred

to as a two-phase, dual-conductor, multi-phase, or multi-component membrane.

The solid state membranes of the present invention may have a first surface, a second surface, an electron-conductive
5 path between the first and second surfaces, and an oxygen ion-conductive path between the first and second surfaces.

The multi-phase membrane of the present invention can be distinguished from the doped materials by such routine procedures as electron microscopy, X-ray diffraction analysis,
10 X-ray adsorption mapping, electron diffraction analysis, infrared analysis, etc., which can detect differences in composition over a multi-phase region of the membrane.

Typically, the product fluid ion-conducting materials or phases are solid solutions (i.e., solid "electrolytes") formed
15 between oxides containing divalent and trivalent cations such as calcium oxide, scandium oxide, yttrium oxide, lanthanum oxide, etc., with oxides containing tetravalent cations such as zirconia, thoria and ceria or the product fluid ion-conducting materials or phases comprise a product fluid
20 ion-conductive mixed metal oxide of a perovskite structure. Their higher ionic conductivity is believed to be due to the existence of product fluid ion site vacancies. One product fluid ion vacancy occurs for each divalent or each two trivalent cations that are substituted for a tetravalent ion
25 in the lattice. Any of a large number of oxides such as yttria stabilized zirconia, doped ceria, thoria-based materials, or doped bismuth oxides may be used. Some of the

known solid oxide transfer materials include Y_2O_3 -stabilized ZrO_2 , CaO -stabilized ZrO_2 , Sc_2O_3 -stabilized ZrO_2 , Y_2O_3 -stabilized Bi_2O_3 , Y_2O_3 -stabilized CeO_2 , CaO -stabilized CeO_2 , ThO_2 , Y_2O_3 -stabilized ThO_2 , or ThO_2 , ZrO_2 , Bi_2O_3 , CeO_2 , or HfO_2 stabilized by
5 addition of any one of the lanthanide oxides or CaO . Many other oxides are known which have demonstrated product fluid ion-conducting ability which could be used in the multi-phase mixtures, and they are included in the present concept.

Preferred among these solid electrolytes are the
10 Y_2O_3 -(yttria) and CaO -(calcia) stabilized ZrO_2 (zirconia) materials. These two solid electrolytes are characterized by their high ionic conductivity, their product fluid ion conduction over wide ranges of temperature and product fluid pressure, and their relatively low cost.

15

Applicants have also discovered that since perovskitic structures exhibit excellent electron-conductive and product fluid ion-conductive properties, in multi-phase materials, perovskitic materials may be used as the
20 electronically-conductive material, the product fluid ion-conductive material, or both. The resulting multi-phase mixture can be coated with a porous, chemically active material to produce a solid state membrane with enhanced flux.

The present invention can consist of a solid state
25 membrane comprising an intimate, gas-impervious, multi-phase mixture comprising from about 1 to about 75 parts by volume of

the electronically-conductive phase and from about 25 to about 99 parts by volume of the product ion-conductive phase.

The porous coating comprises metal or metal oxide
5 selected from the group consisting of platinum, silver, palladium, lead, cobalt, nickel, copper, bismuth, samarium, indium, tin, praseodymium, their oxides, and combinations of the same, where the coating exhibits oxygen ionic conductivity less than about $1.0 \text{ ohm}^{-1}\text{cm}^{-1}$, preferably less than about 0.1
10 $\text{ohm}^{-1}\text{cm}^{-1}$, most preferably less than about $0.01 \text{ ohm}^{-1}\text{cm}^{-1}$ under operating conditions. The porous coating may be applied using standard applications techniques including, but not limited to spraying, dipping, laminating, pressing, implanting, sputter deposition, chemical deposition, and the
15 like.

The membranes of the present invention can be used to recover product fluid, such as oxygen, from a product fluid-containing feed fluid by delivering the product fluid-
20 containing feed fluid into a first compartment which is separated from a second compartment by the subject membrane, establishing a positive product fluid partial pressure difference between the first and second compartments by producing an excess product fluid partial pressure in the
25 first compartment and/or by producing a reduced product fluid partial pressure in the second compartment; contacting the product fluid-containing feed fluid with the membrane at a temperature greater than about 400°C to separate the product

fluid-containing feed into a product fluid-enriched permeate stream and a product fluid-depleted effluent stream.

A difference in product fluid partial pressure between
5 the first and second compartments provides the driving force
for effecting the separation when the process temperature is
elevated to a sufficient temperature to cause product fluid in
the product fluid-containing feed fluid residing in the first
compartment to adsorb onto the first surface of the membrane,
10 become ionized via the membrane and to be transported through
the fluid impermeable membrane in the ionic form. A product
fluid-enriched permeate is collected or reacts in the second
compartment wherein ionic product fluid is converted into the
neutral form by the release of electrons at the second surface
15 of the membrane, in the second compartment.

A positive product fluid partial pressure difference
between the first and second compartments can be created by
compressing the feed fluid, such as air or other oxygen-
20 containing fluid in an oxygen separation process, in the first
compartment to a pressure sufficient to recover the product
fluid-enriched permeate stream at a pressure of greater than
or equal to about one atmosphere. Typical pressures range
from about 15 psia to about 250 psia and the optimum pressure
25 will vary depending upon the amount of product fluid in the
product fluid-containing feed. Conventional compressors can
be utilized to achieve the necessary product fluid partial
pressure. Alternately, a positive product fluid partial
pressure difference between the first and second compartments

can be achieved by evacuating the second compartment to a pressure sufficient to recover the product fluid-enriched permeate. Evacuation of the second compartment may be achieved mechanically, using compressors, pumps and the like; 5 chemically, by reacting the product fluid-enriched permeate; thermally, by cooling the product fluid-enriched permeate; or by other methods known in the art. Additionally, the present invention may utilize an increase of product fluid partial pressure in the first compartment while simultaneously 10 reducing the product fluid partial pressure in the second compartment, by the means described above. The relative pressures may also be varied during operation, as necessary to optimize product fluid separation, or necessitated by process which supply feeds to, or accept product streams from, the two 15 compartments.

Recovery of the product fluid-enriched permeate may be effected by storing the substantially product fluid-enriched permeate in a suitable container or transferring the same to 20 another process. For oxygen production processes, the product fluid-enriched permeate typically comprises pure oxygen or high purity oxygen defined as generally containing at least about 90 vol% O₂, preferably more than about 95 vol% O₂ and especially more than 99 vol% O₂.

25

Although oxygen separation and purification is described herein for illustrative purposes, the present invention may be used in similar fashion for separation, purification and reaction of other product fluids including, but not limited

to, nitrogen, argon, hydrogen, helium, neon, air, carbon monoxide, carbon dioxide, synthesis gases, and the like

The following example is provided to further illustrate Applicants' invention. The example is illustrative and is not intended to limit the scope of the appended claims.

EXAMPLE

Example 1

10 A mixed conductor fluid impermeable membrane of nominal composition $[\text{La}_{0.2}\text{Sr}_{0.8}][\text{Co}_{0.1}\text{Fe}_{0.7}\text{Cr}_{0.2}\text{Mg}_{0.01}]\text{O}_{3-\delta}$ was prepared in a manner similar to the examples described in U.S. Patent No. 5,061,682.

15 4232.60 grams of $\text{Sr}(\text{NO}_3)_2$, 773.80 grams of La_2O_3 (Alpha, dried at 850°C), 6927.80 grams of $\text{Fe}(\text{NO}_3)\cdot 9\text{H}_2\text{O}$, 730.50 grams of $\text{Co}(\text{NO}_3)_3\cdot 6\text{H}_2\text{O}$, and 64.10 grams of $\text{Mg}(\text{NO}_3)_2$ were added to approximately 30 liters of deionized water containing dissolved sucrose.

20 A portable spray-dryer was used to spray-dry the ceramic precursor solution described above. A suitable portable spray-dryer is available from Niro Atomizer of Columbia, Md. The spray-dryer includes a centrifugal atomizer capable of speeds up to 40,000 rpm. The atomizer sits near the top of a
25 drying chamber that has an inner diameter of 2 feet, 7 inches, with a 2-foot cylindrical height and a 60° conical bottom. The centrifugal atomizer and drying chamber are made from stainless steel. The drying chamber is coupled to an electric air heater for providing drying air to the drying chamber.

The drying air is drawn through the drying chamber by a blower positioned downstream from the drying chamber. The spray-dryer includes a cyclone separator that receives the drying air and dry product from the bottom of the drying chamber.

5 The cyclone separator separates the dry product from the exhausted drying air. The bottom of the cyclone separator includes an outlet that allows the dried particles to gravitate into a vertically oriented tube furnace capable of maintaining an air temperature of about 300°-450° C. The dried
10 particles are pyrolyzed in the tube furnace. The tube furnace has a height sufficient to provide a residence time for the freely gravitating particles of about 0.5 to 2.0 seconds. The bottom of the tube furnace communicates with a collection chamber where the ceramic particles are collected.

15

The ceramic precursor solution described above was introduced into the spray-dryer chamber at a flow rate of about 1.8 liters per hour. The centrifugal atomizer spinning at about 30,000 RPM broke up the precursor solution into small
20 droplets having a diameter on the order of about 20-50 microns. The air flow through the drying chamber and cyclone ranged between about 35-40 standard cubic feet per minute. The air entering the drying chamber was preheated to about 375° C. As the small droplets were forcefully convected
25 toward the bottom of the drying chamber, they became fully dehydrated down to a critical state of dehydration such that their diameter was reduced to about 10.0 microns or less. The temperature of the drying gas at the bottom of the drying chamber was approximately 125° C., which ensures substantially

all the water was removed from the particles in the spray-dryer. The dried powder and drying air were then separated from each other in the cyclone separator. The separated powder fell due to gravity through the tube furnace, which was
5 preheated to about 490° C. The particles' residence time in the furnace ranged from about 0.5-2.0 seconds. The temperature in the tube furnace initiated the exothermic anionic oxidation-reduction reaction between the nitrate ions and the oxides in the individual particles. The combustion
10 by-products (CO₂ and water vapor) were passed through the system and out the exhaust, while the reacted particles dropped into the collection jar. About 1000 grams of particles were collected.

15 The resulting powders were analyzed, and had the composition [La_{0.19}Sr_{0.8}][Co_{0.1}Fe_{0.69}Cr_{0.2}Mg_{0.01}]O_x. A 190.10 g portion of the resulting powder, 3.88 g polyvinyl butyral resin (Monsanto, St. Louis MO), and 160 ml toluene were charged, with 820 g of ZrO₂ media to a jar mill, and milled
20 for approximately 3 hours. 20 ml absolute ethanol was added, and the slurry allowed to stand, without milling, overnight. The product was filtered, and the resulting powder was dried and screened to pass through a 60 mesh Tyler screen. X-ray diffraction (XRD) of the powder showed that the material was
25 100% cubic perovskite phase.

A 4 g portion of the screened powder was pressed into a 1-3/8" diameter disk under 28,000 psi applied pressure. The disk was fired in air at 1050°C for 15 minutes, the temperature

increased to 1300°C over the course of 13 hours and maintained for 1 hour, then cooled to ambient temperature.

The disk was polished on both sides with 500 grit SiC
5 with isopropanol to a final thickness of 1 mm. 3.0 wt% Bi₂O₃
(Fluka) was added to platinum ink (Englehardt), and the
resulting mixture was diluted with toluene to form a low
viscosity coating fluid. Both sides of the polished disk were
coated with the fluid over an area of approximately 2.0 cm².
10 The coated disk was heated in air to 1065°C over a period of
10.5 hours, then cooled to ambient temperature. The coated
disk was bonded to a 1 inch outside diameter mullite tube with
a 1/8" thick Pyrex ring, and the exposed surface area measured
to be approximately 2 cm².

15

The mullite tube, disk, and gas handling equipment were
placed in a thermistatically controlled electric heater. The
disk was heated in stagnant air to 850°C as indicated by a
thermocouple affixed to the mullite tube approximately 1 cm
20 from the tube/disk bond. Air flow at the rate of 1.0 l/min
was initiated on one side of the disk, and helium permeate
feed flow at 150 cm³/min started on the other side of the
disk. The effluent helium permeate was analyzed using on-line
gas chromatography. The permeate was also analyzed for
25 nitrogen, to permit correction for any air leakage into the
permeate stream.

Oxygen flux of the membrane was calculated using the
expression:

$$q_{O_2} = [q_P * (x_{O_2P} - 0.256 * x_{N_2P}) * P_0/760 * 273/T_0] / 100$$

where q_{O_2} = Oxygen flux (cm³/min);

5 q_P = Permeate exhaust flow rate (cm³/min);

x_{O_2P} = Oxygen concentration in permeate exhaust (%);

x_{N_2P} = Nitrogen concentration in permeate exhaust
(%);

P_0 = Atmospheric pressure (mm Hg, abs.); and

10 T_0 = Ambient temperature (degrees K).

Oxygen flux was normalized to correct for membrane disk thickness variations using the expression:

15
$$q'_{O_2} = q_{O_2} * L$$

where q'_{O_2} = Oxygen flux normalized for thickness
(cm³/min-mm);

q_{O_2} = Oxygen flux (cm³/min); and

20 L = Thickness of membrane disk (mm).

Oxygen flux per unit area was calculated by dividing the oxygen flux normalized for thickness (q'_{O_2}) by the membrane
25 disk area, measured in cm².

Operating characteristics of the disk were evaluated for over 50 hours. Test data are supplied in Table 1, below. Ambient temperature (T_0) was maintained at 293°K, and P_0 was

741 mm Hg for all data points. The air feed rate was maintained at 1000 sccm.

The data of Table 1 show the excellent long-term stability of the material in air at elevated temperatures, and the high oxygen flux.

TABLE 1

Time	Membrane	Permeate	Permeate		qO ₂	q'O ₂
(hours)	Temp	(sccm)	analysis		(cc/min)	(cc/cm ² /min)
	(Deg. C)		(xO ₂ P)	(xN ₂ P)		
1	850	154	0.163	0.017	0.256	0.128
6	850	152	0.159	0.017	0.248	0.124
53	850	154	0.087	0.020	0.128	0.064

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A solid state membrane having a first surface and a second surface, comprising

A) a structure selected from the group consisting of:

- a) substantially perovskitic material;
- b) an intimate, gas-impervious, multi-phase mixture of an electronically-conductive phase and an oxygen ion conductive phase, wherein said electronically conductive phase forms an electron-conductive path between said first surface and said second surface, and said oxygen ion conductive phase forms an oxygen ion conductive path between said first surface and said second surface; and
- c) combinations thereof;

and

B) a porous, chemically active, electronically conductive coating selected from the group consisting of metals, metal oxides and combinations thereof;

wherein said substantially perovskitic material is selected from the group consisting of cubic perovskites, brownmillerites, Aurivillius phases, and combinations thereof.

2. The solid state membrane of claim 1, wherein said substantially perovskitic material has a composition selected from the group consisting of $(A_{1-x}A'_x)B O_{3-d}$, $\{Bi_{2-y}A_yO_{2-d}\} \{A_{1-x}A'_x\}_{n-1}B_nO_{3n+1-d''}$, and combinations thereof, wherein

A is selected from the group consisting of Ca, Sr, Ba, Bi, Pb, K, Sb, Te, Na and mixtures thereof;

A' is selected from the group consisting of La, Y, Ce, Pr, Nd, Pm, Sm, Eu, Gd, Tb, Dy, Ho, Er, Tm, Yb, Lu, Th, U, and mixtures thereof;

B is selected from the group consisting of Fe, Mg, Cr, V, Ti, Ni, Ta, Mn, Co, V, Cu, and mixtures thereof;

x is not greater than about 0.9;

y is an integer from 0 to 2;

n is an integer from 1 to 7; and

d, d', and d'' are determined by the valence of the metals.

3. The solid state membrane of claim 2, wherein said substantially perovskitic material is a cubic perovskite.

4. The solid state membrane of claim 1, wherein said substantially perovskitic material has a composition $(A_{1-x}A'_x)B O_{3-d}$ wherein

A is selected from the group consisting of Ca, Sr, Ba, Bi, Pb, K, Sb, Te, Na and mixtures thereof;

A' is selected from the group consisting of La, Y, Ce, Pr, Nd, Pm, Sm, Eu, Gd, Tb, Dy, Ho, Er, Tm, Yb, Lu, U, and mixtures thereof;

B is selected from the group consisting of Fe, Mg, Cr, V, Ti, Ni, Ta, Mn, Co, V, Cu, and mixtures thereof;

x is not greater than about 0.9; and

d is determined by the valence of the metals.

5. The solid state membrane of claim 2, wherein said perovskitic material is a brownmillerite.

6. The solid state membrane of claim 1, wherein said porous coating is selected from the group consisting of platinum, silver, palladium, lead, cobalt, nickel, copper, bismuth, samarium, indium, tin, praseodymium, their oxides, and combinations of the same.

7. A solid state membrane, comprising a structure of substantially perovskitic

material and a porous, chemically active, electronically conductive coating selected from the group consisting of metals, metal oxides and combinations thereof, wherein said perovskitic material comprises a composition $\{\text{Bi}_{2-y}\text{A}_y\text{O}_{2-d'}\} \{(\text{A}_{1-x}\text{A}'_x)_{n-1}\text{B}_n\text{O}_{3n+1-d''}\}$, wherein

A is selected from the group consisting of Ca, Sr, Ba, Bi, Pb, K, Sb, Te, Na and mixtures thereof;

A' is selected from the group consisting of La, Y, Ce, Pr, Nd, Pm, Sm, Eu, Gd, Tb, Dy, Ho, Er, Tm, Yb, Lu, Th, U, and mixtures thereof;

B is selected from the group consisting of Fe, Mg, Cr, V, Ti, Ni, Ta, Mn, Co, Cu, and mixtures thereof;

x is not greater than about 0.9;

y is an integer from 0 to 2;

n is an integer from 1 to 7; and

d' and d'' are determined by the valence of the metals.

8. A solid state membrane, comprising a structure of substantially perovskitic material and a porous coating selected from the group consisting of metals, metal oxides and combinations thereof, wherein said perovskitic material comprises an Aurivillius phase.