



(21)(A1) **2,269,988**
(86) 1998/01/03
(87) 1998/07/16

(72) GRÖSCHL, Andreas, DE
(72) GROTH, Torsten, DE
(72) HASSMANN, Volker, DE
(72) HORN, Jürgen, DE
(72) JANISCH, Ingo, DE
(72) JOENTGEN, Winfried, DE
(72) LEHMANN, Bernhard, DE
(72) ZARGES, Wolfgang, DE
(71) BAYER AKTIENGESELLSCHAFT, DE
(51) Int.Cl.⁶ C11D 1/14, C11D 3/37, C11D 3/33
(30) 1997/01/09 (197 00 493.8) DE
(54) PROCEDE POUR NETTOYER DES SURFACES
(54) SURFACE-CLEANING METHOD

(57) L'invention concerne un procédé permettant de nettoyer des surfaces en verre, en graphite, en céramique, en matériaux polymères et métalliques, en fibres synthétiques et végétales, par ex. des tissus, des textiles ou des vieux papiers, ainsi que des surfaces membranaires, par décollement ou désagrégation d'impuretés organiques ou inorganiques, par simple rinçage, à l'aide d'une solution, d'un acide iminocarboxylique, d'un polyamino-acide, d'un émulsifiant ou d'un mélange de ces constituants.

(57) The invention concerns a method of cleaning surfaces made of glass, graphite, ceramics, polymer and metal materials, synthetic and vegetable fibres, for example woven fabrics, textiles or used paper, and membrane surfaces by detaching or dissolving organic and inorganic impurities by means of a simple rinsing process. According to the invention, a solution, an iminocarboxylic acid, a polyamino acid, an emulsifier or a mixture thereof is used.

PCT

WELTORGANISATION FÜR GEISTIGES EIGENTUM

Internationales Büro



INTERNATIONALE ANMELDUNG VERÖFFENTLICHT NACH DEM VERTRAG ÜBER DIE
INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES PATENTWESENS (PCT)

| | | | |
|---|--|-----------|---|
| (51) Internationale Patentklassifikation⁶ : C11D 1/14, 3/33, 3/37 | | A1 | (11) Internationale Veröffentlichungsnummer: WO 98/30661 (43) Internationales Veröffentlichungsdatum: 16. Juli 1998 (16.07.98) |
| <p>(21) Internationales Aktenzeichen: PCT/EP98/00016</p> <p>(22) Internationales Anmeldedatum: 3. Januar 1998 (03.01.98)</p> <p>(30) Prioritätsdaten: 197 00 493.8 9. Januar 1997 (09.01.97) DE</p> <p>(71) Anmelder (für alle Bestimmungsstaaten ausser US): BAYER AKTIENGESELLSCHAFT [DE/DE]; D-51368 Leverkusen (DE).</p> <p>(72) Erfinder; und (75) Erfinder/Anmelder (nur für US): GRÖSCHL, Andreas [DE/DE]; Piet-Mondrian-Strasse 70, D-51375 Leverkusen (DE). GROTH, Torsten [DE/DE]; Bergstrasse 52, D-51519 Odenthal (DE). HASSMANN, Volker [DE/DE]; Uerdinger Strasse 465a, D-47800 Krefeld (DE). HORN, Jürgen [DE/DE]; Nordwall 47, D-47589 Uedem (DE). JANISCH, Ingo [AT/US]; 519 Longley Road, Groton, MA 01450 (US). JOENTGEN, Winfried [DE/DE]; Schlagbaumweg 206, D-51067 Köln (DE). LEHMANN, Bernhard [DE/DE]; Kohlweg 15, D-52072 Aachen (DE). ZARGES, Wolfgang [DE/DE]; Jakob-Böhme-Strasse 2, D-51065 Köln (DE).</p> <p>(74) Gemeinsamer Vertreter: BAYER AKTIENGESELLSCHAFT; D-51368 Leverkusen (DE).</p> | | | |
| <p>(81) Bestimmungsstaaten: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO Patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), eurasisches Patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), europäisches Patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI Patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Veröffentlicht <i>Mit internationalem Recherchenbericht. Vor Ablauf der für Änderungen der Ansprüche zugelassenen Frist. Veröffentlichung wird wiederholt falls Änderungen eintreffen.</i></p> | | | |

(54) Title: SURFACE-CLEANING METHOD**(54) Bezeichnung:** VERFAHREN ZUR REINIGUNG VON OBERFLÄCHEN**(57) Abstract**

The invention concerns a method of cleaning surfaces made of glass, graphite, ceramics, polymer and metal materials, synthetic and vegetable fibres, for example woven fabrics, textiles or used paper, and membrane surfaces by detaching or dissolving organic and inorganic impurities by means of a simple rinsing process. According to the invention, a solution, an iminocarboxylic acid, a polyamino acid, an emulsifier or a mixture thereof is used.

(57) Zusammenfassung

Die vorliegende Erfindung betrifft ein Verfahren zur Reinigung von Oberflächen aus Glas, Graphit, Keramik, polymeren und metallischen Werkstoffen, künstlichen und vegetabilischen Fasern, z.B. Geweben, Textilien oder Altpapier, sowie von Membranoberflächen, durch Ablösen oder Auflösen von organischen und anorganischen Verunreinigungen durch einen einfachen Spülvorgang, wobei eine Lösung, eine Iminocarbonsäure, eine Polyaminoäure, ein Emulgator oder ein Gemisch beider eingesetzt wird.

- 18 -

Method of cleaning surfaces**Abstract**

The present invention relates to a method of cleaning surfaces made of glass, graphite, ceramics, polymeric and metallic materials, synthetic and vegetable fibres, e.g. fabrics, textiles or waste paper, in particular membrane surfaces, by detaching or dissolving organic and inorganic soilings by a simple flushing operation, where a solution, an iminocarboxylic acid, a polyamino acid, an emulsifier or a mixture of the two is used.

- 1 -

Method of cleaning surfaces

The present invention relates to a method of cleaning surfaces made of glass, graphite, ceramics, polymeric and metallic materials, synthetic and vegetable fibres, e.g. fabrics, 5 textiles or waste paper, in particular membrane surfaces, by detaching or dissolving organic and inorganic soilings by a simple flushing operation.

Deposits of organic and inorganic impurities are a constant problem in industry and the 10 home. Thus, the deposits lead, for example, to a reduction in flow rate or even to blockages in pipes, to contaminations in reactors or soilings on objects of everyday use. Glassware is particularly susceptible to soilings and is a particular problem in the domestic sector. In order to maintain the operation of equipment and materials and hygiene, the cleaning of surfaces is an important procedure in many fields.

15 Membranes, as a specific example of surfaces, are used in a variety of ways in industry and in the medical field. For their use to be economical, it is important to maintain a high flow rate. Deposits on the membrane surface partially block the membrane, resulting in a reduced and uneconomical permeate flow. Cleaning compositions can be used to largely remove the soilings and increase the flow rate again.

20 The Aachen membrane colloquium, preprints page 41 (1991) reports on the use of various flushing chemicals; only alkaline formulations which contain, for example, EDTA, phosphates, anionic and nonionic surfactants and enzymes lead to adequate cleaning performances. Citric acid and peracetic acid do not exhibit an adequate action.

25 Permasep Engineering Manual, Bulletin 507, page 1-4 (1982) describes various cleaning compositions and cleaning procedures for cleaning membranes. The cleaning compositions proposed were frequently standard commercial cleaning compositions, which are a complex mixture of very many different active components.

30 Desalination, 77, 135-179 (1990) reports on flushing procedures for various applications of ultrafiltration, where purification is in some instances necessary after an operating period of just a few hours.

35 A list of cleaning compositions and their activity mechanisms is given in Desalination, 71, 325-335 (1989), and the need to use a variety of cleaning compositions in a certain sequence to achieve satisfactory cleaning performances is emphasized in particular.

5 The specialist journal Vom Wasser, 67, 59-68 (1986) reports on the optimization of investigations showed that a combination of EDTA and a formulated cleaning flushing processes during water treatment using reverse osmosis plants, where the aim composition produced inferior performances than EDTA on its own.


10 EP 0 513 948 describes the cleaning of hard surfaces by a cleaning composition that is composed of a variety of components and inter alia comprises a complexing agent and an organic solvent.

15 EP 0 261 874 discloses a cleaning composition for hard surfaces which comprises EDTA and an alkanesulphonate. US 4 808 328 likewise discloses cleaning compositions for hard surfaces which, in addition to EDTA, comprise an alkanesulphonate.

20 It is a common feature of all cleaning compositions and in particular all membrane cleaners which cover a broad field of use that they are composed of a complex mixture of many different cleaning chemicals and auxiliaries, and even that in most cases a flushing procedure with various cleaning compositions has to be carried out in a certain sequence for effective cleaning. In particular, most formulated membrane cleaners 25 contain phosphates or phosphonates to improve the membrane cleaning performance.

Surprisingly, it has now been found that the use of a cleaning composition which 25 comprises at least one component from the series

i) iminodisuccinic acid of the formula (I)

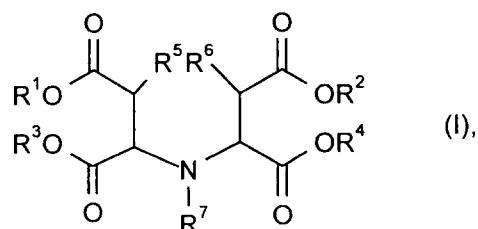

30 in which

R¹, R², R³ and R⁴ independently of one another are H, Li, Na, K, NH₄, H₃NCH₂CH₂OH, H₂N(CH₂CH₂OH)₂ or HN(CH₂CH₂OH)₃,

- 3 -

R⁵ and R⁶ independently of one another are H or OH, and

5 R⁷ is H, CH₂CH₂OH, CH₂CH₂CH₂OH, CH₂CH(OH)CH₃, CH₂COOR⁸ or CH₂CH₂COOR⁸, where R⁸ independently of R¹ has the scope of meanings of R¹,

10 ii) polyamino acid or
 iii) emulsifier,
 15 by a simple flushing operation (no procedure with various cleaners in sequence) achieves significantly better cleaning performances on surfaces, in particular membrane surfaces, than does the use of cleaners recommended in the literature. In addition, better cleaning performances are also achieved than when phosphate- and phosphonate-containing cleaners are used.

20 The invention relates to a method of cleaning surfaces made of glass, graphite, ceramics, polymeric and metallic materials, synthetic and vegetable fibres, and membranes by detaching or dissolving organic or inorganic soilings or a mixture of the two by a simple flushing operation with a solution of a cleaning composition at, in particular, 10-100°C and a pH of in particular 3-13, which is characterized in that the 25 cleaning composition used is at least one component from the series

i) iminodisuccinic acid of the formula (I)
 25

(I).

in which

30 R¹, R², R³ and R⁴ independently of one another are H, Li, Na, K, NH₄, H₃NCH₂CH₂OH, H₂N(CH₂CH₂OH)₂ or HN(CH₂CH₂OH)₃,

R⁵ and R⁶ independently of one another are H or OH, and

5 R⁷ is H, CH₂CH₂OH, CH₂CH₂CH₂OH, CH₂CH(OH)CH₃, CH₂COOR⁸ or
CH₂CH₂COOR⁸, where R⁸ independently of R¹ has the scope of
meanings of R¹,


5

- ii) polyamino acid or
- iii) emulsifier,

10 comprises and the solvent used is water or a mixture of water and a C₁-C₄-alcohol or a
C₃-C₄-ketone.

15 The invention further relates to a composition for cleaning surfaces made of glass,
graphite, ceramics, polymeric and metallic materials, synthetic and vegetable fibres and
membranes, based on at least one component from the series

- i) iminodisuccinic acid of the formula (I)

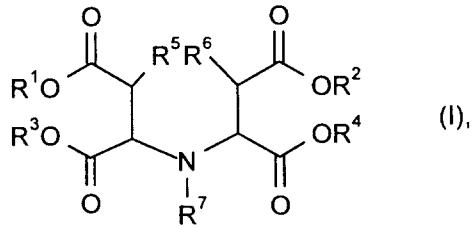

20

in which

R¹, R², R³ and R⁴ independently of one another are H, Li, Na, K, NH₄,
H₃NCH₂CH₂OH, H₂N(CH₂CH₂OH)₂ or HN(CH₂CH₂OH)₃,

25

R⁵ and R⁶ independently of one another are H or OH, and

30 R⁷ is H, CH₂CH₂OH, CH₂CH₂CH₂OH, CH₂CH(OH)CH₃, CH₂COOR⁸ or
CH₂CH₂COOR⁸, where R⁸ independently of R¹ has the scope of
meanings of R¹,

- 5 -

- ii) polyamino acid or
- iii) emulsifier

5 and a solvent from the group consisting of water and a mixture of water and a C₁-C₄-alcohol or a C₃-C₄-ketone, where the solvent constitutes in particular 40-99.9% by weight, preferably 50-99% by weight, particularly preferably 60-90% by weight of the total composition.

10 The emulsifiers to be used according to the invention are preferably C₈-C₂₅-alkanesulphonates, particularly preferably C₁₀-C₂₀-alkanesulphonates, very particularly preferably C₁₂-C₁₈-alkanesulphonates. It is also preferable to use linear alkanesulphonates.

15 The iminodisuccinic acids of the formula (I) to be used according to the invention are used in aqueous solution.

20 Preferably, R⁶ is H, and particularly preferably R⁵ and R⁶ are H. In a likewise preferred manner, R⁷ is H. In a further preferred manner R⁵, R⁶ and R⁷ are H, so that (I) represents the unsubstituted iminodisuccinic acid (IDS) and its salts of the above-described type.

In a further preferred manner, the radicals R¹¹, R¹², R¹³ and R¹⁴ appear in the position of R¹, R², R³ and R⁴ and have the meaning H, Na, K, NH₄ or H₃NCH₂CH₂OH.

25 The iminodisuccinic acids of the formula (I) used according to the invention are in pure form or are combined with small amounts of secondary components from the preparation of (I), such as maleic acid, fumaric acid, aspartic acid, malic acid, asparagine, tartaric acid, hydroxyaspartic acid, condensates of aspartic acid etc. or their salts containing the abovementioned cations R¹ to R⁴. The secondary components are

30 present in the mixture in an amount of at most 35% by weight, preferably 30% by weight and particularly preferably 25% by weight; the remainder to 100% by weight is (I).


(I) is prepared by known methods in aqueous medium, for example from maleic anhydride, maleic acid or epoxysuccinic acid and ammonia or aspartic acid. Methods of this type are described, for example, in GB 1 306 331, SU 0 639 863, JP 6/329 607, JP 6/330 020 and DE 37 39 610.

- 6 -

The polyamino acids according to the invention are, for example, homo- and copolymers of lysine, glutamic acid, alanine and aspartic acid, and protein hydrolysates.

Preference is given to using polyaspartic acids or polymers with repeat succinyl units, 5 which can either be prepared from aspartic acid or from maleic anhydride, its derivatives and ammonia.

In a preferred embodiment, the polyamino acids to be used according to the invention are polymers with repeat succinyl units which have at least one of the following repeat 10 structural units:

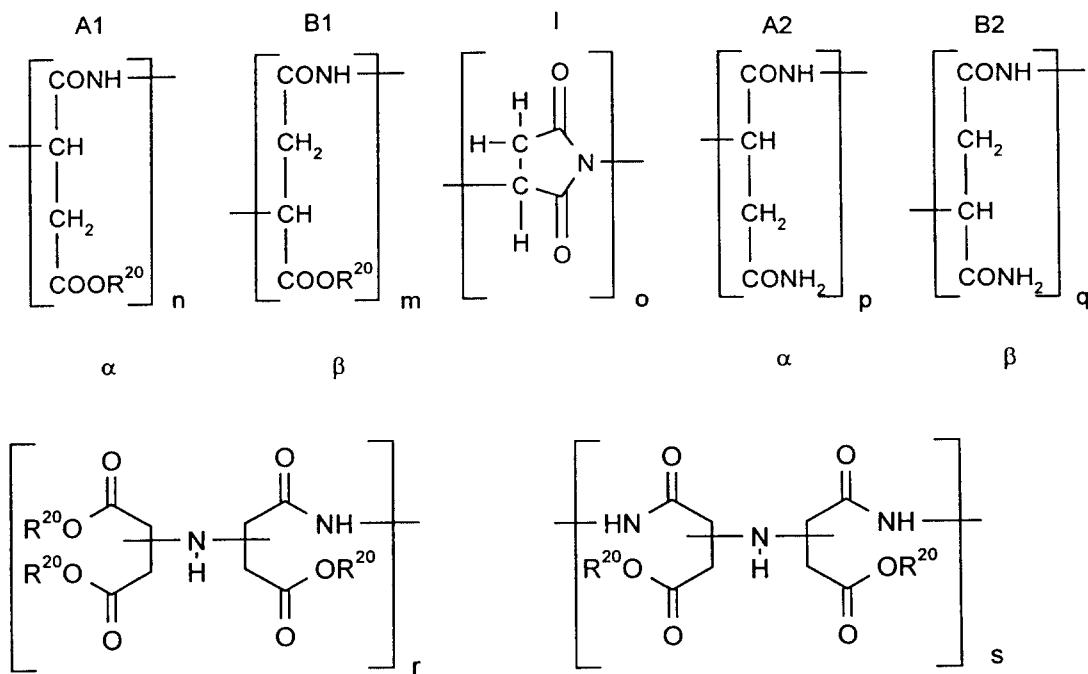

15 where the following statements apply:

R²⁰ is H or is a cation, in particular alkali metal, ammonium, independently of one another where two or more are present,

20 n, m, o is 0 or an integer from 1 to 300,

p, q is 0 or an integer from 1 to 10,

r is 0 or an integer 1 or 2,

s is 0 or an integer from 1 to 10, and

5 n + m + o + p + q is \leq 300, where the indices n, m, o, p, q, r and s indicate how many units are present in the polymer, optionally in random distribution.

The polymers to be used according to the invention are taken to mean the corresponding free acids, their salts and also derivatives of the acids, in particular anhydrides.

10 In a particularly preferred embodiment, the repeat unit B1 is present, based on the total of units B1 and A1, to at least 50%, in particular to at least 70%.

15 The average molecular weight (MW) can fluctuate within a wide range, it being possible to use polyaspartic acids having molecular weights between 500 and 100,000 g/mol, but preference is given to from 1000 to 50,000 g/mol or, even better 1000 to 30,000 g/mol.

20 The molecular weight is determined using gel permeation chromatography (GPC) in LiChrospher diol acids (Merck) and using phosphate buffer (pH = 7) as eluent solution. Calibration is best carried out using pure polyaspartic acid, e.g. Sigma, the molecular weight of which has been determined by an absolute measuring method, for example LALLS.

25 The polymers with repeat succinyl units to be used according to the invention are, in a preferred embodiment, essentially polyaspartic acids. The polymers can be prepared by known processes, for example in accordance with US-A 4 839 461, US-A 5 371 180, US-A 5 288 783, J. Org. Chem., 24, p 1662-1666 (1959) and J. Org. Chem., 26, 1084 (1961).

30 The emulsifiers, iminocarboxylic acids and polyamino acids can be used alone or as mixtures. The mixture proportions (proportions by mass) of emulsifier, preferably C₈-C₂₅-alkanesulphonate, and iminocarboxylic acid or polyamino acid are in the range from 99:1 to 1:99, preferably from 20:80 to 80:20, particularly preferably from 40:60 to 35 60:40.

The mixing proportions of iminocarboxylic acid and polyamino acids are likewise in the range from 99:1 to 1:99, preferably from 20:80 to 80:20, particularly preferably from 40:60 to 60:40.

5 The cleaning composition concentrates according to the invention are used with a water content of from 99.9% by weight to 40% by weight, preferably from 95% by weight to 50% by weight, particularly preferably from 95% by weight to 60% by weight.

10 The cleaning compositions according to the invention are used at a pH of 3-13, preferably 4-12, particularly preferably 4.5-11.5, and at temperatures of 10-100°C, preferably 15-85°C.

15 The cleaning compositions according to the invention are used for cleaning surfaces made of glass, graphite, ceramics, polymeric and metallic materials, synthetic and vegetable fibres, e.g. fabrics, textiles or waste paper, in particular for cleaning membrane surfaces.

20 Membranes which are cleaned according to the invention are those which are preferably used in pressure permeation techniques. The membranes can be made of the following materials: cellulose esters, such as, for example, cellulose acetate, cellulose acetopropionate, cellulose acetobutyrate, polyolefins, such as polyethylene or polypropylene, copolymers of ethylene and C₃-C₈-olefins, polyimides, polyamides, polyphenylenesulphones, polyphenylene ethers, polyphenylenesulphonic esters, polyphenylene ether esters, ceramics, SiO₂, carbon, polypiperazinamide, 25 polytetrafluoroethylene (PTFE), polyvinylidene fluoride (PVDF), polyacrylonitrile (PAN), polysulphone.

30 The membrane to be cleaned or the membrane module to be cleaned is treated with an aqueous, aqueous-alcoholic, aqueous-ketonic or aqueous-alcoholic-ketonic solution of the emulsifier, the iminocarboxylic acid, the polyamino acid or a mixture thereof, optionally with addition of standard commercial cleaning composition enzymes, such as, for example, proteases, lipases or amylases, in a manner which involves pumping such a solution over the membrane surface or through the membrane module. A suitable alcohol is C₁-C₄-alcohol, such as methanol, ethanol, propanol, i-propanol, 35 butanol, i-butanol, preferably methanol, ethanol, i-propanol. A suitable ketone is acetone (C₃) or methyl ethyl ketone (C₄). Of these organic solvents, alcohols are preferred. The duration of the cleaning treatment is obviously dependent, in a manner familiar to the person skilled in the art, on the degree of soiling, on the intensity of the

recirculation, on the concentration of the cleaning solution and, where present, on the said ingredients and also on the temperature. The extent of cleaning can be controlled by determining the flow rate through the membrane.

- 5 The cleaning composition according to the invention is prepared by simply dissolving the emulsifier and/or the iminodisuccinic acid of the formula (I) and/or the polyamino acid and optionally the alkali carrier or the enzyme or a plurality of such substances in water, a water/alcohol mixture, a water/ketone mixture or a water/alcohol/ketone mixture in the stated amounts and ratios. For storage or for dispatch purposes, a mixture 10 of dry substances, for example flake material from a drying roller or spray-dry granules, can be prepared. Where liquid substances are used, for example highly concentrated alkali metal hydroxide solution or ethanolamine, a 10 to 60% strength by weight solution, for example, can be used for storage and dispatch.
- 15 In addition, the cleaning solution according to the invention can comprise other components, such as, for example, enzymes, alcohols, solubility promoters and auxiliaries and fragrances.

The cleaning performance of the cleaning compositions according to the invention may 20 be demonstrated by the following examples:

Example 1

5 An aqueous solution consisting of 30% by weight of H₂SO₄, 30% by weight of naphthalenesulphonic acid and 40% by weight of water was diafiltrated in a batch operation at an operating pressure of 60 bar and an operating temperature of 40°C for 20 hours, and then the membrane separation efficiency was determined under standard conditions (1000 mg/l of Na₂SO₄, 25 bar, 30°C). The module used was a spiral module. The module was then flushed with 50 l of an aqueous solution consisting of 0.5% by weight of the above emulsifier, 0.5% by weight of IDS Na salt and 99% by weight of water without pressure and with recirculation at 40°C and a feed flow rate of 1.2 m³/h for 30 minutes, and the membrane separation efficiency was then determined again under standard conditions (1000 mg/l of Na₂SO₄, 25 bar, 30°C). As a result of the flushing, the module separation efficiency under standard conditions was increased by 10 5%, with a simultaneous decrease in the passage of salt from 5.4% to 2.2%.

15

Example 2

20 An aqueous solution consisting of 7% by weight of the sodium salt of flavonic acid and traces of impurities were concentrated batchwise using reverse osmosis to 50% of the starting volume at an operating pressure of 40 bar and an operating temperature of 40°C. The module used was that from Example 3. The module was then flushed with 50 l of an aqueous solution consisting of 0.5% by weight of the above emulsifier, 0.5% by weight of EDTA and 99% by weight of water without pressure and with recirculation at 40°C and a feed flow rate of 1.2 m³/h for 30 minutes, and the membrane separation efficiency was determined under standard conditions (1000 mg/l of Na₂SO₄, 25 bar, 30°C). A further flushing operation was carried out with 50 l of an aqueous solution consisting of 0.5% by weight of the above emulsifier, 0.5% by weight of IDS Na salt and 99% by weight of water without pressure with recirculation at 40°C and a feed flow rate of 1.2 m³/h for 30 minutes, and the membrane separation efficiency was 25 again measured under standard conditions. As a result of the second flushing with IDS Na salt, the module separation efficiency under standard conditions was increased by a further percentage point compared with the first flushing, with a salt passage of 0.3%.

30

Comparative Example 1

35

Example 1 was repeated. However, the flushing solution used was 10 l of an aqueous solution consisting of 1.5% by weight of Ultrasil 40® (commercial product from Henkel, Düsseldorf, consisting essentially of organic complexing agents and alkali

carriers) and 98.5% by weight of water; flushing was carried out at 40°C and a feed flow rate of 1.2 m³/h for 20 minutes without pressure with recirculation. The module separation efficiency was then determined again under standard conditions. After waste water from Example 1 had been passed through the module, a reduction in the permeate flow to 64% of the permeate flow under standard conditions prior to passing through the waste water, with an unchanged salt passage (concentration in the feed/concentration in the permeate) of 2.9% was found. As a result of the flushing, the module separation efficiency was increased only to 83% of the permeate flow under standard conditions prior to passing through the waste water, with a salt passage of 5 2.9%. As a result of a subsequent further flushing with 10 l of an aqueous solution consisting of 0.15% by weight of the above emulsifier, 0.25% by weight of EDTA and 10 99.6% by weight of water at 40°C and a feed flow rate of 1.2 m³/h for 20 minutes without pressure and with recirculation, the permeate flow was increased to 98% of the permeate flow under standard conditions prior to passing through the waste water, i.e. 15 almost to the initial performance, with an unchanged salt passage (concentration in the feed/concentration in the permeate) of 2.9%.

Comparative Example 2

20 Example 1 was repeated. However, the flushing solution used was 10 l of an aqueous solution consisting of 1% by weight of Ultrasil 10® (commercial product from Henkel, Düsseldorf consisting essentially of Na acetate, Na sulphate, Na phosphate, alkylbenzenesulphonate and EDTA) and 99% by weight of water at 40°C and a feed flow rate of 1.2 m³/h for 20 minutes without pressure and with recirculation. The 25 module separation efficiency was then determined again under standard conditions. After waste water from Example 1 had been passed through the module, a reduction in the permeate flow to 65% of the permeate flow under standard conditions prior to passing through the waste water with an unchanged salt passage (concentration in the feed/concentration in the permeate) of 2.1% was found. As a result of the flushing, the 30 module separation efficiency was increased only to 87% of the permeate flow under standard conditions prior to passing through the waste water, with a salt passage of 1.9%.

Example 3

35

An aqueous solution of an optical brightener which was contaminated with antifoam grease was treated batchwise at an operating pressure of 30 bar and an operating

temperature of 50°C over a period of 10 h, permeate and concentrate being returned to the initial charge.

The solution was then drained off, flushing with water was carried out, and the pure
5 water flow was determined under standard conditions (25°C, 20 bar). The module used
was a plate module which, after the pure water flow had been determined, was flushed
with 10 l of an aqueous solution consisting of 0.5% by weight of the above emulsifier,
0.25% by weight of polyaspartic acid Na salt and 99.25% by weight of water at 40°C
for 20 minutes without pressure and with recirculation. The pure water flow was then
10 measured again under standard conditions (25°C, 20 bar). As a result of the cleaning,
the permeate output under standard conditions was increased by 15% compared with
the permeate output prior to flushing.

Comparative Example 3

15 Example 3 was repeated. However, the flushing solution used was an aqueous solution
consisting of 0.5% by weight of Ultraperm 091® (commercial product from Henkel,
consisting of anionic and amphoteric surfactants, alkali and complexing agents) and
99.5% by weight of water. Flushing was carried out at 40°C for 20 minutes without
20 pressure and with recirculation. Here too, the pure water flow was then determined
under standard conditions. As a result of the cleaning, the permeate output under
standard conditions was increased by 6% compared with the permeate output prior to
flushing. In Example 3, by contrast, an increase in the permeate output of 15% was
achieved.

25
Example 4

An aqueous chromium-containing mother liquor from the dye production was treated at
an operating pressure of 30 bar and a temperature of 25°C over a period of 12 hours,
30 permeate and retentate being recycled for 3 h both at the start and at the end. In
between, permeate was removed resulting in concentration. After 12 h, the solution was
drained off, flushing with water was carried out, and the pure water flow was
determined under standard conditions (25°C, 20 bar). The module used was a plate
module which, after the pure water flow had been determined, was flushed with 10 l of
35 an aqueous solution consisting of 0.5% by weight of the above emulsifier, 0.25% by
weight of iminodisuccinate Na salt and 99.25% by weight of water at 40°C for
20 minutes without pressure and with recirculation. The pure water flow was then
measured again under standard conditions (25°C, 20 bar). As a result of the cleaning,

- 13 -

the permeate output under standard conditions was increased by 21% compared with the permeate output prior to flushing.

Comparative Example 4


5

Example 4 was repeated. However, the flushing solution used was an aqueous solution consisting of 0.5% by weight of Ultraperm 091® (commercial product from Henkel, consisting of anionic and amphoteric surfactants, alkali and complexing agents) and 99.5% by weight of water. Flushing was carried out at 40°C for 20 minutes without 10 pressure and with recirculation. Here too, the pure water flow was then determined under standard conditions. As a result of the cleaning, the permeate output under standard conditions was increased by 8% compared with the permeate output prior to flushing. In Example 4, by contrast, an increase in the permeate output of 21% was achieved.

Patent claims

1. Method of cleaning surfaces made of glass, graphite, ceramics, polymeric and metallic materials, synthetic and vegetable fibres, and membranes by detaching or dissolving organic and inorganic soilings or a mixture of the two by a flushing operation with a solution of a cleaning composition at, preferably, 10-100°C and a pH of preferably 3-13, characterized in that the cleaning composition used is at least one component from the series

5 10 i) iminodisuccinic acid of the formula (I)

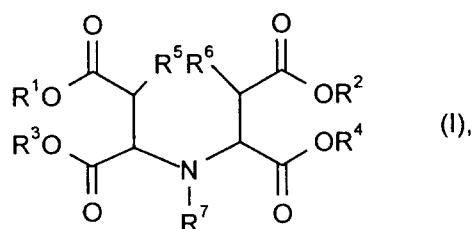

15 in which

R¹, R², R³ and R⁴ independently of one another are H, Li, Na, K, NH₄, H₃NCH₂CH₂OH, H₂N(CH₂CH₂OH)₂ or HN(CH₂CH₂OH)₃,

20 R⁵ and R⁶ independently of one another are H or OH, and


R⁷ is H, CH₂CH₂OH, CH₂CH₂CH₂OH, CH₂CH(OH)CH₃, CH₂COOR⁸ or CH₂CH₂COOR⁸, where R⁸ independently of R¹ has the scope of meanings of R¹,

25 ii) polyamino acid or

iii) emulsifier.

30 2. Method according to Claim 1, characterized in that the polyamino acids used are repeat structural units of the series

- 15 -

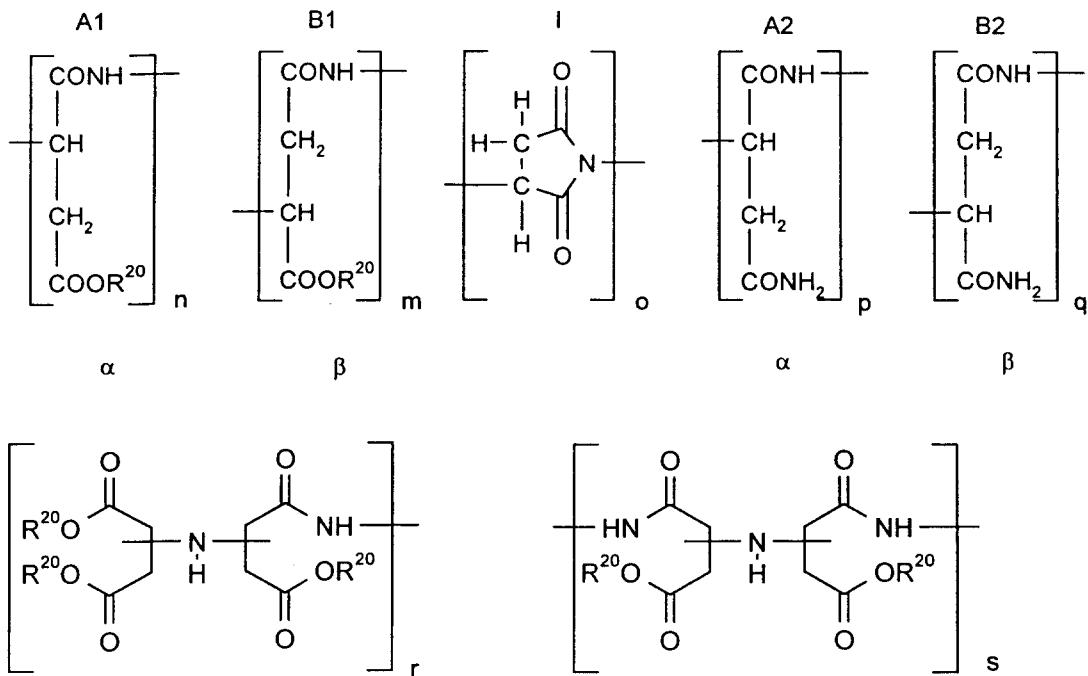

5 where the following statements apply:

R^{20} is H or is a cation, in particular alkali metal, ammonium, independently of one another where two or more are present,

10 n, m, o is 0 or an integer from 1 to 300,

p, q is 0 or an integer from 1 to 10,

r is 0 or an integer 1 or 2,

15 s is 0 or an integer from 1 to 10, and

$n + m + o + p + q \leq 300$, where the indices n, m, o, p, q, r and s indicate how many units are present in the polymer, optionally in random distribution.

20 3. Method according to Claim 1, characterized in that the emulsifier used is a $\text{C}_8\text{-C}_{25}$ -alkanesulphonate.

25 4. Method according to Claim 1, characterized in that the solvent used for the cleaning composition solution is water or a mixture of water and a $\text{C}_1\text{-C}_4$ -alcohol or a $\text{C}_3\text{-C}_4$ -ketone, preferably water on its own.

5. Method according to Claim 1, characterized in that the surface of a membrane is cleaned.


5 6. Method according to Claim 5, characterized in that the membrane consists of a material from the group consisting of cellulose esters, polyolefins, polyimides, polyamides, polyphenylenesulphones, polyphenylene ethers, polyphenylenesulphonic esters, polyphenylene ether esters, ceramics, SiO_2 , carbon, polypiperazinamides, polytetrafluoroethylene, polyvinylidene fluoride, polyacrylonitrile and polysulphones.

10 7. Method according to Claim 1, characterized in that it is carried out at 10-100°C.

8. Method according to Claim 1, characterized in that it is carried out at a pH of 4-12, preferably 4.5-11.5.

15 9. Composition for cleaning surfaces made of glass, graphite, ceramics, polymeric and metallic materials, synthetic and vegetable fibres and membranes, based on at least one component from the series

20 i) iminodisuccinic acid of the formula (I)

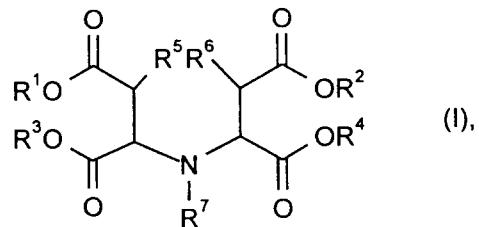

25 in which

R^1 , R^2 , R^3 and R^4 independently of one another are H, Li, Na, K, NH_4 , $\text{H}_3\text{NCH}_2\text{CH}_2\text{OH}$, $\text{H}_2\text{N}(\text{CH}_2\text{CH}_2\text{OH})_2$ or $\text{HN}(\text{CH}_2\text{CH}_2\text{OH})_3$,

30 R^5 and R^6 independently of one another are H or OH, and

R^7 is H, $\text{CH}_2\text{CH}_2\text{OH}$, $\text{CH}_2\text{CH}_2\text{CH}_2\text{OH}$, $\text{CH}_2\text{CH}(\text{OH})\text{CH}_3$, CH_2COOR^8 or $\text{CH}_2\text{CH}_2\text{COOR}^8$, where R^8 independently of R^1 has the scope of meanings of R^1 ,

- 17 -

ii) polyamino acid or

iii) emulsifier

5 and a solvent from the group consisting of water and a mixture of water and a C₁-C₄-alcohol or a C₃-C₄-ketone, the solvent constituting 40-99% by weight of the total composition.

10 10. Composition according to Claim 9, characterized in that where a mixture of iminodisuccinic acid of the formula (I) in accordance with Claim 1 or polyamino acid and C₈-C₂₅-alkanesulphonate is present, the two constituents are in the mass ratio 99:1-1:99.

15 11. Composition according to Claim 9, characterized in that it comprises, as cleaning composition, essentially an iminodisuccinic acid of the formula (I) in accordance with Claim 1 and a polyamino acid, these two constituents being in a mixing ratio of 99:1-1:99.

Monhaugh & Co.
Lta, Canada
Agent A