



(43) International Publication Date
15 June 2017 (15.06.2017)

(10) International Publication Number
WO 2017/100478 A1

- (51) **International Patent Classification:**
B23D 57/02 (2006.01) *B28D 1/08* (2006.01)
B27B 33/14 (2006.01)
- (21) **International Application Number:**
PCT/US2016/065667
- (22) **International Filing Date:**
8 December 2016 (08.12.2016)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/264,783 8 December 2015 (08.12.2015) US
- (71) **Applicant:** BLOUNT, INC. [US/US]; 4909 SE International Way, Portland, OR 97222 (US).
- (72) **Inventor:** GERLACH, Todd; c/o Blount, Inc., 4909 SE International Way, Portland, OR 97204 (US).
- (74) **Agents:** GRISWOLD, Ian J. et al.; Schwabe Williamson & Wyatt, P.C., Pacwest Center, Suite 1900, 1211 SW Fifth Avenue, Portland, OR 97204 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** ABRASIVE SAW CHAIN

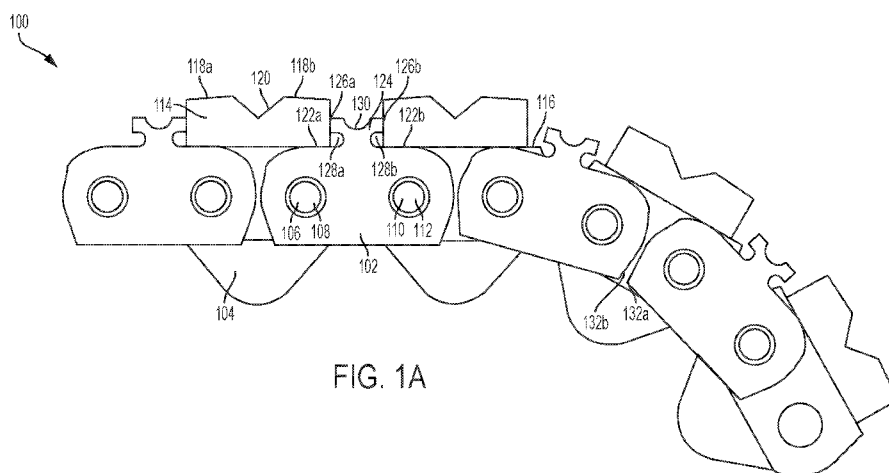


FIG. 1A

(57) **Abstract:** Embodiments herein provide an abrasive saw chain that includes drive links and tie straps coupled to one another. Cutting elements, such as diamond cutting elements, may be coupled to upper surfaces of respective drive links. An upper surface of the tie strap may contact a lower surface of a cutting element to provide support for the cutting element. The tie strap may include a limiting feature to contact front and/or back surfaces of adjacent cutting elements when the links traverse an elongate portion of a guide bar. Alternatively, or additionally, the drive links may include a mating surface that contacts a mating surface of an adjacent drive link when the drive links traverse the elongate portion of the guide bar. Other embodiments may be described and/or claimed.

ABRASIVE SAW CHAIN

Cross-reference to Related Application

[0001] This application claims the priority benefit of the earlier filing date of U.S. Provisional Patent Application No. 62/264,783, filed December 8, 2015, which is hereby incorporated herein by reference in its entirety.

Technical Field

[0002] Embodiments herein relate to the field of chainsaws, and, more specifically, to abrasive saw chain for chainsaws.

Background

[0003] Chainsaws for cutting aggregate materials and/or pipe provide some advantages over alternative cutting devices, such as devices that include circular blades. For example, the chainsaw can perform deep cuts in confined spaces, create square corners without overcuts, and has the ability to cut small, precise openings. However, the chainsaw may require the operator to apply a higher feed load during cutting, may have generally slower cutting speed, and/or may have a shorter usable life for the cutting elements than a cutting device with a circular blade.

Brief Description of the Drawings

[0004] Embodiments will be readily understood by the following detailed description in conjunction with the accompanying drawings and the appended claims. Embodiments are illustrated by way of example and not by way of limitation in the figures of the accompanying drawings.

[0005] Figure 1A illustrates a side view of an abrasive saw chain, in accordance with various embodiments;

[0006] Figure 1B illustrates a side view of a portion of the abrasive saw chain of Figure 1A as it traverses a sprocket, in accordance with various embodiments;

[0007] Figure 2 illustrates a side view of another abrasive saw chain, in accordance with various embodiments;

[0008] Figure 3A illustrates a side view of a tie strap of the abrasive saw chain of Figure 2, in accordance with various embodiments;

[0009] Figure 3B illustrates a front view of the tie strap of Figure 3A, in accordance with various embodiments;

[0010] Figure 4A illustrates a side view of a drive link of the abrasive saw chain of Figure 2, in accordance with various embodiments;

[0011] Figure 4B illustrates a front view of the drive link of Figure 4A, in accordance with various embodiments;

[0012] Figure 5 illustrates a side view of another abrasive saw chain, in accordance with various embodiments;

[0013] Figure 6A illustrates a side view of a tie strap of the abrasive saw chain of Figure 5, in accordance with various embodiments;

[0014] Figure 6B illustrates a front view of the tie strap of Figure 6A, in accordance with various embodiments;

[0015] Figure 7A illustrates a side view of a drive link of the abrasive saw chain of Figure 5, in accordance with various embodiments;

[0016] Figure 7B illustrates a front view of the drive link of Figure 7A, in accordance with various embodiments;

[0017] Figure 8A illustrates a side view of another abrasive saw chain, in accordance with various embodiments;

[0018] Figure 8B illustrates a side view of another abrasive saw chain, in accordance with various embodiments;

[0019] Figure 9A illustrates a side view and inset view of another abrasive saw chain, in accordance with various embodiments;

[0020] Figure 9B illustrates a side view and inset view of the abrasive saw chain shown in Figure 9A, in accordance with various embodiments;

[0021] Figure 10A illustrates a side view of the abrasive saw chain shown in Figure 9A chain showing allowable forward chain articulation, in accordance with various embodiments;

[0022] Figure 10B illustrates a side view of a conventional chain showing allowable forward chain articulation;

[0023] Figure 11A illustrates a side view of the abrasive saw chain shown in Figure 9A showing allowable reverse chain articulation, in accordance with various embodiments;

[0024] Figure 11B illustrates a side view of a conventional chain showing allowable reverse chain articulation; and

[0025] Figure 12 illustrates guide bar wear patterns for conventional (solid line) and abrasive chain disclosed herein (dashed line).

Detailed Description of Disclosed Embodiments

[0026] In the following detailed description, reference is made to the accompanying drawings which form a part hereof, and in which are shown by way of illustration embodiments that may be practiced. It is to be understood that other embodiments may be utilized and structural or logical changes may be made without departing from the scope. Therefore, the following detailed description is not to be taken in a limiting sense, and the scope of embodiments is defined by the appended claims and their equivalents.

[0027] Various operations may be described as multiple discrete operations in turn, in a manner that may be helpful in understanding embodiments; however, the order of description should not be construed to imply that these operations are order dependent.

[0028] The description may use perspective-based descriptions such as up/down, back/front, and top/bottom. Such descriptions are merely used to facilitate the discussion and are not intended to restrict the application of disclosed embodiments.

[0029] The terms “coupled” and “connected,” along with their derivatives, may be used. It should be understood that these terms are not intended as synonyms for each other. Rather, in particular embodiments, “connected” may be used to indicate that two or more elements are in direct physical contact with each other. “Coupled” may mean that two or more elements are in direct physical contact. However,

“coupled” may also mean that two or more elements are not in direct contact with each other, but yet still cooperate or interact with each other.

[0030] For the purposes of the description, a phrase in the form “A/B” or in the form “A and/or B” means (A), (B), or (A and B). For the purposes of the description, a phrase in the form “at least one of A, B, and C” means (A), (B), (C), (A and B), (A and C), (B and C), or (A, B and C). For the purposes of the description, a phrase in the form “(A)B” means (B) or (AB) that is, A is an optional element.

[0031] The description may use the terms “embodiment” or “embodiments,” which may each refer to one or more of the same or different embodiments. Furthermore, the terms “comprising,” “including,” “having,” and the like, as used with respect to embodiments, are synonymous, and are generally intended as "open" terms (e.g., the term "including" should be interpreted as "including but not limited to," the term "having" should be interpreted as "having at least," the term "includes" should be interpreted as "includes but is not limited to," etc.).

[0032] With respect to the use of any plural and/or singular terms herein, those having skill in the art can translate from the plural to the singular and/or from the singular to the plural as is appropriate to the context and/or application. The various singular/plural permutations may be expressly set forth herein for sake of clarity.

[0033] Embodiments herein provide apparatuses, systems, and methods associated with an abrasive saw chain for a chainsaw. The abrasive saw chain may be used to cut aggregate material, such as concrete, brick, etc.; pipe, and/or other hard materials. Abrasive saw chains typically require a wider kerf (cutting width) than cutting blades. The increased kerf width is directly proportional to increased power consumption and requires a higher feed load to be provided by the operator. The links of abrasive saw chains also have some degree of freedom for movement in the pitch, roll, and yaw axes. Such movement occurs not only within the chain, but also at the chain to guide bar interface. The motion generates vibration and impact loads that accelerate wear of the abrasive saw chain (e.g., cutting elements and/or chain chassis) and/or guide bar, and can increase the kerf width.

[0034] In various embodiments, a chainsaw may include a guide bar extending from a body of the chainsaw. The body may include a housing, with a motor disposed

inside the housing to drive the saw chain around the guide bar. The guide bar may include a pair of rails, with a groove disposed between the rails. The guide bar may include one or more sprockets at ends of the guide bar, with elongate portions (e.g., straight portions or portions with a slight curvature) disposed between the ends of the guide bar. For example, with respect to the housing, the guide bar may include a drive sprocket at a proximal end of the guide bar and/or a nose sprocket at a distal end of the guide bar.

[0035] Various embodiments described herein provide an abrasive saw chain with one or more features to improve stability and/or performance of the abrasive saw chain. The improved stability may allow less side clearance of the cutting elements relative to the chain chassis and/or guide bar rails, thereby reducing the kerf width and the associated power consumption and feed load. The improved stability may additionally or alternatively provide reduced wear to extend the usable life of the abrasive saw chain (e.g., cutting elements and/or chain chassis) and/or guide bar. The extended usable life provided by improved stability may also allow use of softer cutting elements to improve cutting efficiency and reduce feed load requirements. In some embodiments, the abrasive saw chain may not be designed to cut wood. Saw chain designed for cutting wood typically uses the chain movement, such as porpoising (e.g. wherein the cutter rides up and down), to increase the cutting efficiency of the chain. In a high stability chain, such as those abrasive chains disclosed herein, this type of movement is minimized, making them inefficient for cutting wood.

[0036] In embodiments herein, a disclosed abrasive saw chain has a limited range of articulation, for example, with respect to conventional abrasive saw chain, such as reduced forward and/or reverse articulation. In embodiments, the reduced range of articulation includes reduced forward articulation. By forward articulation, it is meant the degree in which the chain can bend around the radius of a circle, such as a sprocket, the way it would when coupled to a saw or guide bar during conventional operation (see, for example, Figure 10A). In embodiments, the minimum forward articulation has a radius from about 0.800 inches to about 1.000 inches, such as about 0.800 inches, 0.850 inches, 0.900 inches, 0.950 inches, or about 1.000

inches, such as about 0.850 inches to about 0.950 inches in radius. In embodiments, the reduced range of articulation includes reduced reverse articulation. By reverse articulation, it is meant the degree in which the chain can bend around the radius of a circle opposite the way it would when coupled to a saw or guide bar during conventional operation (see, for example, Figure 11A). In embodiments, the minimum reverse articulation has a radius greater than about 20 inches, such as greater than about 20 inches, greater than about 21 inches, greater than about 22 inches, greater than about 23 inches, greater than about 24 inches, greater than about 25 inches, greater than about 26 inches, greater than about 27 inches, greater than about 28 inches, greater than about 29 inches, or greater than about 30 inches. In some, the minimum reverse articulation is less than about 50 inches. In embodiments, the reduced range of articulation includes both a reduced forward articulation and a reduced reverse articulation. A primary benefit of limiting the range of articulation is that tie strap footprint surface area is increased which reduces footprint and guide bar rail wear rates. Reduced wear rates help to maintain stability at chain/bar interface through life. The chain re-enters the guide bar groove from the drive sprocket in a more controlled fashion which results in less impact loading on the guide bar rails and generates less vibration in the cutting system. Reduced reverse articulation enables cutting loads acting on diamond segments to be distributed evenly across multiple chassis components. In addition, reduced reverse articulation provides greater stability and reduces vibration which extends the life of the diamond segments. Reduced reverse articulation increases guide bar life by spreading wear across more guide bar rail area, prevents unwanted motion of the chain in the cut so the diamond segments maintain consistent and stable contact with the workpiece. On straight portions of guide bar rails, the chain acts more rigidly which promotes cutting efficiency and smoothness. In some embodiments, total articulation, both forward and reverse is reduced by about 55% to about 75% relative to conventional chain that does not include the stability features disclosed herein, for example the total articulation, both forward and reverse is reduced by about 60% to about 70% about 62% to about 68%, or even about 65% and the like. There are significant benefits of limiting the range of articulation. With respect to reduced forward articulation, tie strap

footprint surface area is increased which reduces footprint and guide bar rail wear rates. Reduced wear rates help to maintain stability at chain/bar interface through life. In addition, the chain re-enters the guide bar groove from the drive sprocket in a more controlled fashion resulting in less impact loading on the guide bar rails. This also generates less vibration in the cutting system which may allow for more precise cuts and the use of narrower kerf. With respect to reduced reverse articulation, a reduction in reverse articulation enables cutting loads acting on diamond segments to be distributed evenly across multiple chassis components. A reduction of reverse articulation also provides greater stability and reduces vibration which extends the life of the diamond segments. Reduced reverse articulation increases guide bar life by spreading wear across more guide bar rail area, and prevents unwanted motion of the chain in the cut so the diamond segments maintain consistent and stable contact with the workpiece. On straight portions of guide bar rails, the chain acts more rigidly which promotes cutting efficiency and smoothness.

[0037] In various embodiments, the abrasive saw chain may include a plurality of links coupled to one another, including one or more drive links and/or tie straps. The links may include a pair of rivet holes (e.g., a front rivet hole and a rear rivet hole) to couple the links to respective adjacent links. The drive links may be center links that ride in the groove of the guide bar and/or engage with an internal tooth of the sprockets. The tie straps may be side links (e.g., left-side links or right-side links) that engage with one of the rails of the guide bar. The tie straps may couple successive drive links to one another (e.g., using rivets disposed through the rivet holes of the tie straps and/or drive links, or via another arrangement/coupling).

[0038] In various embodiments, a cutting element may be coupled to an upper surface of some or all of the drive links of the abrasive saw chain. In other embodiments, a cutting element may be coupled to an upper surface of some or all of the tie straps of the abrasive saw chain, for example spanning two opposite tie straps. The cutting element may be any cutting element suitable for cutting the desired material, such as aggregate material and/or pipe. For example, in some embodiments, the cutting element may include diamond segments and/or another suitable hard and/or abrasive material. The cutting elements may extend across an

entire width of the abrasive saw chain. For example, the cutting elements may extend laterally to the same extent as the tie straps in both lateral directions, for example so that the chain and/or guide bar can slide into a slot the width of the cutting elements.

[0039] As discussed above, the disclosed abrasive saw chain may include one or more features to improve stability and/or performance of the abrasive saw chain. For example, an upper surface of the tie strap may contact a lower surface of the cutting element to provide support for the cutting element. In some embodiments, the upper surface of the tie strap may contact the lower surface of the cutting element when the tie strap and corresponding drive link traverse the elongate portion of the guide bar and when the tie strap and the drive link traverse the sprocket of the guide bar. Alternatively, the upper surface of the tie strap may contact the lower surface of the cutting element when the tie strap and corresponding drive link traverse the elongate portion of the guide bar, but there may be a gap between the upper surface of the tie strap and the lower surface of the cutting element when the tie strap and the drive link traverse the sprocket of the guide bar. In embodiments, the upper surface of the tie strap contacts and may support the lower surface of the cutting element when the tie strap and the drive link are under load substantially perpendicular to a long axis of the tie strap for example wherein there is a gap between the upper surface of the tie strap and the lower surface of the cutting element when the tie strap and the drive link are not under load substantially perpendicular to a long axis of the tie strap. In such embodiments, the load applied is effectively shared across multiple links of the chain.

[0040] In some embodiments, the tie strap may include a limiting feature to contact end (front/back) surfaces of adjacent cutting elements when the links traverse an elongate portion of a guide bar. Alternatively, or additionally, the drive links may include a mating surface that contacts a mating surface of an adjacent drive link when the drive links traverse the elongate portion of the guide bar. The limiting feature of the tie straps and/or the mating surfaces of the drive links may prevent rotation (e.g., reverse articulation) of the cutting elements when the drive links exit a sprocket and while traversing the elongate portion of the guide bar. In embodiments, the mating surfaces are substantially perpendicular to a long axis of the guide bar. In

embodiments, the mating surfaces of a drive link extend over the mating surfaces of an adjacent drive link, for example at an angle of between about 10° and 80°, such as between about 30° and about 60° or about 45°. The extensions of the mating surfaces serves to both constrain reverse articulation and control vertical misalignment of the cutting drive links, for example to enhance the chain stability. In some embodiments, the extensions of the mating surfaces provide a desired translational constraint along with sufficient cross-sectional area between contact surfaces to minimize material deformation and burrs due to impact loading. Furthermore, one of the benefits of including such mating surfaces is that in applications where water is used, such as the cutting of aggregate, the water is retained in the guide bar, which may reduce the total water consumption needed for cutting.

[0041] In some embodiments, the abrasive saw chain and/or tie straps may be designed such that the lower corners (e.g., defined by the bottom surface and side surface) of adjacent tie straps are within 0.02 inches or less of one another when the tie straps traverse the sprocket of the guide bar. When traversing an elongate portion of the guide bar, those same surfaces may be 0.15 inches or more from each other. The closeness of the corners may provide a contact area limiting further forward articulation in the event the tie straps over-rotate when traveling around the sprocket, and may increase contact area with the rails of the elongate portion of the guide bar to improve stability and reduce wear.

[0042] In some embodiments, an aspect ratio of the drive links and/or tie straps of the abrasive saw chain (and/or the abrasive saw chain as a whole) may be lower than in conventional saw chains. The aspect ratio may be defined as the ratio of the height of the drive links and/or tie straps compared with the distance between the rivet holes of the respective drive links and/or tie straps. In some embodiments, the height may be measured as the height of the distance that the drive link extends above the rails of the guide bar. In some embodiments, the aspect ratio of the drive links may be 1.0 to 1.15. Additionally, or alternatively, the aspect ratio of the tie straps may be 0.9 to 1.02. For reference, typically conventional chain tie strap aspect ratio is 1.05. These aspect ratio values do not include the height of the cutting element. The

reduced aspect ratio of the drive links, tie straps, and/or abrasive saw chain may allow the cutting load to act closer to the guide bar rails, thereby reducing unwanted movement/vibration (e.g., roll, pitch, and/or yaw) of the links for the benefit of increased stability.

[0043] In some embodiments, the aspect ratio of the links and/or abrasive saw chain may be reduced from prior designs without changing the cross-sectional area of material around the rivet holes and/or the hub and flange dimensions of the rivets.

[0044] In various embodiments, the increased stability of the abrasive saw chain provided by the abrasive saw chain described herein may allow the side clearance of the abrasive saw chain to be reduced, which may provide a reduced width for the cutting elements. The side clearance may be the amount that the cutting elements extend laterally past the tie straps and/or the guide bar rails. The reduced width of the cutting elements provides a narrower kerf for cutting which reduces the power consumption of the tool and requires less feed load from the operator. In embodiments, a suitable kerf width is 0.185 inches to 0.205 inches.

[0045] Figure 1A illustrates an abrasive saw chain 100 in accordance with various embodiments. Additionally, Figure 1B illustrates a portion of the abrasive saw chain 100 as it traverses a sprocket 101 of a guide bar. The abrasive saw chain 100 includes tie straps 102 and drive links 104 coupled to one another via respective rivet holes. For example, the tie straps 102 may include a rear rivet hole 106 that engages with a front rivet hole 108 of a drive link 104 (e.g., via a rivet (not shown) disposed through the rivet holes 106 and 108). The tie straps 102 may further include a forward rivet hole 110 that engages with a rear rivet hole 112 of another drive link 104 in the abrasive saw chain 100.

[0046] In some embodiments, the sprocket 101 shown in Figure 1B may be the drive sprocket of the chainsaw. The drive sprocket may have a smaller pitch diameter compared to the nose sprocket. Accordingly, the maximum forward articulation of the abrasive saw chain 100 may be designed with respect to the pitch diameter of the drive sprocket.

[0047] Although not visible in Figure 1A, the abrasive saw chain 100 may include tie straps disposed on the other side of the drive links 104 from the tie straps

102. The other tie straps may be opposite the tie straps 102 and may be coupled with the drive links 104 and tie straps 102 via respective rivet holes.

[0048] In various embodiments, the abrasive saw chain 100 may further include cutting elements 114 coupled to an upper surface 116 of the drive links 104. The cutting elements 114 may include diamond and/or another suitable hard and/or abrasive material. In some embodiments, the cutting elements 114 may have a top surface with two portions 118a-b that are substantially planar (either aligned in the direction of travel or disposed at an angle) and separated by a notch 120. Notch 120 is optional both in presence and appearance, but it represents an approach to reducing the surface area of the cutting element contact surface. In some embodiments, the cutting elements 114 may be bonded to the upper surface 116 of the drive links 104, such as by welding.

[0049] In some embodiments, as shown in Figure 1A, each drive link 104 may have a cutting element 114 coupled thereto. Such a configuration is known as a “full-house” configuration. In other embodiments, some of the drive links 104 of the abrasive saw chain 100 may have a cutting element 114 coupled thereto and some other drive links 104 may not have a cutting element 114 coupled thereto, see, for example the embodiments shown in Figures 8A and 8B.

[0050] In various embodiments, a portion 122a-b of an upper surface of the tie straps 102 may be substantially coplanar and/or aligned with the upper surface 116 of the drive link 104 to which the tie strap 102 is coupled. Accordingly, the bottom surface of the cutting elements 114 may be in direct contact with the upper surface of the tie straps 102. In embodiments there may be a nominal gap, such as a 0.002 inch gap, between the upper surface of the tie straps 102 and the bottom surface of the cutting elements 114. However, the bottom surface of the cutting elements 114 may not be bonded to the upper surface of the tie straps 102 (e.g., by the welding process). Accordingly, the portions 122a-b of the upper surface may provide support to the cutting elements 114.

[0051] In some embodiments, as shown in Figures 1A and 1B, the cutting elements 114 may contact (e.g., be supported by) the upper surface of the tie straps 102 while the corresponding drive link 104 traverses the elongate portion of the guide

bar and while the drive link 104 traverses the sprocket 101 of the guide bar. Such an arrangement may be accomplished by forming a curved transition surface from the upper surface of tie straps 102 to the front and/or back surfaces of tie straps 102.

[0052] In various embodiments, the tie straps 102 may further include a limiting feature 124 that extends above the body of the tie strap 102. The limiting feature 124 may include mating surfaces 126a-b that contact respective end (front/back) surfaces of adjacent cutting elements 114. In some embodiments, the mating surfaces 126a-b may contact the front/back surfaces of adjacent cutting elements 114 when the tie strap 102 and corresponding drive links 104 are traversing the elongate portion of the guide bar, and the mating surfaces 126a-b may not contact the side surfaces of adjacent cutting elements 114 when the tie strap 102 and corresponding drive links 104 are traversing the sprocket 101. The limiting features 124 may prevent and/or reduce reverse articulation and/or other unwanted movement of the drive links 104 while the drive links 104 traverse the elongate portion of the guide bar.

[0053] In various embodiments, the limiting features 124 may include gaps 128a-b between the mating surfaces 126a-b and the upper surface of the tie strap 102 (e.g., the portions 122a-b). The gaps 128a-b may avoid having a tight fit or misfit of the bottom corners of the cutting elements 114 against the tie strap 102, which may otherwise cause stress on the links and/or require tight manufacturing tolerances.

[0054] In some embodiments, the limiting features 124 may additionally or alternatively include a gap 130 in the top surface of the limiting feature 124 between the mating surfaces 126a-b. The gap 130 may allow for the tie strap to use less material than if the limiting feature 124 did not have a gap. In some cases, during use, the cutting elements 114 may be worn down to, or below, the height of the limiting features 124. The gap 130 may reduce the area of the top surface of the limiting feature 124 that comes into contact with the workpiece when the cutting elements 114 are worn.

[0055] In various embodiments, the abrasive saw chain 100 and/or tie straps 102 may be configured to provide an increased contact area between the bottom

surface of the tie straps 102 and the guide bar rail compared with conventional saw chains. For example, the corners 132a-b defined by the bottom surface and respective side surfaces of the tie straps 102 may be positioned so that the adjacent corners 132a-b of adjacent tie straps 102 may be within less than 0.02 inches from one another as the tie straps 102 traverse the sprocket 101 of the guide bar. The spacing between adjacent corners may provide increased stability and decreased wear while maintaining the bend radius needed to traverse the sprocket 101.

[0056] Figure 2 illustrates an abrasive saw chain 200 in accordance with various embodiments. The abrasive saw chain 200 includes tie straps 202 and drive links 204 coupled to one another via respective rivet holes. For example, the tie straps 202 may include a rear rivet hole 206 that engages with a front rivet hole 208 of a drive link 204 (e.g., via a rivet (not shown) disposed through the rivet holes 206 and 208). The tie straps 202 may further include a forward rivet hole 210 that engages with a rear rivet hole 212 of another drive link 204 in the abrasive saw chain 200.

[0057] A side view of the tie strap 202 is shown in Figure 3A, and a front view of the tie strap 202 is shown in Figure 3B. A side view of the drive link 204 is shown in Figure 4A, and a front view of the drive link 204 is shown in Figure 4B. Although not visible in Figure 2, the abrasive saw chain 200 may include tie straps disposed on the other side of the drive links 204 from the tie straps 202. The other tie straps may be opposite the tie straps 202 and may be coupled with the drive links 204 and tie straps 202 via respective rivets.

[0058] In various embodiments, the abrasive saw chain 200 may further include cutting elements 214 coupled to an upper surface 216 of the drive links 204. The cutting elements 214 may include diamond and/or another suitable hard and/or abrasive material. In some embodiments, the cutting elements 214 may have a top surface with two portions 218a-b that are substantially planar (either aligned in the direction of travel or disposed at an angle) and separated by a notch 220. In some embodiments, the cutting elements 214 may be bonded to the upper surface 216 of the drive links 204, such as by welding.

[0059] In various embodiments, a portion 222a-b of an upper surface of the tie straps 202 may be substantially coplanar and/or aligned with the upper surface 216 of the drive link 204 to which the tie strap 202 is coupled. Accordingly, the bottom surface of the cutting elements 214 may be in direct contact with the upper surface of the tie straps 202. In embodiments there may be a nominal gap, such as a 0.002 inch gap, between the upper surface of the tie straps 202 and the bottom surface of the cutting elements 214. However, the bottom surface of the cutting elements 214 may not be bonded to the upper surface of the tie straps 202 (e.g., by the welding process). Accordingly, the portions 222a-b of the upper surface may provide support to the cutting elements 214.

[0060] In some embodiments, as shown in Figure 2, the cutting elements 214 may contact (e.g., be supported by) the portions 222a-b of the upper surface of the tie straps 202 while the corresponding drive link 204 traverses the elongate portion of the guide bar. However, there may be a gap 234 between the bottom surface of the cutting elements 214 and the upper surface of the tie straps 202 while the drive link 204 traverses the sprocket of the guide bar (as illustrated by the right-most tie strap 202 and drive link 204 shown in Figure 2). The gap 234 may assist manufacturability, avoid tight joints caused by over-constrained links, and/or permit rotation of the tie straps 202 relative to the drive links 204 when traversing the sprocket (in another example see Figure 9A). In some embodiments, the gap 234 may be 0.001 to 0.02 inches.

[0061] In various embodiments, the drive links 204 may include mating surfaces 236a-b that contact the respective mating surface 236a-b of the adjacent drive link 204 when the drive links 204 traverse the elongate portion of the guide bar. The mating surfaces 236a-b may be separated from (e.g., not in contact with) the respective mating surface 236a-b when the drive links 204 are traversing the sprocket. The mating surfaces may prevent and/or reduce reverse articulation and/or other unwanted movement of the drive links 204 when the drive links 204 exit the sprocket and while traversing the elongate portion of the guide bar.

[0062] The mating surfaces 236a-b may be included as an alternative to or in addition to the limiting features 124 of the abrasive saw chain 100 discussed above.

However, in some cases, the mating surfaces 236a-b may form a raised burr from impact loading during articulation. Accordingly, in some embodiments, as shown in Figure 2, the tie straps 202 may include a relief gullet 238 that is aligned with the mating surfaces 236a-b to accommodate the raised burr.

[0063] As seen in Figure 3B, in some embodiments, the tie strap 202 may include a chamfer 240 on the upper portion of the inside side edge. The chamfer 240 may provide a relief angle to facilitate laser welding of the cutting element 214 to the drive link 204. For example, the chamfer 240 on the tie strap 202 may provide a relief angle to allow for clearance should the laser weld between the cutting element 214 and the drive link 204 protrude slightly beyond the first side or the second side of the drive link. The tie strap 202 may include a chamfer 240 on one or both inside side edges.

[0064] As seen in Figure 4B, in some embodiments the drive link 204 may include chamfers 242a-b on one or both top edges of the drive link 204. The chamfers 242a-b may provide a relief angle to facilitate laser welding of the drive link 204. For example, the chamfers 242a-b may provide a relief angle to prevent or reduce the amount that the laser weld may protrude beyond the first side and/or second side of the drive link. In some embodiments, the chamfers 242a-b may extend the length of the top edges of the drive link 204.

[0065] Figure 5 illustrates an abrasive saw chain 500 in which the cutting element 514 is bonded to upper surfaces of an opposing pair of tie straps 502, in accordance with various embodiments. The abrasive saw chain 500 includes tie straps 502 and drive links 504 coupled to one another via respective rivet holes. A side view of the tie strap 502 is shown in Figure 6A, and a front view of the tie strap 502 is shown in Figure 6B. A side view of the drive link 504 is shown in Figure 7A, and a front view of the drive link 504 is shown in Figure 7B.

[0066] Although not visible in Figure 5, the abrasive saw chain 500 may include tie straps disposed on the other side of the drive links 504 from the tie straps 502. The other tie straps may be opposite the tie straps 502 and may be coupled with the drive links 504 and tie straps 502 via respective rivets. The middle two tie straps

502 are shown in Figure 5 to be transparent to show the structure of the drive links 504.

[0067] In various embodiments, the abrasive saw chain 500 may further include cutting elements 514 bonded (e.g., by welding, such as laser welding) to an upper surface 517 of the tie strap 502. The cutting elements 514 may be further bonded to an upper surface of the respective opposing tie strap (not shown). The cutting elements 514 may include diamond and/or another suitable hard and/or abrasive material. In some embodiments, the upper surface 517 of the tie strap 502 may be substantially flat to facilitate bonding with the cutting element 514.

[0068] In various embodiments, a portion 523a-b of an upper surface of the drive links 504 may be substantially coplanar and/or aligned with the upper surface 517 of the tie strap 502 to which the drive link 504 is coupled. Accordingly, the bottom surface of the cutting elements 514 may be in direct contact with the upper surface of the drive links 504. However, the bottom surface of the cutting elements 514 may not be bonded to the upper surface of the drive links 504 (e.g., by the welding process). Accordingly, the portions 523a-b of the upper surface may provide support to the cutting elements 514.

[0069] In some embodiments, as shown in Figure 5, the cutting elements 514 may contact (e.g., be supported by) the portions 523a-b of the upper surface of the drive links 504 while the corresponding tie strap 502 traverses the elongate portion of the guide bar. However, there may be a gap 535 between the bottom surface of the cutting element 514 and the upper surface of the drive link 504 while the drive link 504 traverses the sprocket of the guide bar. The gap 535 may assist manufacturability, avoid tight joints caused by over-constrained links, and/or permit rotation of the tie straps 502 relative to the drive links 504 when traversing the sprocket. In some embodiments, the gap 535 may be 0.001 to 0.02 inches.

[0070] In various embodiments, the tie straps 502 may include mating surfaces 537a-b that contact the respective mating surface 537a-b of the adjacent (e.g., forward or rearward) tie strap 502 when the tie straps 502 traverse the elongate portion of the guide bar. The mating surfaces 537a-b may be separated from (e.g., not in contact with) the respective mating surface 537a-b when the tie straps 502 are

traversing the sprocket. The mating surfaces 537a-b may prevent and/or reduce reverse articulation and/or other unwanted movement of the tie straps 502 when the tie straps 502 exit the sprocket and while traversing the elongate portion of the guide bar.

[0071] In some cases, the mating surfaces 537a-b may form a raised burr from impact loading during articulation. Accordingly, in some embodiments, as shown in Figure 5, the drive links may include a relief gullet 539 that is aligned with the mating surfaces 537a-b to accommodate the raised burr.

[0072] Figures 8A and 8B illustrate side views of various abrasive saw chain, in accordance with various embodiments. The abrasive saw chain 800 includes tie straps 802, cutting drive links 804, and non-cutting drive links 805 coupled to one another via respective rivet holes in an every other alternating pattern. The tie straps 802 may include a rear rivet hole 806 that engages with a front rivet hole 808 of a drive link 804 or 805 (e.g., via a rivet (not shown) disposed through the rivet holes 806 and 808). The tie straps 802 may further include a forward rivet hole 810 that engages with a rear rivet hole 812 of another drive link 804 or 805 in the abrasive saw chain 800. Although not visible in Figures 8A and 8B, the abrasive saw chain 800 may include tie straps disposed on the other side of the drive links 804, 805 from the tie straps 802. The other tie straps may be opposite the tie straps 802 and may be coupled with the drive links 804, 805 and tie straps 802 via respective rivets.

[0073] In various embodiments, the abrasive saw chain 800 may further include cutting elements 814 coupled to an upper surface 816 the cutting drive links 804. In some embodiments, the cutting elements 814 may have a top surface with a central portion 840 that is substantially planar and aligned in the direction of travel, and two end portions 842a-b that are disposed at an angle relative to the central portion 840.

[0074] The cutting elements 814 may include diamond and/or another suitable hard and/or abrasive material. In some embodiments, the cutting elements 814 may be bonded to the upper surface 816 of the cutting drive links 804, such as by welding. In various embodiments, a portion 822a-b of an upper surface of the tie straps 802 may be substantially coplanar and/or aligned with the upper surface 816

of the cutting drive links 804 to which the tie strap 802 is coupled. Accordingly, the bottom surface of the cutting elements 814 may be in direct contact with the upper surface of the tie straps 802. However, the bottom surface of the cutting elements 814 may not be bonded to the upper surface of the tie straps 802 (e.g., by the welding process). Accordingly, the portions 822a-b of the upper surface may provide support to the cutting elements 814. In some embodiments, as shown in Figures 8A and 8B, the cutting elements 814 may contact (e.g., be supported by) the portions 822a-b of the upper surface of the tie straps 802 while the corresponding cutting drive link 804 traverses the elongate portion of the guide bar. However, there may be a gap 834 between the bottom surface of the cutting elements 814 and the upper surface of the tie straps 802 while the cutting drive link 804 traverses the sprocket of the guide bar (as illustrated by the second to the right-most tie strap 802 and cutting drive link 804 shown in Figures 8A and 8B). The gap 834 may assist manufacturability, avoid tight joints caused by over-constrained links, and/or permit rotation of the tie straps 802 relative to cutting drive link 804 when traversing the sprocket. In some embodiments, the gap 834 may be 0.001 to 0.02 inches. In embodiments, there may be a nominal gap, such as a 0.002 inch gap, between the upper surface of the tie straps 802 and the bottom surface of the cutting elements 814. Such a gap may still support the cutting element, for example via compliance in the chain such that the tie straps 802 and cutter drive links have relative up/down movement with respect to each other.

[0075] In the embodiments shown, the non-cutting drive links 805 in which the cutting elements 814 are coupled can include one or more bumpers 844a-b on the upper surface of non-cutting drive links 805. The inclusion of non-cutting drive links 805 with one or more bumpers 844a-b provides for gaps in the cutting surfaces, while maintain stability in in the cut. The single and double bumper versions shown are primarily by example. In embodiments, the various potential bumper profiles create a relatively smooth transition between cutting elements yet minimize the amount of steel introduced into the cut, which simply causes drag and friction.

[0076] In various embodiments, the cutting drive links 804 and the non-cutting drive links 805 may include mating surfaces 846a and 846b, respectively that

contact the respective mating surface 846a-b of the adjacent drive links 804, 805 when the drive links 804, 805 traverse the elongate portion of the guide bar. The mating surfaces 846a-b may be separated from (e.g., not in contact with) the respective mating surface 846a-b when the drive links 804 are traversing the sprocket. The mating surfaces may prevent and/or reduce reverse articulation and/or other unwanted movement of the drive links 804, 805 when the drive links 804, 805 exit the sprocket and while traversing the elongate portion of the guide bar. The mating surfaces 846a-b may prevent and/or reduce downward translation of cutting drive link 804 and upward translation of an adjacent non-cutting drive link 805 to constrain reverse articulation and control vertical misalignment of the cutting drive links. With respect to the cutting drive link, mating surfaces 846a-b prevent/reduce upward translation and contact at portions 822a-b between cutting element 814 and tie strap 802 prevent/reduce downward translation. The reverse is also true. In embodiments, the mating surface 846a of a drive link extend over the mating surface 846b of an adjacent drive link, for example at an angle of between about 10° and 80°, such as between about 30° and about 60° or about 45°. The extensions of the mating surfaces serves to both constrain reverse articulation and control vertical misalignment of the cutting drive links, for example to enhance the chain stability. In some embodiments, the extensions of the mating surfaces provide a desired translational constraint along with sufficient cross-sectional area between contact surfaces to minimize material deformation and burrs due to impact loading.

[0077] The mating surfaces 846a-b may be included as an alternative to or in addition to the limiting features 124 of the abrasive saw chain 100 discussed above and mating surfaces 236a-b of the abrasive saw chain 200 discussed above. However, in some cases, the mating surfaces 846a-b may form a raised burr from impact loading during articulation. Accordingly, in some embodiments, as shown in Figure 8A and 8B, the tie straps 802 may include a relief gullet 838 that is aligned with the mating surfaces 846a-b to accommodate the raised burr.

[0078] In some embodiments, the tie strap 802 may include a chamfer on the upper portion of the inside side edge. The chamfer may provide a relief angle to facilitate laser welding of the cutting element 814 to the cutting drive link 804. For

example, the chamfer on the tie strap 802 may provide a relief angle to allow for clearance should the laser weld between the cutting element 814 and the cutting drive link 804 protrude slightly beyond the first side or the second side of the drive link. The tie strap 802 may include a chamfer on one or both inside side edges.

[0079] In some embodiments the cutting drive link 804 may include chamfers on one or both top edges of the cutting drive link 804. The chamfers may provide a relief angle to facilitate laser welding of the cutting drive link 804. For example, the chamfers may provide a relief angle to prevent or reduce the amount that the laser weld may protrude beyond the first side and/or second side of the drive link. In some embodiments, the chamfers may extend the length of the top edges of the cutting drive link 804.

[0080] Figure 9A and 9B is a side view of an abrasive saw chain, in accordance with various embodiments. The side view and the inset in Figure 9A illustrate a segment of an abrasive chain 900 depicting load sharing contact of a tie strap 902 with a cutting element 914. The side view and the inset in Figure 9B illustrate a segment of an abrasive chain 900 depicting upward/downward translation of drive links 904 that enables contact between the bottom side of a cutting element 914 and the top profile of tie strap 902. In the embodiment shown, the abrasive saw chain 900 includes tie straps 902 and drive links 904 coupled to one another via respective rivet holes. The other tie straps may be opposite the tie straps 902 and may be coupled with the drive links 904 and tie straps 902 via respective rivets. In various embodiments, the abrasive saw chain 900 may further include cutting elements 914 coupled to an upper surface 916 of the cutting drive links 904. However, the bottom surface of the cutting elements 914 may not be bonded to the upper surface of the tie straps 902 (e.g., by the welding process).

[0081] In various embodiments, the drive links 904 may include mating surfaces 936a and 936b that contact the respective mating surface 936a-b of the adjacent drive links, for example, when the drive links 904 traverse the elongate portion of the guide bar. The mating surfaces 936a-b may be separated from (e.g., not in contact with) the respective mating surface 936a-b when the drive links 904 are traversing the sprocket. The mating surfaces may prevent and/or reduce reverse

articulation and/or other unwanted movement of the drive links when the drive links 904 exit the sprocket and while traversing the elongate portion of the guide bar. In embodiments there may be a clearance 934, such as a clearance of .001 inches to .010 inches to aid chain assembly and facilitate contact for load sharing, between the upper surface of the tie straps 902 and the bottom surface of the cutting elements 914 when the drive links 904 traverse the elongate portion of the guide bar. The portions 922a-b of the upper surface may provide support for load sharing between the cutting elements 914, the drive links 904, and the tie straps 902 to distribute the load on the cutting elements 914 across multiple links, and in particular when mating surfaces 936a and 936b are in contact, such as when the drive links 904 traverse the elongate portion of the guide bar. The mating surfaces 936a-b may be included as an alternative to or in addition to the limiting features 124 of the abrasive saw chain 100 discussed above, mating surfaces 236a-b of the abrasive saw chain 200, and mating surfaces 846a-b of the abrasive saw chain 800 discussed above.

[0082] In some embodiments, the tie strap 902 may include a chamfer on the upper portion of the inside side edge. The chamfer may provide a relief angle to facilitate laser welding of the cutting element 914 to the cutting drive link 904. For example, the chamfer on the tie strap 902 may provide a relief angle to allow for clearance should the laser weld between the cutting element 914 and the cutting drive link 904 protrude slightly beyond the first side or the second side of the drive link. The tie strap 902 may include a chamfer on one or both inside side edges.

[0083] In some embodiments the cutting drive link 904 may include chamfers on one or both top edges of the cutting drive link 904. The chamfers may provide a relief angle to facilitate laser welding of the cutting drive link 904. For example, the chamfers may provide a relief angle to prevent or reduce the amount that the laser weld may protrude beyond the first side and/or second side of the drive link. In some embodiments, the chamfers may extend the length of the top edges of the cutting drive link 904.

[0084] Figures 10A and 10B illustrate forward chain articulation. Figure 10A is a side view of an abrasive saw chain 900 illustrating allowable forward chain articulation, in accordance with various embodiments. Figure 10B is a side view of a

conventional chain illustrating forward chain articulation for comparison. With respect to the abrasive chain shown in Figure 10A, the minimum bend radius is defined by contact at adjacent corners of the lower surfaces 932a-b of adjacent tie straps. The minimum allowable bend radius for forward articulation ranges between about 0.850 inches to about 0.950 inches. A primary benefit of limiting the range of articulation is that tie strap footprint surface area is increased which reduces footprint and guide bar rail wear rates. Reduced wear rates help to maintain stability at chain/bar interface through life. The chain re-enters the guide bar groove from the drive sprocket in a more controlled fashion which results in less impact loading on the guide bar rails and generates less vibration in the cutting system.

[0085] Figures 11A and 11B illustrate reverse articulation. Figure 11A is a side view of an abrasive saw chain 900 illustrating allowable reverse chain articulation, in accordance with various embodiments. Figure 11B is a side view of a conventional chain illustrating reverse chain articulation for comparison. With respect to the abrasive chain shown in Figure 11A, contact of the mating surfaces 936a-b of adjacent tie drive links inhibits reverse articulation of the abrasive chain 900. Reduced reverse articulation enables cutting loads acting on diamond segments to be distributed evenly across multiple chassis components. In addition reduced reverse articulation provides greater stability and reduces vibration which extends the life of the diamond segments. Reduced reverse articulation increases guide bar life by spreading wear across more guide bar rail area, prevents unwanted motion of the chain in the cut so the diamond segments maintain consistent and stable contact with the workpiece. On elongate portion of guide bar rails, the chain acts more rigidly which promotes cutting efficiency and smoothness. A minimum allowable bend radius for reverse articulation is greater than 25 inches is defined by contact between bottom side of segments and upper profile of tie straps, and between adjacent drive links.

[0086] Figure 12 illustrates guide bar 1200 wear patterns from conventional chain and abrasive chain disclosed herein. As best seen in the inset, conventional chain, in which forward and reverse articulation are not limited results in deep concentrated wear patterns on the guide bar rails 1270 (solid line), which decreases

the usable life time of the guide bar 1200. These localized areas of high bar rail wear may be due to heat and loads generated in rebar cutting. In contrast, using a disclosed chain in which the forward and reverse articulation is limited results in a more even rail wear pattern 1272 (dashed line) in which the wear is distributed along the guide bar 1200. Bar rail wear from rebar is evenly distributed across more rail surface area, extending the life of the guide bar 1200. This distribution of the wear provides the guide bar 1200 increased chain stability through life with longer usable life, thereby increasing cutting efficiency and reducing costs to the consumer.

[0087] Although certain embodiments have been illustrated and described herein, it will be appreciated by those of ordinary skill in the art that a wide variety of alternate and/or equivalent embodiments or implementations calculated to achieve the same purposes may be substituted for the embodiments shown and described without departing from the scope. Those with skill in the art will readily appreciate that embodiments may be implemented in a very wide variety of ways. This application is intended to cover any adaptations or variations of the embodiments discussed herein. Therefore, it is manifestly intended that embodiments be limited only by the claims and the equivalents thereof.

Claims

What is claimed is:

1. An abrasive saw chain comprising:
a drive link including an upper surface;
a cutting element coupled to the upper surface of the drive link, the cutting element having a lower surface extending across a width of the abrasive saw chain, the cutting element configured to cut aggregate material or pipe; and
a tie strap coupled to the drive link, the tie strap including an upper surface to contact and support the lower surface of the cutting element when the tie strap and the drive link are under load substantially perpendicular to a long axis of the tie strap, wherein there is a gap between the upper surface of the tie strap and the lower surface of the cutting element when the tie strap and the drive link are not under load substantially perpendicular to a long axis of the tie strap and wherein the upper surface of the tie strap contacts the lower surface of the cutting element when the tie strap and the drive link are under load substantially perpendicular to the long axis of the tie strap.
2. The abrasive saw chain of claim 1, wherein the drive link is a first drive link and the cutting element is a first element, and wherein the abrasive saw chain further includes:
a second drive link coupled to the first drive link by the tie strap, wherein the first drive link includes a mating surface that contacts a mating surface of the second drive link when the first and second drive links traverse an elongate portion of a guide bar, thereby preventing reverse articulation of the abrasive saw chain below a minimum radius of 20 inches.
3. The abrasive saw chain of claim 2, wherein the tie strap includes a relief gullet that overlaps with the mating surfaces of the first and second drive links.

4. The abrasive saw chain of claim 2, wherein the second drive link comprises a second cutting element coupled to the upper surface of the drive link, the cutting element having a lower surface extending across a width of the abrasive saw chain, the cutting element configured to cut aggregate material or pipe.

5. The abrasive saw chain of claim 2, wherein the second drive link comprises one or more bumpers.

6. The abrasive saw chain of claim 5, wherein the mating surfaces are perpendicular to a long axis of the guide bar.

7. The abrasive saw chain of claim 5, wherein the mating surface of the second drive link extends over the mating surface of the first drive link to control vertical misalignment of the first drive link.

8. The abrasive saw chain of claim 1, wherein the tie strap includes a limiting feature to contact a front and/or back surface of the cutting element when the tie strap and the drive link traverse an elongate portion of a guide bar, thereby preventing reverse articulation of the abrasive saw chain below a minimum radius of 20 inches.

9. The abrasive saw chain of claim 1, wherein the drive link is a first drive link and the cutting element is a first element, and wherein the abrasive saw chain further includes:

a second drive link coupled to the first drive link by the tie strap; and

a second cutting element coupled to an upper surface of the second drive link;

wherein the limiting feature is further to contact a front and/or back surface of the second cutting element when the tie strap and the first and second drive links traverse the elongate portion of the guide bar.

10. The abrasive saw chain of claim 1, wherein the tie strap is a first tie strap and wherein the abrasive saw chain further includes:

a second tie strap coupled to the first tie strap by the drive link;

wherein a corner defined by a bottom surface and front surface of the first tie strap is disposed less than 0.02 inches from a corner of the second tie strap defined by a bottom surface and rear surface of the second tie strap when the first and second tie straps traverse a sprocket of a guide bar.

11. The abrasive saw chain of claim 10, where contact between the corner of the first tie strap and the corner of the second tie strap limit forward articulation of the abrasive saw chain to a radius greater than 0.800 inches.

12. The abrasive saw chain of claim 1, wherein the aspect ratio of the drive link is between about 1.0 and about 1.15.

13. The abrasive saw chain of claim 1, wherein the aspect ratio of the tie strap is about 0.9 and about 1.02.

14. An abrasive saw chain comprising:

a drive link including an upper surface;

a first tie strap and a second tie strap coupled to the drive link and coupled opposite one another, the first and second tie straps including respective upper surfaces;

a cutting element configured to cut aggregate material or pipe and extending across a width of the abrasive saw chain and bonded to the upper surfaces of the first and second tie straps, the cutting element having a lower surface, the drive link including an upper surface to contact and support the lower surface of the cutting element when the tie strap and the drive link are under load substantially perpendicular to a long axis of the tie strap, wherein there is a gap between the upper surface of the drive link and the lower surface of the cutting element when the tie strap and the drive link are not under load substantially perpendicular to a long

axis of the tie strap and wherein the upper surface of the drive link contacts the lower surface of the cutting element when the tie strap and the drive link are under load substantially perpendicular to the long axis of the tie strap.

15. The abrasive saw chain of claim 14, wherein the first tie strap includes a mating surface that contacts a mating surface of the second tie strap when the first and second tie straps traverse an elongate portion of a guide bar, thereby preventing reverse articulation of the abrasive saw chain below a minimum radius of 20 inches.

16. The abrasive saw chain of claim 14, wherein a corner defined by a bottom surface and front surface of the first tie strap is disposed less than 0.02 inches from a corner of the second tie strap defined by a bottom surface and rear surface of the second tie strap when the first and second tie straps traverse a sprocket of a guide bar and where the corner of the first tie strap the corner of the second tie strap limit forward articulation of the abrasive saw chain to a radius greater than 0.800 inches.

17. A high stability abrasive saw chain comprising:
a first drive link including an upper surface and a mating surface;
a second drive link including a mating surface;
a cutting element configured to cut aggregate material or pipe and coupled to the upper surface of the first drive link, the first cutting element having a lower surface extending across a width of the high stability abrasive saw chain; and
a first tie strap coupling the first drive link to the second drive link;
a second tie strap coupled to the first drive link or the second drive link,
wherein the first tie strap includes an upper surface to contact and support the lower surface of the cutting element, wherein there is a gap between the upper surface of the first tie strap and the lower surface of the cutting element when the first tie strap and the first drive link are not under load substantially perpendicular to a long axis of the first tie strap and wherein the upper surface of the first tie strap contacts the lower surface of the cutting element when the first tie strap and the first drive link are under

load substantially perpendicular to the long axis of the first tie strap, wherein the mating surface of the first drive link contacts the mating surface of the second drive link when the first and second drive links traverse an elongate portion of a guide bar, thereby preventing reverse articulation of the abrasive saw chain below a minimum radius of 20 inches; wherein contact between a corner defined by a bottom surface and front surface of the first tie strap and a corner of the second tie strap defined by a bottom surface and rear surface of the second tie strap limit forward articulation of the abrasive saw chain to a radius greater than 0.800 inches.

18. The abrasive saw chain of claim 17, wherein the tie strap includes a relief gullet that overlaps with the mating surfaces of the first and second drive links.

19. The abrasive saw chain of claim 17, wherein the second drive link comprises a second cutting element coupled to an upper surface of the second drive link, the cutting element having a lower surface extending across a width of the abrasive saw chain, the cutting element configured to cut aggregate material or pipe.

20. The abrasive saw chain of claim 17, wherein the second drive link comprises one or more bumpers.

21. The abrasive saw chain of claim 17, wherein the mating surfaces are perpendicular to a long axis of the guide bar.

22. The abrasive saw chain of claim 17, wherein the mating surface of the second drive link extends over the mating surface of the first drive link to control vertical misalignment of the first drive link.

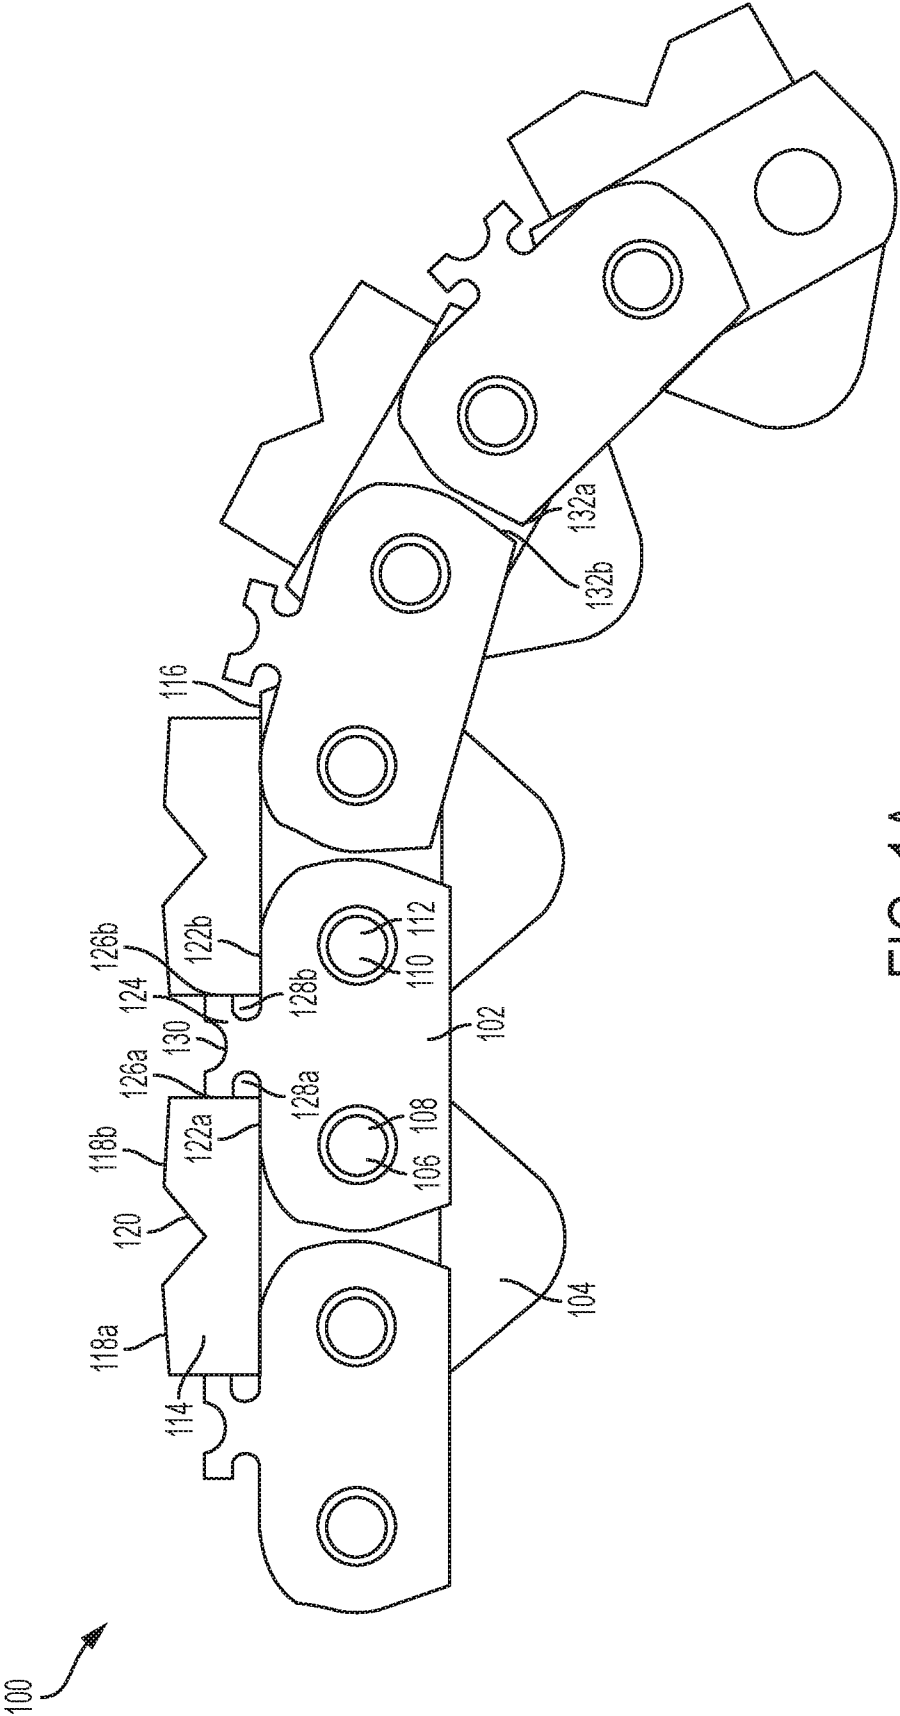


FIG. 1A

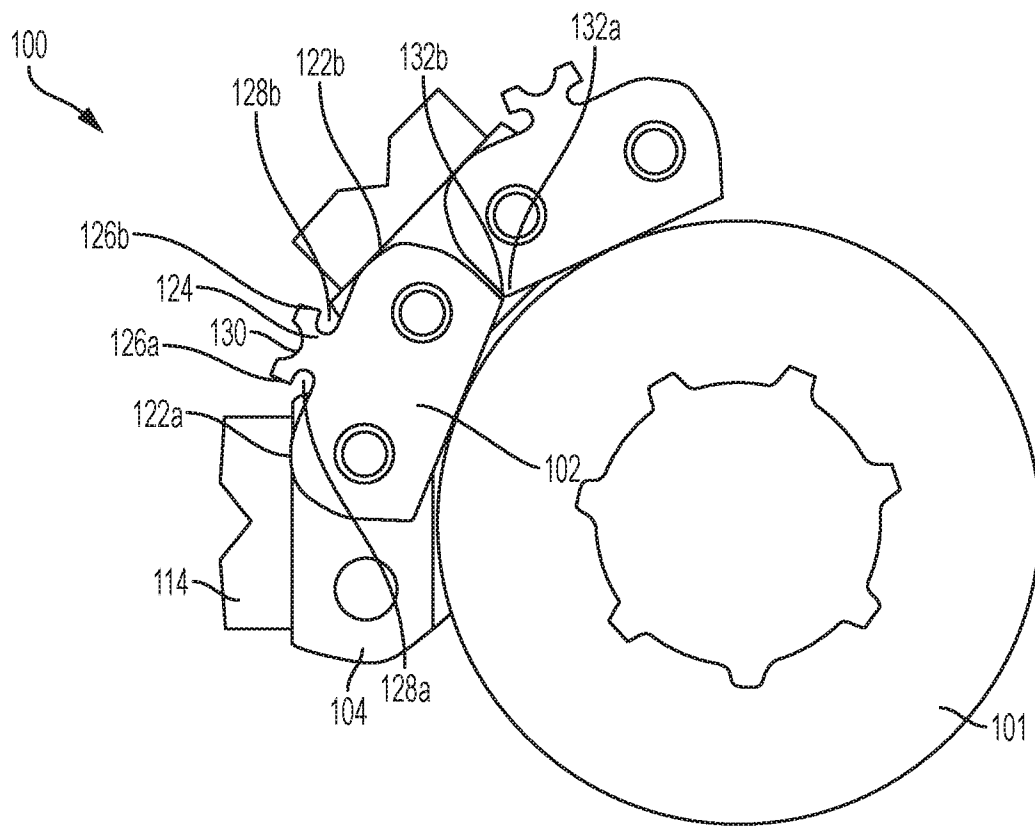


FIG. 1B

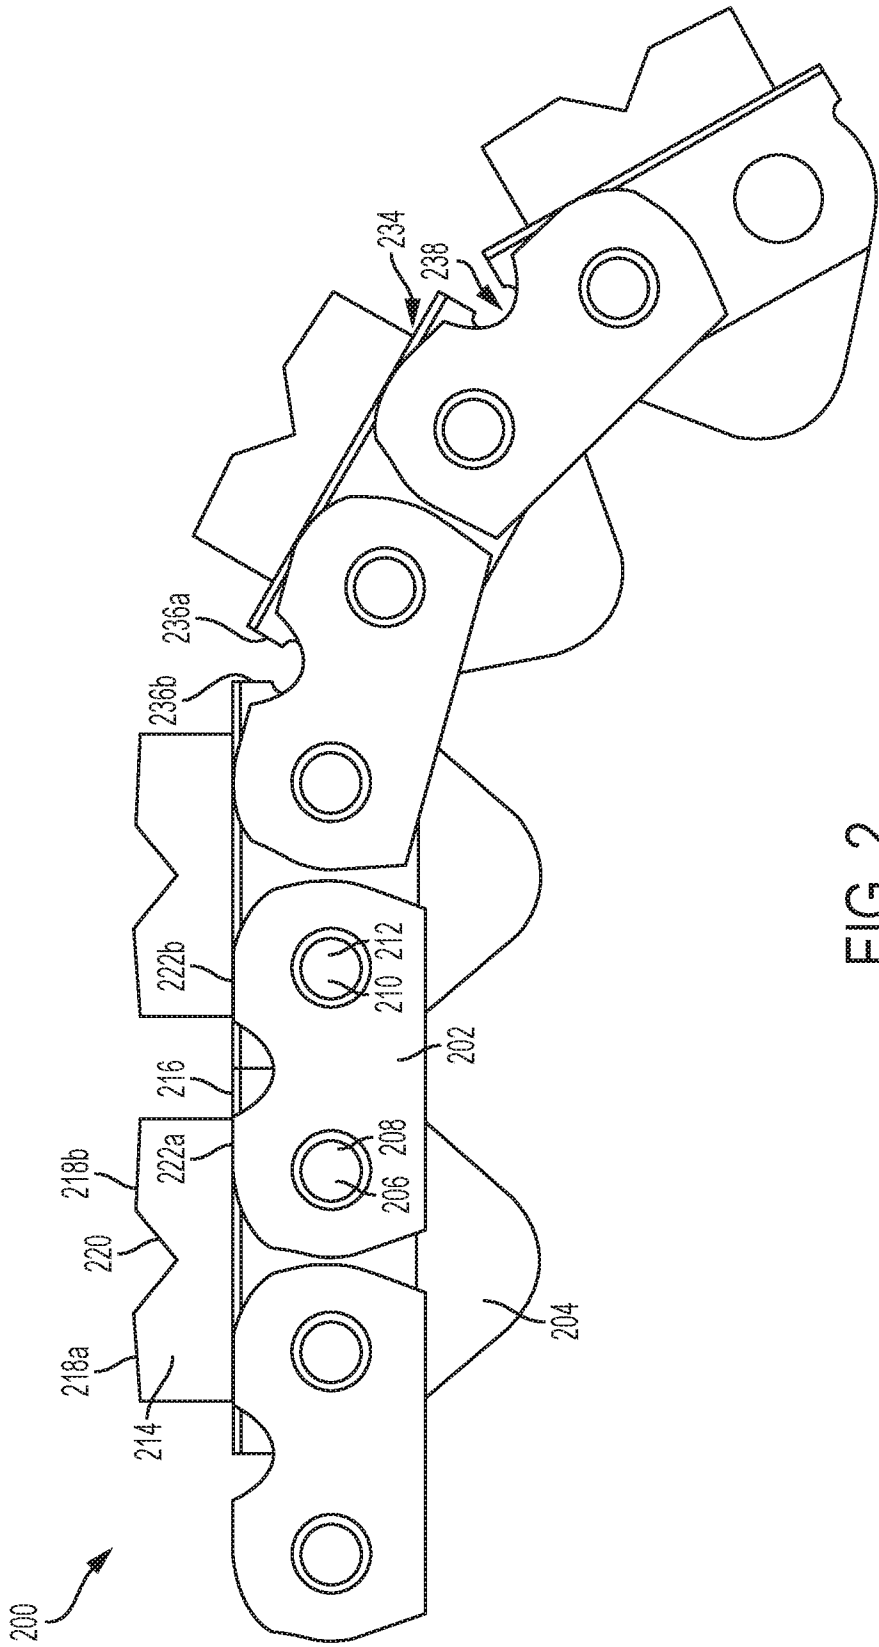


FIG. 2

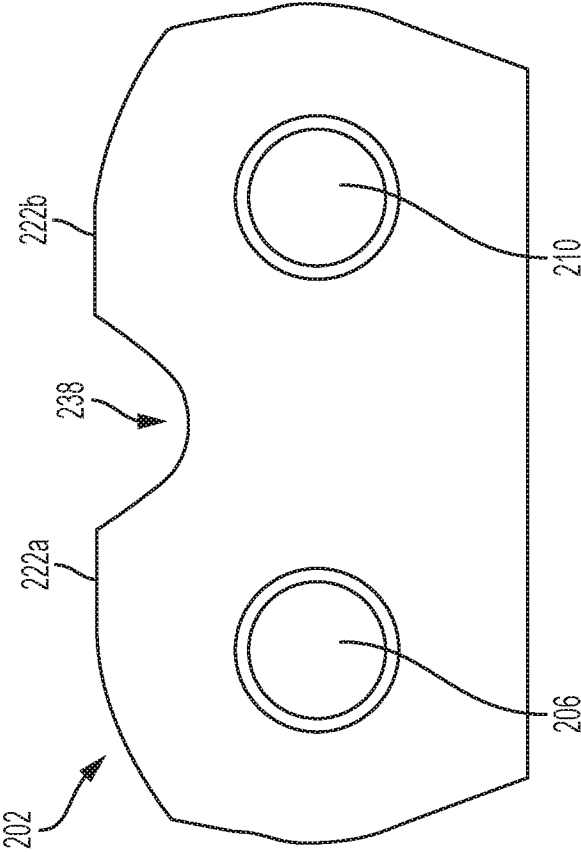


FIG. 3A

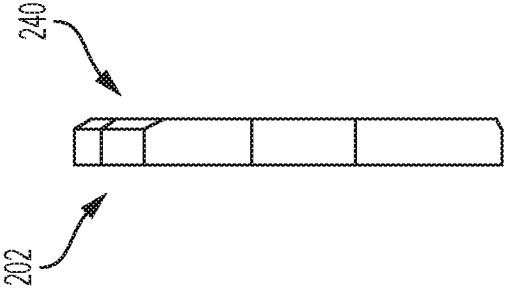


FIG. 3B

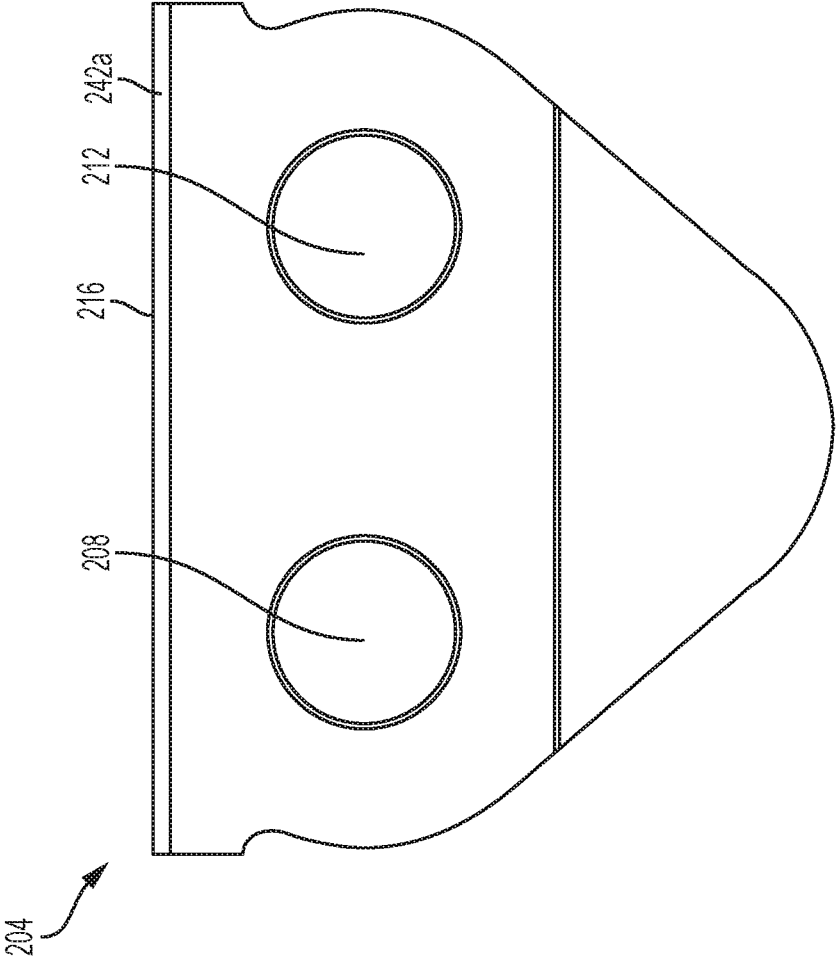


FIG. 4A

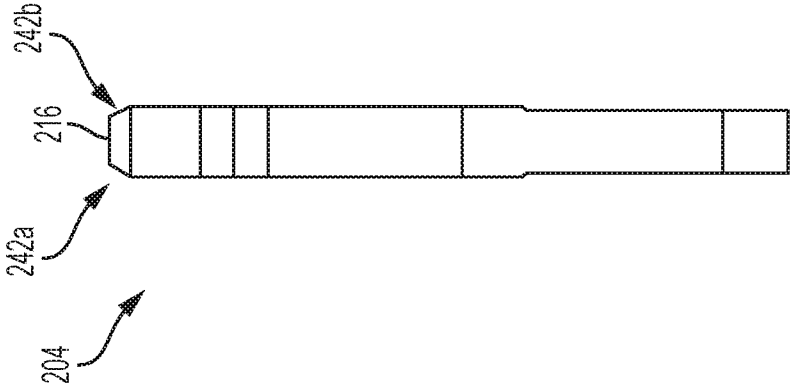


FIG. 4B

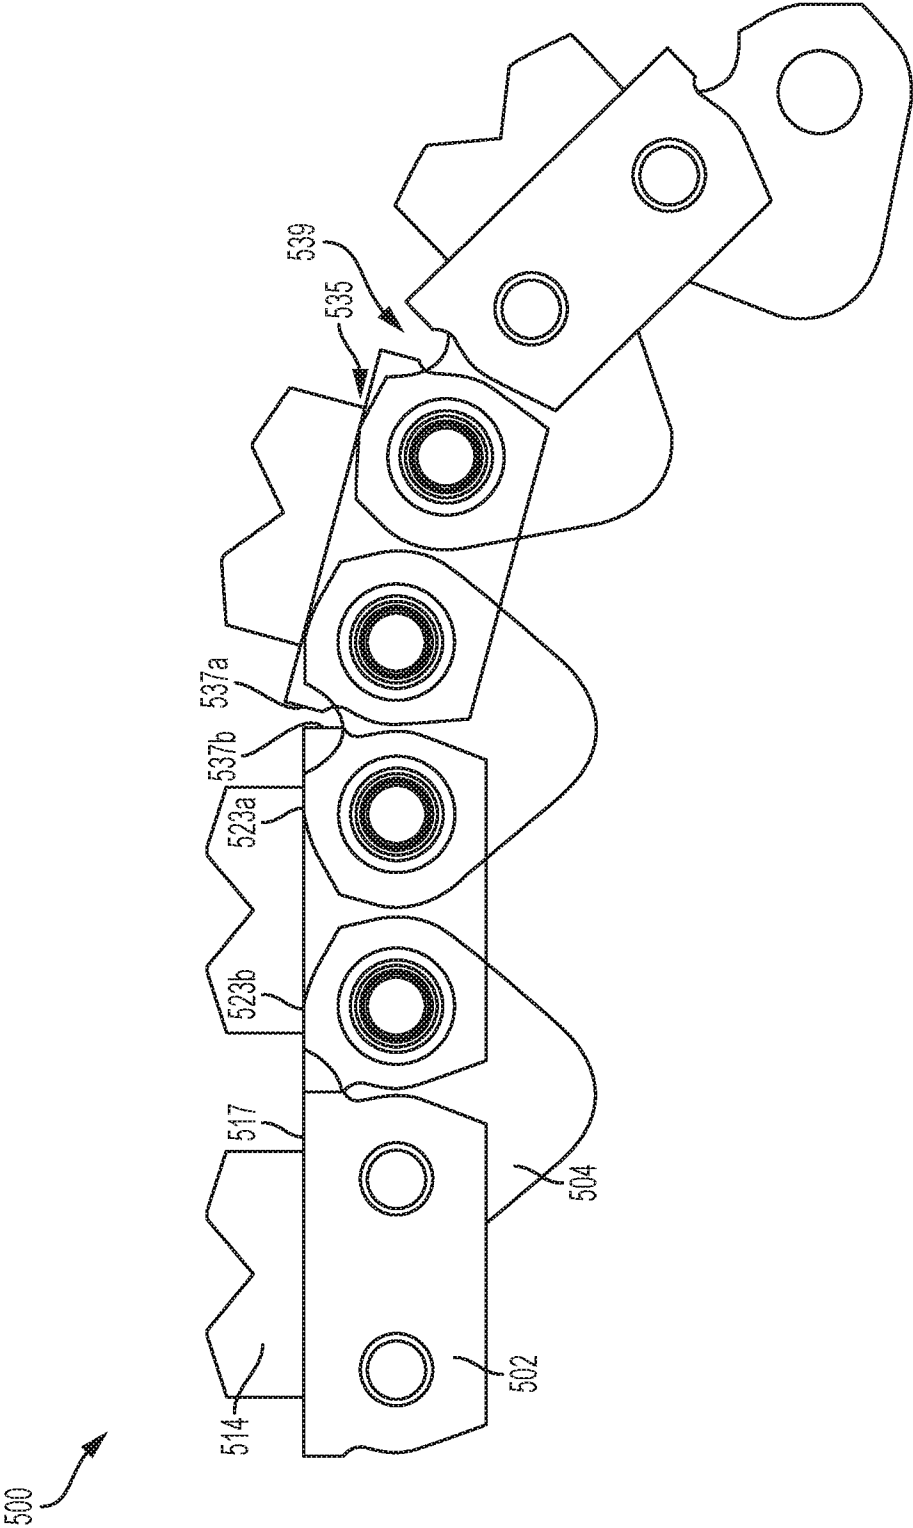


FIG. 5

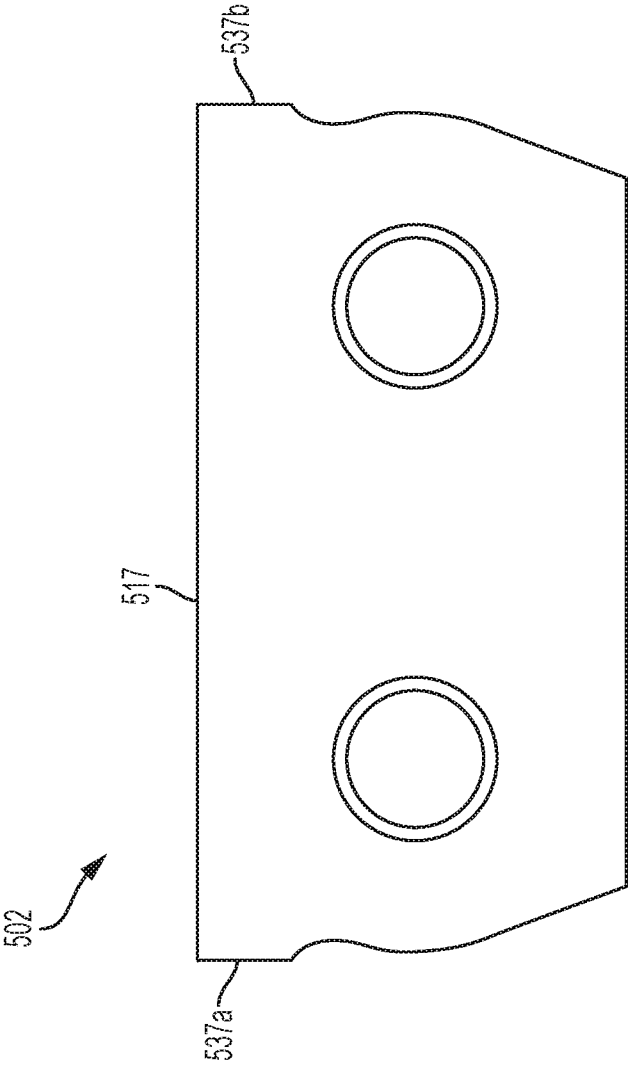


FIG. 6A

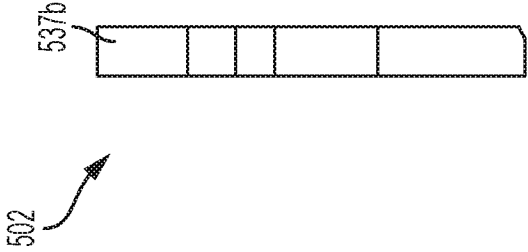


FIG. 6B

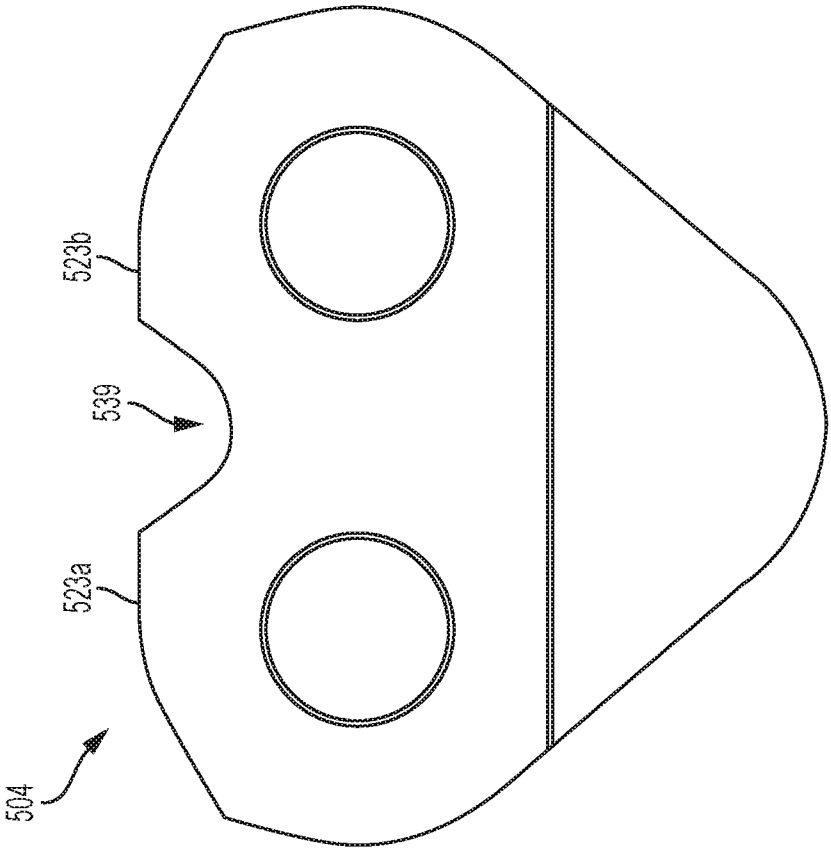


FIG. 7A

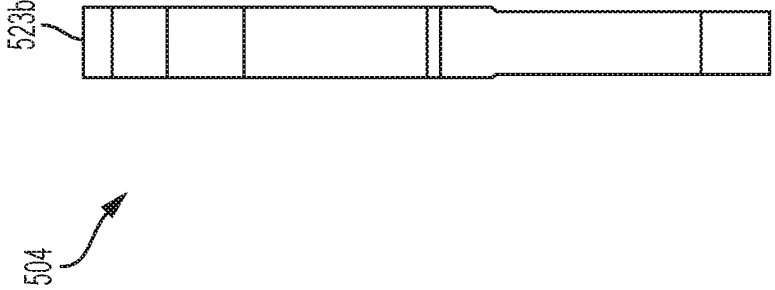


FIG. 7B

Figure 8A

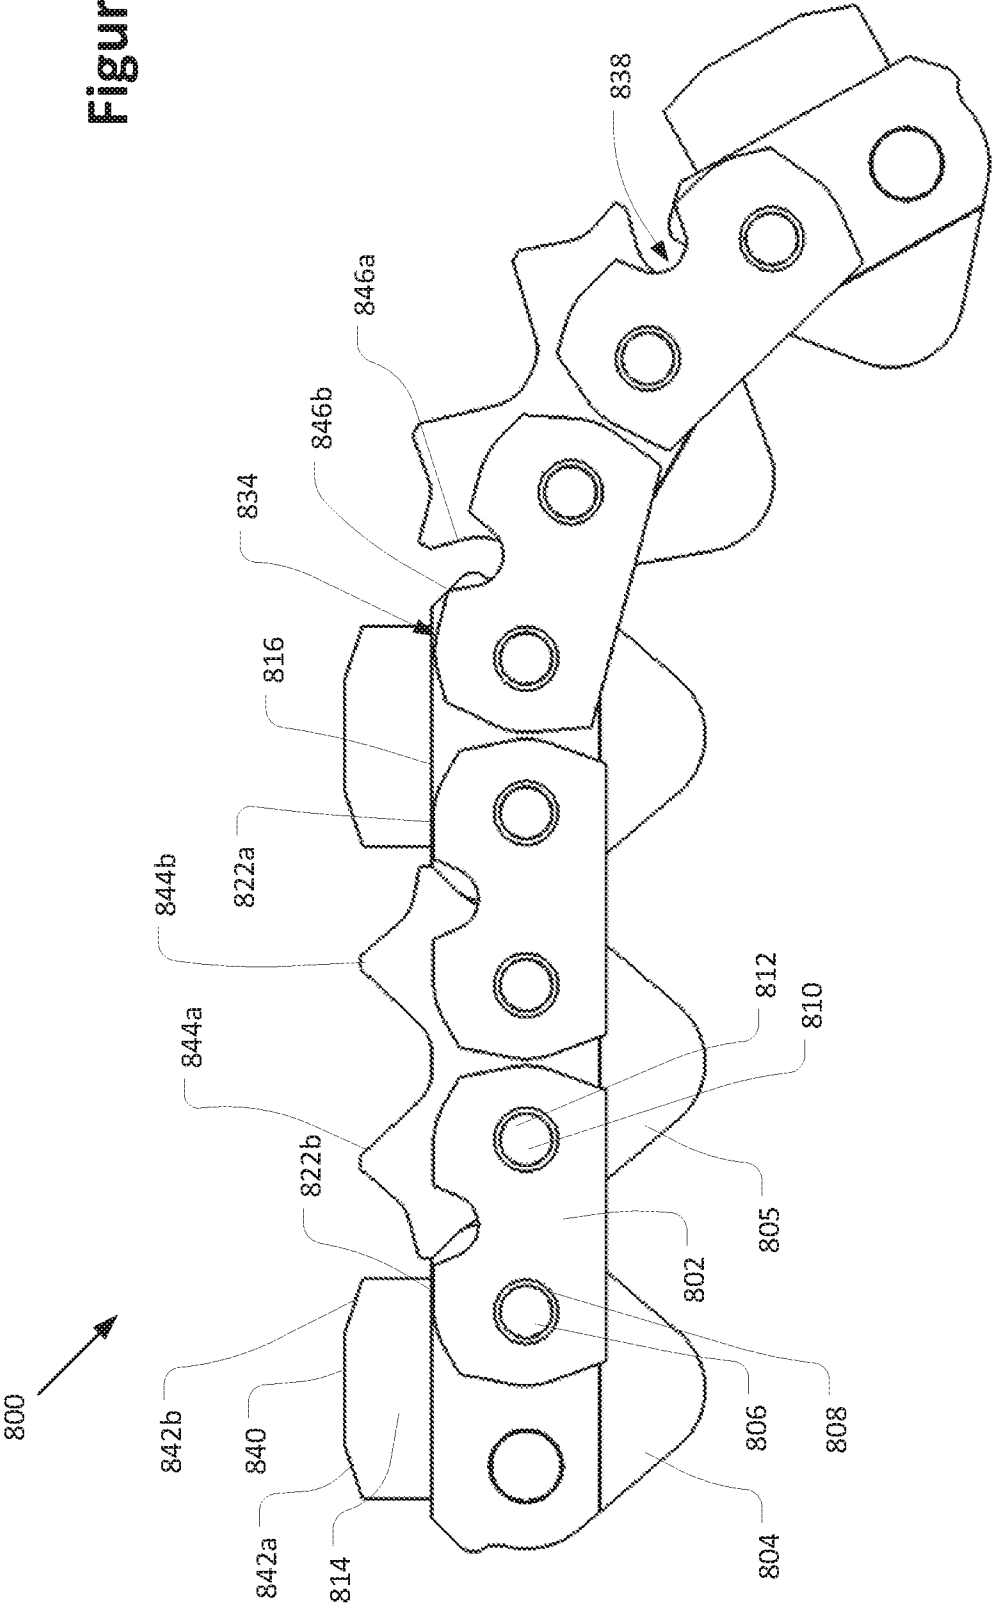


Figure 8B

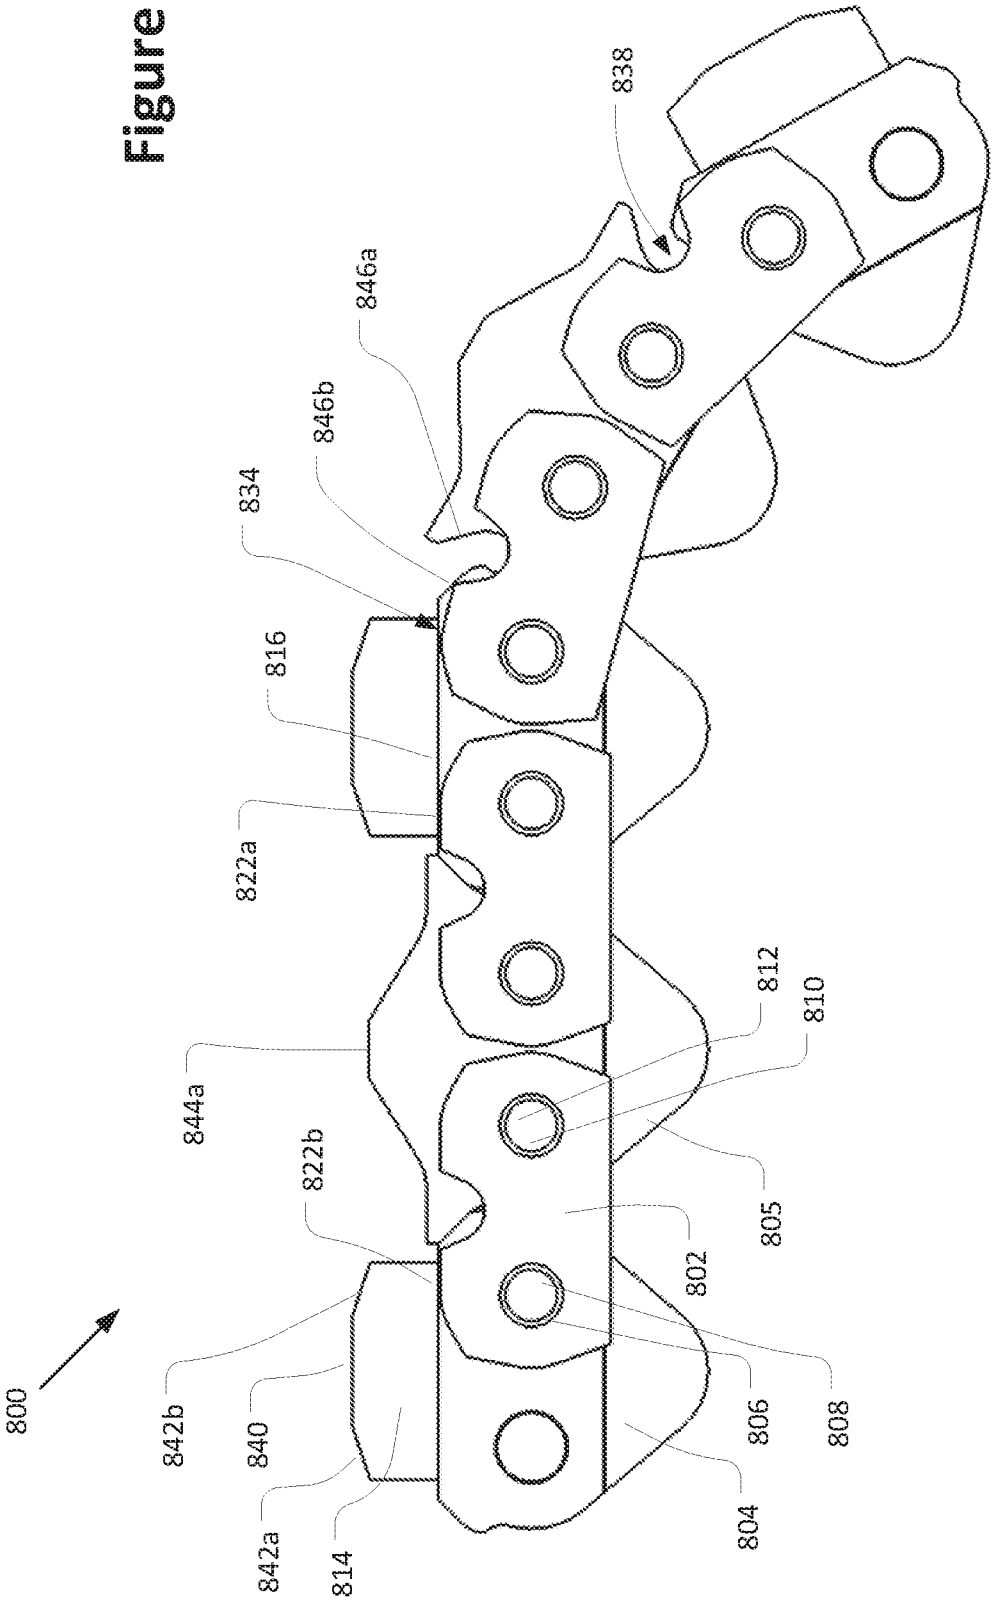
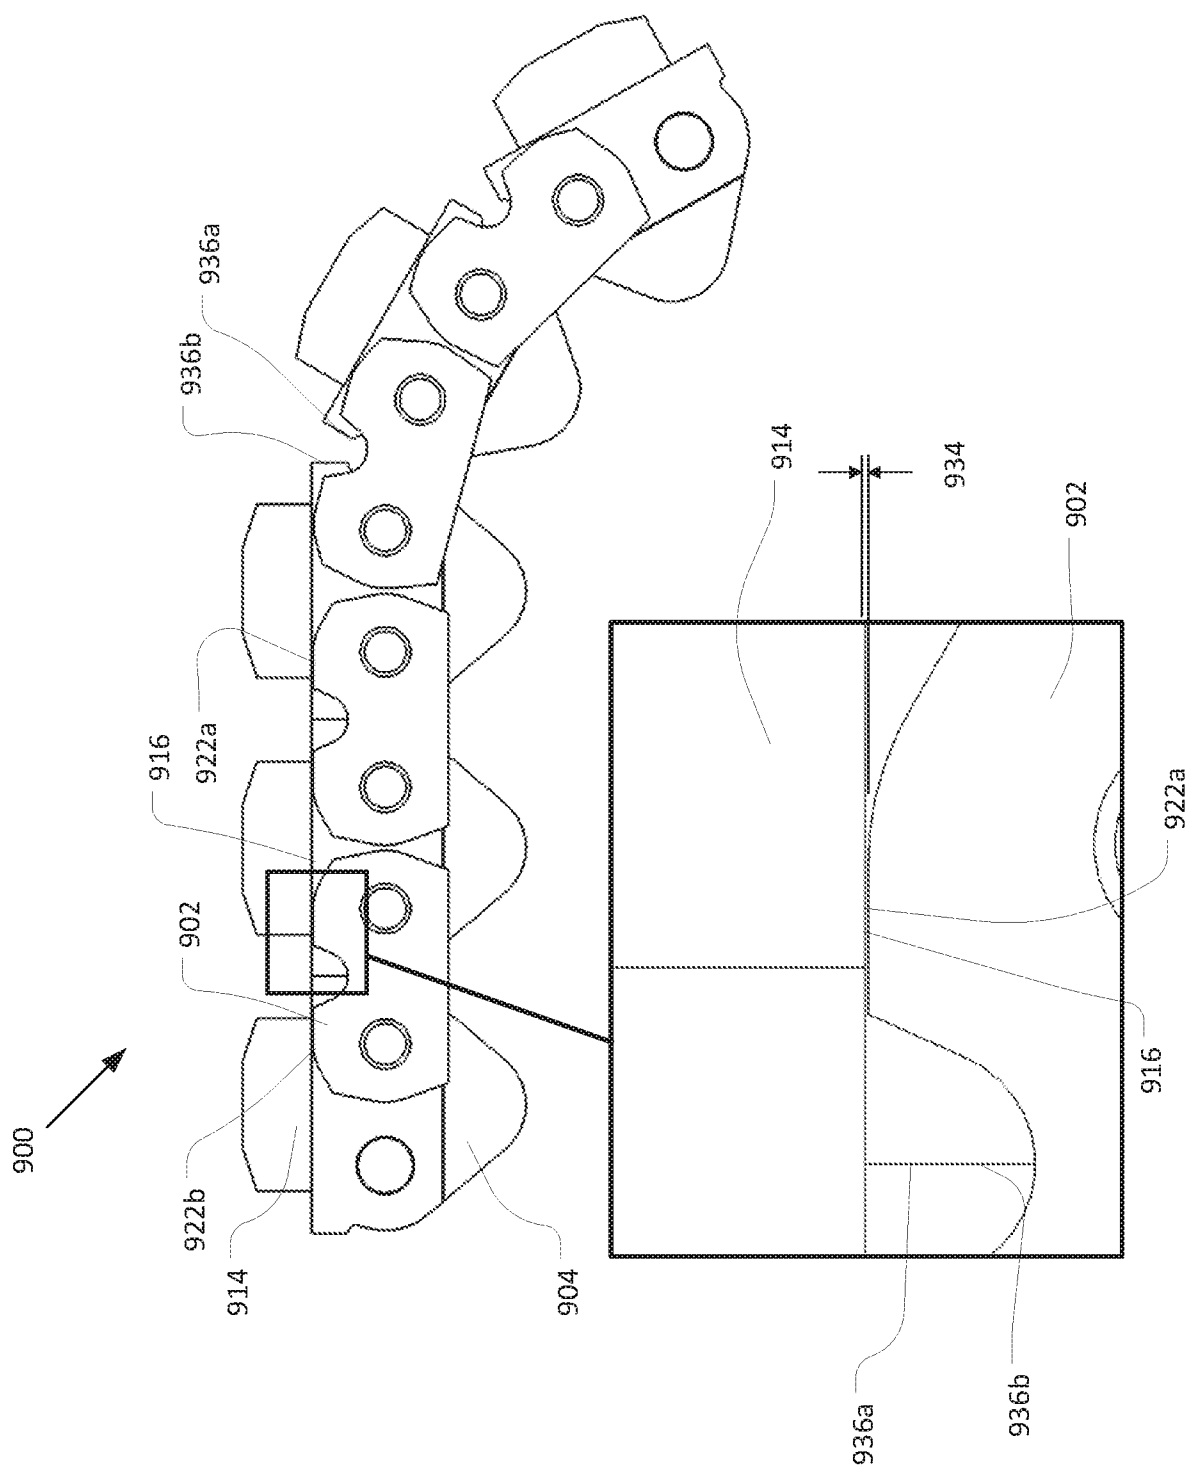


Figure 9A



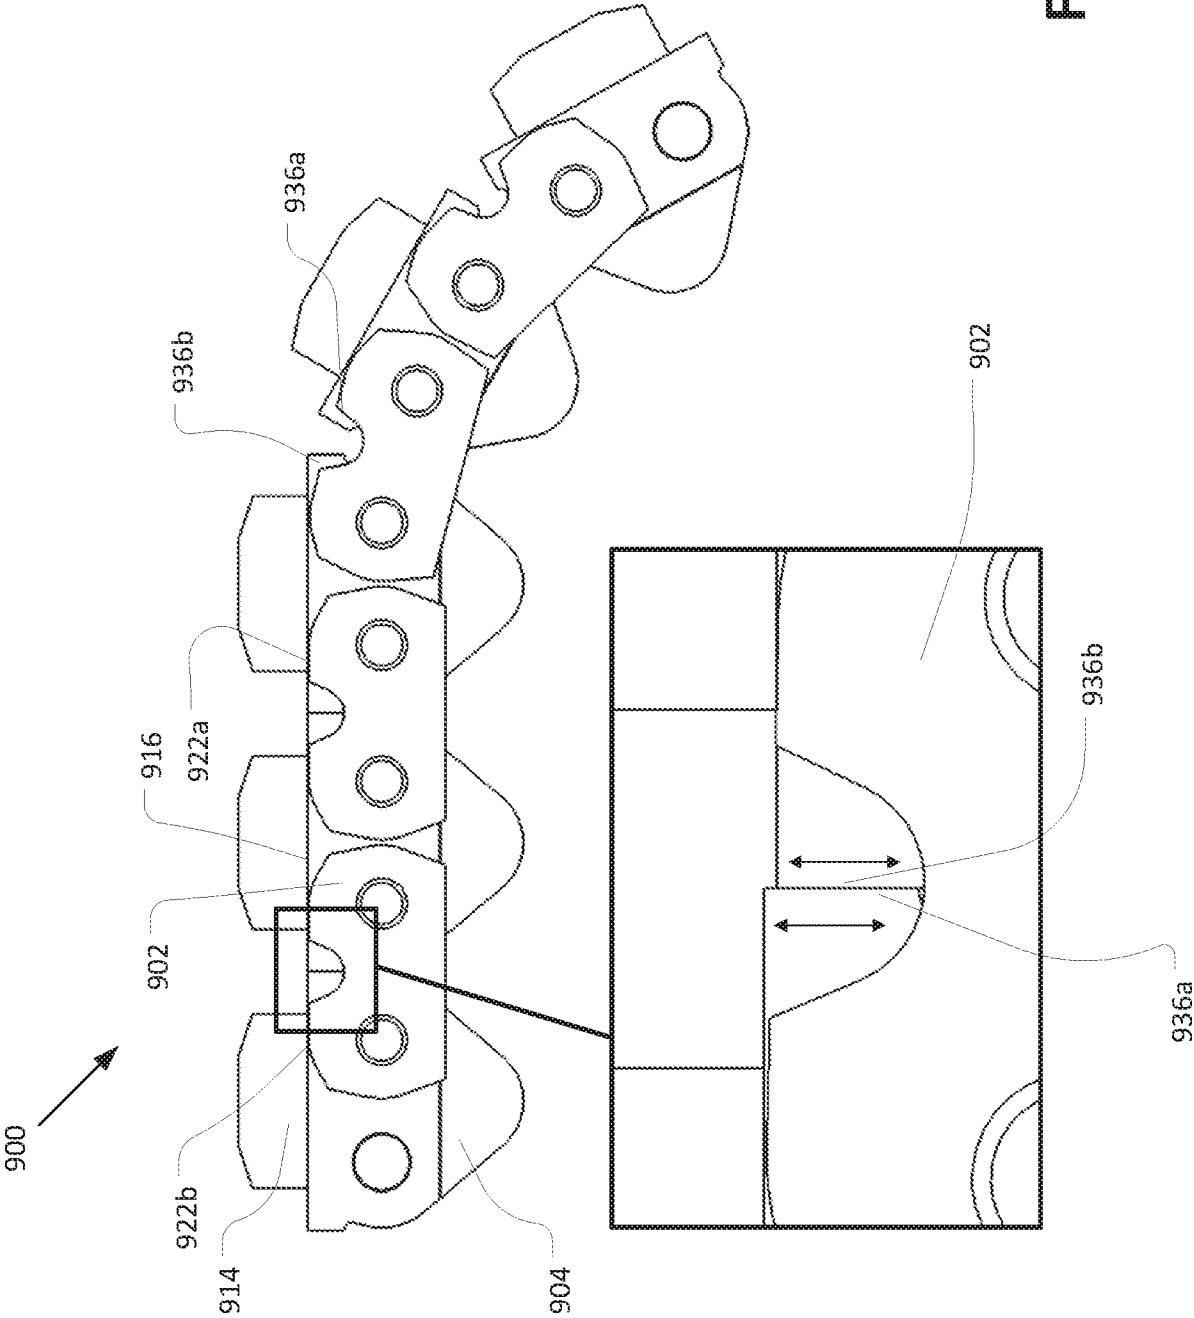


Figure 9B

Figure 10A

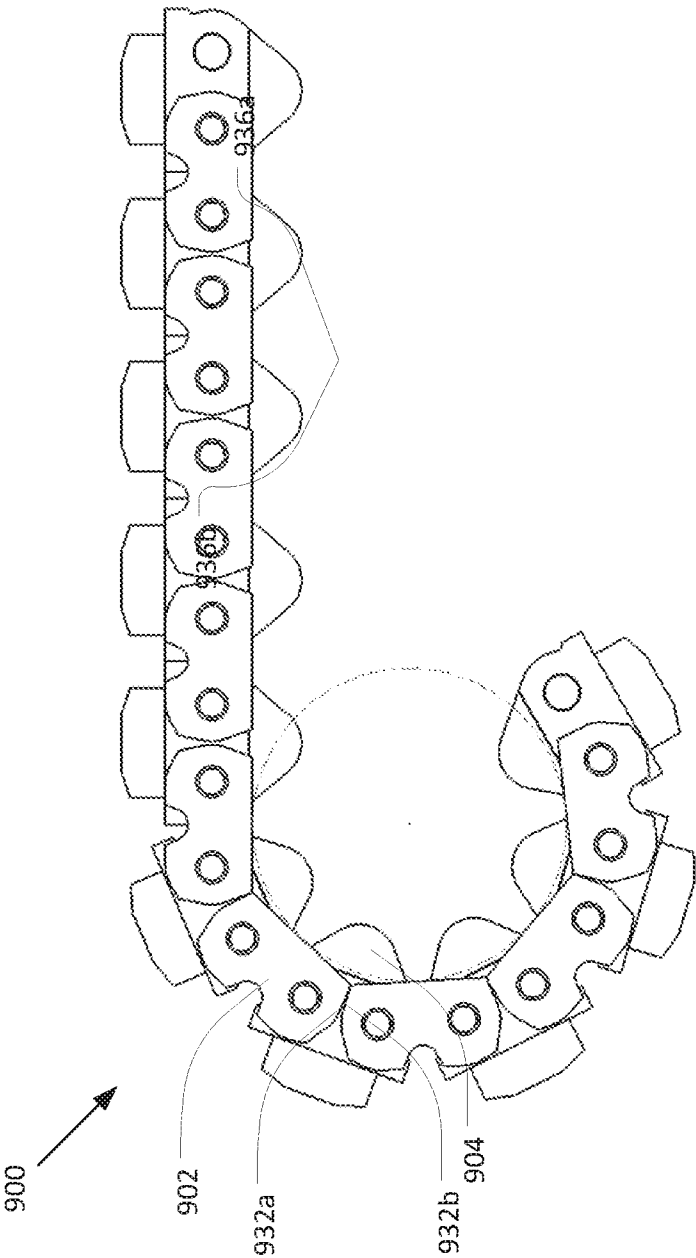


Figure 10B

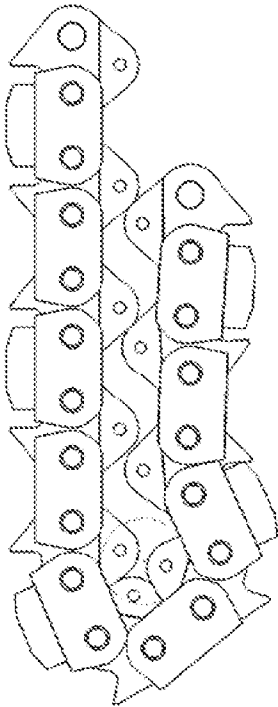


Figure 11A

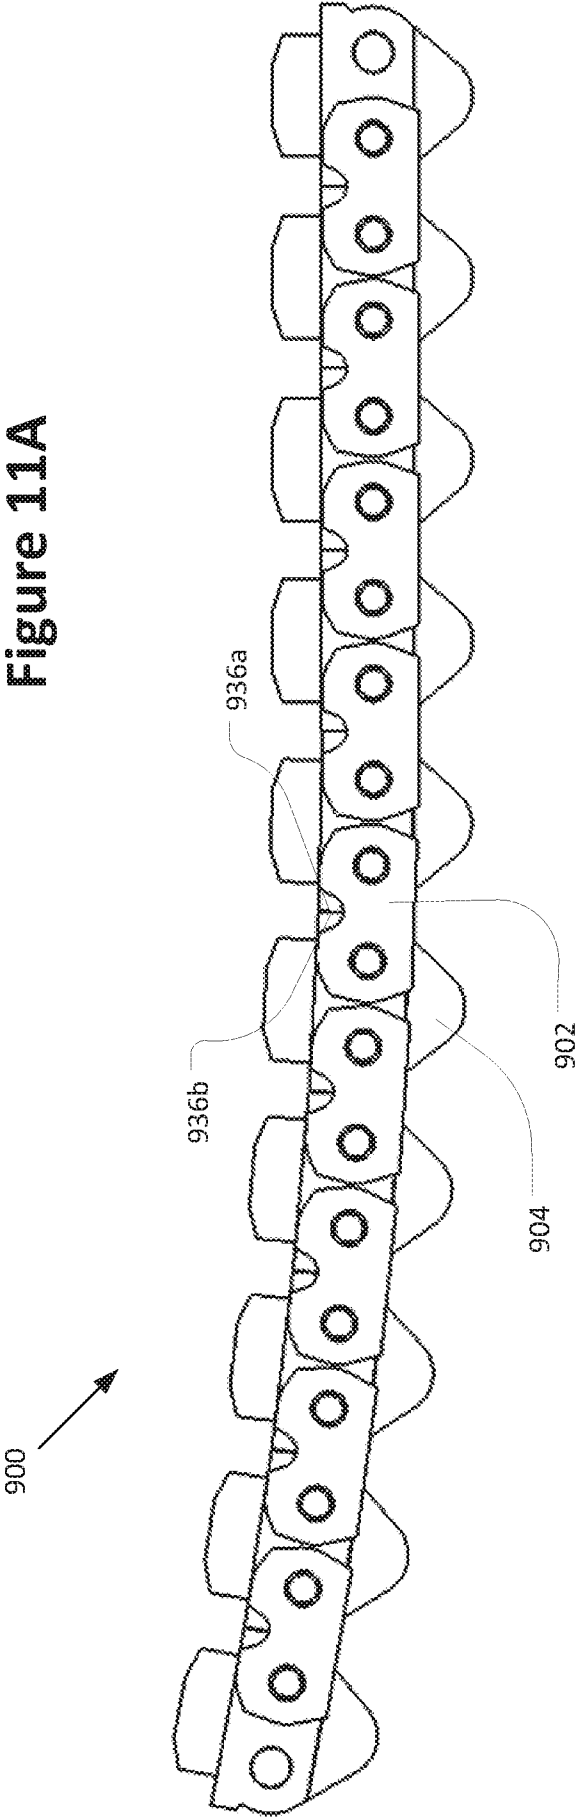


Figure 11B


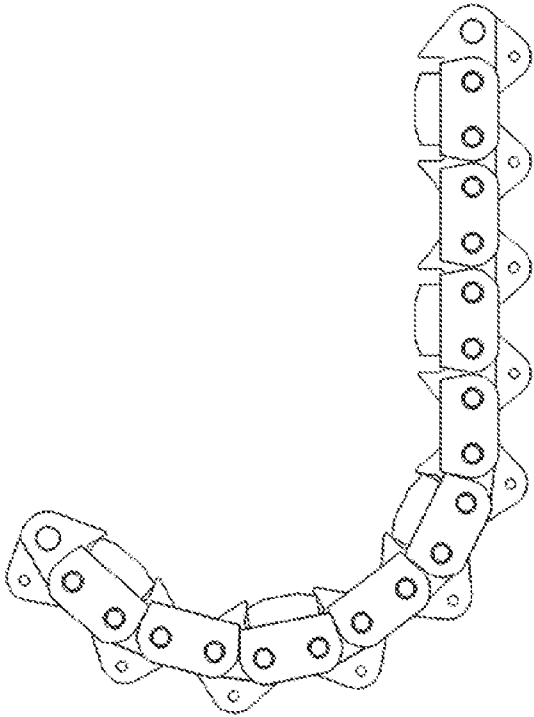


Figure 12

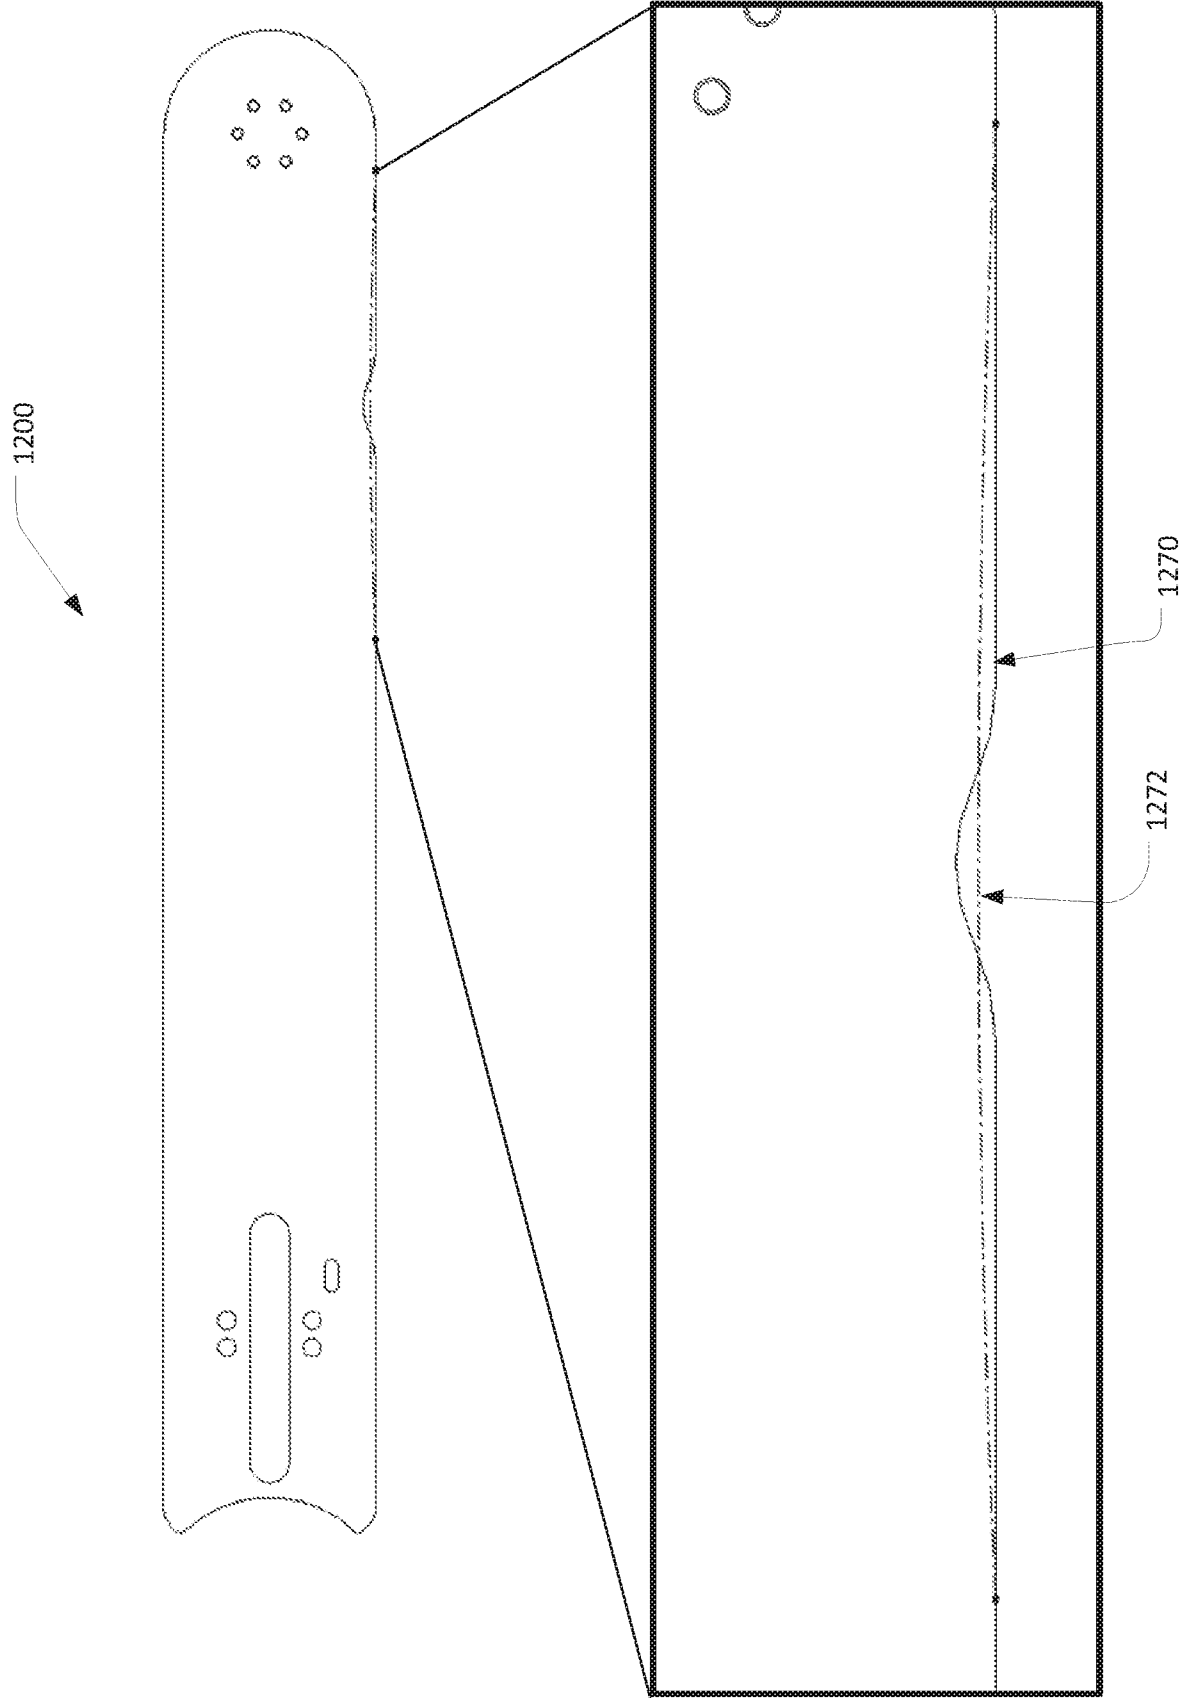

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2016/065667**A. CLASSIFICATION OF SUBJECT MATTER****B23D 57/02(2006.01)i, B27B 33/14(2006.01)i, B28D 1/08(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B23D 57/02; B23P 15/28; B28D 1/08; B27B 33/14

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: abrasive, saw, chain, cutting element, drive link, tie strap, articulation, mating surface, limiting, gap, bumper, corner

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2010-0206286 A1 (MICHELON, JOHN) 19 August 2010 See paragraphs [0031]-[0033] and figures 1-3.	1-22
A	JP 2985925 B2 (MIYANAGA K.K.) 06 December 1999 See paragraphs [0009]-[0016] and figures 1-4.	1-22
A	US 5215072 A (SCOTT, LEWIS A.) 01 June 1993 See column 6, line 12 - column 7, line 21 and figures 5-7.	1-22
A	US 5136783 A (BELL et al.) 11 August 1992 See column 3, lines 20-58 and figures 1, 3.	1-22
A	US 2013-0112057 A1 (BLOUNT, INC.) 09 May 2013 See paragraphs [0017]-[0022] and figures 1A-2B.	1-22



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

07 March 2017 (07.03.2017)

Date of mailing of the international search report

08 March 2017 (08.03.2017)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office


189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

LEE, Jong Kyung

Telephone No. +82-42-481-3360



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2016/065667

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2010-0206286 A1	19/08/2010	EP 2389281 A1 EP 2389281 B1 US 2014-090631 A1 US 8602015 B2 US 9233483 B2 WO 2010-090895 A1	30/11/2011 10/08/2016 03/04/2014 10/12/2013 12/01/2016 12/08/2010
JP 2985925 B2	06/12/1999	JP 07-214505 A	15/08/1995
US 5215072 A	01/06/1993	None	
US 5136783 A	11/08/1992	None	
US 2013-0112057 A1	09/05/2013	CA 2697300 A1 CA 2697300 C CN 101808789 A CN 101808789 B CN 103273574 A CN 103273574 B EP 2183084 A2 EP 2183084 A4 EP 2183084 B1 US 2011-061639 A1 US 8342163 B2 US 8555869 B2 WO 2009-026497 A2 WO 2009-026497 A3	26/02/2009 01/12/2015 18/08/2010 26/06/2013 04/09/2013 19/08/2015 12/05/2010 29/01/2014 10/08/2016 17/03/2011 01/01/2013 15/10/2013 26/02/2009 09/04/2009