




(86) Date de dépôt PCT/PCT Filing Date: 2019/08/20
(87) Date publication PCT/PCT Publication Date: 2020/03/12
(45) Date de délivrance/Issue Date: 2023/08/08
(85) Entrée phase nationale/National Entry: 2021/02/23
(86) N° demande PCT/PCT Application No.: EP 2019/072277
(87) N° publication PCT/PCT Publication No.: 2020/048768
(30) Priorité/Priority: 2018/09/05 (FR1857952)

(51) Cl.Int./Int.Cl. *A61M 60/148* (2021.01),
A61M 60/435 (2021.01)
(72) Inventeurs/Inventors:
CHABANE, SAID, FR;
PLUMEJAULT, SAMUEL, FR
(73) Propriétaire/Owner:
PROCOPE MEDICALS, FR
(74) Agent: OSLER, HOSKIN & HARCOURT LLP

(54) Titre : SYSTEME DE GENERATION D'UNE CIRCULATION SANGUINE
(54) Title: SYSTEM FOR GENERATING A BLOOD CIRCULATION

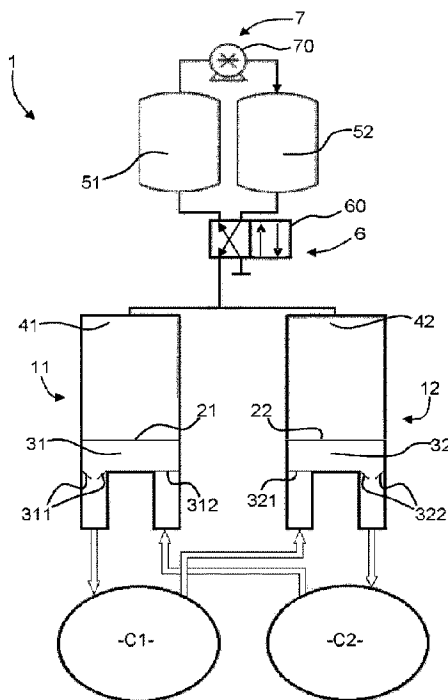

(57) **Abrégé/Abstract:**

The invention relates to a system (1) for generating a blood circulation in at least one part of an organ of a vertebrate, comprising a first artificial cavity (11) and a second artificial cavity (12), wherein said cavities each comprise a flexible membrane (21), (22) capable of beating under the action of a gas, each of said membranes separating, in a leaktight manner, a blood circulation chamber (31), (32) and a chamber containing said gas (41), (42), the system comprising:

- a first, low-pressure gas buffer tank (51);
- a second, high-pressure gas buffer tank (52);
- gas dispensing means (6);
- a pneumatic pump (7).

DESCRIPTIVE ABSTRACT

System for generating a blood circulation

The invention relates to a system (1) for generating a blood circulation in at least part of an organ of a vertebrate, comprising a first artificial cavity (11) and a second artificial cavity (12), said cavities each comprising a flexible membrane (21), (22) capable of beating under the action of a gas, each of said membranes separating in a sealed manner a blood circulation chamber (31), (32) and a chamber containing said gas (41), (42), the system comprising:

- a first low pressure gas buffer reservoir (51);
- a second high-pressure gas buffer reservoir (52);
- gas distribution means (6);
- a pneumatic pump (7).

Fig. 1

System for generating a blood circulation

The field of invention is that of the design and manufacture of medical devices and equipment.

5 More precisely, the invention concerns equipment for artificially creating a blood flow that is classically provided by the heart of a vertebrate. The invention relates in particular but not exclusively to medical equipment implantable in the pericardial cavity of a vertebrate.

In the field of invention, we know the equipment implementing the pneumatic pump concept and those implementing the hydraulic pump concept.

10 Historically, the first artificial cores have used the concept of pneumatic pumps. These artificial hearts have to be implanted inside a patient's rib cage, and external equipment, capable of generating air pressure, is connected to the artificial heart to activate it by means of an air flow.

15 In this technology, the artificial heart comprises artificial cavities inside which flexible membranes are located. Within a cavity, a membrane then separates a blood circulation chamber and a gas chamber in a sealed manner. Via connecting hoses that connect the external equipment to the artificial heart, pulsed compressed air is supplied to the gas chamber in each of the artificial cavities to generate blood flow using the membrane pump principle.

20 This type of solution is robust and reliable.

However, this concept requires particularly heavy external equipment and involves the introduction of air ducts inside the body to the artificial heart. Thus, the patient equipped with this artificial heart does not enjoy a significant autonomy.

25 In the second type of technology, an artificial heart with a hydraulic motor system was proposed.

This hydraulic core has an anthropomorphic design and makes it possible to gain significant autonomy compared to the artificial cores previously described, using pneumatic technology.

Indeed, this type of hydraulic artificial heart, based on the idea of the diaphragm pump, incorporates the motor system that generates pulsatile pressure directly inside the artificial heart.

5 Such an artificial heart uses a temporary battery implanted inside the vertebrate's body, and requires only an external battery recharging system that does not involve any invasive connectors designed to enter the body to electrically power the heart.

However, such a system is less robust and reliable than hearts using pneumatic technology.

10 The solution described in the patent document published under number US4516567, which discloses a total pneumatic artificial heart operating with a single pump, is still known. The pump injects or sucks air at the membranes to generate blood flow.

15 The disadvantage of such a heart is that it requires a high-performance pump that can be heavily stressed during each sub-period of a cardiac operating cycle, as the pump directly injects/aspires the volume of fluid displaced to or from the membranes.

One of the objectives of the invention is to resolve these drawbacks of the state of the art.

20 One of the objectives of the invention is to propose a system for generating a blood circulation that is more robust and reliable than the solutions of the prior art implementing the concept of the hydraulic heart.

The invention also aims to provide such an energy-efficient blood circulation generating system.

25 The invention also aims to provide such a system which is less cumbersome than the solutions according to prior art which implement the pneumatic pump concept.

More specifically, the invention is intended to provide such a solution which is so small that it can easily be implemented inside a total artificial heart intended to be implanted in the rib cage of a vertebrate.

30 These objectives, as well as others which will appear subsequently, are achieved by the invention which has as its object a system for generating a blood

circulation in at least part of an organ of a vertebrate, comprising a first artificial cavity and a second artificial cavity, said cavities each comprising a flexible membrane capable of beating under the action of a gas, each of said membranes sealingly separating a blood circulation chamber and a chamber containing said gas, characterised in that it comprises:

- a first gas buffer reservoir intended to be brought substantially to a first pressure, so-called low pressure, and a second gas buffer reservoir intended to be brought substantially to a second pressure higher than said first pressure, so-called high pressure;
- 10 - gas distribution means connected to the chambers containing said gas of said first and second artificial cavities and to said first and second buffer reservoirs, arranged to alternately inject gas into said chambers containing said gas and expel gas from said chambers containing said gas to provide predetermined values of blood flow rates in the blood flow chambers of
- 15 said first cavity and said second cavity;
- a pneumatic pump supplied with electrical energy mounted between said first buffer reservoir and said second buffer reservoir and intended to suck gas from said first tank to inject it into said second tank.

Thanks to the generation system according to the invention, blood circulation

20 can be artificially generated without the system being as cumbersome as pneumatic systems according to the anterior art using external equipment. The generation system according to the invention may also have a much lower energy consumption than pneumatic systems according to the prior art.

Indeed, according to the principle of the invention, the pneumatic pump's only

25 role is to maintain a pressure difference between the first gas buffer reservoir and the second gas buffer reservoir.

This pump, unlike the previous art, is not intended to directly inject and suck the motive fluid (here the gas) at the level of the chambers containing said gas in each artificial cavity.

30 According to the invention, the first gas buffer reservoir and the second gas buffer reservoir are used to supply or withdraw motive fluid from the chambers containing said gas to make the flexible membranes beat and create blood circulation.

As a result, the use of a single pump to generate a pressure difference between the first gas buffer reservoir and the second gas buffer reservoir allows the system to have a low overall energy consumption, and in particular lower than that of pneumatic systems according to the previous art.

5 In other words, the first gas buffer reservoir and the second gas buffer reservoir serve as an energy storage reserve. The distribution of this energy is permitted and controlled by gas distribution means which connect the chambers containing said gas to the first gas buffer reservoir and the second gas buffer reservoir.

10 Preferably, said first and second artificial cavities, said first and second gas buffer reservoirs, said gas distribution means and said pneumatic pump form an integral unit and the system for generating a blood circulation further comprises a battery for supplying electrical power to said pump and said gas distribution means.

In this way, the generation system according to the invention can, at least temporarily, be self-sufficient and has an advantageous autonomy to supply blood to 15 the organ(s) connected to the system.

A preferred characteristic of this pump is that it is a vane pump.

The rotary vane pump, used to generate a high pressure in the second gas buffer reservoir and a lower pressure in the first gas buffer reservoir, is particularly suitable to enable the generation system according to the invention to have a low overall 20 energy consumption.

This vane pump compensates for internal leakage and flow rates consumed by the heart pump drive.

As a further advantageous feature, said gas distribution means comprise at least one piezoelectric switch and/or at least one shape memory switch and/or at least 25 one electromagnetic switch.

Such means of gas distribution form particularly suitable solutions for miniaturising these means of distribution.

Preferably, said gas is air.

Such a gas allows the system to operate normally and simply without the need 30 for a specific gas supply that would be expensive and potentially difficult to obtain.

It should be noted that the values of the first and second pressure are adjusted according to the patient.

The pressure in the buffer reservoirs is regulated according to the heartbeat to ensure a blood flow corresponding to the patient's needs.

5 This control is done electronically via sensors integrated in the system.

Advantageously, said gas distribution means comprise a 4-way, 2-position valve.

These gas distribution means ensure gas exchanges between the first gas buffer reservoir and the second gas buffer reservoir with the chambers containing said gas of
10 the artificial cavities.

In this case, the valve is preferably a pilot-operated flap valve and/or a pilot operated slide valve.

A first preferred solution is that the system for generating a blood circulation forms a total cardiac prosthesis to be implanted in a patient's pericardial cavity and
15 capable of replacing the patient's left and right ventricles after their removal, with the first and second cavity forming a biventricular module, the blood circulation chamber of the first artificial cavity being intended to be connected to the left atrium and the aorta of said patient and the blood circulation chamber of the second artificial cavity being intended to be connected to the right atrium and the pulmonary artery of said
20 patient.

Such a total cardiac prosthesis then makes it possible to combine the robustness and reliability of pneumatic implants with the small dimensions of total prostheses using a hydraulic motor fluid according to the anterior art. Moreover, the total cardiac prosthesis of the total generation system according to the invention can be
25 completely autonomous and require only a small amount of electricity to operate gas distribution means and the pneumatic pump.

According to a second preferential solution, the system for generating a blood circulation forms a circuit for the ex-vivo perfusion of said organ, making it possible to keep said organ alive for a transplant.

30 Indeed, the generation system according to the invention then makes it possible to ensure extracorporeal blood circulation thanks to an apparatus which is

particularly compact, which is less bulky than those known in the anterior art, and which requires only a very low energy input (of the order of 15W to 20W).

Preferably, a system for generating a blood circulation such as those described above comprises one and only one pneumatic pump.

5 Other characteristics and advantages of the invention will become clearer on reading the following description of a preferred mode of making the invention, given as an illustrative and non-limitative example, and the appended drawings among which:

- 10 - Figure 1 is a schematic representation of the system for generating a blood circulation according to the invention, in which the chambers containing said gas are connected to the second (high-pressure) gas buffer reservoir, the blood circulation chambers then having a small volume;
- Figure 2 is a schematic representation of the same system for generating a blood circulation, in which the chambers containing said gas are connected to the first (low-pressure) gas buffer reservoir, the blood circulation
15 chambers then having a large volume.

With reference to Figures 1 and 2, the system for generating a blood circulation 1 allows the artificial generation of blood flow in at least one part of a vertebrate organ. Specifically, System 1 is used to generate blood flow in two circuits of a blood stream, including:

- 20 - a first circulation circuit of the blood flow C1;
- a second circulation circuit of the C2 blood flow.

As will be detailed later, System 1 for generating blood circulation can form a total heart prosthesis as a first preferred solution. In this case, for example, the first circulation circuit of blood flow C1 corresponds to an anatomical circulation circuit
25 supplying the body of a vertebrate with oxygenated blood, and the second circulation circuit of blood flow C2 corresponds to another anatomical circulation circuit intended to oxygenate the blood (this other circulation circuit integrating notably the lungs of the vertebrate).

According to a second preferred solution, the system for generating a blood
30 circulation 1 can form an ex-vivo blood circulation circuit of an organ. In this case, at

least one of the first circulation circuit of blood flow C1 or the second circulation circuit of blood flow C2 is then coupled to the organ to supply it with blood.

As shown in Figures 1 and 2, System 1 for generating a blood circulation includes:

- 5 - a first artificial cavity 11;
- a second artificial cavity 12;
- a first gas buffer tank 51;
- a second gas buffer tank 52;
- gas distribution means 6 coupling the first artificial cavity 11 and the
- 10 second artificial cavity 12 to the first gas buffer tank 51 and the second gas
- buffer tank 52;
- a pneumatic pump 7 coupled to the first gas buffer tank 51 and the second
- gas buffer tank 52.

15 The first artificial cavity 11 and the second artificial cavity 12 each comprise
a flexible membrane 21, 22 that can be beaten by the action of a gas. Indeed, the system
for generating a blood circulation 1 is a pneumatic system and uses a gas as the driving
fluid to allow the generation of blood circulation. This gas is preferably air.

These flexible membranes 21, 22 are elastic and divide, respectively, the first
artificial cavity 11 and the second artificial cavity 12 into two chambers.

20 More specifically:

- the flexible membrane 21 of the first artificial cavity 11 separates in a
- sealed manner, within this first cavity 11, a blood circulation chamber 31
- and a chamber containing said gas 41;
- the flexible membrane 22 of the second artificial cavity 12 separates in a
- 25 sealed manner, within this second cavity 12, a blood circulation chamber
- 32 and a chamber containing said gas 42.

The first artificial cavity 11 and the second artificial cavity 12 also comprise:

- injection valves 312, 321 of blood in the blood circulation chambers 31,
- 32;
- 30 - ejection valves 311, 322 of blood from the blood circulation chambers 31,
- 32.

These injection valves 312, 321 and ejection valves 311, 322 ensure that the direction of blood flow in the system is guaranteed. Specific settings for each 311, 312, 321, 322 valve enable the operating pressures of the artificial cavities to be adjusted.

As previously explained, the flexible membranes 21, 22 are able to beat under
5 the action of gas.

The flexible membranes 21, 22 each vary the volume of the blood circulation chambers 31, 32 by beating.

When the volume of a blood circulation chamber 31, 32 is increased, the pressure in the blood circulation chamber 31, 32 drops and causes the ejection valves
10 311, 322 to close and the injection valves 312, 321 to open, allowing the blood circulation chamber 31, 32 to be filled with blood.

On the contrary, when the volume of a blood circulation chamber 31, 32 is reduced, the pressure within the blood circulation chamber 31, 32 increases and causes the injection valves 312, 321 to close and the ejection valves 311, 322 to open, allowing
15 the blood to be expelled from the blood circulation chamber.

The gas exchanges (injection and extraction) at the level of the chambers containing said gas 41, 42 are ensured by:

- gas distribution means 6;
- the first gas buffer reservoir 51;
- 20 - the second gas buffer reservoir 52;
- the pneumatic pump 7.

The first gas buffer tank 51 is intended to be raised to a first pressure, the so-called low pressure.

As for the second gas buffer tank 52, it is intended to be raised to a second
25 pressure, called high pressure, the second pressure being higher than the first pressure.

As an example, the first pressure can be increased to 1.1 bar and the second pressure can be increased to 1.15 bar.

Preferably, the operation of the pneumatic pump is dependent on the "heart rate" defined by the means of gas distribution, to keep the pressures within the above
30 limits.

In this case, the control of system 1 is carried out electronically by means of sensors integrated in the system.

As shown in figures 1 and 2, the pneumatic pump 7 is mounted between the first buffer tank 51 and the second buffer tank 52.

5 The pneumatic pump 7 sucks gas from the first buffer tank 51 and injects it into the second buffer tank 52. In this way, the pneumatic pump 7 allows the first buffer tank 51 to be maintained at approximately its low pressure and the second buffer tank 52 to be maintained at approximately its high pressure.

To operate, this pneumatic pump 7 is supplied with electrical energy.

10 This pump is advantageously a vane pump 70. The vane pump is a positive displacement transfer pump, consisting of a stator (stationary) and a rotor (mobile) that rotates tangentially to the stator. The vanes are fixed to the rotor and can slide in rotor housings, perpendicularly to the axis of rotation of the rotor, to come into contact with the stator walls by centrifugal force. In addition to the centrifugal force, the rotor may
15 possibly include means for returning the vanes to a position in contact with the stator walls.

Preferably and as shown in the figures, the pneumatic pump 7 is unique.

As explained above, gas distribution means 6 are coupled to the first artificial cavity 11, the second artificial cavity 12 and the buffer tanks. Specifically, gas
20 distribution means 6 are connected to the gas chambers 41, 42, the first buffer tank 41, and the second buffer tank 42.

Gas distribution means 6 are arranged to alternately inject gas into and extract gas from the chambers containing said gas 41, 42, to ensure predetermined values of blood flow rates in the blood circulation chambers of the artificial cavities.

25 In other words, gas distribution means 6 (as well as the buffer tanks) allow the pressure of the chambers containing said gas 41, 42 to be modified in such a way as to cause an expansion or reduction in the volume of these chambers thanks to the elastic deformation of the flexible membranes 21, 22.

A repetitive variation in the volume of the chambers containing said gas
30 mechanically leads to a repetitive variation in the volume of the blood circulation chambers 31, 32.

This variation in the volume of the blood circulation chambers 31, 32 also results in a variation in the blood pressure within these chambers.

Therefore, gas distribution means 6, by alternately injecting and extracting gas, creates a blood flow by pumping blood into the blood circulation chambers 31, 32 and expelling the blood from these blood circulation chambers 31, 32 by means of the injection valves 312, 321 and the ejection valves 311, 322 described above.

Preferably, gas distribution means 6 comprise at least one piezoelectric switch and/or at least one shape memory switch and/or at least one electromagnetic switch.

As shown in Figures 1 and 2, the means of gas distribution 6 includes a 4-way, 2-position 60 valve. The valve 60 can be a pilot operated spool valve 60 or a flap valve.

In fact, with reference to Figure 1, the distributor 60 adopts a first position in which the second buffer tank 52 (high pressure) communicates with the chamber containing said gas 41 of the first artificial cavity 11 and with the chamber containing said gas 42 of the second artificial cavity 12. In this case, the high pressure gas in the second buffer tank 52 is injected into the chambers containing said gas 41, 42.

Following the passage of valve 60 in its second position and as shown in figure 2, the second buffer tank 52 no longer communicates with the chambers containing said gas 41, 42, which then communicate with the first buffer tank 51 (low pressure) and the gas.

According to the present embodiment, the chambers containing said gas 41, 42 communicate at the same time with the first buffer tank 51 or with the second buffer tank 52. As a result, the blood circulation chambers 31, 32 fill and expel blood synchronously.

In other possible embodiments, the valve can be configured to desynchronise the filling and expulsion of blood from the blood circulation chambers 31, 32 and/or to carry out these fills or expulsions at a different rate between each artificial cavity.

Preferably, the first 11 and second 12 artificial cavities, the first 51 and second 52 gas buffer tanks, gas distribution means 6 and the pneumatic pump 7 form a one-piece unit.

The system for generating a blood circulation 1 also comprises a battery for supplying electrical energy to the pneumatic pump 7 and gas distribution means 6 for

installation in an abdominal cavity. This battery is recharged by transcutaneous induction.

As mentioned above, system 1 of blood circulation generation can form a total heart prosthesis. In this case, System 1 is intended to be implanted in a patient's pericardial cavity. System 1 can then be used to replace the patient's ventricles (left and right). The first artificial chamber 11 and the second artificial chamber 12 thus form a biventricular module, with blood flow chamber 31 of the first artificial chamber 11 being connected to the patient's left atrium and aorta, and blood flow chamber 32 of the second artificial chamber 12 being connected to the patient's right atrium and pulmonary artery.

An example of the operating cycle of the total heart prosthesis is developed below.

Systole is the ejection of blood from the blood circulation chambers (artificial ventricles) into the blood circulation circuits C1, C2.

Diastole is the injection of the blood contained in the blood circulation circuits C1, C2 (blood from the left and right atria) into the blood circulation chambers 31, 32 (aspiration of blood into the artificial ventricles).

The change from diastole to systole and vice versa results in a change in the pressure development in the blood flow chambers 31, 32 (increase and decrease in pressure) and results in a change in the state of the injection valves 312, 321 and the ejection valves 311, 322.

During the transition from diastole to systole, the ejection valves 311, 322 (aortic and pulmonary valves) change from closed to open state, and the injection valves 312, 321 (atrioventricular valves) change from open to closed state.

When changing from systole to diastole, the ejection valves 311, 322 (aortic and pulmonary valves) change from open to closed state, and the injection valves 312, 321 (atrioventricular valves) change from closed to open state.

In the initial state of systole, the chambers containing said gas 41, 42 each have a volume of the order of 5 mL with a pressure of the order of 0.107 Bar, the blood circulation chambers 31, 32 (artificial ventricles) are filled with blood, the valve 60 has

been switched and the chambers containing said gas 41, 42 have just been connected to the second buffer reservoir 52 (high pressure).

The pressure in the chambers containing said gas 41, 42 increases and causes the deformation of the elastic membranes 21, 22. The pressure in the chambers
5 containing said gas increases in particular up to 0.160 Bar.

The blood circulation chambers 31, 32 are emptied and the blood is sent to the blood circulation circuits C1, C2 (organs and lungs).

In the initial state of diastole, the chambers containing said gas each have a volume of the order of 130 mL with a pressure of the order of 0.160 Bar, the blood
10 circulation chambers 31, 32 (artificial ventricles) are empty of blood (or at their lowest level), the dispenser has been tilted and the chambers containing said gas 41, 42, have just been connected to the first buffer reservoir 51 (low pressure).

The pressure in the chambers containing said gas 41, 42 drops (then returning to 0.107 Bar) and causes the deformation of the elastic membranes 21, 22 leading to an
15 increase in the volume of the blood circulation chambers 31, 32.

The blood circulation chambers 31, 32 (artificial ventricles) fill up.

System 1 according to the invention is configured so that the blood circulation chambers (artificial ventricles) are filled at constant pressure, i.e. on average:

- 0.012 Bar for the blood circulation chamber of the first artificial cavity 11
20 (left artificial ventricle);
- 0.005 Bar for the blood circulation chamber of the second artificial cavity 12 (right artificial ventricle).

At the end of the diastole, the systole-diastole cycle can then be restarted.

The embodiments of the present invention for which an exclusive property or privilege is claimed are defined as follows:

1. A system for generating a blood circulation in at least part of an organ of a vertebrate, comprising a first artificial cavity and a second artificial cavity, said cavities each comprising a flexible membrane for beating under the action of a gas, each of said membranes sealingly separating a blood circulation chamber and a chamber containing said gas,

characterised in that it comprises

- a first gas buffer reservoir brought substantially to a first pressure, referred to as low pressure, and a second gas buffer reservoir brought substantially to a second pressure higher than said first pressure, referred to as high pressure;
- gas distribution means connected to the chambers containing said gas of said first and second artificial cavities and to said first and second buffer reservoirs, arranged to alternately inject gas into said chambers containing said gas and expel gas from said chambers containing said gas to provide predetermined values of blood flow rates in the blood circulation chambers of said first cavity and said second cavity;
- a pneumatic pump for sucking gas from said first reservoir in order to inject it into said second reservoir, said pneumatic pump being supplied with electrical energy and mounted between said first buffer reservoir and said second buffer reservoir.

2. The system for generating a blood circulation according to claim 1, characterised in that said first and second artificial cavities, said first and second gas buffer reservoirs, said gas distribution means and said pneumatic pump form a single-piece assembly and in that it further comprises a battery for supplying electrical energy to said pump and said gas distribution means.

3. The system for generating a blood circulation according to claim 1 or claim 2, characterised in that said pump is a vane pump.

4. The system for generating a blood circulation according to any one of claims 1 to 3, characterised in that said gas distribution means comprise at least one piezoelectric switch and/or at least one shape memory switch and/or at least one electromagnetic switch.

5. The system for generating a blood circulation according to any one of claims 1 to 4, characterised in that said gas is air.

6. The system for generating a blood circulation according to any one of claims 1 to 5, characterised in that said gas distribution means comprises a 4-way, 2-position valve.


7. The system for generating a blood circulation according to claim 6, characterised in that said valve is a flap valve and/or a pilot operated slide valve.

8. The system for generating a blood circulation according to any of claims 1 to 7, characterised in that it forms a total cardiac prosthesis implanted in the pericardial cavity of a patient and for replacing the left and right ventricles of said patient after ablation thereof, the first and second cavity forming a biventricular module, the blood circulation chamber of the first artificial cavity being connected to the left atrium and the aorta of said patient and the blood circulation chamber of the second artificial cavity being connected to the right atrium and the pulmonary artery of said patient.

9. The system for generating a blood circulation according to any one of claims 1 to 7, characterised in that it forms a circuit for the ex-vivo perfusion of said organ to keep said organ alive for transplantation.

10. The system for generating a blood circulation according to any one of claims 1 to 9, characterised in that it comprises one and only one pneumatic pump.

1/2

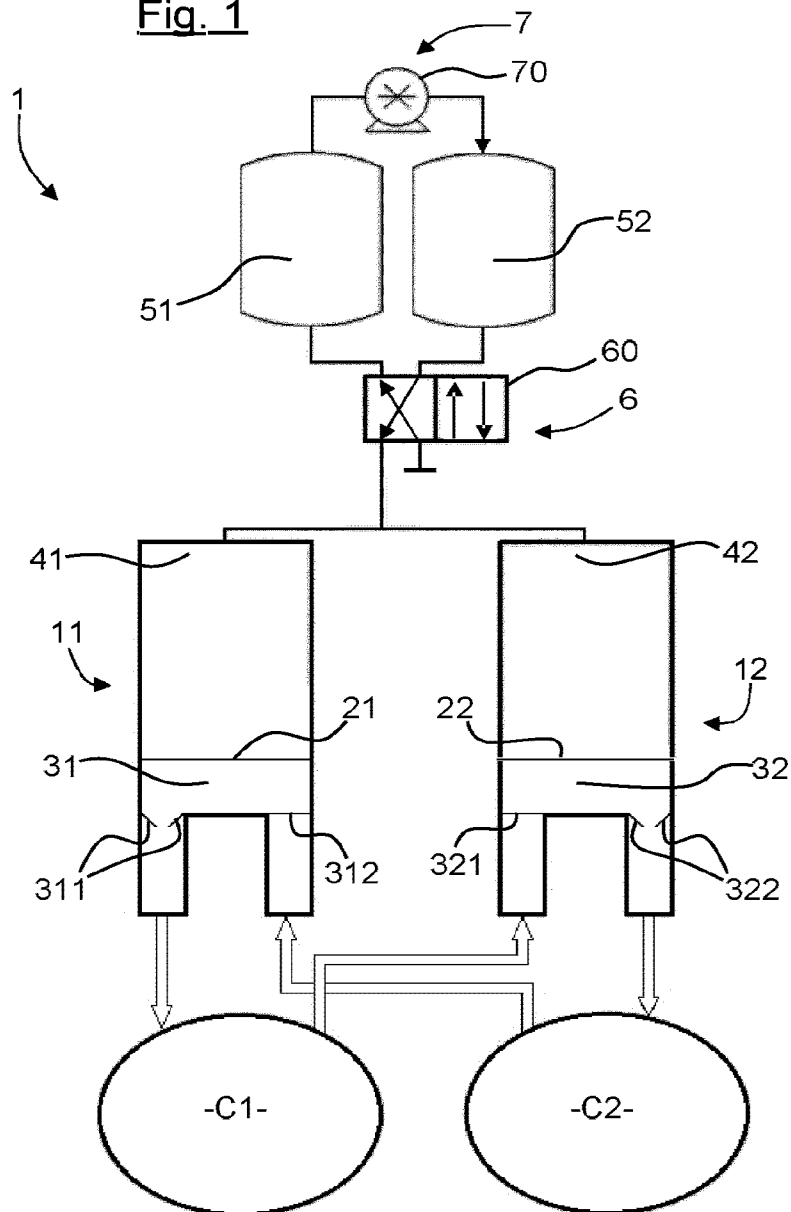Fig. 1

2/2

Fig. 2