

(21) (A1) **2,254,335**  
(86) 1996/10/07  
(87) 1997/12/11

(72) LEE, Nicholas A., US

(72) HENSON, Gordon D., US


(71) MINNESOTA MINING AND MANUFACTURING COMPANY, US

(51) Int.Cl. <sup>6</sup> G02B 6/36, G02B 6/40

(30) 1996/06/07 (08/660,296) US

**(54) CONNECTEUR D'ENSEMBLE DE FIBRES OPTIQUES  
RESISTANT A LA TRACTION**

**(54) PULL-PROOF FIBER OPTIC ARRAY CONNECTOR**

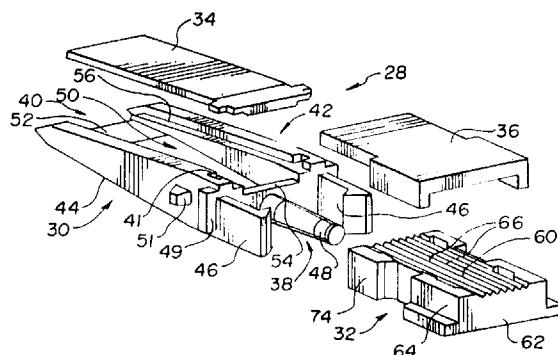

(57) L'invention concerne un connecteur de câble de fibres optiques présentant un faible coût et permettant de soulager les contraintes exercées sur les fibres optiques sans réduire la qualité du couplage optique. Ce connecteur de câble possède un corps (30) pourvu d'extrémités avant et arrière (38, 40). L'extrémité avant du corps du câble possède une paire d'éléments de verrouillage (46) s'étendant depuis ladite extrémité et une tige de montage (48) s'étendant également depuis ladite extrémité. L'extrémité arrière du corps (30) du connecteur se rétrécit progressivement, de manière à constituer un élément de transition de câble. Un couvercle (34) du corps du connecteur sert à protéger les fibres optiques situées entre le corps (30) du connecteur et le couvercle (34) du corps. Un bloc d'alignement (32) des fibres, ou ferrule, possède une surface (60) destinée à recevoir au moins une fibre optique, une surface (58) de contact avec le corps du connecteur et une surface (62) de composant d'interface optique. Une pluralité de rainures d'alignement (66) sont situées dans la surface de réception (60) et servent à aligner au moins une fibre optique. La surface (58) de la ferrule servant à établir un contact avec le corps du connecteur comprend une cavité de réception (76) destinée à recevoir la tige de montage (48) du corps (30) du connecteur.

(57) The present invention is a fiber optic cable connector for providing a low cost connector that provides strain relief to optical fibers without compromising an optical coupling. The cable connector has a connector body (30) that has front and back ends (38, 40). The front end of the cable body has a pair of latching members (46) extending therefrom and a mounting post (48) that also extends therefrom. The back end of the connector body (30) is tapered to form a cable transition member. A connector body cover (34) is provided to protect optical fibers residing between the connector body (30) and the body cover (34). A fiber alignment block (32), or ferrule, is provided that has a fiber receiving surface (60) for receiving at least one optical fiber and a connector body engagement surface (58) and an optical interface device surface (62). A plurality of alignment grooves (66) are formed in the receiving surface (60) for aligning the at least one optical fiber. The connector body engagement surface (58) of the ferrule includes a receiving cavity (76) for receiving the mounting post (48) of the connector body (30).

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> :	A1	(11) International Publication Number: <b>WO 97/46900</b>
<b>G02B 6/38</b>		(43) International Publication Date: 11 December 1997 (11.12.97)
(21) International Application Number: PCT/US96/16039		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: 7 October 1996 (07.10.96)		
(30) Priority Data: 08/660,296 7 June 1996 (07.06.96) US		
(71) Applicant: MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).		
(72) Inventors: LEE, Nicholas, A.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). HENSON, Gordon, D.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US).		
(74) Agents: GWIN, H., Sanders et al.; Minnesota Mining and Manufacturing Company, Office of Intellectual Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).		

## (54) Title: PULL-PROOF FIBER OPTIC ARRAY CONNECTOR

## (57) Abstract

The present invention is a fiber optic cable connector for providing a low cost connector that provides strain relief to optical fibers without compromising an optical coupling. The cable connector has a connector body (30) that has front and back ends (38, 40). The front end of the cable body has a pair of latching members (46) extending therefrom and a mounting post (48) that also extends therefrom. The back end of the connector body (30) is tapered to form a cable transition member. A connector body cover (34) is provided to protect optical fibers residing between the connector body (30) and the body cover (34). A fiber alignment block (32), or ferrule, is provided that has a fiber receiving surface (60) for receiving at least one optical fiber and a connector body engagement surface (58) and an optical interface device surface (62). A plurality of alignment grooves (66) are formed in the receiving surface (60) for aligning the at least one optical fiber. The connector body engagement surface (58) of the ferrule includes a receiving cavity (76) for receiving the mounting post (48) of the connector body (30).

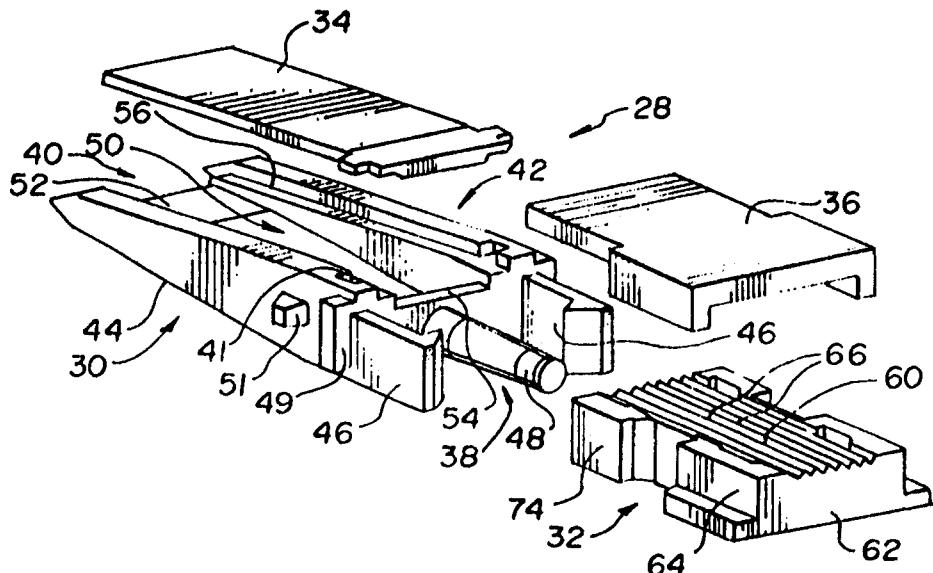

## PULL-PROOF FIBER OPTIC ARRAY CONNECTOR

### FIELD OF THE INVENTION

The present invention relates generally to connectors for optical fibers. In particular, the present invention relates to a Pull-Proof Fiber Optic Array 5 Connector wherein the optical fibers provide strain relief.

### BACKGROUND OF THE INVENTION

Optical fiber ribbon cables are well known for the transmission of optical signals. Use of optical cables, including optical fiber ribbon cables, has generally been limited to long haul trunking installations where the improved transmission 10 characteristics of the optical fibers justify the greater expense and difficulty associated with their manufacturing and installation. As the demands on communication media continue to increase, the advantages of using optical cable for transmission of signals across shorter distances, or for interconnecting local devices, continues to grow. With this growth has come the need to connect fiber 15 optic ribbon cables to a multiplicity of devices.

Numerous optical cable connectors have been introduced within the past few years. Examples of known multi-fiber connectors include those available from Berg Electronics under the trade designation MAC, and those available from US Conec. under the trade designation MT. Further examples of optical connectors 20 are illustrated in U.S. Patent Nos. 5,420,952 to Katsura, et al.; 5,276,755 to Longhurst; 5,500,915 to Foley, et al.; 4,784,457 to Finzell; 5,430,819 to Sizer II, et al.; and 5,287,426 to Shahid.

Many of the known connectors are equipped with strain relief features. For example, the Longhurst, U.S. Patent No. 5,276,755 discloses a multipart 25 optical fiber connector having a connector body connected to a plurality of optical fibers via a separate strain relief member.

Without proper strain relief, optical fibers in a connector may be easily damaged. Often times, the damage is not readily apparent, and in fact, the damage may be of a type that does not manifest itself for weeks, months or years. 30 Standard strain relief members typically provide some protection from bending, and also provide protection from torsional or axial forces. However, many of the

known strain relief members are secured to the connector such that when an axial force is applied to the cable, the connector is pulled away from the coupled device thus destroying the coupling integrity. Additionally, when the axial force is removed, the fibers on the face of the connector are often times chipped and 5 damaged as a result of the connectors smashing into one another.

Connectors do exist which strain-relief the fibers without compromising the optical coupling, but these connectors require separate strength members within the body of the cable in order to perform their function, thus adding cost. While the known optical connectors fulfill the need for coupling optical devices, 10 there exists a need for a connector that provides strain relief to the fibers without compromising the optical coupling and without adding significant cost.

#### SUMMARY OF THE INVENTION

The present invention is a fiber optic cable connector that satisfies the existing need for providing a low cost connector that provides strain relief to 15 optical fibers without compromising the integrity of an optical coupling. The cable connector has a connector body that has front and back ends. The front end of the connector body has a pair of latching members extending therefrom and a mounting post that also extends therefrom. The back end of the connector body is tapered to form a cable transition member. A connector body cover is provided to protect optical fibers residing between the connector body and the body cover. A 20 fiber alignment block, or ferrule, is provided that has a fiber receiving surface for receiving at least one optical fiber. A plurality of alignment grooves are formed in the receiving surface for aligning the at least one optical fiber. The ferrule includes a connector body engagement surface and an optical device interface surface. The connector body engagement surface of the ferrule includes a 25 receiving cavity for receiving the mounting post of the connector body. The receiving cavity of the ferrule also includes a spring.

In the preferred embodiment of the present invention, the connector body has a recessed floor which creates a fiber chamber between the connector body 30 cover and the floor. The combination of the spring loaded ferrule and the fiber receiving chamber help provide a pull-proof connector assembly by allowing the

ferrule to retract relative to the connector body, thus isolating the ferrule from external forces applied to the body.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a figure of a prior art multi-fiber optical connector.

5 Figure 2 is an exploded perspective view of a connector body and alignment block, or ferrule, with cover plates according to the present invention.

Figure 3 is a top plan view of the connector body of Figure 2.

15 Figure 4 is a rear elevation view of the ferrule of Figure 2 with a portion cut away.

Figures 5(a)-5(f) are side views, with adhesive tape layers shown in cross-section, of a method of manufacturing a fiber optic ribbon cable having a connector body and ferrule according to the present invention.

Figure 6 is a cross-sectional view of a ribbon cable for field connectorization.

15 Figures 7(a)-7(d) are cross-sectional views of a method of field installation of a connector assembly according to the present invention.

Figures 8(a) and 8(b) are top plan views of a connector body and ferrule mated together in accordance with the present invention.

20 Figure 9 is a top plan view of a connector assembly having fibers contained therein with portions cut away.

Figure 10 is a sectional view taken along line 10--10 of Figure 9.

Figure 11 is a sectional view taken along line 11--11 of Figure 9.

25 Figure 12 is an exploded perspective view of a connector body and ferrule of the present invention along with a latching shell, a latching mechanism and a coupling housing.

Figure 13 is a perspective view of a partially assembled connector assembly according to the present invention.

#### DETAILED DESCRIPTION OF THE INVENTION

The present invention is directed to a fiber optic cable connector assembly 30 that provides strain relief by the fibers themselves without needing a separate strain relief member. As discussed in the background section, there are many

known optical fiber connectors having strain relief members. One such example is illustrated in Figure 1. As illustrated in Figure 1, a mating connector 20 is provided for mating first and second optical cables 22. Ferrules 24 are provided and are connected to optical fibers 22a. Strain relief members 26 are provided 5 inside of cable 22 and typically run longitudinally down the length of cable 22. These strain members 26 are usually braided high-strength fibers such as those available from E.I. du Pont de Nemours, Wilmington, DE, under the trade designation KEVLAR, which serve to increase the tensile strength of the entire length of the cable as well as providing tensile strain relief to the connectors at the 10 cable ends. Strain members 26 are usually bonded to a connector body 21 by a crimp ring 23 or other like feature. Ferrule 24 is provided with a spring 27 and is allowed to float relative to the body 21, thus in essence, providing a strain relieved connection. In the present invention the need for an additional strength member within the cable is eliminated. This is possible because the combined strength of 15 the fibers is high enough to provide adequate tensile strain relief. In typical installations, the optical fibers are weakened by the various stripping procedures required when installing a fiber optic connector. Since the connector assembly of the present invention can be applied directly over the fibers in the cabling process, as described below and in the related co-pending applications, these stripping 20 procedures are unneeded.

The present invention is illustrated perspectively in Figure 2. A fiber optic cable connector assembly is illustrated generally at 28 having a connector body 30 and a fiber alignment block, or ferrule, 32. Connector body 30 is provided to transition optical fibers from an optical fiber cable to ferrule 32. Ferrule 32 on the other hand, is provided to align the optical fibers and to directly interface with 25 other like ferrules or with a number of different light-emitting components such as LEDs, laser arrays, edge-emitting lasers, superluminescent diodes, vertical cavity surface emitting lasers (VCSELs) and other surface emitting devices. Additionally, ferrule 32 may interface with a number of different opto-electronic 30 detectors. In the preferred embodiment of the present invention, a connector body cover 34 and a ferrule cover 36 are provided, for protecting optical fibers

positioned there beneath. It should be noted, however, that covers 34 and 36 could be eliminated without departing from the spirit or scope of the invention. In the preferred embodiment of the present invention connector body 30 is made of plastic and ferrule 32 is made of ceramic. However, it should be noted that either 5 or both of the connector body 30 and ferrule 32 could be manufactured from ceramic, plastic, metal or other materials without departing from the spirit or scope of the invention.

Connector body 30 has a front end 38, a back end 40, a top portion 42 and a bottom portion 44 (not seen). As can be seen in additional detail in Figure 3, 10 latching arms 46 extend from front end 38 at the outer periphery of connector body 30. Extending from the center of front end 38 is a mounting post 48. As can be seen in Figure 2, connector body 30 tapers from front end 38 to back end 40 and begins to taper at bevel line 41. Tapered back end 40 provides for a gentle transition from a fiber optic ribbon cable to the connector body. Projecting 15 substantially perpendicular to the longitudinal axis of connector body are retention members 49 and stops 51, the purposes of which will be described in detail below.

Top portion 42 has a recessed floor 50 which is best seen in Figure 2. Recessed floor 50 has a rear transition platform 52 and a front lip 54. A raceway 56 is also provided on top portion 42 for receiving connector body cover 34. 20 Raceway 56 is provided such that when connector body cover 34 is mounted on to connector body 30, connector cover 34 is flush with the top of connector body 30. This is important for reasons that will be evident below.

Ferrule 32, as illustrated in Figures 2 and 4, has a connector body engagement surface 58 (not seen in Figure 2), an optical fiber engaging surface 60, 25 an optical device interface surface 62 and sides 64. A plurality of alignment grooves 66 are formed in fiber engagement surface 60 for aligning optical fibers. In the preferred embodiment of the present invention, grooves 66 are V-shaped, however, other cross-sectional shapes could be chosen such as semi-circular or rectangular without departing from the spirit or scope of the present invention.

30 Sides 64 of ferrule 32 contain latching ears 74 for engagement with latching arms 46 of connector body 30. As can be seen in Figure 4, ferrule 32 also

contains a receiving cavity 76 in connector body engagement surface 58. A spring 78 is mounted inside of receiving cavity 76 to spring load ferrule 32 with respect to connector body 30 such that the assembly is pull-proof, as will be described in detail below. Alternative arrangements of a spring are also considered within the 5 spirit and scope of the present invention such as a washer-style spring positioned on mounting post 48.

Figures 5(a) - 5(f) illustrate an assembly process of a fiber optic ribbon cable having connector body 30 and ferrule 32 installed thereon. The present invention will be described with reference to a multi-fiber ribbon cable 80, but it 10 should be understood that the present invention could also apply to single fiber cables as long as the single fiber was strong enough to provide strain relief. As illustrated in Figures 5(a) - 5(f), at least one optical fiber 82 is drawn from a corresponding spool (not shown) which holds optical fibers. In the preferred embodiment of the present invention, optical fibers 82 are hard clad fiber, available 15 under the trade designations TECS and FT-200-EMA from 3M Company, St. Paul, Minnesota. However, it should be noted that fiber optic cables utilizing a variety of different optical fibers would also be acceptable.

An array of fibers are positioned over a pair of connector assemblies 28 each comprising a connector body 30 and a ferrule 32. The connector pair is then 20 brought into contact with the fiber array. Connector body covers 34 and ferrule covers 36 are then brought into contact with the fiber array and the connector assemblies. In the embodiment illustrated, there are two separate connector body covers 34 and a dual ferrule cover 37, which when cut in half forms two individual ferrule covers 36. At this point, the covers are bonded in place and optical fibers 25 82 are bonded to transition platform 52 of connector body 30, and fibers 82 are also bonded in grooves 66. In an alternative embodiment, prior to bonding the covers in place, optical fibers 82 may be bonded to transition platform 52 of connector body 30 and in grooves 66. The bonding materials used in the present invention are commonly known, such as multi-part epoxy, or a light curing 30 adhesives such as those available from ABLESTIK under the trade designation

Luxtrak LCR 0603B+UV. Fibers 82 may also be potted in grooves 66 near interface surface 62 for ease of polishing the fibers.

After covers 34 and 37 are properly positioned, upper and lower adhesive tape layers, 86 and 88, respectively, are provided to sandwich optical fibers 82 therebetween creating fiber optic ribbon cable 80. A pair of compression rollers (not shown) are preferably used to supply the force necessary to secure upper and lower adhesive tape layers 86 and 88 with optical fibers 82 therebetween. Where present, connector body 30 and ferrule 32 are also sandwiched between upper and lower adhesive tapes 86 and 88. Upper and lower tape layers 86 and 88 are each 10 three layer planar tape assemblies comprised of an inner-encapsulating layer, an adhesive layer and an outer protective layer. The encapsulating layer serves to encapsulate the fibers and is preferably comprised of a deformable material such as a pressure-sensitive adhesive, thermoset adhesive, thermal plastic adhesive, radiation curable adhesive, gel, foam, fibrous material, deformable plastic or any 15 combination thereof. The adhesive layer is interposed between the inner layer and the outer layer and is preferably comprised of a material such as pressure-sensitive adhesive, thermoset adhesive, thermal plastic adhesive, radiation curable adhesive, mechanically interlocking structures or any combination thereof. The outer protective layer serves as the outer jacket for the fiber optic ribbon cable and is 20 preferably comprised of vinyl or plastic material which is suitable for a variety of environmental applications or may be comprised of plastic, metal, fabric or any combination thereof. For a more detailed description of the method of making a ribbon cable, reference should be made to applicants' co-pending U.S. Patent Application Serial No. 08/456,571 entitled: Fiber Optic Ribbon Cable Assembly 25 and Method of Manufacturing Same.

The connector assembly is thus encapsulated in tape layers 86 and 88 in a continuous run of fiber optic cable 80. Tape layers 86 and 88 are then peeled back approximately to bevel line 41 exposing the connector pair, dual ferrule cover 37 and a portion of both connector body covers 34. The purpose for peeling back 30 tape layers 86 and 88 is to allow the ferrule and ferrule cover to fit into a latching shell 92, as will be described and illustrated below. After peeling back tape layers

86 and 88, dual ferrule cover 37 and the fiber array are cut with a diamond saw. Severed ferrule cover 36 and the fiber array are then polished flush with optical device interface surface 62.

Connector body 30 and ferrule 32 of the present invention could also be 5 field installed. For a detailed description of ribbon cables prepared for field installation and methods of field installation, reference should be made to applicants' co-pending U.S. Patent Application Serial No. 08/544,611, Filed October 18, 1995, entitled Fiber Optic Ribbon Cable With Pre-Installed Locations For Subsequent Connectorization.

10 In a field installable application, a fiber optic ribbon cable having access points manufactured in line with the ribbon cable so as to provide a simple access point to the fibers for installing a connector thereon is provided. As illustrated in Figure 6, a pair of adhesive tape layers 130 and 132 are provided about optical fibers 134 to create a fiber optic ribbon cable 136. At least one release element 15 138 is provided between the adhesive tape layers and the optical fibers at one or more access points along the ribbon cable to allow easy access to the fibers therein. By having the access points manufactured in line with fiber optic ribbon cable 136, the resulting ribbon cable is much easier to connectorize in the field.

Figures 7(a) - 7(d) illustrate one method of field connectorization. 20 For field connectorization, a technician must first locate one of the access points on ribbon cable 136. Once found, the cable is cut at the access point. After the cable is cut adhesive tape layers 130 and 132 may be easily peeled back exposing optical fibers 134 at the access point because the release elements prevent the adhesive side of the tape layer from adhering to the optical fibers. Once the tape 25 layers are peeled back, a connector assembly 140 is then installed onto the exposed fibers. The release elements are then removed from the tape layers and the adhesive side of each tape layer is then secured to the outer surface of the connector assembly. Finally, any excess tape is trimmed off.

Figures 8(a) and 8(b) illustrate top plan views of connector body 30 and 30 ferrule 32 mated together. In Figure 8(a), ferrule 32 is illustrated in its quiescent state with internal spring 78 not compressed. Figure 8(b) illustrates ferrule 32

being partially retracted toward connector body 30 which in turn compresses spring 78. In this position, any coaxial force if exerted on back end 40 is transmitted to connector body 30 but not to ferrule 32. In this way, pull-proof strain relief is provided to fibers situated in grooves 66 (not shown) of ferrule 32.

5 A further illustration of the pull-proof strain relief feature of the present invention is illustrated schematically in Figure 9. Figure 9 is a cut-away top plan view of connector body 30 and ferrule 32 illustrating individual fibers 82 as they are retained beneath connector body cover 34 and ferrule cover 36. Optical fibers 82 are only adhered to connector body 30 at transition platform 52. They are  
10 allowed to float between recessed floor 50 and connector cover 34 throughout the remaining length of connector body 30. By having recessed floor 50 recessed a substantial distance from the top of connector body 30, optical fibers 82 are allowed to buckle and bow without interference. This then assists in the pull-proof strain relief feature of the present invention. Figures 10 and 11 are cross-  
15 sectional views that illustrate the difference between fibers 82 secured tightly below ferrule cover 36 in Figure 10, and fibers floating between recessed floor 50 and connector body cover 34 in Figure 11.

Figure 12 is an exploded perspective view of the connector assembly 28 along with latching shell 92 and a coupling assembly 94. Coupling assembly 94  
20 comprises a latching mechanism 96 and a coupling housing 98. Figure 13 illustrates a partially assembled assembly wherein connector body 30 and ferrule 32 are secured in latching shell 92 via latching mechanism 96. Latching shell 92, latching mechanism 96 and coupling housing 98 are all preferably made of plastic, but as with connector body 30 and ferrule 32, they could be made of glass,  
25 ceramic or other materials.

Latching shell 92 is a substantially rectangular hollow body structure for receiving a substantial portion of connector body 30 and ferrule 32. Latching shell 92 has a top portion 100, front portion 101, sides 102, and rear portion 103. Sides 102 have ramped tabs 104 for facilitating the push-pull latching feature of  
30 the present invention. Slots 106 are formed in sides 102 of latching shell 92 through which retention members 49 and stops 51 project. As can be seen,

latching shell 92 is wider at rear portion 103 than at front portion 101 to allow retention members 49 and stops 51 to pass through. Top portion 100 has an abutment member 108 positioned to prevent latching shell 92 from being inserted further in coupling housing 98 than desired.

5 Latching mechanism 96 is a substantially H-shaped dual latch. Latching mechanism 96 has first and second latching ends 110 and 112, respectively. Both first and second latching ends 110 and 112 have a pair of latching arms 114 for engagement in latching shell 92 with retention members 49 of connector body 30. Latching mechanism 96 also has a coupling portion 116 where ferrules 32 are  
10 coupled.

15 Coupling housing 98 houses a single latching mechanism 96 for coupling two connector assemblies 28 together. Coupling housing 98 is a rectangular hollow structure having a pair of slots 118 in the top of the housing for receiving abutment members 108 of latching shells 92. A pair of fastening tabs 120 are also provided to secure coupling housing when desired.

When fully assembled, optical fibers 82 provide strain relief, the pull-proof feature, to the connector, without needing additional strain relief members. When connector assembly 28 is latched into place, ferrule 32 is retracted relative to connector body 30 thus decoupling latching arms 46 of connector body 30 from latching ears 74 of ferrule 32 and providing slack in the fibers within the connector body. This allows a load to be applied to cable 80 and thus to fibers 82 within the cable via tape layers 86 and 88. The load is then transferred to connector body 30 via the adhesive bond between fibers 82 and transition platform 52, and thus to coupling assembly 94 via latching mechanism 96. Finally, the load is transferred 20 to the world via fastening tabs 120 on coupling housing 98. Therefore, the load is transferred from cable 80 to the world all without disturbing ferrule 32 and thus 25 without disturbing the optical coupling.

## WHAT IS CLAIMED IS:

1. A fiber optic cable connector assembly (28) for connection to at least one optical fiber, the connector assembly (28) comprising:
  - 5 a connector body (30) having front and back ends (38,40), the front end having a pair of latching members (46) and a mounting post (48) projecting therefrom, and wherein the back end forms a cable transition member;
  - 10 a connector body cover (34) mountable on the connector body (30); and
  - 15 a fiber alignment block (32) mountable with the connector body (30) having a fiber receiving surface (60) for receiving the at least one optical fiber, wherein at least one alignment groove (66) is formed in the fiber receiving surface (60) for aligning the at least one fiber, wherein the alignment block (32) further includes a connector body engagement surface (58) and an optical interface device surface (62) and wherein a receiving cavity (76) is formed in the connector body engagement surface (58) for receiving the mounting post (48).
- 20 2. The connector assembly of claim 1 wherein the latching members and the mounting post project from the connector body along the longitudinal axis of the connector body.
- 25 3. The connector assembly of claim 1 wherein the fiber alignment block further comprises latching ears (74) for engagement with latching members of the connector body.
- 30 4. The connector assembly of claim 1 wherein the connector body has a recessed floor (50) having a transition platform (52) at the back end and a lip (54) at the front end.

5. The connector assembly of claim 4 wherein the at least one optical fiber is adhered to the connector body at the transition platform and to the alignment block in the alignment groove.
- 5 6. The connector assembly of claim 1 further including a spring (78) between the connector body and the alignment block.
7. The connector assembly of claim 6 wherein the alignment block is movable between the front end of the connector body and the latching members.
- 10 8. The connector assembly of claim 5 wherein the at least one optical fiber floats between the recessed floor and the connector body cover.
9. The connector assembly of claim 1 further comprising an alignment block cover (36) mountable on the alignment block.
- 15 10. The connector assembly of claim 1 further comprising a latching shell (92) that receives the connector body and fiber alignment block.
- 20 11. The connector assembly of claim 10 further comprising a coupling assembly (94).
12. The connector assembly of claim 11 wherein the coupling assembly has a latching mechanism (96) and a coupling housing (98), wherein the latching mechanism engages the connector body and wherein the coupling housing houses the latching mechanism, the latching shell, the alignment block and a portion of the connector body when fully assembled.
- 25 30 13. A method of manufacturing a fiber optic ribbon cable having a connector assembly (28) formed therein comprising the steps of:

(a) providing a connector body (30) and fiber alignment block (32) wherein the connector body (30) has a fiber receiving channel (50) and wherein the alignment block (32) has a fiber engaging surface (60) having a plurality of grooves (66) formed therein;

5 (b) positioning at least one optical fiber adjacent the fiber receiving channel (50) and the plurality of grooves (66) in the fiber engagement surface (60) of the alignment block (32);

(c) retaining the at least one fiber in the receiving channel (50) with a connector body cover (34);

10 (d) retaining the at least one fiber in the grooves (66) formed in the alignment block (32); and

(e) sandwiching the at least one fiber and the connector assembly (28) between first and second adhesive tape layers (86,88) to form a ribbon cable (80).

15 14. A method of applying a connector assembly (28) having a connector body (30) and an alignment block (32) and a connector body cover (34) and an alignment block cover (36) to a fiber optic ribbon cable (136) containing a pair of adhesive tape layers (130,132), at least one optical fiber (134) arranged in a generally longitudinal orientation between the pair of tape layers and a pair of release elements (138) disposed between the adhesive tape layers and the at least one optical fiber, the method comprising the steps of:


20 (a) locating the release elements on the fiber optic ribbon cable;




(b) cutting the ribbon cable substantially perpendicular to its longitudinal axis near the midpoint of the release elements;







25 (c) peeling back the adhesive tape layers and release elements to expose the at least one optical fiber;








(d) aligning the connector body and alignment block with the at least one exposed fiber;



- (e) retaining the at least one exposed fiber between the connector body cover and alignment block cover and the connector body and alignment block, respectively;
- (f) removing the release elements from the adhesive tape layers; and
- 5 (g) applying the tape layers to the connector assembly.

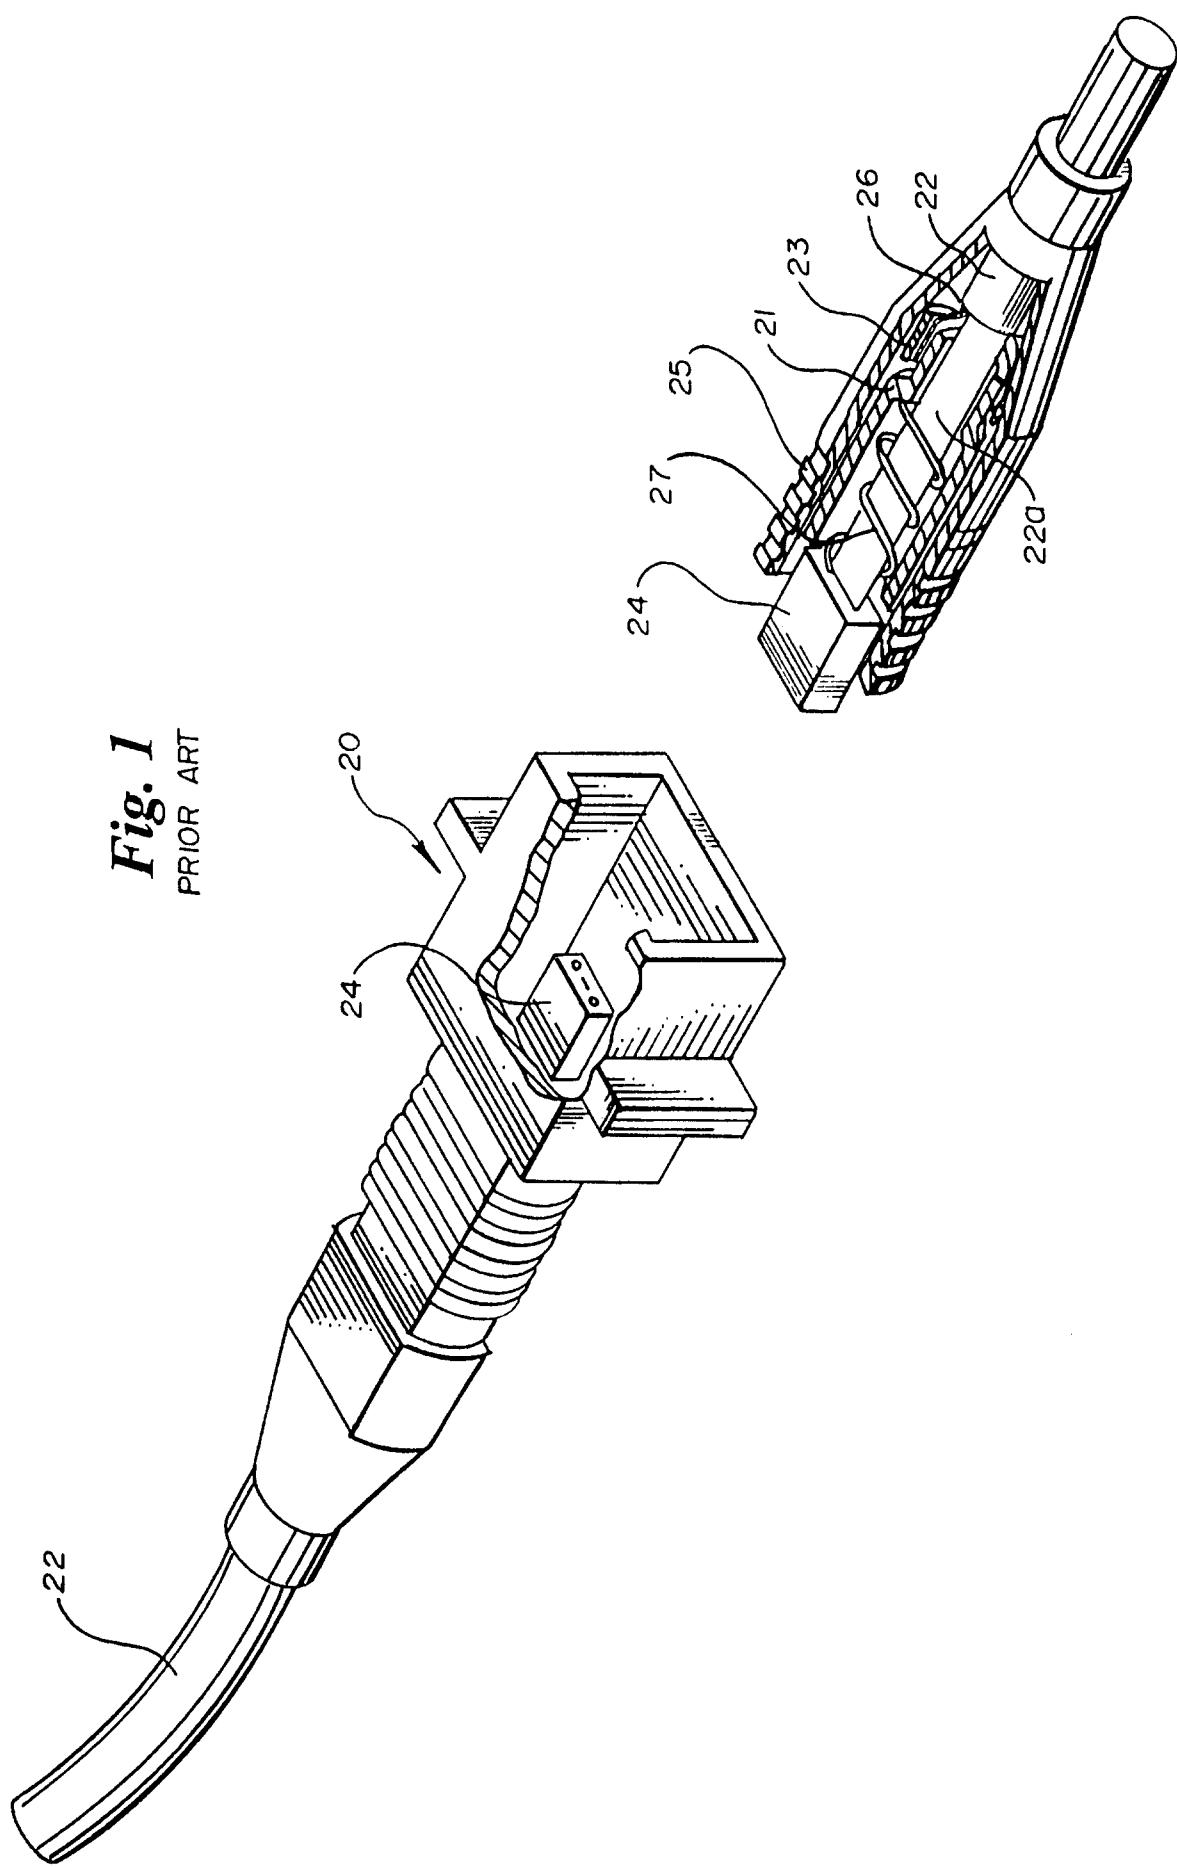

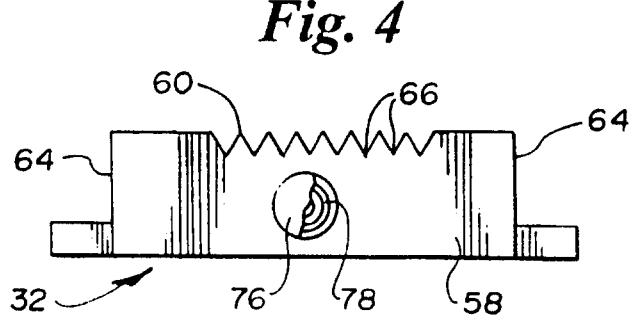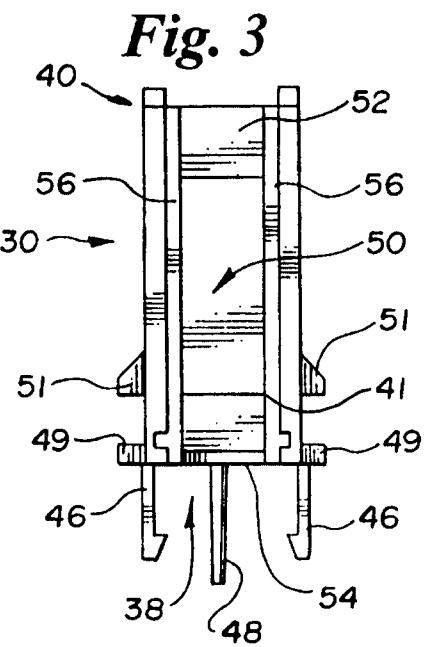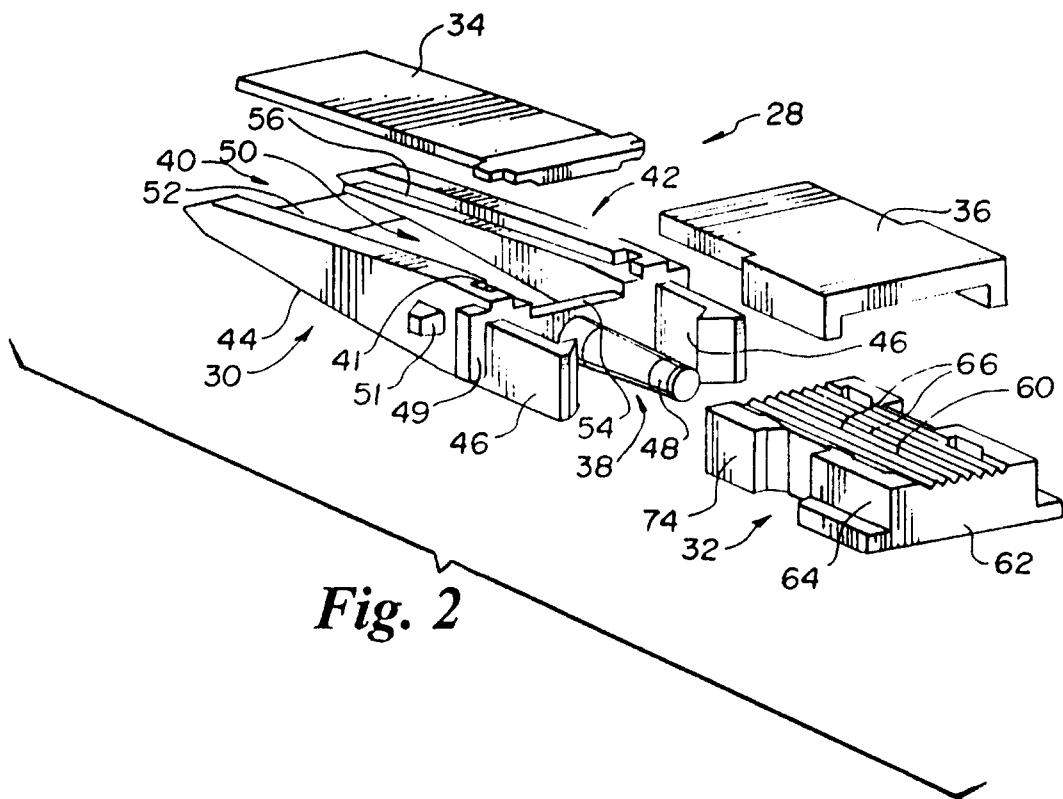

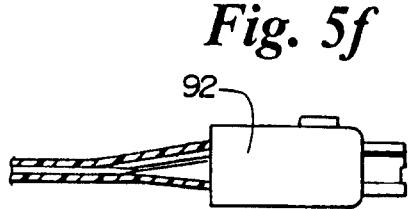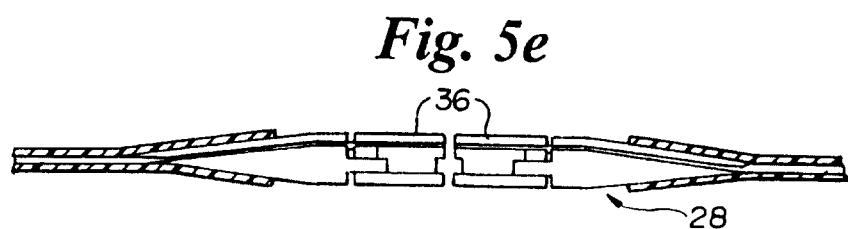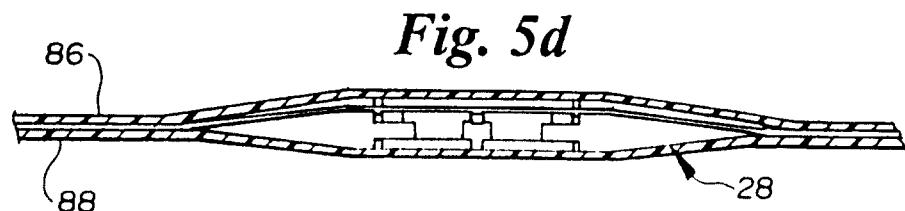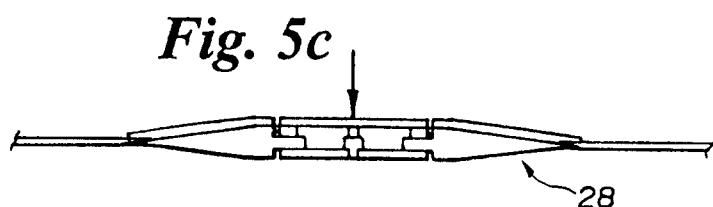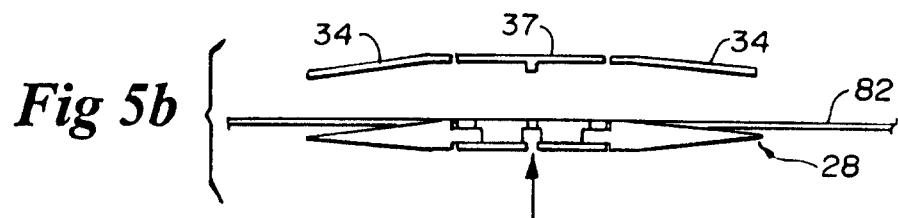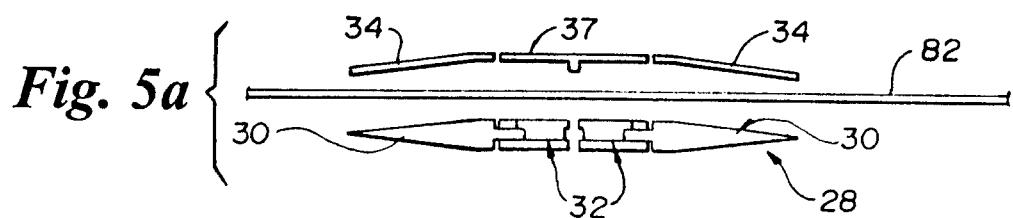

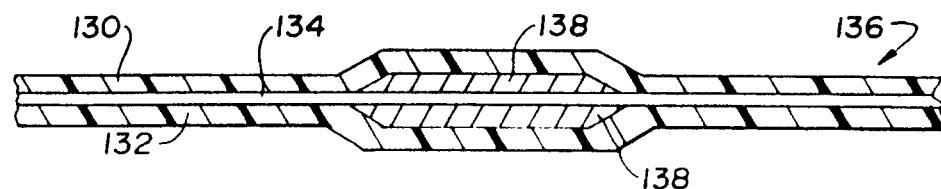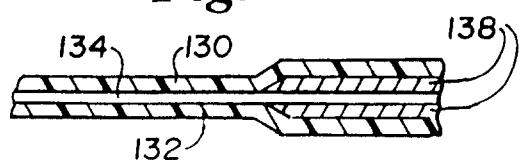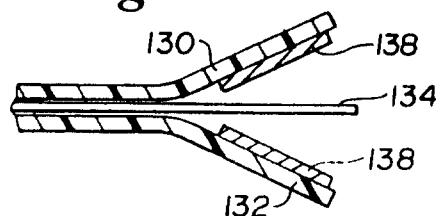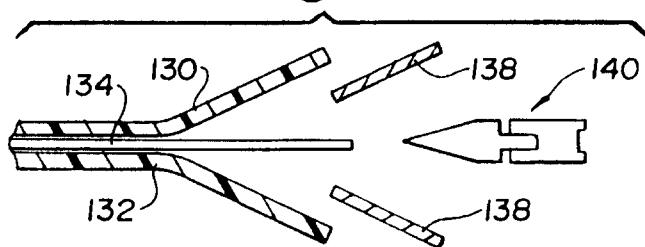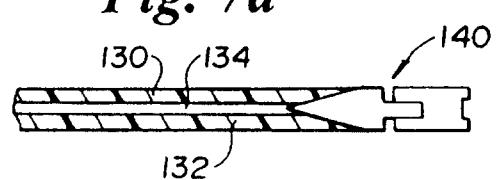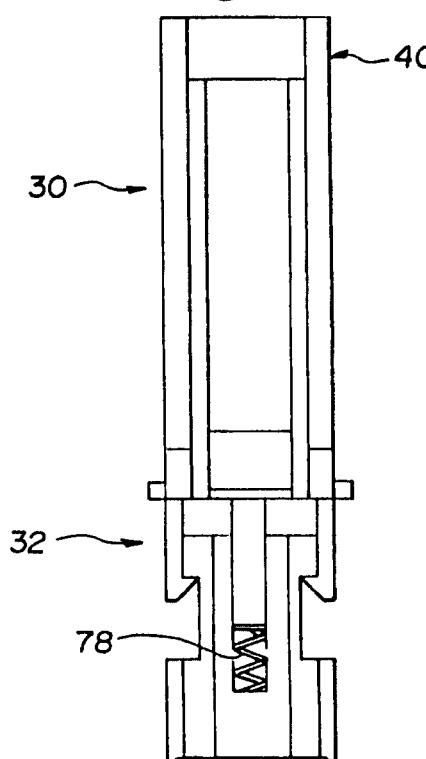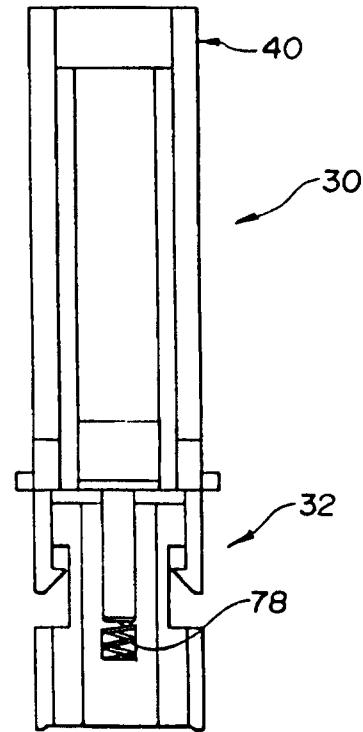*Fig. 6**Fig. 7a**Fig. 7b**Fig. 7c**Fig. 7d**Fig. 8a**Fig. 8b*

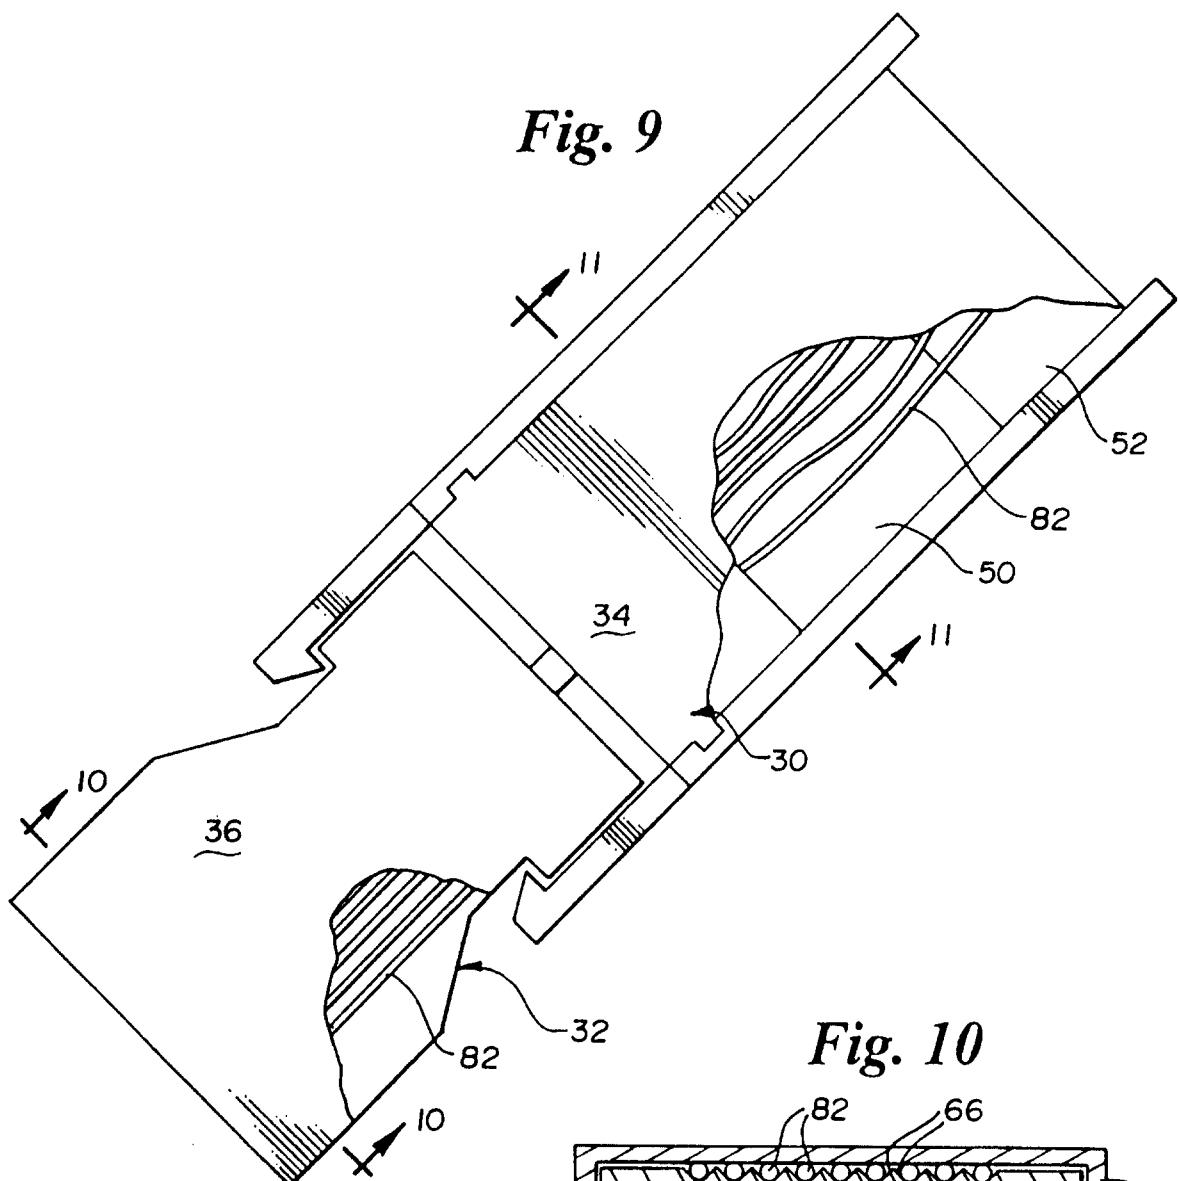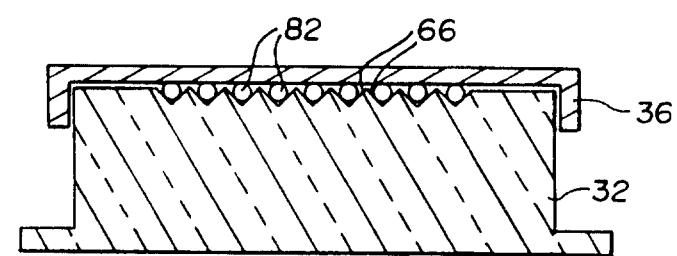*Fig. 9**Fig. 10**Fig. 11*