

(51) International Patent Classification:
G06F 17/21 (2006.01)(21) International Application Number:
PCT/KR2013/006259(22) International Filing Date:
12 July 2013 (12.07.2013)


(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10-2012-0076304 12 July 2012 (12.07.2012) KR
10-2013-0031673 25 March 2013 (25.03.2013) KR(71) Applicant: **SAMSUNG ELECTRONICS CO., LTD.**
[KR/KR]; 129, Samsung-ro, Yeongtong-gu, Suwon-si,
Gyeonggi-do 443-742 (KR).(72) Inventors: **RYU, Young-Sun**; #412-504, Kkachimaetul
Lotte APT., 58, Migeumil-ro, Bundang-gu, Seongnam-si,
Gyeonggi-do 463-738 (KR). **SONG, Jae-Yeon**; #105-101,
Raemian Penta Ville, 19, Seolleung-ro 69-gil, Gang-
nam-gu, Seoul 135-796 (KR).(74) Agents: **LEE, Keon-Joo** et al.; Mihwa Bldg. 110-2, My-
ongryun-dong 4-ga, Chongro-gu, Seoul 110-524 (KR).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KZ,
LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).**Published:**

— with international search report (Art. 21(3))

(54) Title: METHOD AND APPARATUS FOR COMPOSING MARKUP FOR ARRANGING MULTIMEDIA ELEMENTS

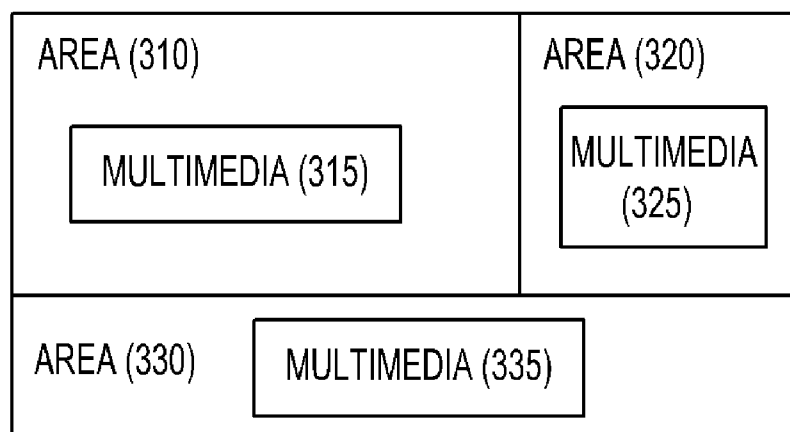SCENE (300)(57) **Abstract:** A method of configuring a markup for composition of multimedia elements in a multimedia communication system is provided. The method includes configuring area description information corresponding to each of a plurality of areas included in a scene, configuring multimedia description information corresponding to at least one multimedia included in each of the plurality of areas, configuring scene composition information describing spatial composition and temporal composition of each of the plurality of areas, and configuring a markup including the scene composition information, the area description information, and the multimedia description information.

Description

Title of Invention: METHOD AND APPARATUS FOR COMPOSING MARKUP FOR ARRANGING MULTIMEDIA ELEMENTS

Technical Field

- [1] The present disclosure relates to multimedia elements. More particularly, the present disclosure relates to a method of composing a markup for spatially and temporally arranging and synchronizing multimedia elements.

Background Art

- [2] The demand for multimedia services has continuously increased, and the necessities of providing various multimedia services for current display devices and configuring a new markup for the provision of the various multimedia services have also increased.
- [3] A technology defining a multimedia element on the web largely includes a Hypertext Markup Language (HTML) and a Synchronized Multimedia Integration Language (SMIL). Hereinafter, the HTML and the SMIL will be described in more detail with reference to FIGS. 1 and 2.
- [4] FIG. 1 illustrates an HTML document structure in a multimedia communication system according to the related art.
- [5] Referring to FIG. 1, the HTML is a markup language for defining a hypertext document structure, and corresponds to a technology most widely used on the web today, of which revision work of version 5 is currently being completed. HTML version 5 has enhanced support for multimedia services such as a video, audio and the like, but cannot support functions such as temporal composition or interaction of the media, synchronization, and the like since the HTML is basically a language for defining a structure of a static document.
- [6] As illustrated in FIG. 1, the HTML document structure includes <header>, <nav>, <section>, <article>, <footer>, and <aside>.
- [7] <header> indicates a logo area, <nav> indicates a menu area, <section> indicates contents of the body, <article> indicates a main content area within the body, <footer> indicates a lower part of a site, and <aside> indicates a sub area or an advertisement content area.
- [8] FIG. 2 illustrates an example of arranging multimedia elements by using the SMIL in a multimedia communication system according to the related art.
- [9] Referring to FIG. 2, the SMIL is the World Wide Web Consortium (W3C) standard established for temporally and spatially composing and controlling multimedia data such as videos, audio, images, text and the like on the web by using an eXtensible

Markup Language (XML).

[10] As illustrated in FIG. 2, there is an advantage of temporally and spatially composing and controlling the multimedia data through the use of the SMIL. However, since the SMIL is defined by the XML, the SMIL requires a separate player in order to render a document defined by the SMIL, and accordingly, corresponds to the standard which is not actually used in current industrial fields.

[11] As described, although the multimedia elements are defined by the aforementioned HTML or SMIL, both the HTML and the SMIL can only compose the media and neither can configure the scene including a plurality of areas. Accordingly, there exists a need for an apparatus and method for dividing multimedia elements into scene, area, and media levels to configure a markup.

Disclosure of Invention

Technical Problem

[12] The above information is presented as background information only to assist with an understanding of the present disclosure. No determination has been made, and no assertion is made, as to whether any of the above might be applicable as prior art with regard to the present disclosure.

Solution to Problem

[13] Aspects of the present disclosure are to address at least the above-mentioned problems and/or disadvantages and to provide at least the advantages described below. Accordingly, an aspect of the present disclosure is to provide a method and an apparatus for dividing multimedia elements into scene, area, and media levels to configure a markup.

[14] Another aspect of the present disclosure is to provide a method and an apparatus for temporally and/or spatially composing multimedia elements in a multimedia communication system and configuring a markup which can support synchronization between the multimedia.

[15] In accordance with an aspect of the present disclosure, a method of configuring a markup for composition of multimedia elements in a multimedia communication system is provided. The method includes configuring a markup including scene composition information, area description information, and multimedia description information and spatially and temporally composing multimedia elements according to the configured markup.

[16] In accordance with another aspect of the present disclosure, a display device for configuring a markup for composition of multimedia elements in a multimedia communication system is provided. The display device includes a markup configuration unit configured to configure area description information corresponding to each of a

plurality of areas included in a scene, to configure multimedia description information corresponding to at least one multimedia included in each of the plurality of areas, to configure scene composition information describing spatial composition and temporal composition of each of the plurality of areas, and to configure a markup including the scene composition information, the area description information, and the multimedia description information, and a display unit configured to display the scene based on the markup.

[17] The present disclosure can not only spatially and/or temporally compose multimedia elements but also provides a synchronization means between the multimedia. Further, a basic scene can be configured in a browser which cannot support an extensible markup. In addition, the present disclosure provides a means which can variously configure and use scene information in a plurality of devices in the future by separating scene description information and actual area description and media expression information.

[18] Other aspects, advantages, and salient features of the disclosure will become apparent to those skilled in the art from the following detailed description, which, taken in conjunction with the annexed drawings, discloses various embodiments of the present disclosure.

Brief Description of Drawings

[19] The above and other aspects, features, and advantages of certain embodiments of the present disclosure will be more apparent from the following description taken in conjunction with the accompanying drawings, in which:

[20] FIG. 1 illustrates a Hypertext Markup Language (HTML) document structure in a multimedia communication system according to the related art;

[21] FIG. 2 illustrates an example of composing multimedia elements by using a Synchronized Multimedia Integration Language (SMIL) in a multimedia communication system according to the related art;

[22] FIG. 3 illustrates an example of configuring a scene for a display device in a multimedia communication system according to an embodiment of the present disclosure;

[23] FIG. 4A illustrates an example of configuring a markup in a multimedia communication system according to a first embodiment of the present disclosure;

[24] FIG. 4B illustrates an example of configuring a markup in a multimedia communication system according to a second embodiment of the present disclosure;

[25] FIG. 5A illustrates the markup configured in the multimedia communication system and an example of a scene executed based on the markup according to the first embodiment of the present disclosure;

- [26] FIG. 5B illustrates an example of a scene executed based on the markup configured in the multimedia communication system according to the second embodiment of the present disclosure;
- [27] FIG. 6A illustrates an example of a scene configured in a browser supporting a markup configured in a multimedia communication system according to an embodiment of the present disclosure;
- [28] FIG. 6B illustrates an example of a scene configured in a browser supporting only HTML in a multimedia communication system according to an embodiment of the present disclosure;
- [29] FIG. 7 is a flowchart illustrating a process in which a display device spatially configures a scene based on a markup configured in the multimedia communication system according to an embodiment of the present disclosure;
- [30] FIG. 8A is a flowchart illustrating a process in which a display device temporally configures a scene based on the markup configured in the multimedia communication system according to the first embodiment of the present disclosure;
- [31] FIG. 8B is a flowchart illustrating a process in which a display device temporally configures a scene based on the markup configured in the multimedia communication system according to the second embodiment of the present disclosure;
- [32] FIG. 9 illustrates an example of configuring a scene according to a markup configured in a multimedia communication system according to an embodiment of the present disclosure;
- [33] FIG. 10 illustrates time configuration information of an example of scene composition, such as the scene composition illustrated in FIG. 9, according to an embodiment of the present disclosure; and
- [34] FIG. 11 illustrates a display device spatially and temporally configuring a scene based on a markup configured in the multimedia communication system according to an embodiment of the present disclosure.
- [35] Throughout the drawings, like reference numerals will be understood to refer to like parts, components, and structures.

Best Mode for Carrying out the Invention

- [36] The following description with reference to the accompanying drawings is provided to assist in a comprehensive understanding of various embodiments of the present disclosure as defined by the claims and their equivalents. It includes various specific details to assist in that understanding but these are to be regarded as merely exemplary. Accordingly, those of ordinary skill in the art will recognize that various changes and modifications of the various embodiments described herein can be made without departing from the scope and spirit of the present disclosure. In addition, descriptions

of well-known functions and constructions may be omitted for clarity and conciseness.

[37] The terms and words used in the following description and claims are not limited to the bibliographical meanings, but, are merely used by the inventor to enable a clear and consistent understanding of the present disclosure. Accordingly, it should be apparent to those skilled in the art that the following description of various embodiments of the present disclosure is provided for illustration purpose only and not for the purpose of limiting the present disclosure as defined by the appended claims and their equivalents.

[38] It is to be understood that the singular forms a, an, and the include plural referents unless the context clearly dictates otherwise. Thus, for example, reference to a component surface includes reference to one or more of such surfaces.

[39] FIG. 3 illustrates an example of configuring a scene for a display device in a multimedia communication system according to an embodiment of the present disclosure.

[40] Referring to FIG. 3, a shown scene 300 is the uppermost end within the structure of a document, and there may be multiple scenes 300 within the document. For example, when it is assumed that a broadcast program for one hour consists of scenes, the broadcast program may be configured by scene #1 included the first 30 minutes and scene #2 included in the second 30 minutes.

[41] One scene 300 is divided into a plurality of areas. The number of areas may be one to n based on one scene. Further, the area may be considered as an independent unit, and a current independent broadcast program, a Video on Demand (VoD) service, or a document of a web service may be considered as one area. That is, independent areas 310, 320, and 330 are gathered to form one scene 300.

[42] One area consists of a plurality of multimedia. The multimedia may include all media data such as videos, audio, images, text and the like. That is, the areas 310, 320, and 330 include multimedia 315, 325, and 335, respectively.

[43] Hereinafter, a method of configuring a markup for the scene 300 illustrated in FIG. 3 will be described with reference to FIGS. 4A and 4B according to embodiments of the present disclosure.

[44] FIG. 4A illustrates an example of configuring a markup in a multimedia communication system according to a first embodiment of the present disclosure.

[45] Referring to FIG. 4A, a shown markup document includes scene composition information 400, scene description information 410, and areas included in the scene 300. Moreover, multimedia information corresponds to information on the markup document in a one to one relationship. That is, each element of the area 310 and the multimedia 315 is expressed by area description information 420 and multimedia description information 425, each element of the area 320 and the multimedia 325 is expressed by area description information 430 and multimedia description information

435, and each element of the area 330 and the multimedia 335 is expressed by area description information 440 and multimedia description information 445.

[46] The scene composition information 400 describes space composition and time composition of each of the areas included in the scene. Actual information on each area separately exists so that the areas can operate individually. Further, a plurality of scenes can be configured in one document by separately describing the space composition and the time composition of the scene.

[47] Although one scene composition information 400 is illustrated in FIG. 4A, the number of scene composition information 400 may be plural to express a plurality of scenes including scene #1, scene #2, etc. Further, although the scene composition information 400 is described together with the time information and the space information in FIG. 4A, the time information and the space information can be separately described. Hereinafter, an example of separately describing the time information and the space information will be described with reference to FIG. 4B according to an embodiment of the present disclosure.

[48] FIG. 4B illustrates an example of configuring a markup in a multimedia communication system according to a second embodiment of the present disclosure.

[49] Referring to FIG. 4B, a separate markup document 401 including scene composition information 450 and multimedia time information 455 describing time information of each multimedia included in the scene is configured, and scene description information 460 including basic area description information 470, 480, and 490 and multimedia description information 475, 485, and 495 are described as one markup document. In this case, a browser reads the markup document indicating the scene description information 460 and the separate markup document 401 indicating the scene composition information 450 and the multimedia time information 455 together to configure a final scene. As described above, when the scene composition information 450 and the multimedia time information 455 are configured as the separate markup document, a browser which cannot support the method provided by the present disclosure also can display the scene description information 460.

[50] FIG. 5A illustrates the markup configured in the multimedia communication system and an example of a scene executed based on the markup according to the first embodiment of the present disclosure. That is, FIG. 5A illustrates an example of a scene executed based on the markup configured according to the method of FIG. 4A.

[51] Referring to FIG. 5A, the shown markup document includes scene composition information, scene description information, area description information, multimedia description information, and description information for supporting a legacy browser.

[52] (1) Scene composition information

[53] The scene composition information includes a <mmt-ci:composition> element and a

<mmt-ci:divLocation> element. The <mmt-ci:composition> element describes the scene composition information and includes the <mmt-ci:divLocation> element as a lower element, and the <mmt-ci:divLocation> element describes composition information of each area and has an attribute as shown in Table 1 below.

[54] Table 1

[Table 1]

Id	unique identifier that distinguishes between elements
Ref	designates a reference for a connection with an actual area
Left	x axis offset
Top	y axis offset
width	width of an area
height	length of an area
begin	describes start time of an area (in the unit of seconds)
beginAfter	starts after a particular element ends and designates an id value of an element
beginEvent	starts when a particular event is generated (for example, designates the same event as that when particular media is clicked)
dur	continues for a designated time (in units of seconds)
end	describes an end time of an area (in units of seconds)
endAfter	ends after a particular element ends and designates an id value of an element
endEvent	ends when a particular event is generated (for example, designates the same event as that when particular media is clicked)
repeat	designates whether to repeat, a boolean value

[55] (2) Scene description information

[56] The scene description information includes a <body> element, does not have contents newly added for the scene description, and uses the <body> element of the Hypertext Markup Language (HTML) as an uppermost unit of the scene description.

[57] (3) Area description information

[58] The area description information includes <div> and <section> elements and directly uses the <div> and <section> elements of the HTML in the area description information. However, a new attribute as shown in Table 2 below may be additionally defined.

[59] Table 2

[Table 2]

Width	designates an actual horizontal size of Division (div)
Height	designates an actual vertical size of div
background	designates a background color of div
Border	designates a border color of div
Begin	describes a start time of div (in units of seconds)
beginAfter	starts after a particular element ends and designates an id value of an element
beginEvent	starts when a particular event is generated (for example, designates the same event as that when particular media is clicked)
Dur	continues for a designated time (in units of seconds)
End	describes an end time of div (in units of seconds)
endAfter	ends after a particular element ends and designates an id value of an element
endEvent	ends when a particular event is generated (for example, designates the same event as that when particular media is clicked)

[60] (4) Multimedia description information

[61] The multimedia description information has no contents newly added for the multimedia description and directly uses <video>, <audio>, <source>, <canvas>, <svg>, and <track> elements of the HTML in the media description information. Of course, if there are other multimedia defined by other standards, the multimedia can be directly used.

[62] (5) Description information for supporting a legacy browser

[63] The aforementioned scene composition information, scene description information, area description information, and multimedia description information are only effective to a browser that completely analyzes and supports a new markup. The area description and time description information of the scene cannot be completely supported by the HTML browser, but a minimum of the scene description information may be configured to be supported by the HTML browser.

[64] Attributes to be supported by the HTML browser are described in Table 3 and Table 4 below. That is, Table 3 describes attributes supported by the <body> element, and Table 4 describes attributes supported by the <div> and <section> elements.

[65] Table 3

[Table 3]

style	position	absolute position, a relative position
	width	horizontal size of an element
	height	vertical size of an element
	background	background color of an element

[66] Table 4

[Table 4]

style	position	absolute position, a relative position
	left	x axis offset of an element
	right	y axis offset of an element
	width	horizontal size of an element
	height	vertical size of an element
	background	background color of an element
	border	border of an element

[67] That is, in the shown scene description information of the markup, the <body> element includes three areas, so that three areas can be arranged in one scene.

[68] FIG. 5B illustrates an example of a scene executed based on the markup configured in the multimedia communication system according to the second embodiment of the present disclosure. That is, FIG. 5B illustrates an example of a markup configured according to the method of FIG. 4B.

[69] Referring to FIG. 5B, the shown markup document includes scene composition information, scene description information, area description information, multimedia description information, and description information for supporting a legacy browser like the markup of FIG. 5A, and further includes multimedia time information.

[70] (6) Multimedia time information

[71] The multimedia time information includes a <mmt-ci:MediaSync> element and an <Asset> element. The <mmt-ci:MediaSync> element is an uppermost element for configuring the multimedia time information and includes the <Asset> element as a lower element. The <Asset> element corresponds to the multimedia one to one and indicates each of the multimedia time information included in the multimedia description information. Attributes supported by the <Asset> element are described through Table 5 below.

[72] Table 5

[Table 5]

Begin	describes a start time of media (in units of seconds)
BeginClip	describes a position at which a reproduction of media starts (in units of seconds)
beginAfter	starts after a particular element ends and designates an id value of an element
beginEvent	starts when a particular event is generated (for example, designates the same event as that when particular media is clicked)
Dur	describes a duration time of media (in units of seconds)
End	describes an end time of media (in units of seconds)
EndClip	describes a position where a reproduction of media ends (in units of seconds)
endAfter	ends after a particular element ends and designates an id value of an element
endEvent	ends when a particular event is generated (for example, designates the same event as that when particular media is clicked)

[73] FIG. 6A illustrates an example of a scene configured in a browser supporting a markup configured in a multimedia communication system according to an embodiment of the present disclosure.

[74] Referring to FIG. 6A, when the markup configured according to the embodiment of the present disclosure is used, a browser supporting a new element and attribute can show all functions related to scene switching and temporal and spatial composition. Further, a browser supporting the markup configured according to the embodiment of the present disclosure, that is, an extensible markup, can change space description when an event related to provision of a space description of the multimedia element is generated or after a certain time passes.

[75] FIG. 6B illustrates an example of a scene configured in a browser supporting only HTML in a multimedia communication system according to an embodiment of the present disclosure.

[76] Referring to FIG. 6B, the browser supporting only the HTML can show only a minimum amount of the scene description information. That is, a browser which cannot support the extensible markup can provide only the scene description information.

[77] FIG. 7 is a flowchart illustrating a process in which a display device spatially configures a scene based on a markup configured in the multimedia communication system according to an embodiment of the present disclosure.

[78] Referring to FIG. 7, the display device reads scene composition information of the markup at operation 700 and acquires width and height information of areas included in the scene at operation 702. When the scene composition information is implemented as a separate document, the width and height information of the area are acquired from the separate document. At operation 704, the display device configures entire scenes including areas configured according to the width and height information acquired at

operation 702.

- [79] The display device reads area description information of the markup at operation 706 and reads a division (hereinafter, referred to as div) reference identifier at operation 708. The display device loads a div element at operation 710 and acquires width and height information of the div element at operation 712.
- [80] At operation 714, the display device determines whether the width and height of the area acquired at operation 702 are larger than or equal to the width and height of the div element. When the width and height of the area are larger than or equal to the width and height of the div element as a result of the determination, the display device reduces the width and height of the area to match the width and height of the div element at operation 716 and proceeds to operation 720.
- [81] However, when the width and height of the area are smaller than the width and height of the div element as a result of the determination, the display device enlarges the width and height of the area to match the width and height of the div element at operation 718 and proceeds to operation 720. The display device configures the area according to the reduced or enlarged width and height of the div element at operation 720 and proceeds to operation 722.
- [82] The display device reads multimedia description information at operation 722 and acquires width and height information of the multimedia at operation 724. At operation 726, the display device determines whether the width and height of the multimedia acquired at operation 724 are larger than or equal to the width and height of the area configured at operation 720. When the width and height of the multimedia are larger than or equal to the width and height of the area as a result of the determination, the display device reduces the width and height of the multimedia to match the width and height of the area at operation 728.
- [83] However, when the width and height of the multimedia are smaller than the width and height of the area as a result of the determination, the display device completes the scene composition through the spatial description of the scene at operation 730.
- [84] FIG. 8A is a flowchart illustrating a process in which a display device temporally configures a scene based on the markup configured in the multimedia communication system according to the first embodiment of the present disclosure. In FIG. 8A, the markup configured according to the first embodiment refers to the markup configured according to the method of FIG. 4A.
- [85] Referring to FIG. 8A, the display device reads scene composition information of the markup at operation 800 and acquires time information of the scene at operation 802. At operation 804, the display device temporally configures the entire scene according to the time information of the scene acquired at operation 802.
- [86] The display device reads area description information of the markup at operation 806

and acquires time information of each area included in the entire scene at operation 808. The display device temporally configures each area according to the time information of each area acquired at operation 808 at operation 810 and reads a div reference identifier at operation 812.

[87] The display device loads the div element at operation 814 and acquires time information of each multimedia at operation 816. At operation 818, the display device temporally configures each multimedia according to the time information of each multimedia acquired at operation 816 to complete the scene composition.

[88] FIG. 8B is a flowchart illustrating a process in which a display device temporally configures a scene based on the markup configured in the multimedia communication system according to the second embodiment of the present disclosure. In FIG. 8B, the markup configured according to the second embodiment refers to the markup configured according to the method of FIG. 4B.

[89] Referring to FIG. 8B, the display device reads scene composition information of the markup at operation 850 and acquires time information of the scene at operation 852. At operation 854, the display device temporally configures the entire scene according to the time information of the scene acquired at operation 852.

[90] The display device reads area description information of the markup at operation 856 and acquires time information of each area included in the entire scene at operation 858. The display device temporally configures, at operation 860, each area according to the time information of each area acquired at operation 858 and reads a div reference identifier at operation 862.

[91] The display device loads the div element at operation 864 and acquires identifier information of the multimedia at operation 866. The display device reads time information of the multimedia from the time information of the multimedia of the separately provided markup document and detects time information which matches the identifier of the multimedia at operation 868. At operation 890, the display device acquires the same information as the time information of the multimedia acquired at operation 816 by reflecting the detected time information in the multimedia. Thereafter, the display device temporally configures each multimedia at operation 892 to complete the scene composition.

[92] As described above, operations 850 to 864 are substantially the same as operations 800 to 814 of the first embodiment, and only operations 866 to 890 are different from operation 816 of the first embodiment.

[93] FIG. 9 illustrates an example of configuring a scene according to a markup configured in a multimedia communication system according to an embodiment of the present disclosure. In FIG. 9, it is assumed that the scene consists of three areas and area 3 is reproduced for 100 seconds and then divided into area 4 and area 5. Further, it

is assumed that area 4 is immediately reproduced and area 5 is reproduced after 0.2 seconds when the reproduction of area 3 is completed.

[94] Referring to FIG. 9, scene 1 consists of area 1, area 2, and area 3, where area 1 reproduces a video and audio, area 2 reproduces information in text form, and area 3 reproduces an advertisement image. After the advertisement image of area 3 is reproduced for 100 seconds, the scene is switched and thus area 4 reproduces the advertisement image and area 5 reproduces information in the text form after 0.2 seconds.

[95] An example code of the markup for configuring the scene of FIG. 9 may be shown in Table 6.

[96] [Table 6]

[97] <html>

[98] <head>

[99] // Scene information

[100] <mmt-ci:composition>

[101] <area id="Area1_s" left="0" top="0" begin="0" />

[102] <area id="Area2_s" left="0" top="810" begin="0" />

[103] <area id="Area3_s" left="1440" top="0" begin="0" dur="100s"/>

[104] <area id="Area4_s" left="1440" top="0" beginAfter="area3" />

[105] <area id="Area5_s" left="1440" top="410" beginAfter="area3" />

[106] </mmt-ci:composition>

[107] // Scene description

[108] <body style="position: absolute; width: 1920px; height:1080px; background: #ffff00">

[109] // Area description

[110] <div id="area1" style="position: absolute; left: 0px; top: 0px; width: 1440px; height: 810px; background: #ff0000; border: 1px solid #eee" mmt-ci:ref_spacial="area1_s" mmt-ci:ref_temporal="area1_t" width="1440" height="810" begin="0">

[111] // Asset decription

[112] <par>

[113] <video id="video1" src="video1.mp4">

[114] <video id="video2" src="video2.mp4">

[115] </par>

[116] </div>

[117] <div id="area2" style="position: absolute; left: 0px; top: 810px; width: 1920px; height: 270px; background: #00ff00; border: 1px solid #eee" mmt-ci:ref_spacial="area2_s" mmt-ci:ref_temporal="area2_t" width="1920" height="270" begin="0">>

[118] <par>

```

[119]    <p>Text information</p>
[120]    </par>
[121]    </div>
[122]    <div id="area3" style="position: absolute; left: 1440px; top: 0px; width: 480px;
height: 810px; background: #0000ff; border: 1px solid #eee" mmt-
ci:ref_spacial="area3_s" mmt-ci:ref_temporal="area3_t" width="480" height="810"
begin="0">
[123]    <par>
[124]    
[125]    </par>
[126]    </div>
[127]    <div id="area4" style="position: absolute; left: 1440px; top: 0px; width: 480px;
height: 410px; background: #0000ff; border: 1px solid #eee" left="1440" top="0"
mmt-ci:ref_spacial="area4_s" mmt-ci:ref_temporal="area4_t" >
[128]    <par>
[129]    
[130]    </par>
[131]    </div>
[132]    <div id="area5" style="position: absolute; left: 1440px; top: 410px; width: 480px;
height: 400px; background: #0000ff; border: 1px solid #eee" mmt-
ci:ref_spacial="area5_s" mmt-ci:ref_temporal="area5_t" width="480" height="400">
[133]    <par>
[134]    <p>This is Text Area</p>
[135]    </par>
[136]    </div>
[137]    </body>
[138]    </html>

```

[139] FIG. 10 illustrates time configuration information of an example of scene composition, such as the scene composition illustrated in FIG. 9, according to an embodiment of the present disclosure.

[140] Referring to FIG. 10, a horizontal axis refers to a time axis, area 1 and area 2 are reproduced in entire time area, area 3 is reproduced until a selected time, and area 4 and area 5 are simultaneously reproduced after the selected time.

[141] FIG. 11 illustrates a display device spatially and temporally configuring a scene based on a markup configured in the multimedia communication system according to an embodiment of the present disclosure.

[142] Referring to FIG. 11, a display device 1100 includes a markup configuration unit 1110 and a display unit 1120.

- [143] The markup configuration unit 1110 configures area description information corresponding to each of a plurality of areas included in the scene, configures multimedia description information corresponding to at least one multimedia included in each of the plurality of areas, and configures scene composition information describing spatial composition and temporal composition of each of the plurality of areas. Then, the markup configuration unit configures a markup including the scene composition information, the area description information, and the multimedia description information.
- [144] The display unit 1120 acquires width and height information of each of the plurality of areas from the scene composition information, acquires width and height information of a multimedia element from the area description information, and configures an area by considering the width and height information of the area and the width and height information of the multimedia element. Then, the display unit 1120 acquires the width and height information of the multimedia from the multimedia description information and configures the scene by considering the width and height information of the area and the width and height information of the multimedia.
- [145] It may be appreciated that a method of configuring a markup for spatially and temporally composing and synchronizing multimedia components according to embodiments of the present disclosure can be implemented in software, hardware, or a combination thereof. Any such software may be stored, for example, in a volatile or non-volatile storage device such as a ROM, a memory such as a RAM, a memory chip, a memory device, or a memory IC, or a recordable optical or magnetic medium such as a CD, a DVD, a magnetic disk, or a magnetic tape, regardless of its ability to be erased or its ability to be re-recorded. It can be also appreciated that the memory included in the mobile terminal is one example of machine-readable devices suitable for storing a program including instructions that are executed by a processor device to thereby implement embodiments of the present disclosure. Therefore, embodiments of the present disclosure provide a program including codes for implementing a system or method claimed in any claim of the accompanying claims and a machine-readable device for storing such a program. Further, this program may be electronically conveyed through any medium such as a communication signal transferred via a wired or wireless connection, and embodiments of the present disclosure appropriately include equivalents thereto.
- [146] Accordingly, the present disclosure includes a program including a code for implementing an apparatus and a method stated in the claims of the specification and a machine (computer)-readable storage medium storing the program. Further, the program may be electronically transported through a random medium such as a communication signal transmitted through a wired or wireless connection and the present

disclosure properly includes the equivalents thereof.

[147] Further, a device for configuring a markup for spatially and temporally composing and synchronizing multimedia components according to an embodiment of the present disclosure can receive the program from a program providing apparatus connected to the device wirelessly or through a wire and store the received program. The program providing apparatus may include a memory for storing a program containing instructions for allowing the device to perform a preset content protecting method and information required for the content protecting method, a communication unit for performing wired or wireless communication with the device, and a controller for transmitting the corresponding program to the device according to a request of the device or automatically.

[148] While the present disclosure has been shown and described with reference to various embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the spirit and scope of the present disclosure as defined by the appended claims and their equivalents thereof.

Claims

- [Claim 1] A method of configuring a markup for composition of multimedia elements in a multimedia communication system, the method comprising:
configuring area description information corresponding to each of a plurality of areas included in a scene;
configuring multimedia description information corresponding to at least one multimedia included in each of the plurality of areas;
configuring scene composition information describing spatial composition and temporal composition of each of the plurality of areas; and
configuring a markup including the scene composition information, the area description information, and the multimedia description information.
- [Claim 2] The method of claim 1, further comprising spatially composing the scene based on the markup,
wherein the spatially composing of the scene comprises:
acquiring width and height information of each of the plurality of areas from the scene composition information and acquiring width and height information of a div element from the area description information;
configuring an area in consideration of the width and height information of the area and the width and height information of the div element; and
acquiring width and height information of multimedia from the multimedia description information and configuring the scene in consideration of the width and height information of the area and the width and height information of the multimedia.
- [Claim 3] The method of claim 2, wherein the configuring of the area comprises:
comparing a width and a height of the area with a width and a height of the div element;
reducing the width and the height of the area to match the width and the height of the div element when the width and the height of the area are larger than the width and the height of the div element; and
enlarging the width and the height of the area to match the width and the height of the div element when the width and the height of the area are smaller than the width and the height of the div element.
- [Claim 4] The method of claim 3, wherein the configuring of the scene comprises:

comparing the width and the height of the area with a width and a height of the multimedia;
reducing the width and the height of the multimedia to match the width and the height of the area when the width and the height of the multimedia are larger than the width and the height of the area; and
maintaining the width and the height of the multimedia when the width and the height of the multimedia are smaller than the width and the height of the area.

[Claim 5] The method of claim 1, further comprising temporally composing the scene based on the markup,
wherein the temporally composing of the scene comprises:
acquiring time information of the scene from the scene composition information and composing entire scenes according to the time information of the scene;
acquiring time information of the area from the area description information and composing each area according to the time information of the area; and
acquiring multimedia time information from the multimedia description information and composing the multimedia according to the multimedia time information.

[Claim 6] The method of claim 5, wherein, when the scene composition information is configured by a markup separate from the markup, the composing of the multimedia according to the multimedia time information comprises detecting time information which matches an identifier of the multimedia from the separate markup and temporally composing the multimedia by reflecting the detected time information in the multimedia.

[Claim 7] The method of claim 1, wherein the scene composition information includes at least one attribute of an x axis offset, a y axis offset, a width of an area, a height of an area, a start time of an area, an end time of an area, and a duration time of an area.

[Claim 8] The method of claim 1, wherein the area description information includes at least one attribute of a width of a div element, a height of a div element, a start time of a div element, an end time of a div element, and a duration time of a div element.

[Claim 9] A display device for configuring a markup for composition of multimedia elements in a multimedia communication system, the display device comprising:

a markup configuration unit configured to configure area description information corresponding to each of a plurality of areas included in a scene, to configure multimedia description information corresponding to at least one multimedia included in each of the plurality of areas, to configure scene composition information describing spatial composition and temporal composition of each of the plurality of areas, and to configure a markup including the scene composition information, the area description information, and the multimedia description information; and

a display unit configured to display the scene based on the markup.

[Claim 10]

The display device of claim 9, wherein the display unit is configured to acquire width and height information of each of the plurality of areas from the scene composition information, acquire width and height information of a div element from the area description information, configure an area in consideration of the width and height information of the area and the width and height information of the div element, acquire width and height information of multimedia from the multimedia description information, and configure the scene in consideration of the width and height information of the area and the width and height information of the multimedia.

[Claim 11]

The display device of claim 10, wherein the display unit is configured to compare a width and a height of the area with a width and a height of the div element, reduce the width and the height of the area to match the width and the height of the div element when the width and the height of the area are larger than the width and the height of the div element, and enlarge the width and the height of the area to match the width and the height of the div element when the width and the height of the area are smaller than the width and the height of the div element.

[Claim 12]

The display device of claim 11, wherein the display unit is configured to compare a width and a height of the area with a width and a height of the multimedia, reduce the width and the height of the multimedia to match the width and the height of the area when the width and the height of the multimedia are larger than the width and the height of the area, and maintain the width and the height of the multimedia when the width and the height of the multimedia are smaller than the width and the height of the area.

[Claim 13]

The display device of claim 9, wherein the display unit is configured to acquire time information of the scene from the scene composition in-

formation, compose entire scenes according to the time information of the scene, acquire time information of the area from the area description information, compose each area according to the time information of the area, acquire multimedia time information from the multimedia description information, and compose the multimedia according to the multimedia time information.


[Claim 14] The display device of claim 13, wherein, when the scene composition information is configured by a markup separate from the markup, the display unit is configured to detect time information which matches an identifier of the multimedia from the separate markup and temporally compose the multimedia by reflecting the detected time information in the multimedia.

[Claim 15] The display device of claim 9, wherein the scene composition information includes at least one attribute of an x axis offset, a y axis offset, a width of an area, a height of an area, a start time of an area, an end time of an area, and a duration time of an area.


[Claim 16] The display device of claim 9, wherein the area description information includes at least one attribute of a width of a div element, a height of a div element, a start time of a div element, an end time of a div element, and a duration time of a div element.

[Claim 17] A non-transitory computer-readable storage medium storing instructions that, when executed, cause at least one processor to perform the method of claim 1.

[Fig. 1]

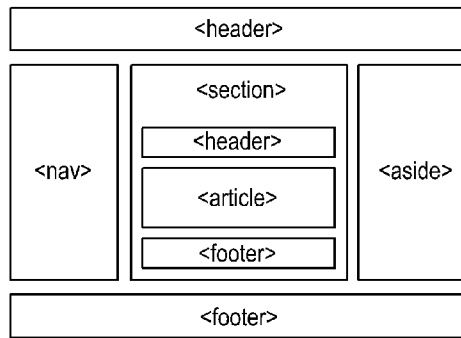


[Fig. 2]

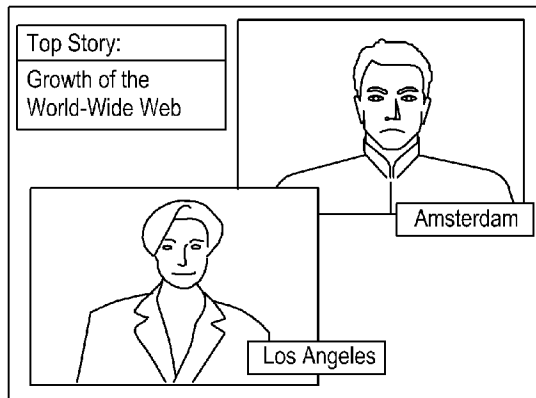


[Fig. 3]


SCENE (300)

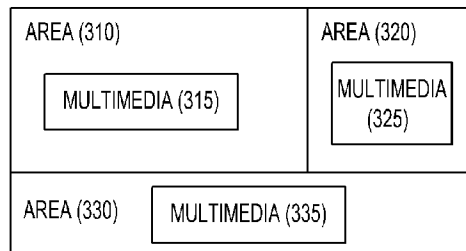


[Fig. 4A]

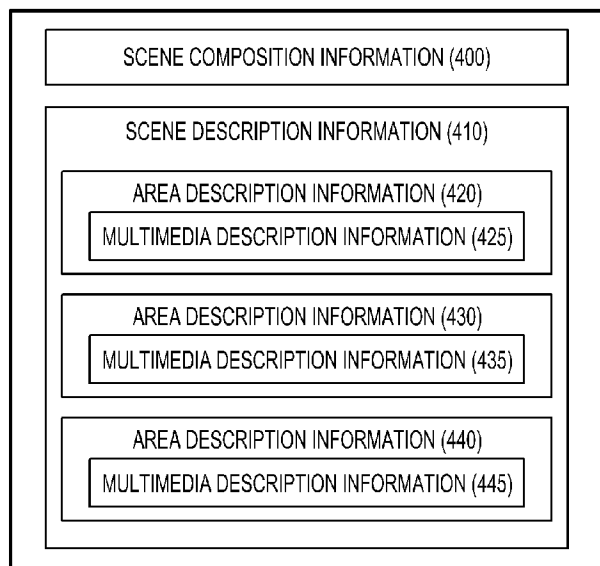

[Fig. 4B]

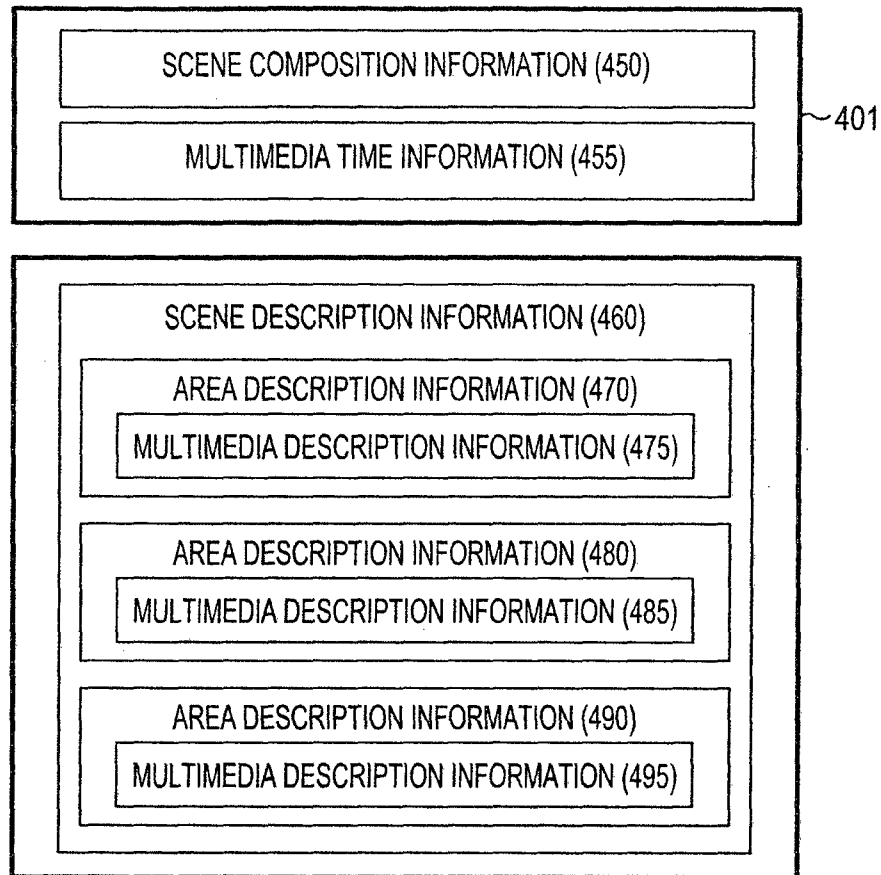


[Fig. 5A]

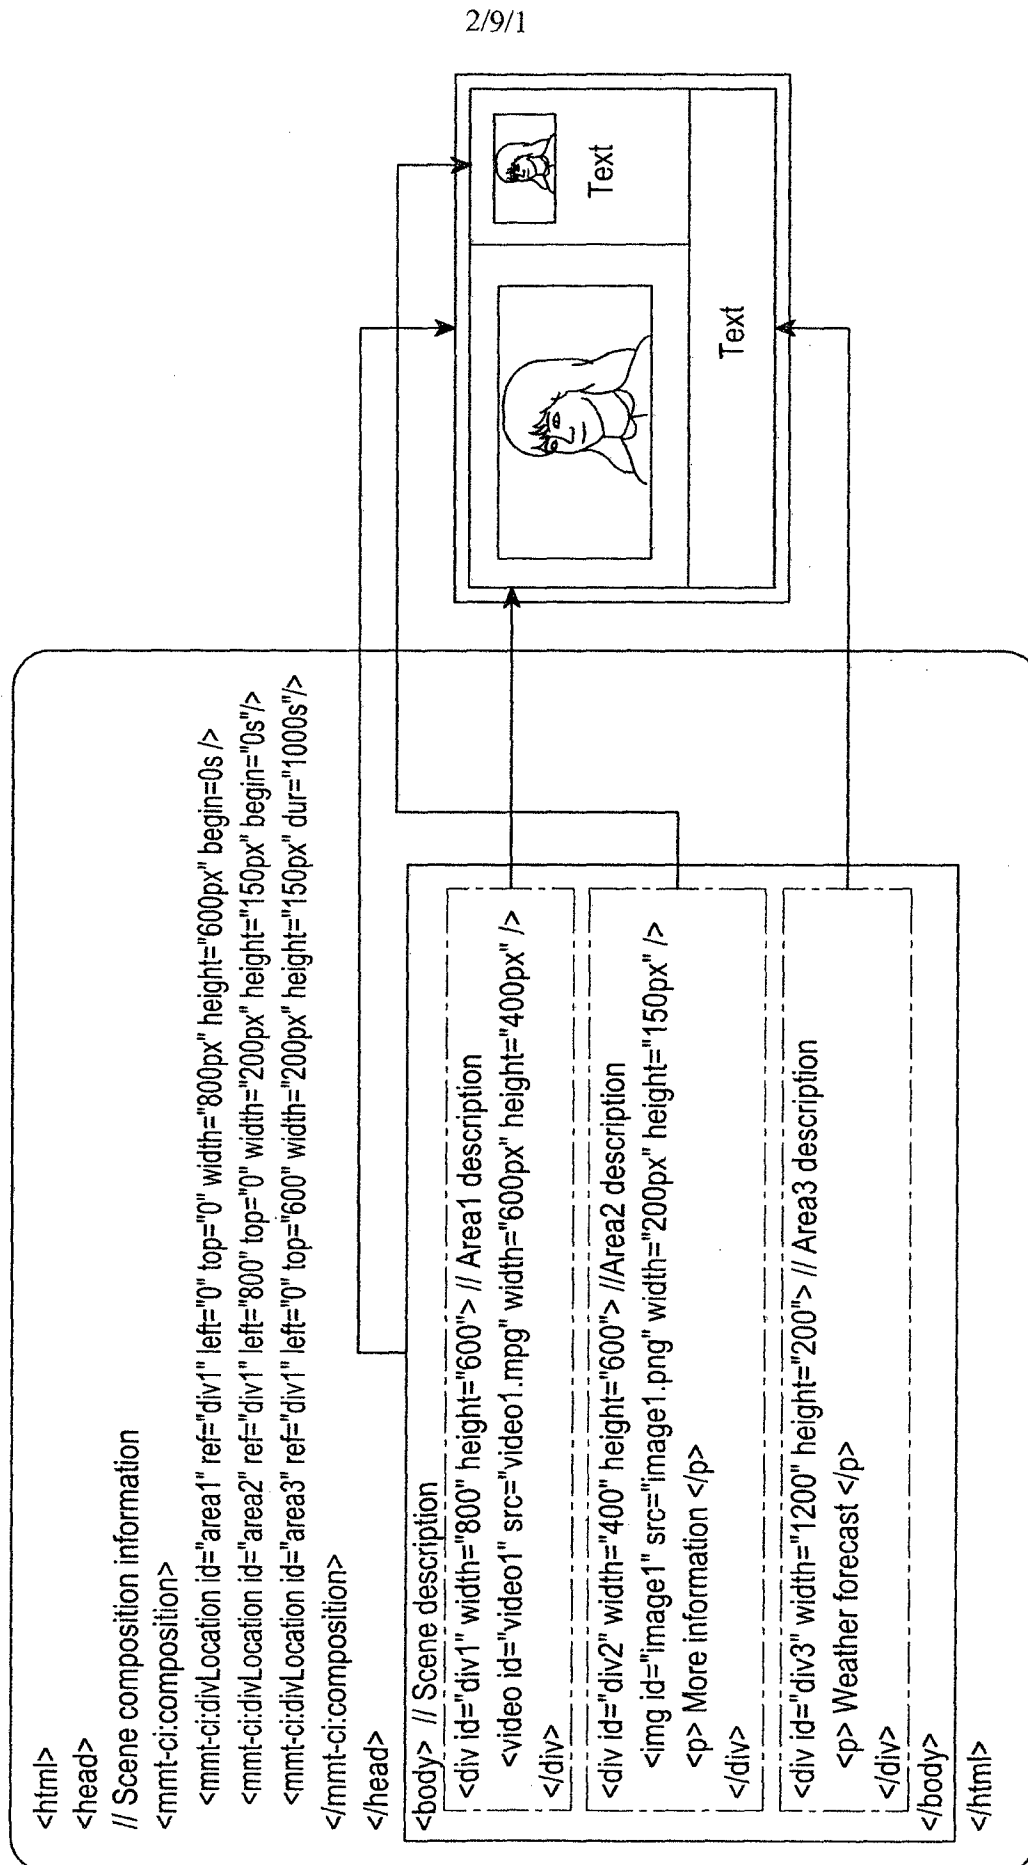


[Fig. 5B]


3/9

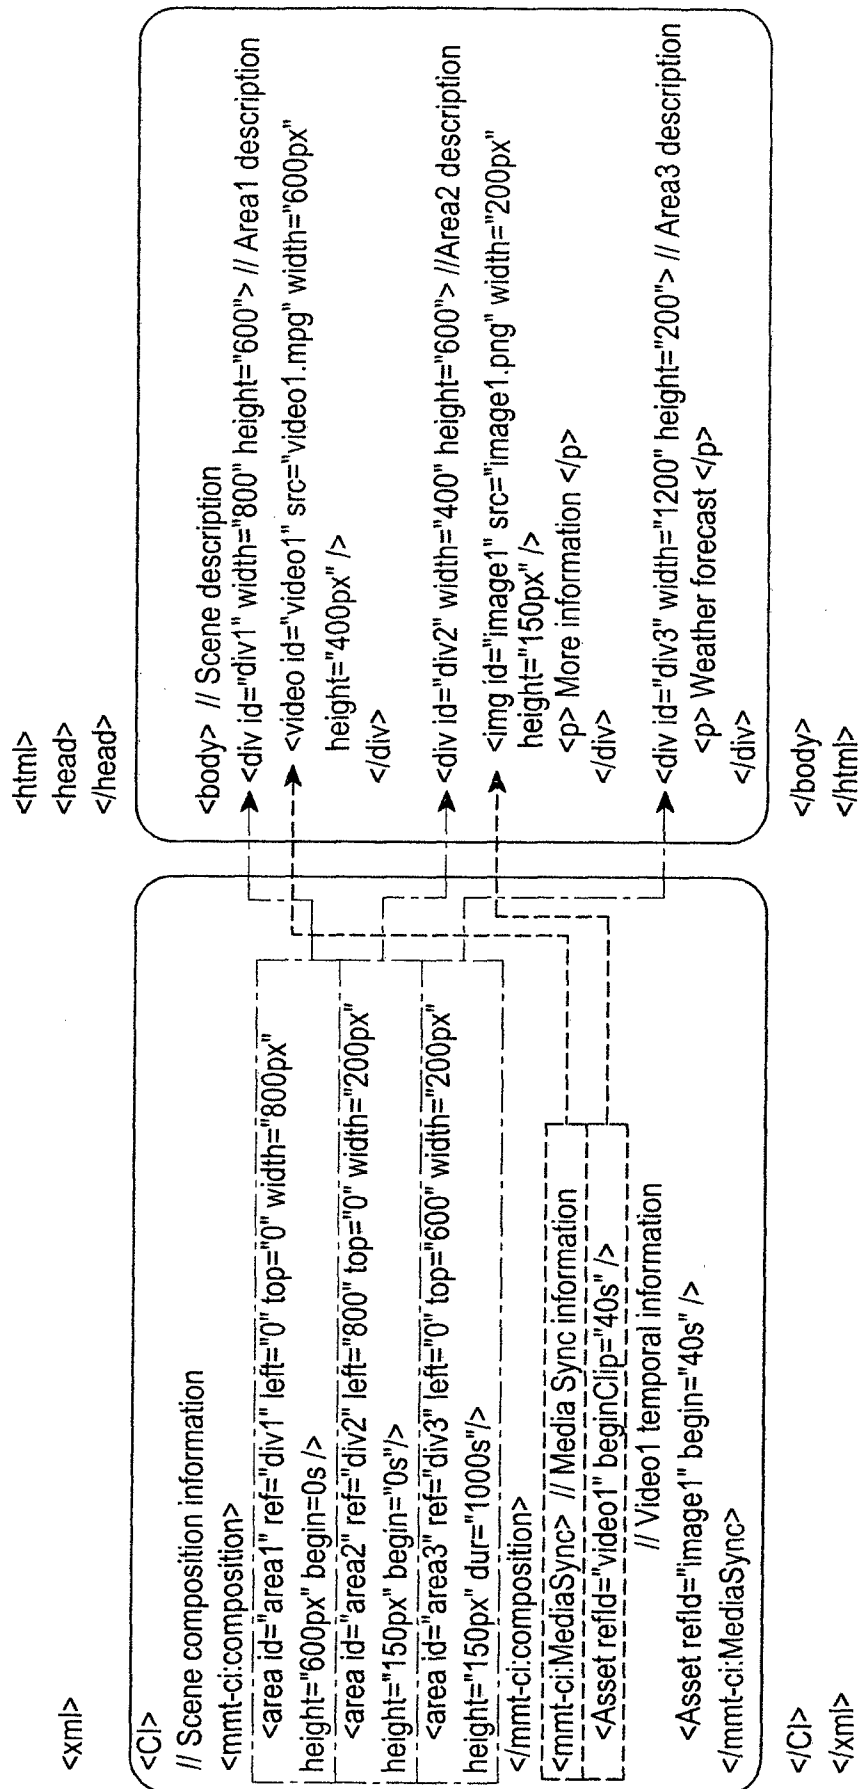


[Fig. 6A]

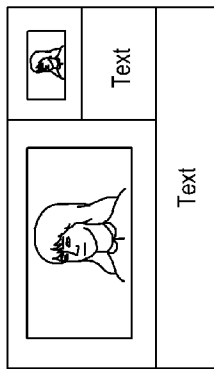

↑
WHEN EVENT IS GENERATED
OR AFTER CERTAIN
TIME PASSES

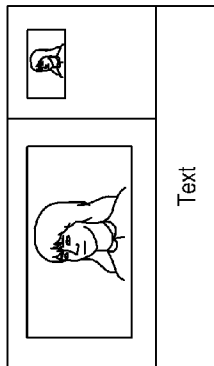


[Fig. 6B]

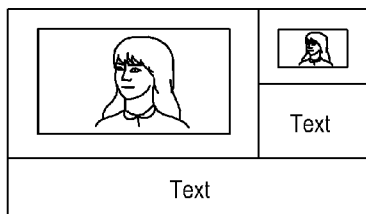


[Fig. 7]


5/9

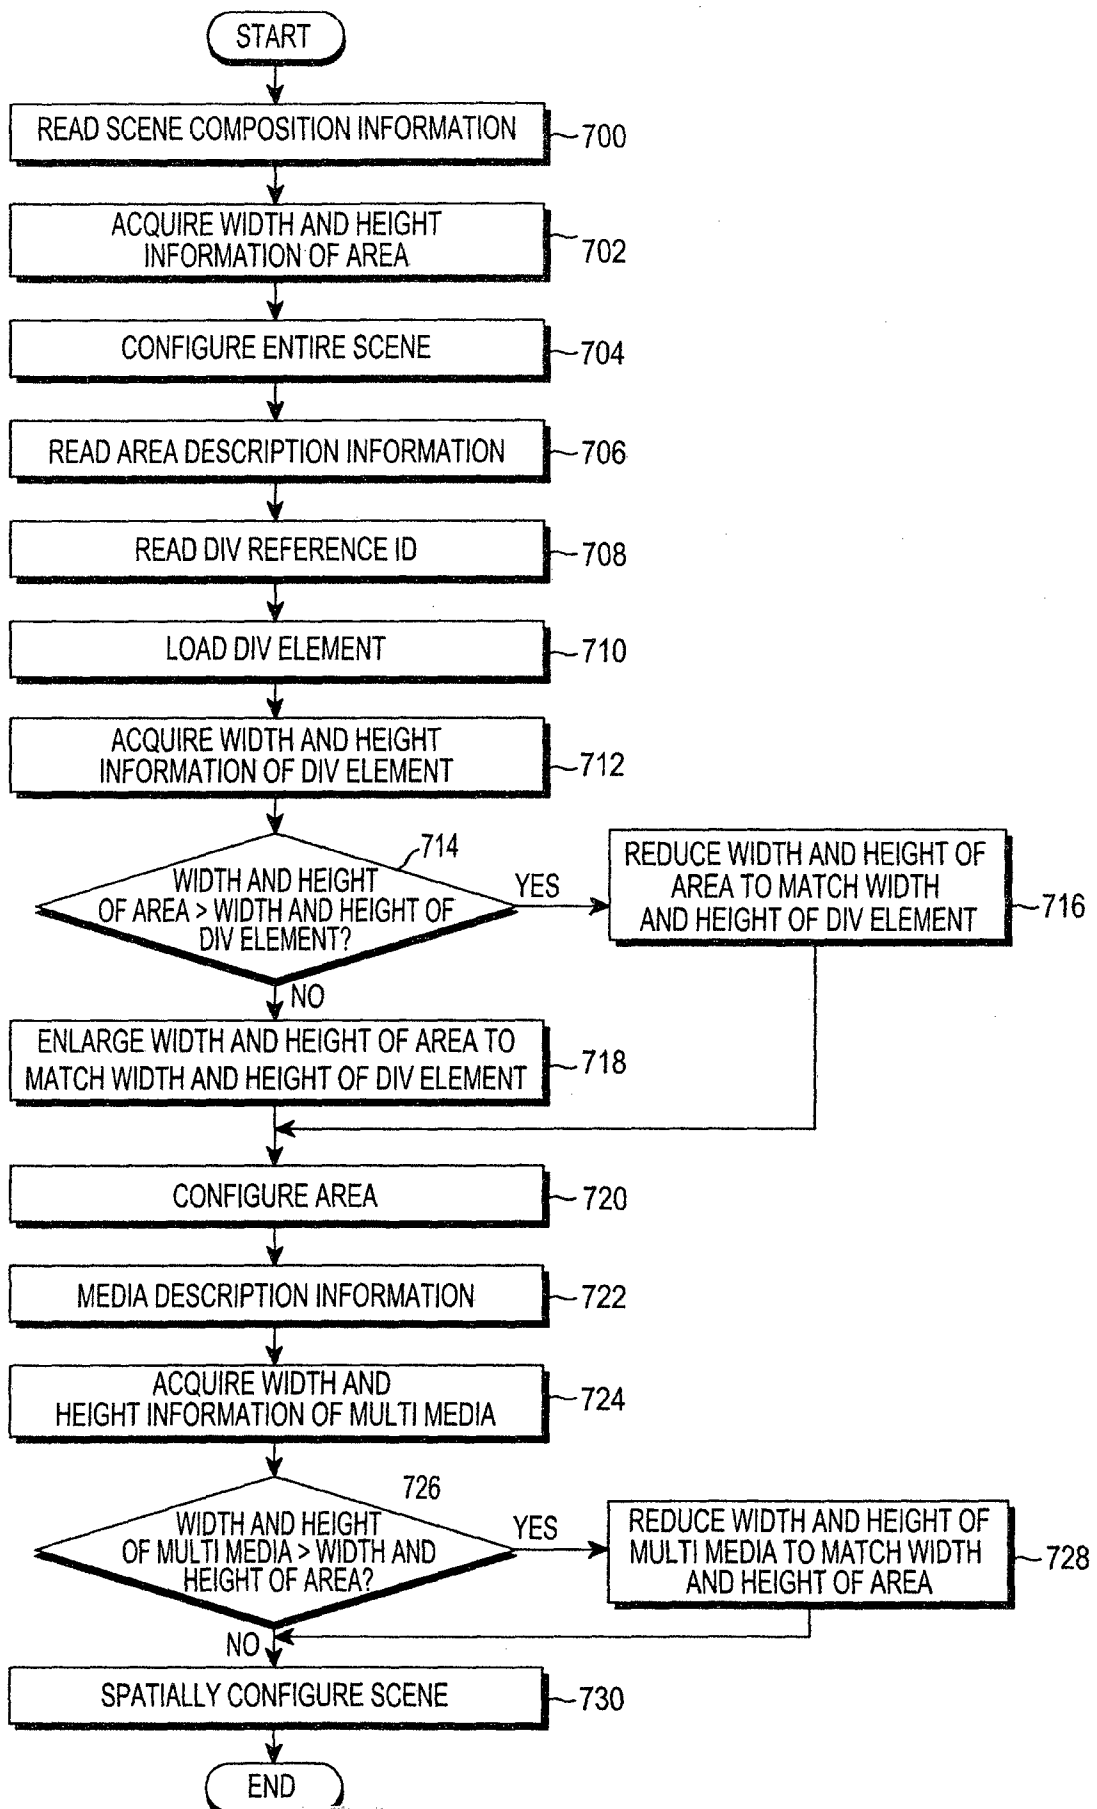

[Fig. 8A]

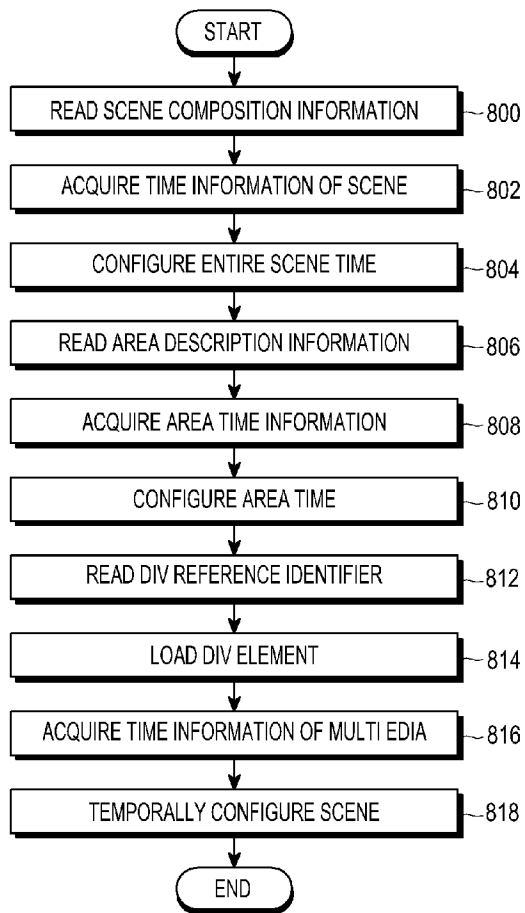


[Fig. 8B]

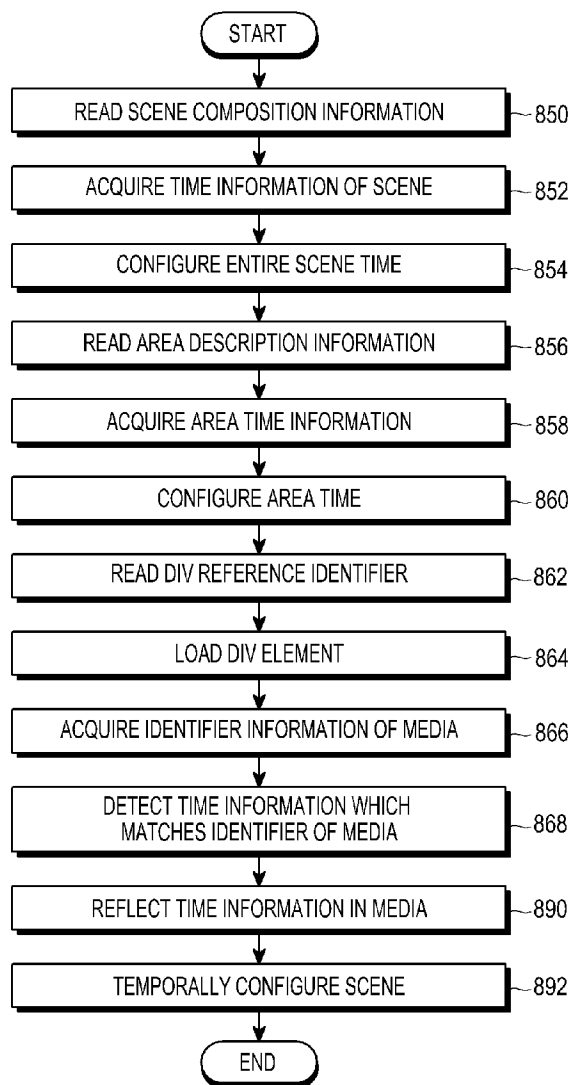


[Fig. 9]

8/9

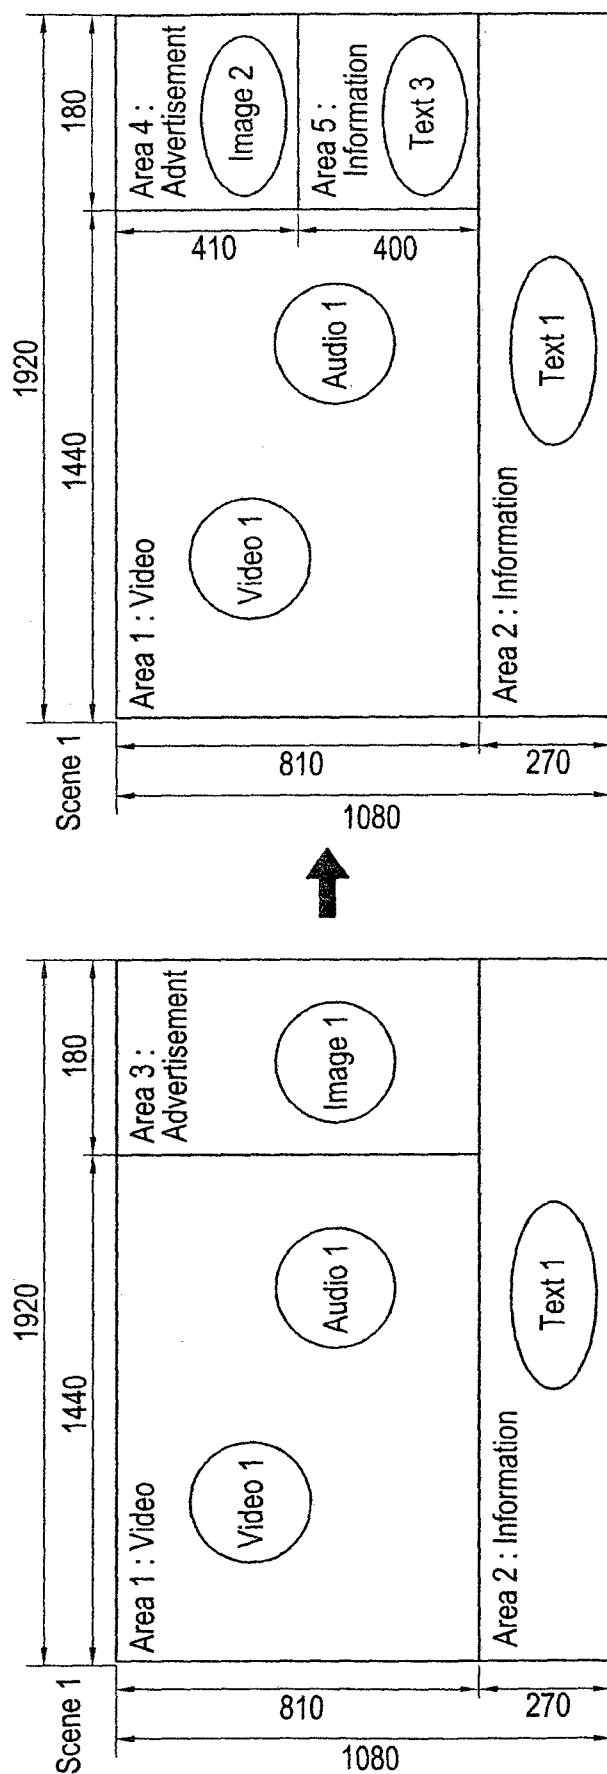


8/9/1

[Fig. 10]

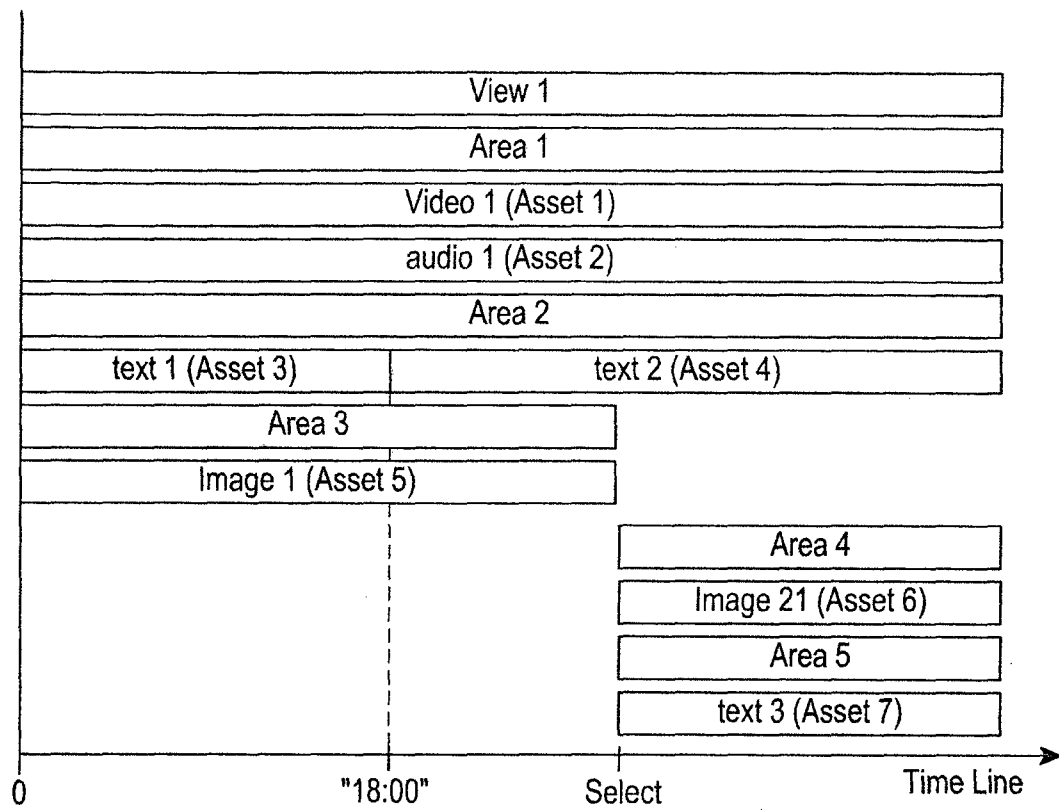

[Fig. 11]

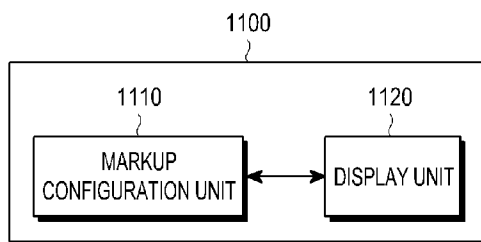

A. CLASSIFICATION OF SUBJECT MATTER**G06F 17/21(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G06F 17/21; G06F 15/16; G06F 17/00; G06F 17/30

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: markup, multimedia, composition, area description, scene composition, spatial, temporal, html, and similar terms.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2011-0060979 A1 (O'BRIEN-STRAIN, EAMONN) 10 March 2011 See paragraphs [0022], [0024]-[0026], [0031]-[0033], [0037], [0061]-[0066], and [0079]-[0081]; claim 1; and figures 2 and 10-11.	1,7-9,15-17
A		2-6,10-14
A	US 2012-0159314 A1 (SCHRIER, EVAN J. et al.) 21 June 2012 See paragraphs [0024]-[0028] and [0035]-[0036]; and figures 2 and 4.	1-17
A	US 7,725,812 B1 (BALKUS, PETER A. et al.) 25 May 2010 See column 6, line 43 - column 8, line 24; and figures 7A-7B.	1-17
A	US 2008-0028285 A1 (HOCHE, MICHAEL WALTER et al.) 31 January 2008 See paragraphs [0109]-[0110]; claim 1; and figures 11-12.	1-17
A	US 2011-0167081 A1 (KOSAKA, RYO et al.) 07 July 2011 See paragraphs [0068] and [0116]-[0121]; claim 14; and figures 4 and 12.	1-17



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

21 October 2013 (21.10.2013)

Date of mailing of the international search report

22 October 2013 (22.10.2013)

Name and mailing address of the ISA/KR


Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City,
302-701, Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

NHO, Ji Myong

Telephone No. +82-42-481-8528



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2013/006259

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011-0060979 A1	10/03/2011	CN 102084337 A DE 112008003854 T5 GB 201020315 D0 GB 2473370 A JP 2011-524035 A WO 2009-136888 A1	01/06/2011 22/06/2011 12/01/2011 09/03/2011 25/08/2011 12/11/2009
US 2012-0159314 A1	21/06/2012	None	
US 7725812 B1	25/05/2010	AU 2001-247854 A8 AU 2001-47854 A1 AU 4785401 A EP 1464009 A2 US 2004-0268224 A1 WO 01-77880 A2 WO 01-77880 A3	23/10/2001 23/10/2001 23/10/2001 06/10/2004 30/12/2004 18/10/2001 21/05/2004
US 2008-0028285 A1	31/01/2008	EP 1503299 A1 US 2005-0027677 A1 US 2008-0178070 A1 US 7594164 B2	02/02/2005 03/02/2005 24/07/2008 22/09/2009
US 2011-0167081 A1	07/07/2011	CN 102131020 A JP 2011-141598 A	20/07/2011 21/07/2011