




(86) **Date de dépôt PCT/PCT Filing Date:** 2013/08/14
(87) **Date publication PCT/PCT Publication Date:** 2014/03/06
(45) **Date de délivrance/Issue Date:** 2016/02/02
(85) **Entrée phase nationale/National Entry:** 2014/12/23
(86) **N° demande PCT/PCT Application No.:** CN 2013/081474
(87) **N° publication PCT/PCT Publication No.:** 2014/032524
(30) **Priorité/Priority:** 2012/08/30 (CN201210316048.4)

(51) **Cl.Int./Int.Cl. E06B 3/20** (2006.01),
B29C 47/00 (2006.01), **C08K 13/02** (2006.01),
C08K 7/14 (2006.01), **C08L 27/06** (2006.01),
C08L 67/02 (2006.01)

(72) **Inventeurs/Inventors:**
YANG, FEIHU, CN;
CHENG, XIANSHENG, CN;
JIANG, FENG, CN;
FAN, HUAJIN, CN;
ZHOU, HONGRONG, CN;
YIN, ZHIJUN, CN

(73) **Propriétaire/Owner:**

(54) **Titre : PROFILE PLASTIQUE A RENFORCEMENT PROPRE ET SON PROCEDE DE PRODUCTION**
(54) **Title: SELF-ENHANCEMENT PLASTIC PROFILE AND PRODUCTION METHOD THEREOF**

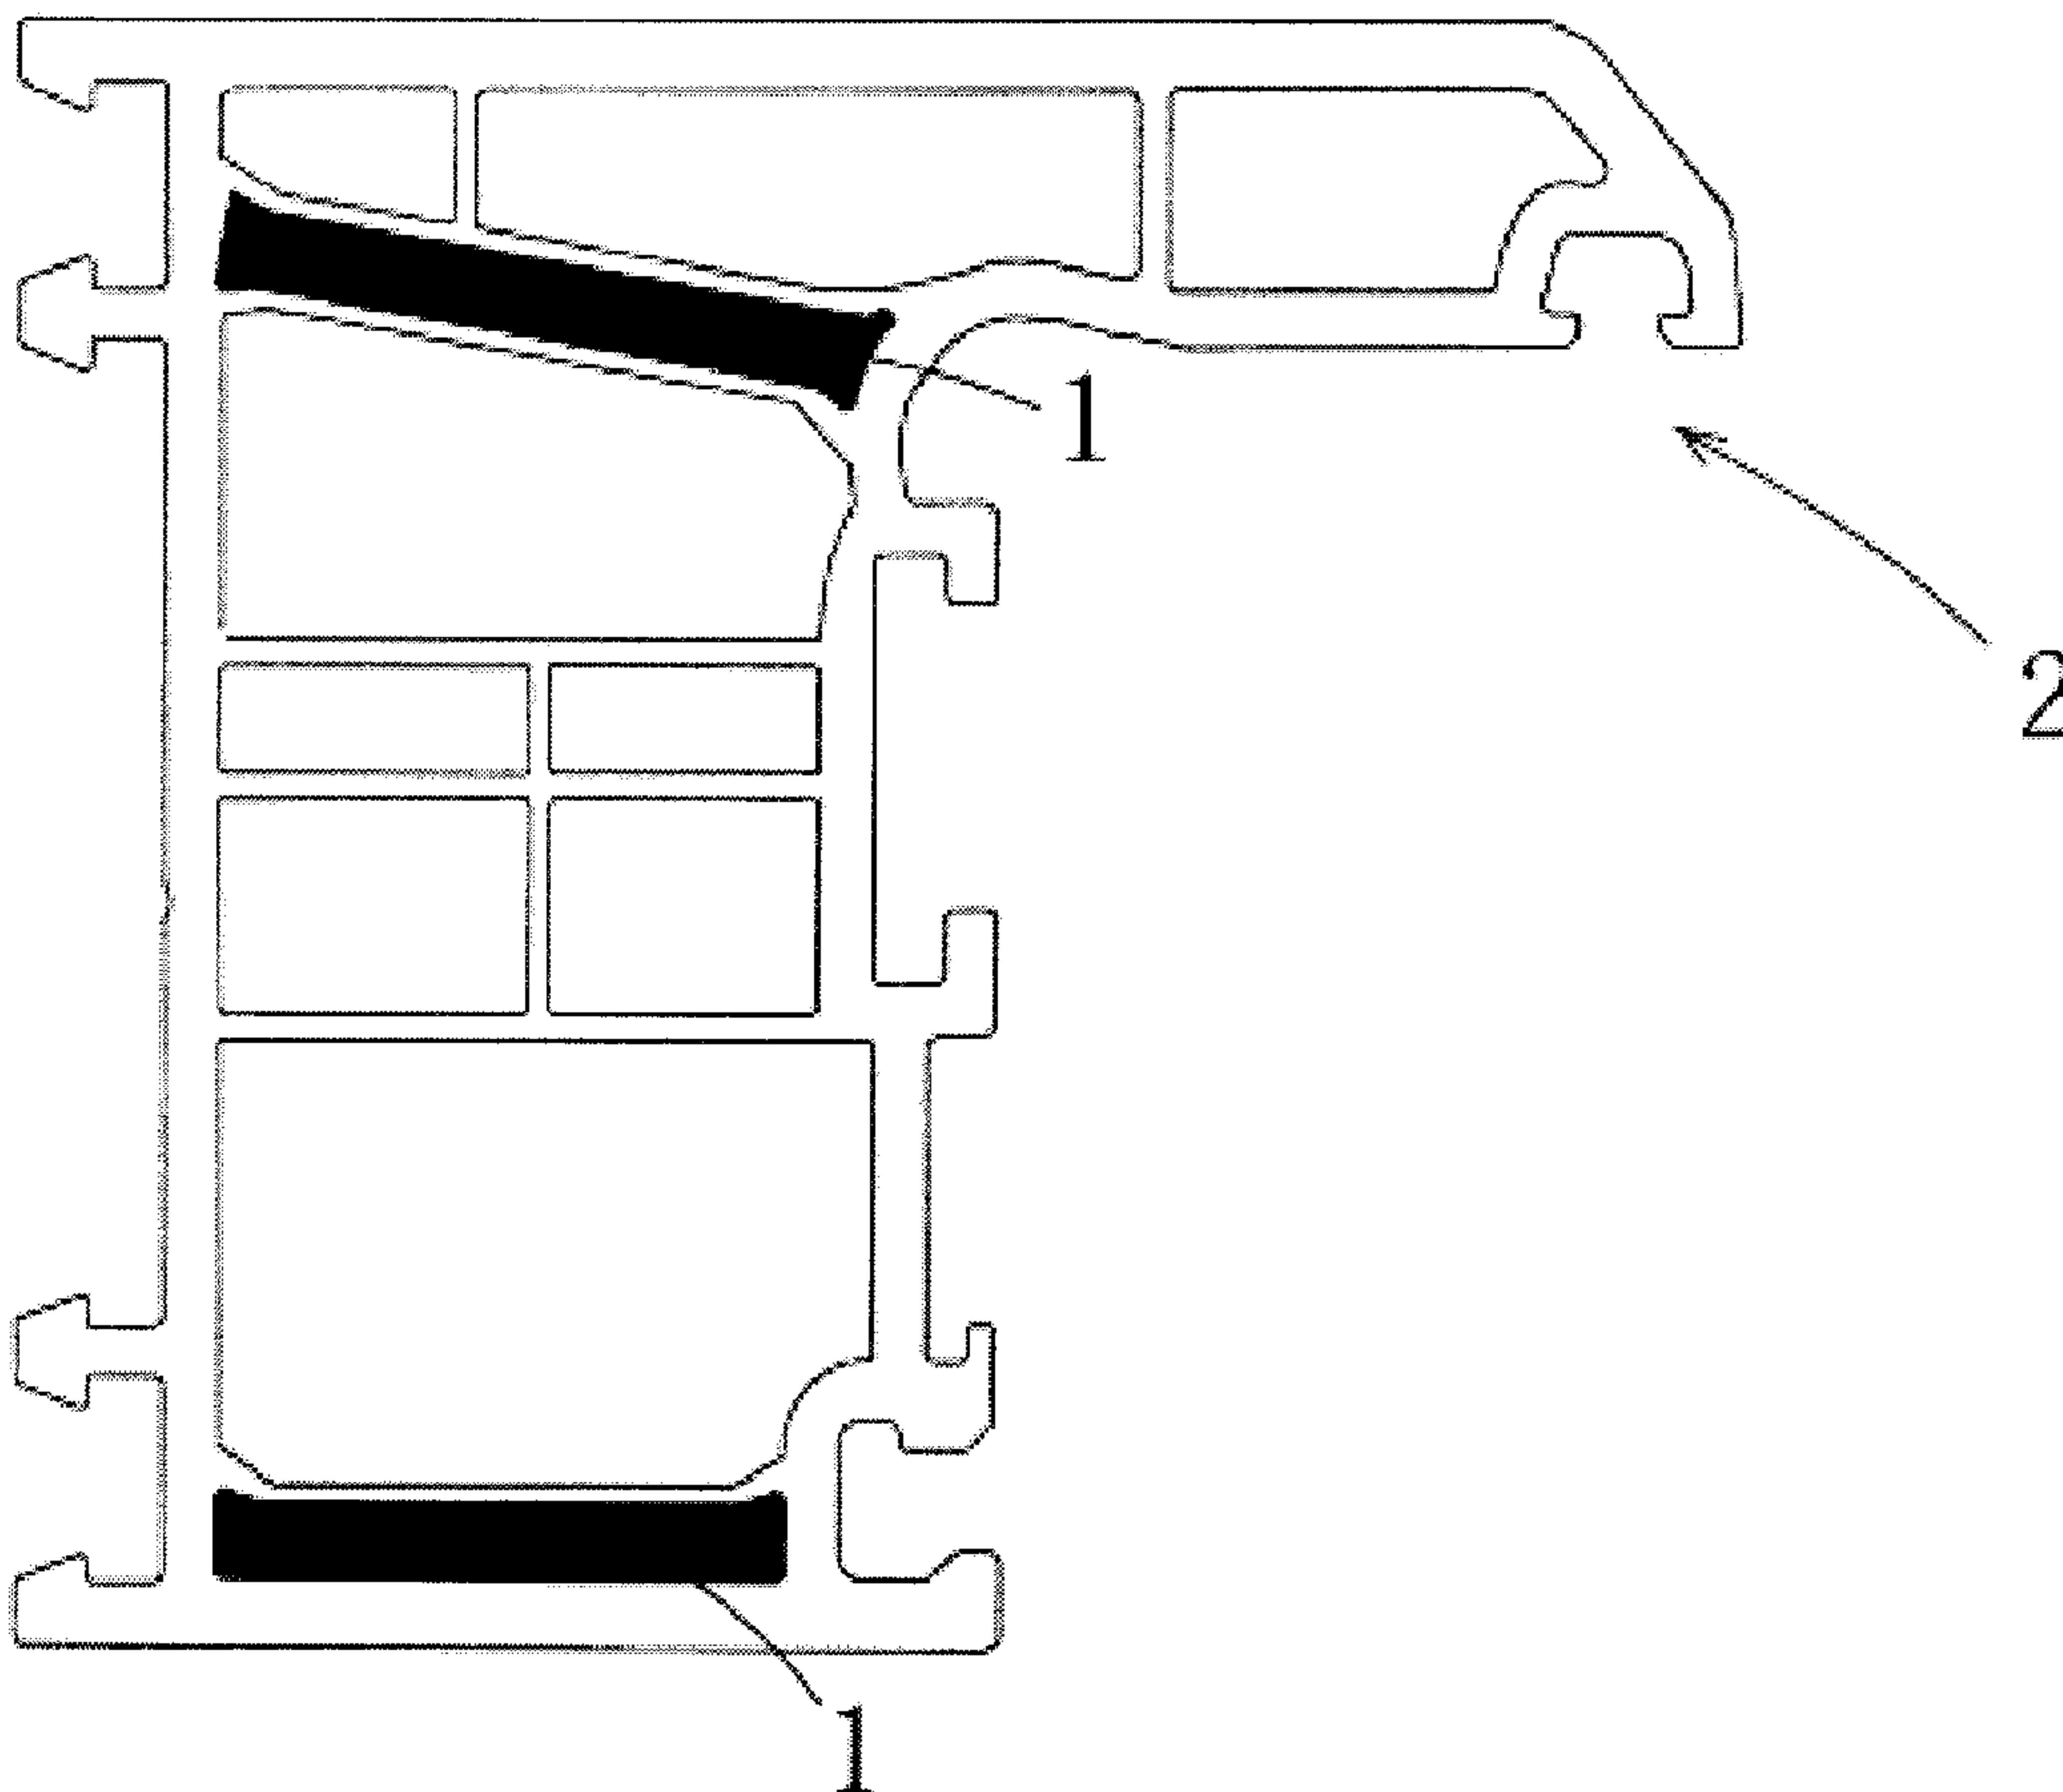

(57) **Abrégé/Abstract:**

The present invention provides a self-enhancement plastic profile and a production method thereof. The self-enhancement plastic profile is made by co-extrusion a substrate resin and a PBT resin containing fiber glass. The production method of the self-



(73) **Propriétaires(suite)/Owners(continued)**:DALIAN SHIDE SCIENCE & TECHNOLOGY DEVELOPMENT CO., LTD., CN

(74) **Agent**: SMART & BIGGAR

(57) **Abrégé(suite)/Abstract(continued)**:

enhancement plastic profile is that: melting and co-extrusion of the substrate resin and the PBT resin containing fiber glass. Infrastructures comprise a main engine and an auxiliary engine vertically arranged to the main engine. The main engine processes the PVC substrate (1), the auxiliary engine processes an enhancement bar (2) of the PBT resin containing fiberglass, the raw materials are extruded by the main engine and the auxiliary engine at the same and the extrudate is pre-profiled, and subjected to cold cutting and sized. The enhancement bar (2) is made by blending the fiberglass with the polybutylene terephthalate (PBT) plastic. The self-enhancement plastic profile has advantages of simple, convenient and quick installation and convenient to produce.

ABSTRACT

The present invention provides a self-enhancement plastic profile and a production method thereof. The self-enhancement plastic profile is made by co-extrusion a substrate resin and a PBT resin containing fiber glass. The production method of the self-enhancement plastic profile is that:
5 melting and co-extrusion of the substrate resin and the PBT resin containing fiber glass. Infrastructures comprise a main engine and an auxiliary engine vertically arranged to the main engine. The main engine processes the PVC substrate (1), the auxiliary engine processes an enhancement bar (2) of the PBT resin containing fiberglass, the raw materials are extruded by the main engine and the auxiliary engine at the same and the extrudate is pre-profiled, and subjected to
10 cold cutting and sized. The enhancement bar (2) is made by blending the fiberglass with the polybutylene terephthalate (PBT) plastic. The self-enhancement plastic profile has advantages of simple, convenient and quick installation and convenient to produce.

15

20

25

30

53610-7

DESCRIPTION**SELF-ENHANCEMENT PLASTIC PROFILE AND PRODUCTION METHOD THEREOF****5 FIELD OF THE INVENTION**

The present invention relates to an organic high molecular compound; preparation or chemical processing of the organic high molecular compound; and a composition taking the organic high molecular compound as a substrate.

10 BACKGROUND OF THE INVENTION

Doors and windows on a building sustain the influences from the environment which are mainly wind pressure and invasion of rain and snow, and also sustain the opening and closing force while in use as well as self gravity. The wind force is the main reason that enables the rod pieces (cross bar, vertical stile and window lattice serving as lattice profiles), frames and sashes to bend
15 and deform. Safety of the doors and windows are mainly decided by the ability of the doors and windows for sustaining the wind force, and is usually measured according to the gas pressure value sustained in unit area.

The mechanical properties of rigid PVC plastic which is namely a PVC profile is far poorer than that of steel, aluminum and wood. Particularly, the bending strength of the PCV profile is only
20 1/4 of that of the wood product, 1/28 of that of the aluminum product and 1/84 of that of the steel product; under the same section shape and size, the bending property of the PVC profiled bar is much poorer than that of the aluminum profiled bar and the steel profiled bar. In order to makeup this defect, one important measure is to additionally arrange steel enhancement profiled bar which is namely a steel lining in the empty cavity of the PVC profile.

25 Additionally arranging the steel lining can solve the problem of insufficient intensity of the PVC profile, but also brings some negative defects.

Usually, the steel linings and the PVC profiles are separately stored. When installing the doors and windows, the installation personnel needs to fix the steel linings and the PVC profiles in the job site, thus increasing the assembling procedure of installing the doors and windows. Moreover, the
30 site installation personnel need to have corresponding technologies and proficiency. Consumption

of a number of steel products causes severe wastes inevitably. Moreover, there are certain requirements for storage and transportation of the steel products, for example, attention needs to be paid to water prevention, keeping cleanness of the steel products, and keeping far away from articles having corrosion effect, and the like. More importantly, because the steel lining is metal
 5 which is a good conductor of heat, the heat transfer coefficient of the PVC doors and windows is increased, and the thermal insulation performance of the PVC doors and windows is reduced, which is not beneficial for thermal insulation and energy conservation.

SUMMARY OF THE INVENTION

10 Due to the adoption of the technical scheme, this invention provides a self-enhancement plastic profile, comprising: a plastic profile substrate and at least one enhancement bar integrally formed with the plastic profile substrate to increase the intensity of the profile.

The enhancement bar is arranged inside the profile substrate.

The enhancement bar is a PBT resin added with fiberglass.

15 The self-enhancement plastic profile is made by co-extrusion of a substrate resin with a PBT resin containing fiberglass, wherein the composition of the substrate resin is:

raw material name	mass fraction
PVC	100
stabilizer	3-8
modifier	4-11
stain	3-6
filler	5-10
processing agent	1-4
pigment	0.015-0.045

wherein, the stabilizer is a lead based stabilizer, a calcium/zinc stabilizer or an organic tin stabilizer; the modifier is a CPE modifier or an acrylic ester modifier; the stain is titanium dioxide; the filler is kaolin, wollastonite, calcium carbonate or talc powder; the processing agent is acrylic
 20 ester; and the pigment is ultramarine or phthalocyanine blue;

the PBT resin containing fiberglass is made by blending the fiberglass with the PBT material, wherein the raw materials and proportion compositions of the PBT resin are:

53610-7

raw material name	mass ratio (%)
PBT material	45-75
enhanced fiberglass	25-55

A method for producing the self-enhancement plastic profile, wherein the self-enhancement plastic profile is made by melting and co-extrusion of a substrate resin with the PBT resin containing fiberglass; the raw material formulation of the substrate resin is:

raw material name	mass fraction
PVC	100
stabilizer	3-8
modifier	4-11
stain	3-6
filler	5-10
processing agent	1-4
pigment	0.015-0.045

The main raw materials of an intermediate enhancement material co-extrusion layer and their proportions are:

raw material name	mass ratio (%)
PBT material	45-75
enhanced fiberglass	25-55

The production process is that: infrastructures comprise a main engine and an auxiliary engine vertically arranged to the main engine; the PVC profile is processed by the main engine; the enhancement bar of the PBT resin containing fiberglass is processed by the auxiliary engine; the raw materials are extruded by the main engine and the auxiliary engine at the same, the extrudate is pre-profiled and subjected to cold cutting and sized; the enhancement bar is made by blending the fiberglass with PBT plastic.

The main engine is a double screw plastic extruder, wherein the inside of the extruder has six heating zones: the heating temperatures of each heating zone are respectively that:

zone I: 172-176°C, zone II: 175-180°C, zone III: 176-183°C, zone IV: 182-187°C, zone V: 184-190°C, zone VI: 172-176°C;

the temperature in an adapter is 185-195°C;

53610-7PPH

the rotating speed of an extrusion screw in the main engine is 7-9 rpm, and the rotating speed of a feeding screw is 18-25 rpm, the torque is: 32-39%, and the melting pressure is 310-330 bar. The auxiliary engine is a single screw plastic extruder;

5 The auxiliary engine has three heating zones, wherein the heating temperatures of each heating zone are respectively: zone I: 220-240°C, zone II: 220-240°C, zone III: 220-240°C;

the temperature in an adapter is 220-240°C;

10 The auxiliary engine has two co-extrusion heads in total, wherein the heating temperature of the co-extrusion head I is 220-240°C, and the heating temperature of the co-extrusion head II is 220-240°C; temperature parameters of a die head: zone I: 185-200°C, zone II: 185-200°C, zone III: 185-200°C, and zone IV: 185-200°C.

15 Because the foregoing technical solution is adopted, the self-enhancement plastic profile provided by the present invention is a plastic profile having the advantages of simple, convenient and quick installation, low requirement on the technical proficiency of the site installation personnel, convenience in storage, better heat insulation performance, energy conservation and environment protection. The self-enhancement plastic profile not only is convenient to produce, but also has a very low cost and is suitable for wide popularization.

20 This invention as claimed relates to a method for producing a self-enhancement plastic profile, wherein the self-enhancement plastic profile is made by melting and co-extrusion of a PVC resin substrate and a PBT resin containing fiberglass; the PVC resin substrate is used to manufacture a plastic profile substrate; the raw material formulation of the PVC resin substrate is:

53610-7PPH

raw material name	mass fraction
PVC	100
stabilizer	3-8
modifier	4-11
stain	3-6
filler	5-10
processing agent	1-4
pigment	0.015-0.045

wherein, the stabilizer is a lead based stabilizer, a calcium/zinc stabilizer or an organic tin stabilizer; the modifier is a CPE modifier or an acrylic ester modifier; the stain is titanium dioxide; the filler is kaolin, wollastonite, calcium carbonate or talc powder; the processing agent is acrylic ester; and the pigment is ultramarine or phthalocyanine blue; the PBT resin

5 containing fiberglass is used to manufacture an enhancement bar which is arranged inside the plastic profile substrate and increases the intensity of the profile; the raw material formulation of the PBT resin containing fiberglass is:

raw material name	mass ratio (%)
PBT material	45-75
enhanced fiberglass	25-55

the PVC resin substrate is processed by a main engine; the enhancement bar of the PBT resin containing fiberglass is processed by an auxiliary engine vertically arranged to the main

10 engine; the raw materials are extruded by the main engine and the auxiliary engine at the same time and the extrudate is pre-profiled, and subjected to cold cutting and sized; the main engine is a double screw plastic extruder, wherein the inside of the extruder has six heating zones and an adapter: the heating temperatures of each heating zone are respectively that: zone I: 172-176°C, zone II: 175-180°C, zone III: 176-183°C, zone IV: 182-187°C, zone V: 184-190°C, 15 zone VI: 172-176°C; the temperature in the adapter is 185-195°C; the rotating speed of an extrusion screw in the main engine is 7-9 rpm, and the rotating speed of a feeding screw is 18-25 rpm, the torque is: 32 - 39%, and the melting pressure is 310-330 bar; the auxiliary engine is a single screw plastic extruder; the auxiliary engine has three heating zones and an adapter, wherein the heating temperatures of each heating zone are respectively: zone I: 220-240°C,

53610-7PPH

zone II: 220-240°C, zone III: 220-240°C; the temperature in the adapter is 220-240°C; the auxiliary engine has a co-extrusion head I and a co-extrusion head II, wherein the heating temperature of the co-extrusion head I is 220-240°C, and the heating temperature of the co-extrusion head II is 220-240°C; temperature parameters of a die head: zone I: 185-200°C,
5 zone II: 185-200°C, zone III: 185-200°C, and zone IV: 185-200°C.

BRIEF DESCRIPTION OF THE DRAWINGS

In order to illustrate the technical solutions in the embodiments of the present invention or the prior art more clearly, the accompanying drawings used in the descriptions of the embodiments or the prior art will be described simply hereunder. Apparently, the
10 accompanying drawings described hereunder are merely some embodiments of the present invention. Those having ordinary skills in the art may also figure out other accompanying drawings according to the accompanying drawings without going through any creative work.

Fig. 1 is a flow schematic view of a production process according to the present invention.

15 Fig. 2 is a sectional view of a profile produced according to the present invention.

In the drawings, 1 refers to a substrate and 2 refers to an enhancement material co-extrusion layer.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

53610-7

To make the objective, technical solution and advantages of the present invention more clear, the technical solution in the embodiments of the present invention is further described in details by reference to the drawings and embodiments hereunder.

The sections of the profiled bars produced in each embodiment are as shown in Fig. 2.

5 Embodiment 1

The raw materials of the base material with PVC as a main part and their proportions are as follows:

Raw material name	Mass fraction
PVC	100
Stabilizer	5
Modifier	7
Stain	4
Filler	9
Processing agent	1
Pigment	0.02

The main raw materials of intermediate enhancement material co-extrusion layer and their proportions are as follows:

Raw material name	Mass ratio (%)
PBT material	71
Enhanced fiberglass	29

10 The stabilizer is a lead based stabilizer or a calcium/zinc stabilizer; the modifier is acrylic ester; the stain is titanium dioxide; the filler is calcium carbonate or wollastonite; the processing agent is acrylic ester; and the pigment is ultramarine.

The main engine is a double screw plastic extruder, wherein the extruder has six heating zones and an adapter, and the working temperatures of each heating zone and the adapter are as

15 follows:

Heating zone	Temperature (degree celsius °C)
Zone I	175
Zone II	177
Zone III	180

53610-7

Zone IV	186
Zone V	184
Zone VI	176
Adapter	190

The rotating speed of an extrusion screw in the main engine is 7 rpm, and the rotating speed of a feeding screw is 18 rpm, the torque is 32%, and the melting pressure is 310 bar.

The auxiliary engine is a single screw plastic extruder, and the auxiliary engine has three heating zones, two co-extrusion heads and one die head, wherein:

temperature of zone I is 220°C, the temperature of zone II is 220°C, the temperature of zone III is 220°C; the temperature of the adapter is 220°C.

The auxiliary engine has two co-extrusion heads in total, wherein the heating temperature of the co-extrusion head I is 220°C, and the heating temperature of the co-extrusion head II is: 220°C. Temperature parameters of the die head are that: the temperature of zone I is 185°C, the temperature of zone II is 190°C, the temperature of zone III is 190°C, and the temperature of zone IV is 190°C.

Embodiment 2

The raw materials of base material with PVC as a main part and their proportions are as follows:

Raw material name	Mass fraction
PVC	100
Stabilizer	6
Modifier	9
Stain	6
Filler	7
Processing agent	2
Pigment	0.03

The main raw materials of an intermediate enhancement material co-extrusion layer and their proportions are as follows:

Raw material name	Mass ratio (%)
PBT material	68
Enhanced fiberglass	32

53610-7

The stabilizer is a lead based stabilizer or a calcium/zinc stabilizer; the modifier is acrylic ester, the stain is titanium dioxide; the filler is calcium carbonate or wollastonite; the processing agent is acrylic ester; and the pigment is ultramarine.

The main engine is a double screw plastic extruder, wherein the extruder has six heating zones and an adapter, and the working temperatures of each heating zone and the adapter are as follows:

Heating zone	Temperature (degree celsius °C)
Zone I	176
Zone II	180
Zone III	183
Zone IV	185
Zone V	190
Zone VI	173
Adapter	195

The rotating speed of an extrusion screw in the main engine is 9 rpm, and the rotating speed of a feeding screw is 25 rpm, the torque is 39%, and the melting pressure is 330 bar.

The auxiliary engine is a single screw plastic extruder, and the auxiliary engine has three heating zones, two co-extrusion heads and one die head, wherein:

temperature of zone I is 240°C, the temperature of zone II is 240°C, the temperature of zone III is: 240°C, the temperature of the adapter is 240°C.

The auxiliary engine has two co-extrusion heads in total, wherein the heating temperature of the co-extrusion head I is 240°C, and the heating temperature of the co-extrusion head II is 240°C. Temperature parameters of the die head are that: the temperature of zone I is 200°C, the temperature of zone II is 200°C, the temperature of zone III is 200°C, and the temperature of zone IV is 200.

Embodiment 3

The raw materials of base material with PVC as a main part and their proportions are as follows:

Raw material name	Mass fraction
PVC	100
Stabilizer	3
Modifier	6

Stain	9
Filler	8
Processing agent	1.5
Pigment	0.035

The main raw materials of an intermediate enhancement material co-extrusion layer and their proportions are as follows:

Raw material name	Mass ratio (%)
PBT material	74
Enhanced fiberglass	26

wherein, the stabilizer is an organic tin stabilizer; the modifier is an acrylic ester modifier; the stain is titanium dioxide; the filler is calcium carbonate or talc powder; the processing agent is acrylic ester; and the pigment is phthalocyanine blue.

The main engine is a double screw plastic extruder, wherein the extruder has six heating zones and an adapter, and the working temperatures of each heating zone and the adapter are as follows:

Heating zone	Temperature (degree celsius °C)
Zone I	172
Zone II	175
Zone III	176
Zone IV	182
Zone V	184
Zone VI	173
Adapter	185

The rotating speed of an extrusion screw in the main engine is 8 rpm, and the rotating speed of a feeding screw is 23 rpm, the torque is 37%, and the melting pressure is 320bar.

The auxiliary engine is a single screw plastic extruder, and the auxiliary engine has three heating zones, two co-extrusion heads and one die head, wherein:

temperature of zone I is 230°C, the temperature of zone II is 230°C, the temperature of zone III is: 230°C, the temperature of the adapter is 230°C.

The auxiliary engine has two co-extrusion heads in total, wherein the heating temperature of the co-extrusion head I is 240°C, and the heating temperature of the co-extrusion head II is 240°C.

53610-7

Temperature parameters of the die head are that: the temperature of zone I is 185°C, the temperature of zone II is 185°C, the temperature of zone III is 185°C, and the temperature of zone IV is 185°C.

Embodiment 4

The raw materials of base material with PVC as a main part and their proportions are as follows:

Raw material name	Mass fraction
PVC	100
Stabilizer	3
Modifier	11
Stain	9
Filler	5
Processing agent	1
Pigment	0.025

The main raw materials of an intermediate enhancement material co-extrusion layer and their proportions are as follows:

Raw material name	Mass ratio (%)
PBT material	65
Enhanced fiberglass	35

wherein, the stabilizer is an organic tin stabilizer; the modifier is a CPE modifier; the stain is titanium dioxide; the filler is kaolin or wollastonite; the processing agent is acrylic ester; and the pigment is phthalocyanine blue.

The main engine is a double screw plastic extruder, wherein the extruder has six heating zones and an adapter, and the working temperatures of each heating zone and the adapter are as follows:

Heating zone	Temperature (degree celsius °C)
Zone I	173
Zone II	179
Zone III	182
Zone IV	185
Zone V	189

53610-7

Zone VI	176
Adapter	194

The rotating speed of an extrusion screw in the main engine is 8 rpm, and the rotating speed of a feeding screw is 23 rpm, the torque is 36%, and the melting pressure is 320 bar.

The auxiliary engine is a single screw plastic extruder, and the auxiliary engine has three heating zones, two co-extrusion heads and one die head, wherein:

5 the temperature of zone I is 230°C, the temperature of zone II is 230°C, the temperature of zone III is: 230°C, the temperature of the adapter is 230°C.

The auxiliary engine has two co-extrusion heads in total, wherein the heating temperature of the co-extrusion head I is 240°C, and the heating temperature of the co-extrusion head II is 240°C. Temperature parameters of the die head are that: the temperature of zone I is 185°C, the temperature
10 of zone II is 185°C, the temperature of zone III is 185°C, and the temperature of zone IV is 185°C.

The foregoing descriptions are merely preferred embodiments of the present invention, but are not intended to limit the scope of the appended claims.

15

53610-7PPH

CLAIMS:

1. A method for producing a self-enhancement plastic profile, wherein the self-enhancement plastic profile is made by melting and co-extrusion of a PVC resin substrate and a PBT resin containing fiberglass; the PVC resin substrate is used to manufacture a plastic
 5 profile substrate; the raw material formulation of the PVC resin substrate is:

raw material name	mass fraction
PVC	100
stabilizer	3-8
modifier	4-11
stain	3-6
filler	5-10
processing agent	1-4
pigment	0.015-0.045

wherein, the stabilizer is a lead based stabilizer, a calcium/zinc stabilizer or an organic tin stabilizer; the modifier is a CPE modifier or an acrylic ester modifier; the stain is titanium dioxide; the filler is kaolin, wollastonite, calcium carbonate or talc powder; the processing agent is acrylic ester; and the pigment is ultramarine or phthalocyanine blue;

10 the PBT resin containing fiberglass is used to manufacture an enhancement bar which is arranged inside the plastic profile substrate and increases the intensity of the profile; the raw material formulation of the PBT resin containing fiberglass is:

raw material name	mass ratio (%)
PBT material	45-75
enhanced fiberglass	25-55

the PVC resin substrate is processed by a main engine; the enhancement bar of the PBT resin containing fiberglass is processed by an auxiliary engine vertically arranged to
 15 the main engine; the raw materials are extruded by the main engine and the auxiliary engine at the same time and the extrudate is pre-profiled, and subjected to cold cutting and sized;

53610-7PPH

the main engine is a double screw plastic extruder, wherein the inside of the extruder has six heating zones and an adapter: the heating temperatures of each heating zone are respectively that: zone I: 172-176°C, zone II: 175-180°C, zone III: 176-183°C, zone IV: 182-187°C, zone V: 184-190°C, zone VI: 172-176°C; the temperature in the adapter is 5 185-195°C; the rotating speed of an extrusion screw in the main engine is 7-9 rpm, and the rotating speed of a feeding screw is 18-25 rpm, the torque is: 32 - 39%, and the melting pressure is 310-330 bar;

the auxiliary engine is a single screw plastic extruder; the auxiliary engine has three heating zones and an adapter, wherein the heating temperatures of each heating zone are 10 respectively: zone I: 220-240°C, zone II: 220-240°C, zone III: 220-240°C; the temperature in the adapter is 220-240°C; the auxiliary engine has a co-extrusion head I and a co-extrusion head II, wherein the heating temperature of the co-extrusion head I is 220-240°C, and the heating temperature of the co-extrusion head II is 220-240°C; temperature parameters of a die head: zone I: 185-200°C, zone II: 185-200°C, zone III: 185-200°C, and zone IV: 185-200°C.

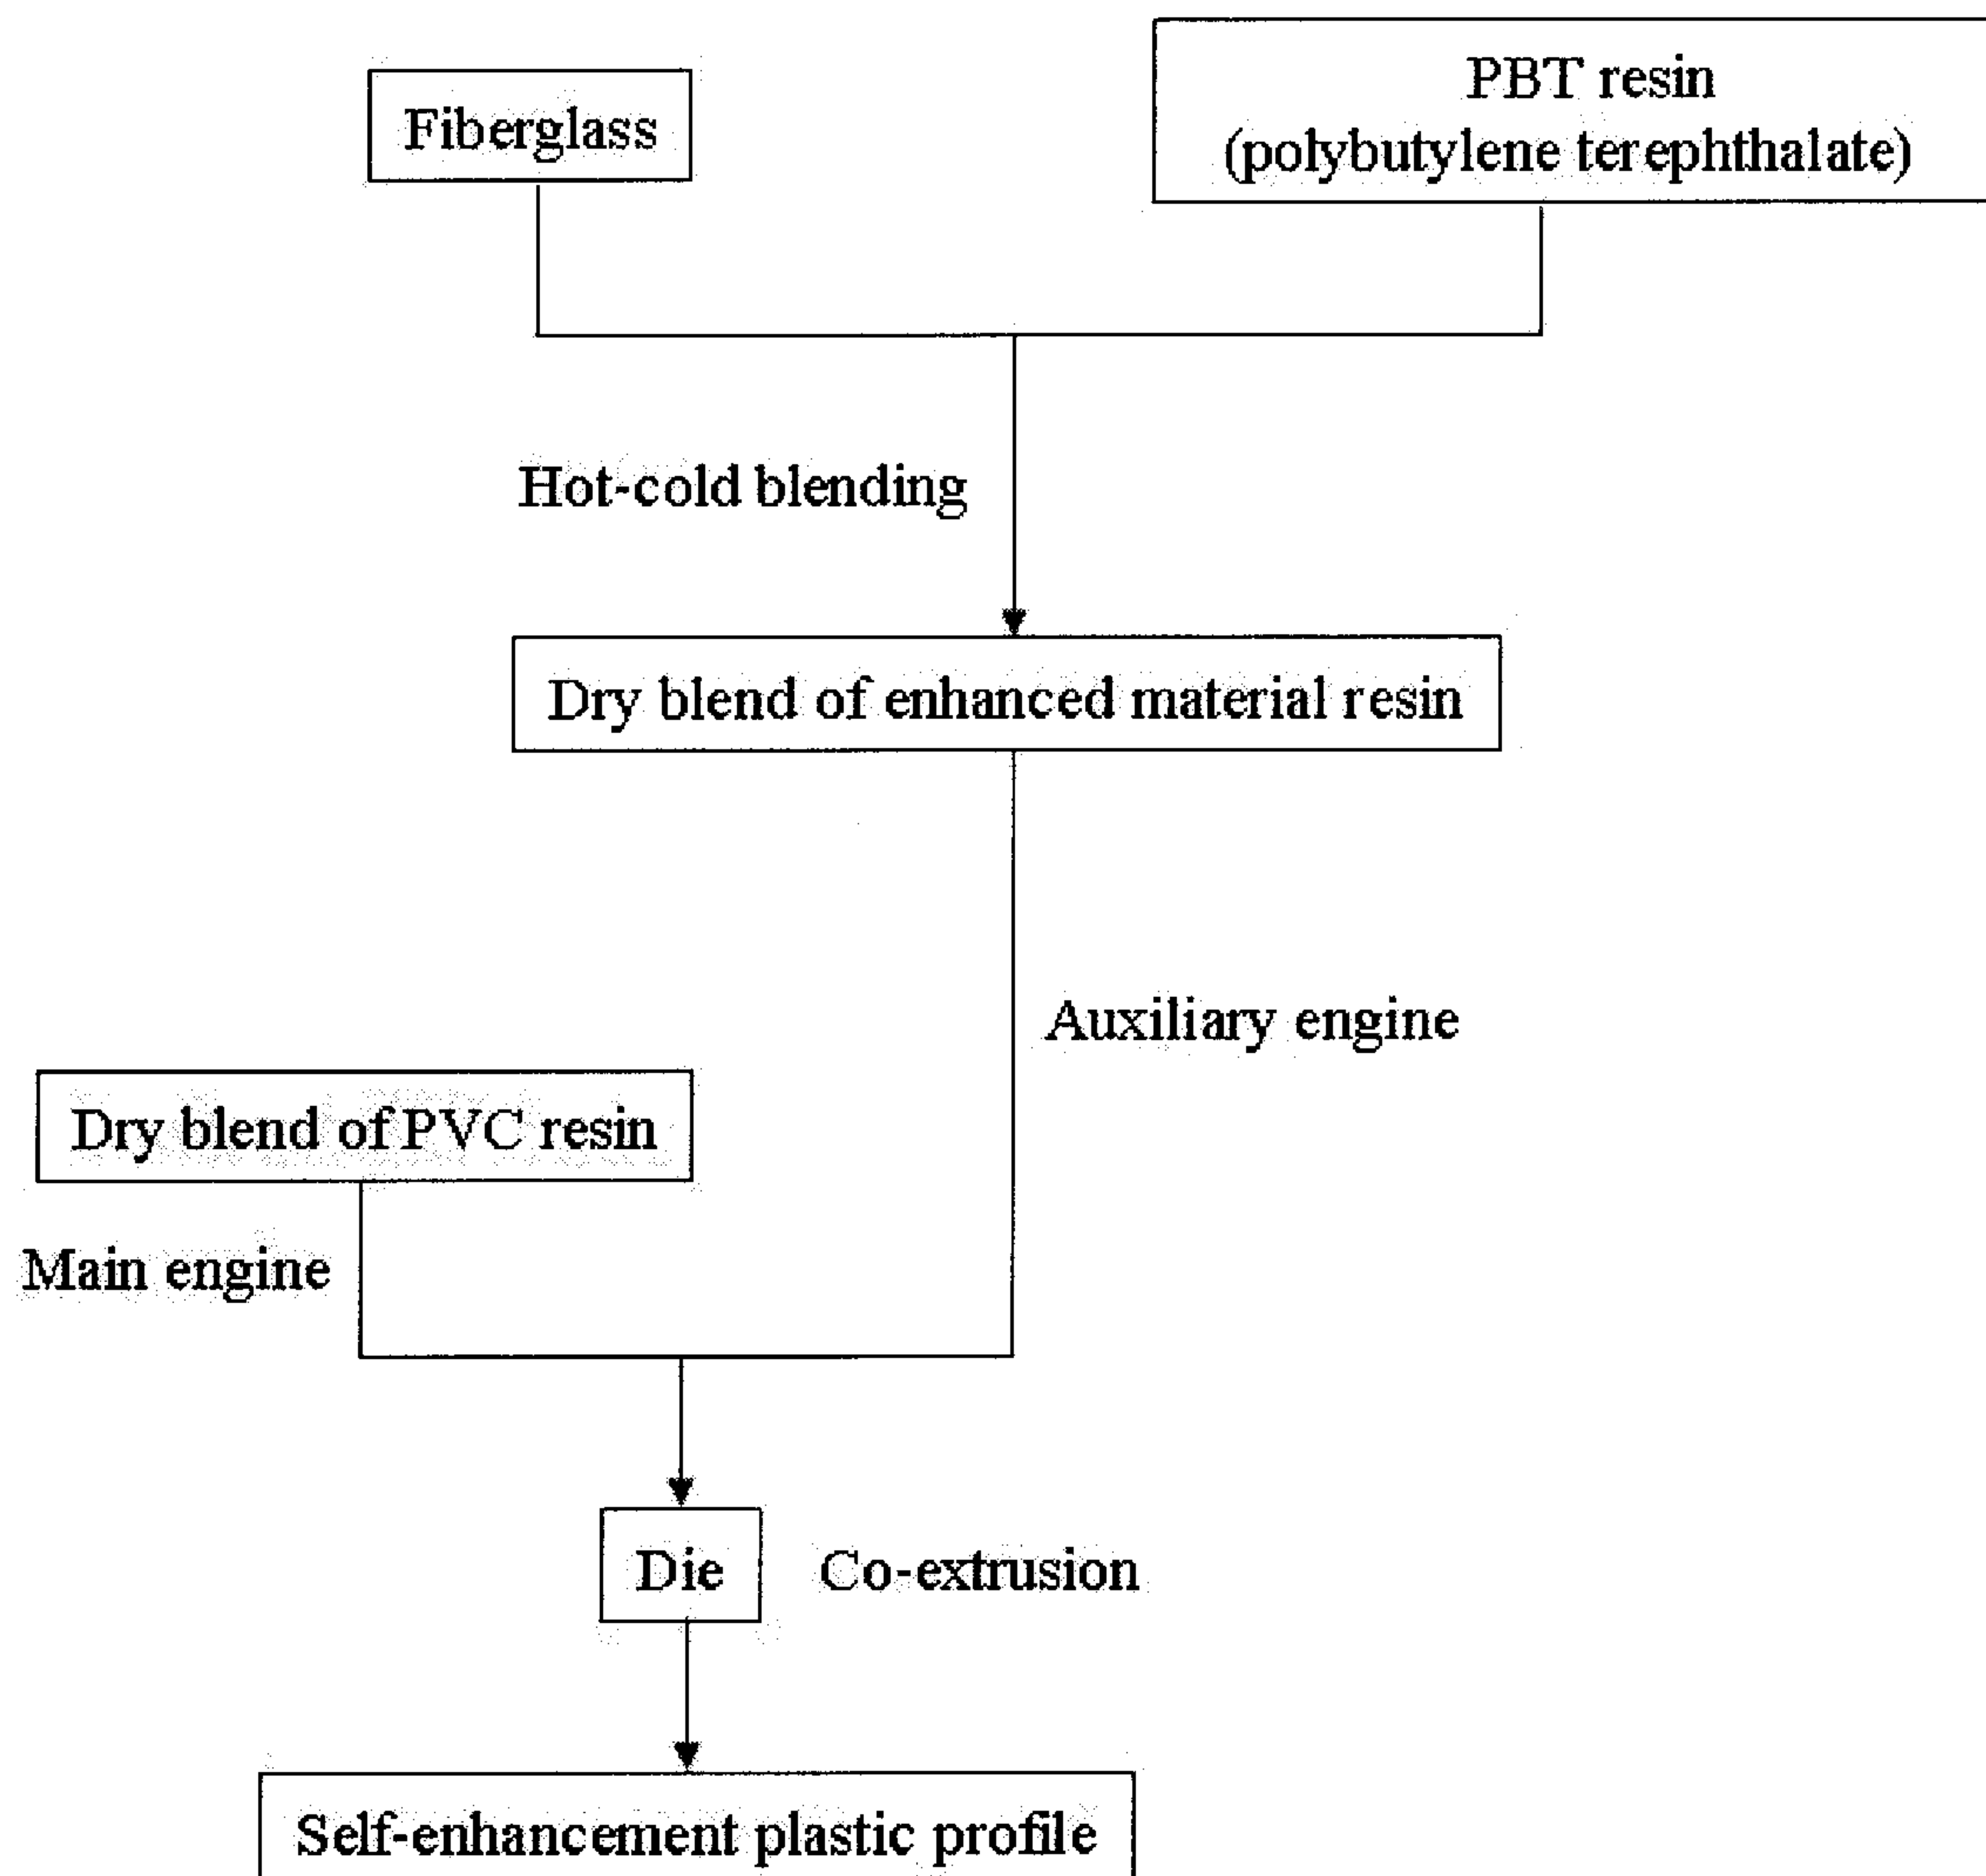
DRAWING

Fig. 1

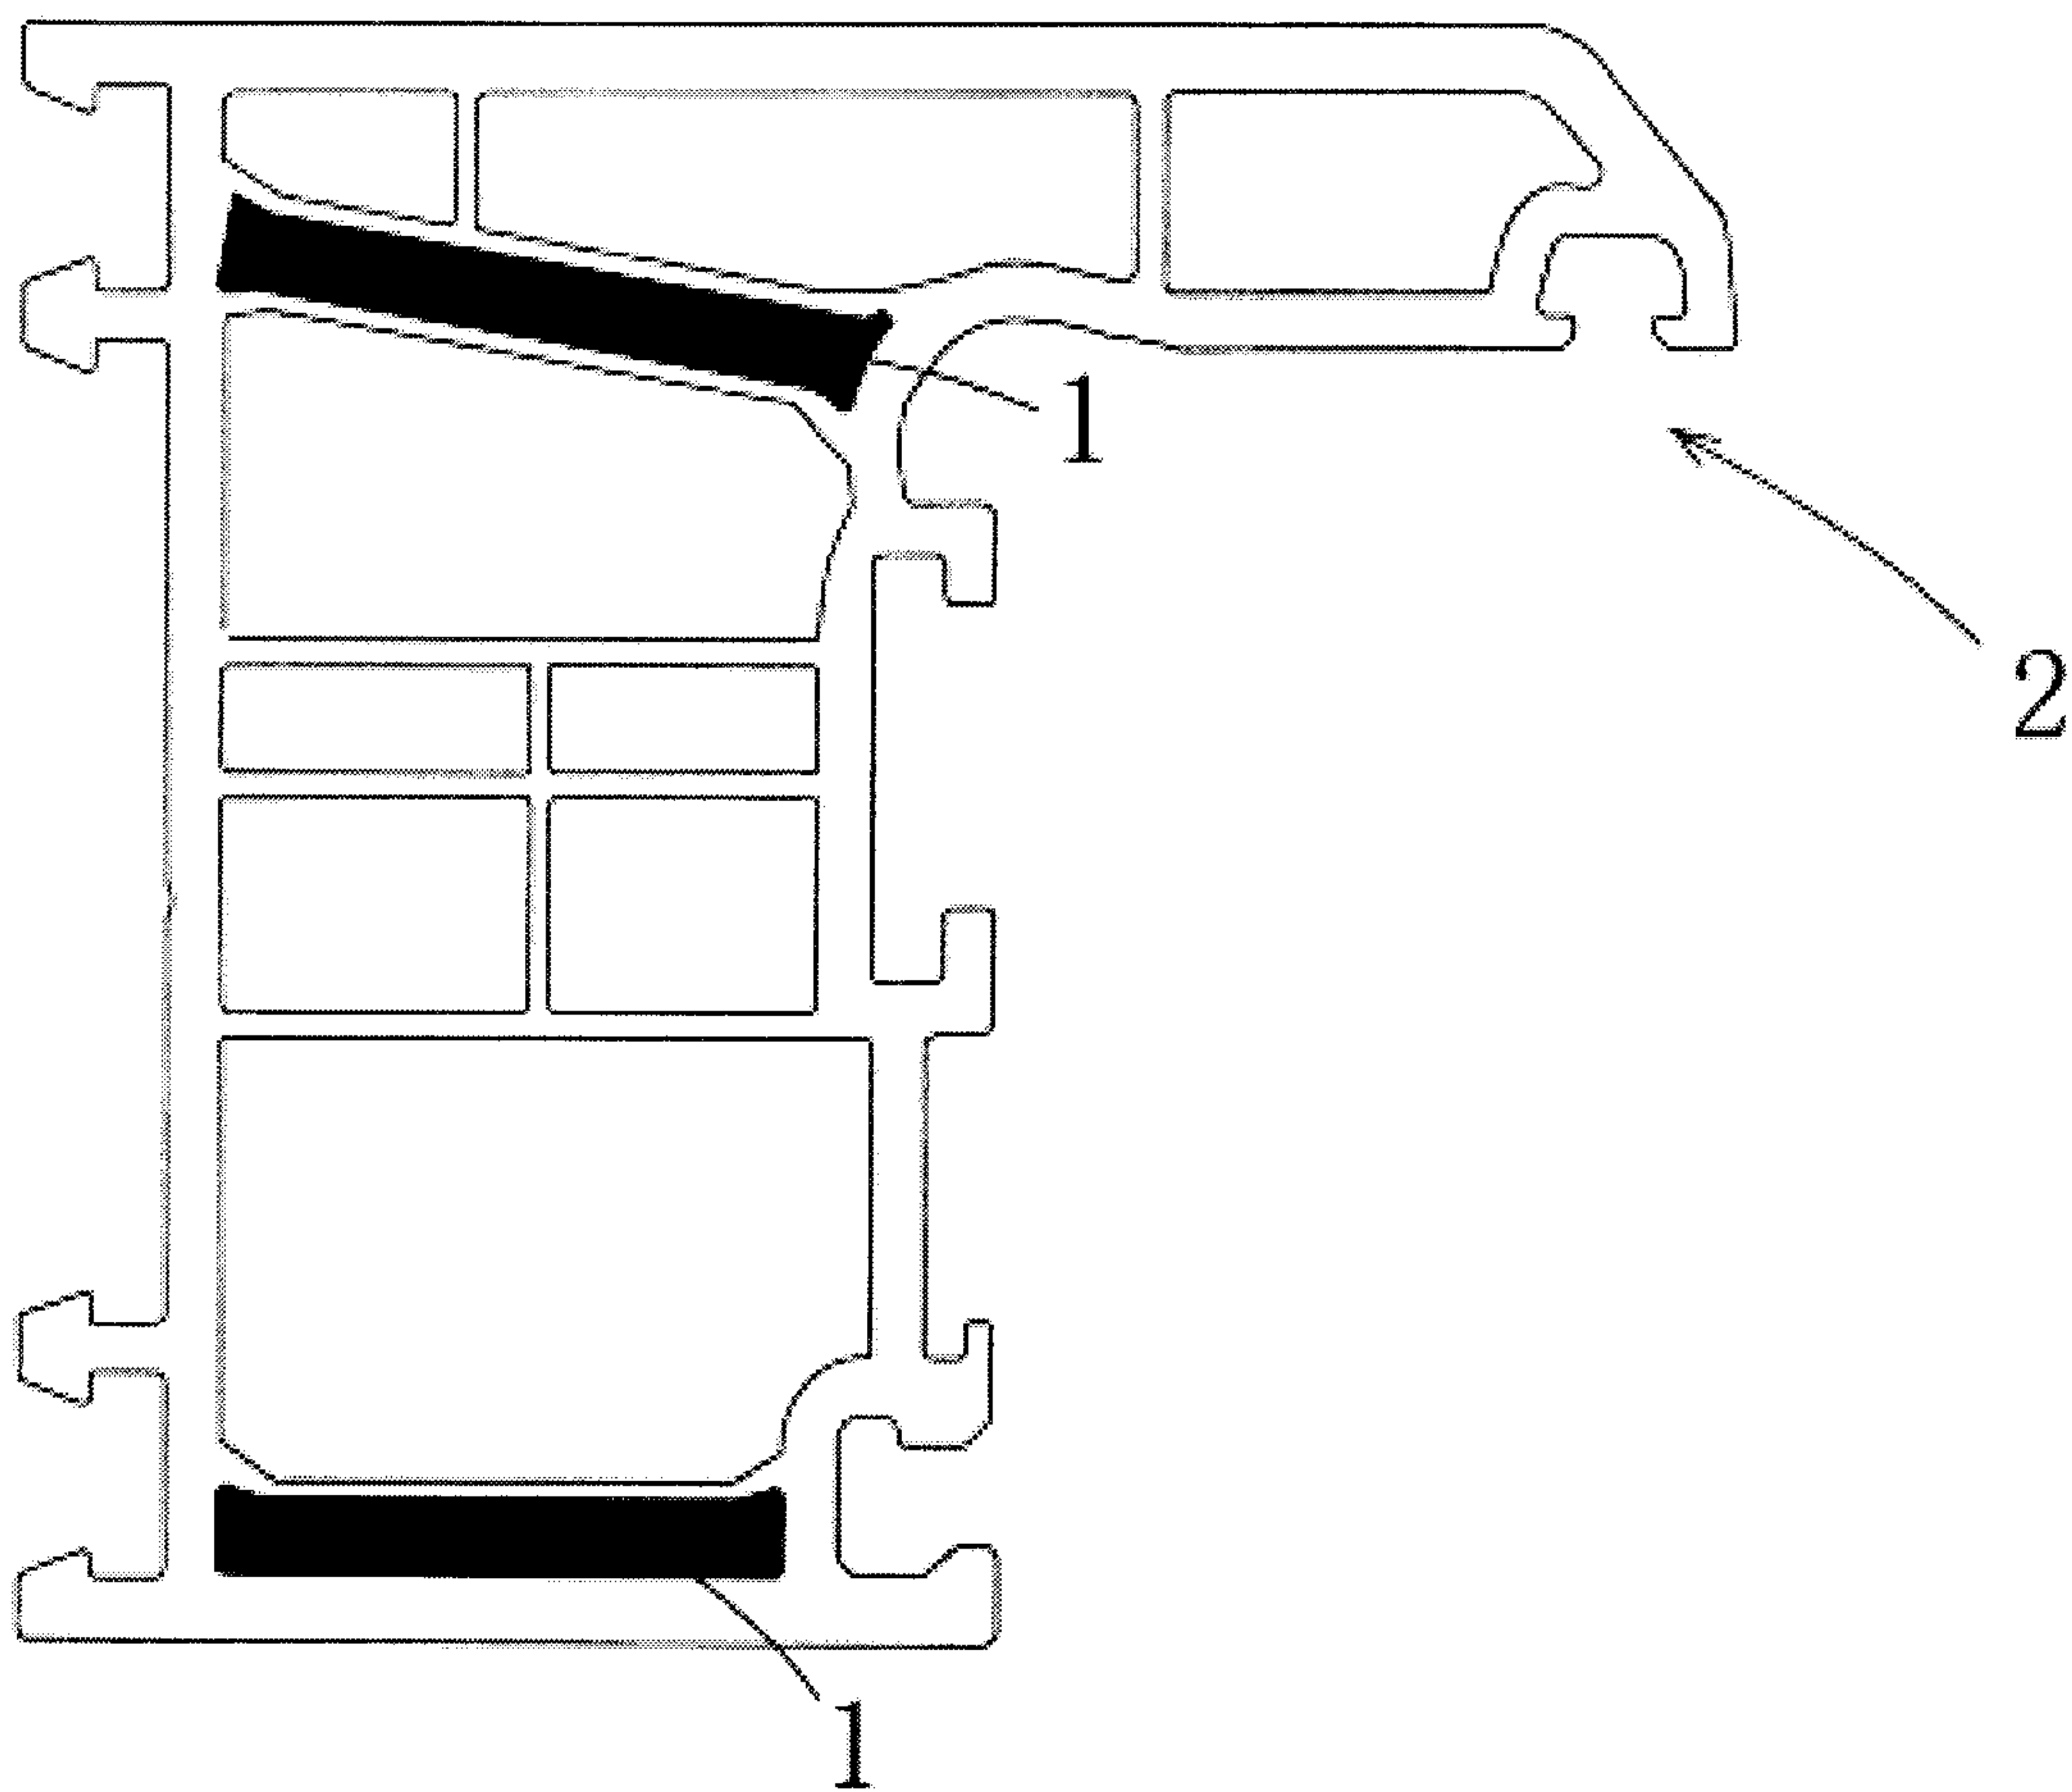


Fig. 2

