

APPLICATION ACCEPTED AND AMENDMENTS
ALLOWED 25-1-90

AUSTRALIA

Patents Act

CONVENTION

APPLICATION FOR A STANDARD PATENT

595681

I/We ICI Americas Inc

of New Murphy Road and Concord Pike,
Wilmington,
Delaware,
UNITED STATES OF AMERICA.

hereby apply for the grant of a standard patent for an invention
entitled:

DEFORMABLE POLYURETHANE HAVING IMPROVED CURE TIME

which is described in the accompanying complete specification.

Details of basic application

Number of basic application: 012,972

Convention country in which
basic application was filed: UNITED STATES OF AMERICA

Date of basic application : 10 February 1987

Address for Service:

LOGGED AT SUB-OFFICE

- 9 FEB 1988

Melbourne


PHILLIPS ORMONDE & FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
Melbourne 3000 AUSTRALIA

Dated: 8 February 1988



PHILLIPS ORMONDE & FITZPATRICK
Attorneys for:
ICI Americas Inc

By:

Our Ref : 84082
POF Code: 1453/24860



6012q/1

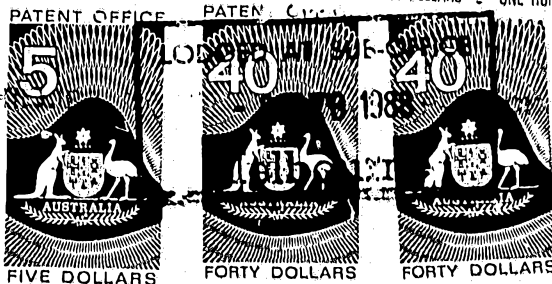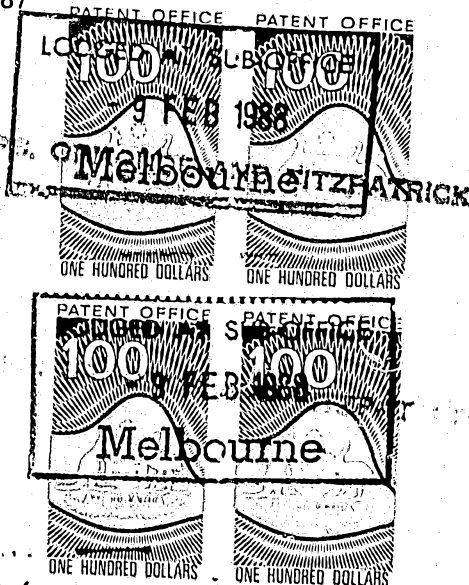

2/E 34613/AV

AUSTRALIA

Patents Act

DECLARATION FOR A PATENT APPLICATION

▼ INSTRUCTIONS

- (a) Insert "Convention" if applicable
(b) Insert FULL name(s) of applicant(s)

In support of the (a) convention application made by
(b) ICI AMERICAS INC.

- (c) Insert "of addition" if applicable
(d) Insert TITLE of invention

(hereinafter called "applicant(s)" for a patent (c) for an
invention entitled (d)

DEFORMABLE POLYURETHANE HAVING IMPROVED CURE TIME

- (e) Insert FULL name(s) AND address(es) of declarant(s)
(See headnote*)

I/We (e) Robin E. Gadsby, Vice President
ICI Americas Inc.
Mantua Grove Road
West Deptford, NJ 08066

do solemnly and sincerely declare as follows:

1. ~~I am/We are the applicant(s).~~
(or, in the case of an application by a body corporate)
1. I am/We are authorized to make this declaration on behalf of the applicant(s).
2. ~~I am/We are the actual inventor(s) of the invention.~~
(or, where the applicant(s) is/are not the actual inventor(s))

- (f) Insert FULL name(s) AND address(es) of actual inventor(s)

2. (f) Nai W. Lin: 2200 North Fairview Lane, Rochester Hills, Michigan, United States of America and
Richard W. Niedt: 35620 Willis Court, Mt. Clemens, Michigan, United States of America

- (g) Recite how applicant(s) derive(s) title from actual inventor(s)
(See headnote**)

is/are the actual inventor(s) of the invention and the facts upon which the applicant(s) is/are entitled to make the application are as follows:

- (g) The applicant is the assignee of the invention from the actual inventor.

(Note: Paragraphs 3 and 4 apply only to Convention applications)

- (h) Insert country, filing date, and basic applicant(s) for the/or EACH basic application

3. The basic application(s) for patent or similar protection on which the application is based is/are identified by country, filing date, and basic applicant(s) as follows:

- (h) United States of America
10 February, 1987
Nai W. Lin and Richard W. Niedt

4. The basic application(s) referred to in paragraph 3 hereof was/were the first application(s) made in a Convention country in respect of the invention the subject of the application.


- (k) Insert PLACE of signing

Declared at (k) West Deptford, NJ

- (l) Insert DATE of signing

Dated (l) September 6, 1988

- (m) Signature(s) of declarant(s)

(m) 

Note: No legalization or other witness required

To: The Commissioner of Patents

(12) PATENT ABRIDGMENT (11) Document No. AU-B-11445/88
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 595681

(54) Title
DEFORMABLE POLYURETHANE HAVING IMPROVED CURE TIME

International Patent Classification(s)
(51)⁴ C08G 018/66 A43B 013/38 A63H 009/00 C08L 067/00
C08L 071/02

(21) Application No. : 11445/88 (22) Application Date : 09.02.88

(30) Priority Data

(31) Number (32) Date (33) Country
012972 10.02.87 US UNITED STATES OF AMERICA

(43) Publication Date : 11.08.88

(44) Publication Date of Accepted Application : 05.04.90

(71) Applicant(s)
ICI AMERICAS INC.

(72) Inventor(s)
NAI W. LIN; RICHARD W. NIEDT

(74) Attorney or Agent
PHILLIPS, ORMONDE & FITZPATRICK

(56) Prior Art Documents
US 3437608
AU 67952/87 C08G 18/32 C08G 18/14
AU 36592/84 C08G 18/66 C08C 71/02

(57) Claim

1. A reaction system for use in making molded objects by an open or closed casting process, said system comprising the following components:

(A) an aromatic polyisocyanate; and
(B) an active hydrogen-containing composition comprising

(i) a polyhydric alcohol having an average molecular weight in the range of about 1000 to about 8000 and an average functionality of about 2 to about 4;

(ii) a polyhydric alcohol having 2 to 12 carbon atoms and an average functionality of about 2 to about 3; and

(iii) a secondary monoamine of the formula



wherein R and R' are independently saturated aliphatic groups having 1 to 20 carbon atoms, provided that R and R¹ together contain at least 4 carbon atoms, the ratio of (A) to (B) being such that the reaction of said system is conducted at an isocyanate index between about 0.90 and about 1.15,

wherein said system, components (A) and (B), react to form a polyurethane partially capped with disubstituted urea groups.

21. A polyurethane which is the reaction product of:

- (A) an aromatic polyisocyanate; and
- (B) an active hydrogen-containing composition comprising

- (i) a polyhydric alcohol having an average molecular weight in the range of about 1000 to about 8000 and an average functionality of about 2 to about 4;

- (ii) a polyhydric alcohol having 2 to 12 carbon atoms and an average functionality of about 2 to about 3; and

- (iii) a secondary monoamine of the formula



wherein R and R' are independently saturated aliphatic groups having 1 to 20 carbon atoms, provided that R and R¹ together contain at least 4 carbon atoms, the ratio of (A) to (B) being such that said reaction is conducted at an isocyanate index between about 0.90 and about 1.15.

44. An active hydrogen composition comprising, in the proportions noted,

- (i) 100 parts by weight of a polyhydric alcohol having an average molecular weight in the range of about 1000

(11) AU-B-11445/88
(10) 595681

-3-

to about 8000 and an average functionality of about 2 to about 4;

(ii) 2 to 10 parts by weight of a polyhydric alcohol having 2 to 12 carbon atoms and an average functionality of about 2 to about 3; and

(iii) 2 to 60 parts by weight of a secondary monoamine of the formula



wherein R and R' are independently saturated aliphatic groups having 1 to 20 carbon atoms, provided that R and R¹ together contain at least 4 carbon atoms.

Patents Act

595681

COMPLETE SPECIFICATION
(ORIGINAL)

Class

Int. Class

Complete Specification Lodged:
Accepted:
Published:

Priority

Related Art:

This document contains the amendments made under Section 49 and is correct for printing.

APPLICANT'S REFERENCE: Z/E 34613/AU

Name(s) of Applicant(s):

ICI Americas Inc

Address(es) of Applicant(s):

New Murphy Road and Concord Pike,
Wilmington,
Delaware,
UNITED STATES OF AMERICA.

Address for Service is:

PHILLIPS ORMONDE & FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
Melbourne 3000 AUSTRALIA

Complete Specification for the invention entitled:

DEFORMABLE POLYURETHANE HAVING IMPROVED CURE TIME

Our Ref : 84082
POF Code: 1453/24860

The following statement is a full description of this invention, including the best method of performing it known to applicant(s):

DEFORMABLE POLYURETHANE HAVING IMPROVED
CURE TIME

Field of the Invention

5

This invention relates to a polyurethane partially capped with disubstituted urea groups which exhibits delayed recovery following deformation, which can be used to make molded articles by an open or closed casting system, optionally with low pressure injection, but which has a much faster cure rate relative to the corresponding polyurethane capped with a primary alcohol. The invention further relates to a reaction system and to an active hydrogen-containing composition used to make the polyurethane.

Background of the Invention

Polyureas, polyurethanes, and polyurethane-ureas are well known to the polymer arts and are made by reacting a polyisocyanate with one or more active hydrogen containing materials. In the case of polyureas a polyamine is reacted with a polyisocyanate to form a polymer containing urea (-NH-CO-NH-) linkages. In the case of polyurethanes a polyhydric alcohol is reacted with a polyisocyanate to form a polymer containing urethane (-O-CO-NH-) linkages. Polyurethaneureas, as the name implies, are made by reacting a mixture of polyamine and polyhydric alcohol with a polyisocyanate to yield a polymer having mixed (urethane and urea) linkages.

Generally, polyamines react with polyisocyanates (to form polyureas) at a much faster rate than polyhydric alcohols (to form polyurethanes) and are thus prime candidates for use in fast reaction injection molding (RIM) systems. In such systems secondary amine groups react more slowly than primary amine groups.

In slower molding reaction systems such as those designed for use with open casting low pressure apparatus, however, even the more slowly reacting secondary amines are generally still too reactive for use therein, and the (polyurea) amine/isocyanate composition tends to cure and "set up" before the mold has entirely filled.

Thus open casting systems tend to be used most often with polyurethane systems. Such systems, comprising a polyol and polyisocyanate as described above, react slowly enough to allow more than adequate mold filling time, but herein also lies a disadvantage in such systems since their in-mold residence (cure) time, i.e. the amount of time before a molded article can be demolded without damage, can be long enough to adversely affect production.

A modified polyurethane casting is disclosed in U.K. Patent Application 2160881 published January 2, 1986, the polyurethane material being prepared by the reaction of

(a) an essentially primary hydroxyl tipped polyol having a molecular weight in the range of from 2,500 to 8,000;

- (b) a polyhydric alcohol;
- (c) an aliphatic monohydric primary alcohol containing up to 10 carbon atoms; and
- (d) a polyisocyanate,

5 the reaction being carried out at a isocyanate index of 1.0 or greater.

10 The above U.K. patent application states that the polyurethane materials disclosed therein have certain desirable properties, including being readily deformable, possessing delayed recovery characteristics, and being characterized by low compression set with high, temperature-insensitive damping over a broad temperature range. The present inventors have determined that such systems are, however, disadvantageous in that they require relatively long mold residence times.

Summary of the Invention

20 The present invention provides a system for use in making molded objects by an open (mold) or closed (mold) casting process, said system comprising the following components:

- (A) an aromatic polyisocyanate; and
- 25 (B) an active hydrogen-containing composition comprising

30 (i) a polyhydric alcohol having an average molecular weight in the range of about 1000 to about 8000 and an average functionality of about 2 to about 4;

(ii) a polyhydric alcohol having 2 to 12 carbon atoms and an average functionality of about 2 to about 3; and

(iii) a secondary monoamine of the formula



wherein R and R' are independently saturated aliphatic groups having 1 to 20 carbon atoms, with the proviso that R and R' together contain at least 4 carbon atoms, said system forming a polyurethane partially capped with disubstituted urea groups.

This invention further provides an active hydrogen containing composition, component (B), defined above.

This invention further provides polyurethanes, and molded objects therefrom, which are the reaction product of component (A) and component (B), the reaction being carried out at an isocyanate index between about 0.90 and about 1.15, preferably between 0.95 and 1.10. The molded polyurethanes are made by a low pressure casting process.

The phrases "polyhydric alcohol", "secondary monoamine", and "aromatic polyisocyanate" are intended to comprehend compositions containing mixtures of each as well as single species of each.

The present invention provides physical properties, including deformability and delayed recovery characteristics comparable to or better than polyurethane systems which specify the inclusion of a primary alcohol rather than applicants' secondary


monoamine, component (B)(iii), such as the aforementioned U.K. patent application. Advantageously, the secondary amine-containing system of this invention allows ample time to fill an open cast mold, yet cures faster than the corresponding total polyol system (i.e. wherein the secondary monoamine is replaced by a primary alcohol), such that a significant increase in production over the total polyol system can be achieved. This is surprising inasmuch as the monoamine, being monofunctional, stops chain growth and would thus be expected to slow reactivity, as measured by gel time.

DETAILED DESCRIPTION

As the polyisocyanate, component (A), aromatic polyisocyanates having an average isocyanate functionality between about 2 and about 3, most preferably between 2 and 2.3, are preferred. Suitable polyisocyanates include, for example, p-phenylene diisocyanate, m-phenylene diisocyanate, 2,4-toluene diisocyanate, 2,6-toluene diisocyanate, naphthalene diisocyanate, dianisidine diisocyanate, 2,4'-diphenylmethane diisocyanate (2,4' MDI), 4,4'-diphenylmethane diisocyanate (4,4' MDI), 3,3'-dimethyl-4,4'-biphenylene diisocyanate, mixtures thereof and the like. The MDI (2,4' and 4,4') and mixtures and derivatives thereof are most preferred.

An additional preferred polyisocyanate is (methylene bridged) polymethylenepolyphenyl polyisocyanate compositions having an average isocyanate

functionality greater than 2. Methylene bridged polyphenyl polyisocyanates are well known in the art and have the general formula



10 wherein n is an integer of 1 or more in the case of individual compounds and has an average value of 1 or more in the case of mixtures of such compounds. The latter referred to mixtures are
15 commonly termed in the art as "crude MDI" or "polymeric MDI".

The term "polymethylene polyphenyl polyisocyanate" as used herein thus comprehends polymeric MDI mixtures which can contain significant
20 amounts of monomeric MDI (i.e. n=0). Crude MDI can be made by phosgenating of a mixture of polyamines obtained from the acid condensation of aniline and formaldehyde.

The manufacture both of the polyamine mix-
25 tures and of the polyisocyanate mixtures therefrom is well known. The condensation of aniline with formaldehyde in the presence of strong acids, such as hydrochloric acid, yields a product containing diaminodiphenylmethane together with polymethyl-
30 enepolyphenyl polyamines of higher functionality, the precise composition depending on the aniline/formaldehyde ratio.

The crude MDI can be made by phosgenating such polyamine mixtures, the various proportions of diamines, triamines and higher polyamines giving rise to like proportions of diisocyanates, triisocyanates and higher polyisocyanates.

The relative proportions of diisocyanates, triisocyanates and higher polyisocyanates in such crude MDI compositions in turn determine the average functionality of the compositions, that is, the average number of isocyanate groups per molecule. By varying the proportions of starting materials, the average functionality of the polyisocyanate compositions can be varied from little more than 2 up to 3 or even higher.

When preparing the compositions of the present invention, the crude MDI preferably has an average functionality from about 2.0 to about 3.0, most preferably from about 2.0 to about 2.3. Such compositions contain from 30 to 65 percent by weight of monomeric MDI, the remainder being higher order polymethylenepolyphenyl polyisocyanates of functionality greater than 2 together with by-products formed in the manufacture of such polyisocyanates by phosgenation. A particularly preferred polymethylene-polyphenyl polyisocyanate for preparing the polyisocyanate compositions is available from Rubicon Chemical Inc. under the trademark RUBINATE M.

Suitable aliphatic polyisocyanates include isophorone diisocyanate; 1,6-hexamethylene diisocyanate; 1,4-cyclohexyl diisocyanate; saturated analogues of the above mentioned aromatic polyiso-

5 cyanates, mixtures thereof and the like. If aliphatic polyisocyanates are employed, they should be present in an amount less than 50 mole %, preferably less than 30 mole %, most preferably less than 10 mole %, based on the total moles of polyisocyanates used.

10 Suitable uretonimine modified diisocyanates can also be used and are prepared by a process wherein a polyisocyanate, generally an aromatic polyisocyanate, is heated to a temperature exceeding the melting temperature of the polyisocyanate, for example, 140°C, in the presence of a carbodiimide catalyst to convert some of the isocyanate groups to carbodiimide groups and then allowing the carbodiimide groups to react with unreacted isocyanate groups to form uretonimine groups.

15 Suitable isocyanate terminated prepolymers are also useful. These can be prepared by reacting an excess of polyisocyanate with polyols, which may include aminated polyols. Suitable polyols include, for example;

(a) polyether polyols and/or hydrocarbon-based polyols having a molecular weight from 60 to 400, and an average hydroxyl functionality from 1.9 to 2.5;

25 (b) polyether (and/or thioether) polyols having a molecular weight of at least 1000 and an average hydroxyl functionality from 1.9 to 4;

(c) polyester polyols having a molecular weight from 100 to 1000, and an average hydroxyl functionality from 1.9 to 2.5;

30

(d) polyester polyols having a molecular weight greater than 1000, and an average amine hydrogen functionality from 1.9 to 4;

(e) amine terminated polyethers having
5 a molecular weight of at least 1000, and an average amine hydrogen functionality from 1.9 to 6.

Examples of suitable polyether or hydrocarbon polyols having a molecular weight from 60 to 400 include propylene glycol; dipropylene glycol;
10 tripropylene glycol; 2,3-butanediol; 1,3-butanediol 2,2-dimethyl-1,3-propanediol and polypropylene glycols. Examples of suitable polyether polyols having a molecular weight of at least 1000 include polyethylene glycols; polyoxyethylene polyoxypropylene copolymer
15 diols; and polytetramethylene glycols, higher polypropylene glycols, polyoxypropylene triols, etc. Ethylene oxide-capped polyoxypropylene based polyols are preferred.

Examples of suitable polyester polyols
20 having a molecular weight from 100 to 500 include aliphatic polyester diols, and aromatic polyester diols. These polyester diols are obtained from the reaction of dibasic carboxylic acids such as succinic, adipic, suberic, azelic, phthalic, isophthalic, and
25 the like, with alkylene glycols, and oxyalkylene glycols to form the corresponding polyalkylene, and polyoxyalkylene ester diols or copolymers thereof. Examples of suitable polyester polyols having a molecular weight of at least 1000 include the polyester
30 ester diols and triols obtained from the reaction of

polybasic carboxylic acids, and alkylene polycols, and/or oxyalkylene polycols, to form the corresponding polyalkylene and polyoxyalkylene esters or copolymers thereof having a molecular weight of at least 1000.

5 Examples of suitable amine-terminated polyethers having a molecular weight of at least 1000 include polypropylene oxide triamines polyoxypropylene diamines, and polyoxyethylene/polyoxypropylene copolymer diamines and triamines.

10 High molecular weight polyols, component (B)(i), useful in this invention include polyalkylene glycols such as polyoxyethylene glycol, polyoxypropylene glycol, polyoxybutylene glycol, mixtures thereof, and the like having an average molecular weight and
15 functionality as previously defined. Suitable polyols are widely available commercially, for example under the designation "DALTOCEL" from ICI.

 Also suitable for use as high molecular weight polyols are polyester polyols. Suitable
20 polyester polyols may be produced by reacting dicarboxylic acids, preferably aliphatic dicarboxylic acids, having 2 to 12 carbon atoms in the alkylene radical, with multifunctional alcohols, preferably diols.

25 Suitable dicarboxylic acids include, for instance, aliphatic dicarboxylic acids such as glutaric acid, pimelic acid, suberic acid, azelaic acid, sebacic acid, undecanedioic acid, dodecanedioic acid, and preferably, succinic and adipic acids;
30 cycloaliphatic dicarboxylic acids such as 1,3- and 1,4-cyclohexane dicarboxylic acid; and aromatic

dicarboxylic acids such as phthalic acid and terephthalic acid. Examples of di- and multifunctional, particularly difunctional, alcohols are: ethylene glycol, diethylene glycol, propylene glycol, 5 dipropylene glycol, 1,3-propanediol, 1,10-decanediol glycerine, trimethylolpropane, and preferably, 1,4-butanediol, and 1,6-hexanediol. If trifunctional alcohols are used for the manufacture of the polyester polyols, their amount is preferably chosen in such a 10 manner that the functionality is a maximum of 2.8, preferably 2 to 2.3.


Also useful are those polyester polyols produced by polycondensation of a dicarboxylic acid mixture which, based on the total weight of the named 15 dicarboxylic acids, contains the following: 20 to 35 percent by weight, preferably 28 to 33 percent by weight, of succinic acid; 35 to 50 percent by weight, preferably 40 to 45 percent by weight, of glutaric acid; and 20 to 32 percent by weight, preferably 24 to 20 28 percent by weight, of adipic acid; and alcohol mixtures of ethylene glycol/diethylene glycol, ethylene glycol/trimethylolpropane and diethylene glycol/trimethylolpropane. In addition to the named dicarboxylic acids, the dicarboxylic acid mixture may 25 contain up to 5 percent by weight, preferably 2 to 3 percent by weight, based on the total mixture weight, of other adducts, which consist of primarily imides of the succinic and glutaric acids. Dicarboxylic acid mixtures of the named type may, for instance, be 30 obtained as by-products during the manufacture of adipic acid oxidation of cyclohexanol or cyclohexanone

with nitric acid. Suitable polyols are available commercially, for example, under the designation "Daltorez" from ICI.

5 The polyester polyols preferably have molecular weights of 1000 to 7500, most preferably 1500 to 3000, and functionalities of 2 to 3.5, preferably 2 to 2.3, and can be used as such or in the form of mixtures in accordance with this invention.

10 Low molecular weight polyhydric alcohols (herein also referred to as "chain extenders"), component (B)(ii), useful in this invention, include glycerol, 1,4-butanediol, pentaerythritol, trimethylolpropane, 1,2-propylene glycol, 1,6-hexanediol, 2-ethylhexane-1,3-diol, and the bis (hydroxyethyl)
15 ether of hydroquinone. Oligomeric polyoxyethylene and polyoxypropylene glycols having 2 or more carbon atoms may also be used, i.e. diethylene glycol, triethylene glycol, tetraethylene glycol, pentaethylene glycol, dipropylene glycol, tripropylene glycol, and tetra-
20 propylene glycol. Polyols having a functionality greater than 3 may be employed as part of a polyol mixture, so long as the average functionality of the mixture is less than about 3.

25 The secondary monoamine, component (B)(iii), has the formula



wherein R and R' are independently saturated aliphatic groups having 1 to 20, preferably 2 to 13 carbon atoms, most preferably 2 to 6 carbon atoms, with the
30 proviso that R and R' together contain at least 4 carbon atoms. Suitable examples include one or a

mixture of di-n-butylamine, di-n-propylamine, diethylamine, N-ethyl-N-n-butylamine, and ditridecylamine.

5 The polyurethanes partially capped with
disubstituted urea groups of this invention can be
formulated to contain additives as conventionally
known and used in elastomer formulations. A non-
exhaustive list of typical additives includes pigments
10 for coloration, fillers to reduce economics or to
impart special properties or modify existing proper-
ties of the elastomer, stabilizers to protect against
chemical degradation such as oxidation or discolora-
tion, flame retardants, blowing agents such as
halohydrocarbons conventionally known and used for
15 producing foamed resins (available, eg. under the
registered trademark FREON from DuPont or ARCTON from
ICI) or carbon dioxide generated in situ by the
addition of water, surfactants to stabilize foams
(e.g. DOW CORNING³ silicone glycol copolymers known
20 for use in producing polyurethane foams), defoaming
agents to prevent foam formation, catalysts such as
amines and organotin compounds conventionally known,
biocides to prevent bacterial degradation, perfumes to
impart pleasing odors, and plasticizers to modify
25 physical properties of the elastomer such as hardness
and elongation.

The amount of additives depends, of course,
on the particular additives being used. As a general
rule of thumb, the total weight of all additives
30 should not exceed about 60 percent by weight based on
the total formulation.

Components (A) and (B) are formulated for molding via an open or closed casting process, optionally using low pressure injection, meaning that the coreactants are mixed in the liquid state and injected under low pressure or poured into the final (open or closed) mold. Casting is well known and understood in the art, see for example Polyurethane Technology, edited by Paul F. Bruins, Interscience Publishers, especially Chapter 9 titled "Casting of Urethane Elastoplastics". The reactants are metered and mixed and poured or injected into a mold in such a manner that air will not be entrapped. The reactants may be all mixed and poured together in a so-called one shot system. Alternatively, a so-called two-step prepolymer-curative process, wherein excess polyisocyanate is first reacted with a stoichiometrically deficient amount of active hydrogen compound to form an isocyanate-terminated prepolymer, followed by reacting the prepolymer with the remaining active hydrogen compounds, may be employed.

The polyurethanes may be formulated and shaped into molded objects by casting methods conventionally known in the art, generally involving the use of a casting machine. Examples of casting machines include those offered commercially by Klockner Ferromatik De ma, Inc., Sudbury, Massachusetts, including the DS 30/30 and PSA 91 models used in the Examples of this invention.

In the casting process, the polyisocyanate is referred to as the "A" component and the mixture of active hydrogen-containing compounds, components

(B)(i)-(B)(iii), is referred to as the "B" component. If additives are employed they are generally incorporated into the B component, although they may also be added in the A component so long as they are not isocyanate-reactive. The B component mixture, including additives, may be blended or agitated in a suitable container or supply tank, generally at ambient temperature, although temperatures up to about 160°F may be employed. Agitation can be conducted using conventional propeller type stirrers (generally supplied by the casting machine manufacturer) at RPM's of several hundred at most.

The "A" and "B" components are placed in separate containers, which are generally equipped with agitators, of the casting machine wherein the temperature of each component is ambient to 140°F. Molded polyurethane products are made by conducting each component via suitable metering pumps, to a mixing head where the components are mixed under low pressures, generally pressures less than 30 bar, preferably less than 20 bar. The mixed components can then be poured or injected into a mold.

Once a desired mold shape has been filled, the mold is closed and curing is effected. Generally curing temperatures of about 30°F to about 160°F can be used. Curing (as reflected by demold times) requires about 3 to 20 minutes, usually about 5 to 15 minutes. This cure time is ample to allow mixing, foaming if desired, and mold filling, yet sufficiently rapid to allow high rates of production. The cure rates obtainable using the compositions of this

invention which contain a secondary monoamine (e.g., di-n-butylamine) are to be contrasted with compositions wherein instead of a monoamine, the corresponding primary alcohol (eg. n-butanol) is used, which primary alcohol-containing compositions generally require much longer demold times.

The reaction of the "A" component and "B" component to make the molded polyurethanes partially capped with disubstituted urea groups of this invention is carried out at an isocyanate index between about 0.90 and about 1.15, preferably between about 0.95 and about 1.10. Most preferably, the reaction is carried out at an isocyanate index substantially equal to 1.

Although the exact proportions of each reactant will vary depending on the individual molecular weights and whether prepolymers are employed, typical proportions, based on using 100 parts by weight (pbw) of high molecular weight polydric alcohol component (B)(i), will be 2-10 pbw of low molecular weight polyhydric alcohol component (B)(ii), 2-60 pbw of secondary monoamine component (B)(iii), and an amount of polyisocyanate component (A) which provides sufficient free isocyanate (-NCO) groups to react essentially stoichiometrically with the total of active hydrogens provided by (B)(i)-(B)(iii), i.e., an amount sufficient to provide the desired isocyanate index.

The invention is further disclosed and described by means of the following examples which are not to be taken as limiting.

The following glossary of terms is to identify materials used in the examples.

Glossary

5

<u>Material</u>	<u>Identity</u>	<u>Supplier</u>
Daltocel F-2805 (ethylene oxide tipped triol, MW 6000)	Polyether Polyol	ICI
NIAX E-351 (M.W. 2800)	Polyether Polyol	Union Carbide
NIAX 11-34 (M.W. 5000)	Polyether Polyol	Union Carbide
1,4-Butanediol	Chain Extender	GAF
Dipropylene Glycol	Chain Extender	
1,6-Hexanediol	Chain Extender	Badische Coroproation-CBA
Diethylene Glycol	Chain Extender	Quaker City
DABCO S5-25	Amine Catalyst	Air Products
DABCO 33LV	Amine Catalyst	Air Products
FOMREZ UL-1	Tin Catalyst	Witco
Dibutylamine	Secondary Monoamine	Fisher Scientific
Di Tridecyl Amine (Adogen 283)	Secondary Monoamine	Sherex
PC-1244	Defoaming Agent	Monsanto
SF 96-5	Surfactant	Union Carbide
Dioctyl Phthalate	Plasticizer	Inland Leidy
TP 90-B	Plasticizer	Morton-Thiokol

CaCO ₃	filler	ICI
ZEOLITH	Molecular sieves	
BAYLITH	Molecular sieves	Mobay
ANTIBLAZE 80	Flame Retardant	Mobil Organic Chemicals
ANTIBLAZE 100	Flame Retardant	Mobil Organic Chemicals
ES-76	MDI-based ureton- imine-modified polyisocyanate, terminated poly ether prepolymer Functionality-- 2.0-2.1 Eq. Wt. 185-195	ICI

20 The formulations set forth in TABLES I-IV
are of typical reaction systems according to the
invention and list individual component amounts in
parts by weight, together with gel times and demold
times required for test plaques. "Gel time" as
25 used herein represents the amount of time, from the
time pouring of the mixed components into the mold
was completed, that the molded article was just set
(i.e. polymerized) sufficiently that, if touched
lightly with the edge of a metal spatula, no polymer
30 material adhered to the spatula, although the product
was rubbery enough that an indentation in the material
could easily and visibly be made. The gel times
using this test are estimated to be accurate to within
about ±20%. "Demold time" is the time at which the
35 test plaque was demolded without damage.

The polyisocyanate, a prepolymer,
constituted the "A" component and all other
ingredients constituted the "B" component. Each

component was placed in a separate supply tank and agitation was maintained with a propeller stirrer. The components were mixed using either a Desma model DS 30/30 casting machine or a Desma Model PSA 91 injection machine, both of which are conventional and commercially available. No solvents were employed in either component. Sufficient amounts of the mixed components were poured or injected into the mold to provide a part of the required average density upon completion.

Tables I-IV are set forth, following

Table I

15 Different Secondary Monoamine in the Deformable, Delayed Recovery Polyurethane Systems

Example	1	2	3	4	5	6	7
Daltocel F-2805	100	100	100	100	100	100	100
Dipropylene Glycol	4.5	4.5	4.5	4.5	4.5	4.5	4.5
Dabco 33LV	4	4	4	4	4	4	4
Dibutylamine	5	15	25	0	0	0	0
Di Tridecyl Amine	0	0	0	40	60	60	15
PC-1244	0.3	0.3	0.3	0.3	0.3	0.3	0.3
Diocetyl Phthalate	80	80	80	80	80	80	80
CaCO ₃	20	20	20	0	0	0	0
Baylith	8	8	8	8	0	8	8
Fomrez UL-1	0	0.05	0.05	0.08	0.12	0.12	0.08
Freon 11A	0	18	0	0	0	0	0
H ₂ O	0	0	0	0	.10	0	0
Total Polyol							
Component (P)	221.8	249.85	241.85	236.88	249.02	256.92	211.88
ES-76 Polyisocyanate							
Polyether Pre-polymer (I)	37.6	52.5	74.4	50	61.8	59.7	37.8
Ratio I/P	0.17	0.21	0.308	0.211	0.248	0.232	0.178
Gel Time*	2.0	2.40	3.20	2.40	3.20	3.20	2.20
Demold Time*	4.0	5.0	8.0	5.0	8.0	8.0	4.0

* Times are in minutes and seconds, e.g. 2.40 denotes 2 minutes and 40 seconds.

Table II

Different High M.W. Polyols in the Deformable,
Delayed Recovery Polyurethane Systems

Example	8	9	10	11	12
Daltocel F-2805	100	0	0	0	0
NIAX 11-34 Poly- ether Polyol	0	100	33.4	66.6	80
NIAX E-351 Poly- ether Polyol	0	0	66.6	33.4	20
Dipropylene Glycol	4.5	4.5	4.5	4.5	4.5
Dabco 33LV	4	4	4	4	4
Dibutylamine	15	15	15	15	15
PC-1244	0.3	0.3	0.3	0.3	0.3
Dioctyl Phthalate	80	80	80	80	80
Baylith	8	8	8	8	8
Fomrez UL-1	0.16	0.08	0.08	0.08	0.08
Total Polyol Component (P)	221.96	211.88	211.88	211.88	211.88
ES-76 Polyether Pre- polymer (I)	52.5	54.6	56	55.3	55
Ratio I/P	0.237	0.258	0.264	0.261	0.26
Gel Time*	3.0	3.0	5.0	4.0	3.30
Demold Time*	6.0	6.0	12.0	9.0	8.0

* See Table I

TABLE III

Different Chain Extenders in the Deformable,
Delayed Recovery Polyurethane Systems

Example	13	14	15	16	17
Daltocel F-2805	100	100	100	100	100
Dabco 33 LV		4	4	4	4
Dabco S-25	2	0			
PC-1244	0.3	0.3	0.3	0.3	0.3
Diethyl Phthalate	80	40	80	80	80
Baylith	8	8	8	8	8
Formez UL-1	0	0	0.08	0.08	0.08
Dibutylamine	5	5	15	15	15
Dipropylene Glycol	0	4.5	1.8	2	4
1,6-Hexandiol	0	0	2.7	0	0
Diethylene Glycol	0	0	0	2	4
1,4-Butanediol	2	0	0	0	0
CaCO ₃	40	20	0	0	0
Total Polyol Component (P)	237.3	181.8	211.88	211.38	215.38
ES-76					
Polyether Prepolymer (I)	44.8	37.6	53.1	52.3	65.6
Ratio I/P	0.189	0.207	0.251	0.247	0.305
Cel Time*	2.0	2.0	2.40	2.40	2.40
Demold Time*	4.0	4.0	6.0	6.0	6.0

* See Table I

TABLE IV

Different Additives in the Deformable,
Delayed Recovery Polyurethane Systems

Example	18	19	20	21	22	23	24
Daltocel F-2805	100	100	100	100	100	100	100
Dipropylene Glycol	4.5	4.5	4.5	4.5	4.5	4.5	4.5
Dabco 33 LV	4	4	4	4	4	4	4
Dibutylamine	5	15	15	15	15	15	15
PC-1244	0.3	0.3	0.3	0.3	0.3	0.3	0.3
Diocetyl Phthalate	80	80	80	40	80	0	40
TP-90B	0	0	0	40	0	0	0
CaCO ₃	40	20	0	20	40	20	20
Baylith	8	8	8	8	8	8	8
Fomrez UL-1	0	0	0	0.16	0.08	0.05	0.05
Antiblaze 80	0	0	0	0	0	80	0
Antiblaze 100	0	0	0	0	0	0	40
Total Polyol							
Component (g)	241.8	231.8	211.8	231.96	251.88	231.85	231.85
ES-76							
Polyether Pre-							
polymer (I)	37.6	52.5	52.5	52.5	52.5	52.5	52.5
Ratio I/P	0.156	0.226	0.248	0.226	0.208	0.226	0.226
Gel Time*	1.40	2.50	3.20	1.30	2.0	2.20	2.20
Demold Time*	3.0	6.0	7.0	3.0	4.0	4.30	4.30

* See Table I

Examples 25-35

Examples 25-35 are intended to show the improvement in cure time (as reflected in demold 5 time), and improvements in physical properties, of test plaques made from reaction systems according to the invention, relative to similar compositions wherein a primary alcohol (e.g. n-butanol) is substituted for a secondary monoamine (e.g. di- 10 n-butylamine).

A blend of ingredients for use in the "B" component was prepared containing the following proportions (in parts by weight, pbw):

15	Daltocel F-2805	-	100
	Dipropylene glycol	-	4.5
	Dabco 33 LV	-	4.0
	PC-1244	-	0.3
	CaCO ₃	-	20.0
20	Baylith	-	8.0
	<u>Fomrez UL-1</u>	-	0.02
	Total	-	136.82

The above blend, herein denoted as the 25 "Master Batch" was used to formulate various test plaques from polyurethanes partially capped with disubstituted urea groups according to the invention, and various comparative polyurethanes wherein the di-n-butylamine was replaced by n-butanol in an amount 30 such that the reaction isocyanate index was maintained at 1.00. The master batch was combined with the

remaining ingredients in the (pbw) amounts listed in Table V to make the "B" component, and the "B" component was combined with ES-76, the A component, to make test plaques having the gel times, demold times, 5 and physical properties also listed in Table V.

The molded articles of Examples 25-35 were made using a Desma DS30/30 machine wherein the holding tanks for both the "A" and "B" components were at room temperature and the mold temperature was 10 50°C.

The physical properties shown in Table V were determined according to tests well known to the art. Tensile strength, elongation, and tensile modulus were determined according to ASTM D412. Shore 15 A hardness was determined according to ASTM D2240. Tear resistance (Die C tear) was determined according to ASTM D624. Ball resilience was determined according to ASTM D3574.

TABLE V

Example	25	26	27	28	29	30++	31++	32	33	34	35++
"A" Comp.											
Master Batch	136.82	136.82	136.82	136.82	136.82	136.82	136.82	136.82	136.82	136.82	136.82
Dioctyl Phthalate	0	40	80	40	80	40	40	40	80	40	0
Di-n-butylamine	0	0	0	15	15	0	0	0	0	0	0
n-butanol	0	0	0	0	0	8.6	4.3	2.15	2.15	3.22	0
Total (P)	136.82	176.82	216.82	191.82	231.82	185.42	181.12	178.97	218.97	180.04	151.82
"B" Comp.											
ES-76 (I)	30	30	30	52.2	52.2	52.2	41.2	35.6	35.6	38.3	52.2
Ratio (I/P)	0.219	0.17	0.138	0.272	0.225	0.282	0.227	0.199	0.163	0.213	0.344
Isocyanate Index	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Gel Time*	1.0	1.50	2.40	1.30	2.20	3.0	2.50	2.10	3.0	4.0	1.10
Demold Time*	3.0	4.0	5.0	4.0	5.0	DNC**	60.0+	13.0	22.0	60.0+	3.0
Physical Properties											
Hardness, Shore A	45-50	40-45	30-35	20-25	10-15			10	10		35-40
Tensile, PSI	171	178	112	266	166			40	14		290
Elongation, %	131	172	13%	409	375			600	560		459
Die C Tear, PLI	50.1	38.1	28.1	33.3	24.2			20.7	13.1		52.8
Ball Resilience, %	28	29	34	20	18			14	14		23
Modules, PSI											
@100% Elongation	236	225	172	76	47			7	1		66
@200% Elongation++				89	61			4	1		51
@300% Elongation++				113	79			2	1		51

* See Table 1

** DNC = Did not cure

+ Sample took longer than 60 minutes to cure

++ Blank spaces indicate samples were too soft to conduct physical test measurements

Example 36

A polyurethane is made as in Example 28,
except that di-n-butylamine and ES-76 are replaced,
5 respectively, by an equal amount of di-n-propylamine
and an amount of LF 168 (a uretonimine modified
4,4'-diphenylmethanediisocyanate having an average
isocyanate equivalent weight of about 143,
commercially available from Rubicon Chemicals, Inc.)
10 such that the reaction is conducted to an isocyanate
index substantially equal to 1. Gel and demold
times, and physical properties similar to those shown
for Examples 28, 29 and 35 are obtained for the
polyurethane.

15

Example 37

A polyurethane is made as in Example 28,
except that di-n-butylamine and ES-76 are replaced,
20 respectively, by an equal amount of diethylamine and
an amount of a polyisocyanate which is a mixture of
diphenylmethanediisocyanates containing about 80%
4,4'-isomer and about 20% of 2,4'-isomer such that
the reaction is conducted at an isocyanate index
25 substantially equal to 1. Gel and demold times, and
physical properties similar to those shown for
Examples 28, 29, and 35 are obtained for the
polyurethane.

Example 38

A polyurethane is made as in Example 28, except that di-n-butylamine and ES-76 are replaced, 5 respectively, by an equal amount of ditridecylamine and an amount of a polyisocyanate (polyphenylmethylene polyisocyanate, crude MDI, having an average isocyanate equivalent weight of about 133.3 and an average isocyanate functionality of 2.75; commercially 10 available from Rubicon Chemicals, Inc. as RUBINATE³ M) such that the reaction is conducted at an isocyanate index substantially equal to 1. Gel and demold times, and physical properties similar to those shown for Examples 28, 29, and 35 are obtained for the 15 polyurethane.

The polyurethanes of this invention may be used in a variety of applications including the manufacture of shoe insoles or components thereof. The polymers have good elongation, recover their 20 molded shape well, and have a skinlike feel, and thereby can be used in the toy industry to make objects requiring such characteristics, such as body parts (head, limbs, torso) for dolls and other toys made of rubber.

25 The compositions of this invention have further utility in applications which require shock attenuation, energy absorption, or sound deadening capabilities, which applications include but are not limited to the manufacture of orthotic devices (such 30 as arch supports), packing material, turntable pads for record players, linings for speaker cabinets,

protective athletic cushioning devices such as elbow pads or knee pads, and grips for handles (such as tennis raquets) to reduce shock transmitted through the racquet to a user.

5 The polyurethanes of this invention are particularly suited to being molded into flat sheets by processes as described herein from which articles such as shoe insoles can be die cut or otherwise cut.

10 Those skilled in the art will appreciate that many modifications to the exemplary embodiments presented herein may be made without departing from the scope of the invention. Accordingly, all such modifications are considered to be part of the
15 invention as defined in the appended claims.

~~What is claimed is:~~

The claims defining the invention are as follows:

1. A reaction system for use in making molded objects by an open or closed casting process, said system comprising the following components:

- (A) an aromatic polyisocyanate; and
- (B) an active hydrogen-containing composition comprising

10 (i) a polyhydric alcohol having an average molecular weight in the range of about 1000 to about 8000 and an average functionality of about 2 to about 4;

15 (ii) a polyhydric alcohol having 2 to 12 carbon atoms and an average functionality of about 2 to about 3; and

(iii) a secondary monoamine of the formula



20 wherein R and R' are independently saturated aliphatic groups having 1 to 20 carbon atoms, provided that R and R¹ together contain at least 4 carbon atoms,

the ratio of (A) to (B) being such that the reaction 25 of said system is conducted at an isocyanate index between about 0.90 and about 1.15,

wherein said system, components (A) and (B), react to form a polyurethane partially capped with disubstituted urea groups.

30

2. A system as defined in Claim 1, wherein said polyisocyanate is p-phenylene diisocyanate, m-phenylene diisocyanate, 2,4-toluene diisocyanate, 2,6-toluene diisocyanate, naphthalene diisocyanate, dianisidine diisocyanate, 2,4'-diphenylmethane diisocyanate (2,4'-MDI), 4,4'-diphenylmethane diisocyanate (4,4'-MDI), 3,3'-dimethyl-4,4'-biphenylene diisocyanate, polydiphenylmethane diisocyanate having a functionality greater than 2, or mixtures thereof.

10

3. A system as defined in Claim 1, wherein said polyisocyanate is a polymethylenepolyphenyl polyisocyanate composition having an average isocyanate functionality greater than 2.

15

4. A system as defined in Claim 1, wherein said polyisocyanate comprises crude diphenylmethane diisocyanate.

~~20 5. A system as defined in Claim 1, wherein said polyisocyanate has an average isocyanate functionality between about 2 and about 2.3.~~

6. A system as defined in Claim 1, wherein said polyisocyanate comprises up to about 50 mole % of aliphatic polyisocyanates.

~~7. A system as defined in Claim 6, wherein said polyisocyanate comprises less than 30 mole % of aliphatic polyisocyanates.~~




5. A system as defined in any one of claims 1 to 4, wherein said polyisocyanate has an average isocyanate functionality between about 2 and about 2.3.


6. A system as defined in claim 1, wherein said polyisocyanate comprises up to about 50 mole % of aliphatic polyisocyanates.

7. A system as defined in claim 6, wherein said polyisocyanate comprises less than 30 mole % of aliphatic polyisocyanates.

10



20



30



GD

8. A system as defined in Claim 7, wherein said polyisocyanate comprises less than 10 mole % of aliphatic polyisocyanates.

5 9. A system as defined in Claim 6, wherein said aliphatic polyisocyanates are selected from isophorone diisocyanate, 1,6-hexamethylene diisocyanate, 1,4-cyclohexyl diisocyanate, saturated analogues thereof, and mixtures thereof.

10

10. A system as defined in Claim 1, wherein said polyisocyanate is a uretonimine-modified diisocyanate.

15 11. A system as defined in Claim 1, wherein said polyisocyanate is an isocyanate-terminated prepolymer.

~~12. A system as defined in Claim 1, wherein~~
20 ~~said high molecular weight polyhydric alcohol, component (B)(i), is a polyoxyalkylene glycol.~~

~~13. A system as defined in Claim 12,~~
wherein said polyalkylene glycol is selected from
25 ~~poly(ethylene glycol), poly(propylene glycol), poly-(butylene glycol), and mixtures thereof.~~

~~14. A system as defined in Claim 1, wherein~~
said high molecular weight polyhydric alcohol,
30 ~~component (B)(i), is a polyester polyol.~~



12. A system as defined in any one of claims 1 to 11, wherein said high molecular weight polyhydric alcohol, component (B)(i), is a polyoxyalkylene glycol.

13. A system as defined in claim 12, wherein said polyalkylene glycol is selected from poly(ethylene glycol), poly(propylene glycol), poly(butylene glycol), and mixtures thereof.

14. A system as defined in any one of claims 1 to 11, wherein said high molecular weight polyhydric alcohol, component (B)(i), is a polyester polyol.

15. A system as defined in any one of claims 1 to 14, wherein said low molecular weight polyhydric alcohol, component (B)(ii), is selected from glycerol, 1,4-butanediol, pentaerythritol, trimethylolpropane, 1,2-propylene glycol, 1,6-hexanediol, 2-ethyl-hexane-1,3-diol, and the bis (hydroxyethyl) ether of hydroquinone.

16. A system as defined in any one of claims 1 to 14, wherein said low molecular weight polyhydric alcohol, component (B)(ii), is an oligomeric poly(ethylene glycol) or poly(propylene glycol).

17. A system as defined in any one of claims 1 to 16, wherein, in said secondary monoamine, R and R' independently contain 1 to 13 carbon atoms.

18. A system as defined in claim 17, wherein R and R' independently contain 1 to 6 carbon atoms.

19. A system as defined in any one of claims 1 to 16, wherein said secondary monoamine is selected from di-n-butylamine, di-n-propylamine, diethylamine, and ditridecylamine.

20. A system as defined in any one of claims 1 to 19, further comprising up to 60 weight percent of additives based on the total weight of the system.

21. A polyurethane which is the reaction product of:



(A) an aromatic polyisocyanate; and
(B) an active hydrogen-containing composition comprising

5 (i) a polyhydric alcohol having an average molecular weight in the range of about 1000 to about 8000 and an average functionality of about 2 to about 4;

10 (ii) a polyhydric alcohol having 2 to 12 carbon atoms and an average functionality of about 2 to about 3; and

(iii) a secondary monoamine of the formula



15 wherein R and R' are independently saturated aliphatic groups having 1 to 20 carbon atoms, provided that R and R' together contain at least 4 carbon atoms,

the ratio of (A) to (B) being such that said reaction
20 is conducted at an isocyanate index between about 0.90 and about 1.15.

22. A polyurethane as defined in Claim 21, wherein said polyisocyanate is p-phenylene diisocyanate, m-phenylene diisocyanate, 2,4-toluene
25 diisocyanate, 2,6-toluene diisocyanate, naphthalene diisocyanate, diarisisidine diisocyanate, 2,4'-diphenylmethane diisocyanate (2,4'-MDI), 4,4'-diphenylmethane diisocyanate (4,4'-MDI), 3,3'-dimethyl-4,4'-biphenylene
30 diisocyanate, polydiphenylmethane diisocyanate having a functionality greater than 2, or mixtures thereof.

23. A polyurethane as defined in claim 21, wherein said polyisocyanate is a polymethylenepolyphenyl polyisocyanate composition having an average isocyanate functionality greater than 2.


24. A polyurethane as defined in claim 21, wherein said polyisocyanate comprises crude diphenylmethane diisocyanate.

25. A polyurethane as defined in any one of claims 21 to 24, wherein said polyisocyanate has an average isocyanate functionality between about 2 and about 2.3.


10



20



30



39

-33a-

GD

~~23. A polyurethane as defined in Claim 21,~~
wherein said polyisocyanate is a polymethylenepoly-
phenyl polyisocyanate composition having an average
isocyanate functionality greater than 2.

5

24. A polyurethane as defined in Claim 21,
wherein said polyisocyanate comprises crude diphenyl-
methane diisocyanate.

10

~~25. A polyurethane as defined in Claim 21,~~
wherein said polyisocyanate has an average isocyanate
~~functionality between about 2 and about 2.3.~~


26. A polyurethane as defined in Claim 21,
15 wherein said polyisocyanate comprises up to about 50
mole % of aliphatic polyisocyanates.

27. A polyurethane as defined in Claim 26,
wherein said polyisocyanate comprises less than 30
20 mole % of aliphatic polyisocyanates.

28. A polyurethane as defined in Claim 27,
wherein said polyisocyanate comprises less than 10
mole % of aliphatic polyisocyanates.

25

29. A polyurethane as defined in Claim 26,
wherein said aliphatic polyisocyanate is isophorone
diisocyanate, 1,6-hexamethylene diisocyanate,
1,4-cyclohexyl diisocyanate, saturated analogues
30 thereof, or mixtures thereof.



30. A polyurethane as defined in claim 21, wherein said polyisocyanate is a uretonimine-modified diisocyanate.

31. A polyurethane as defined in claim 21, wherein said polyisocyanate is an isocyanate-terminated prepolymer.

32. A polyurethane as defined in any one of claims 21 to 31, wherein said high molecular weight polyhydric alcohol, component (B)(i), is a polyalkylene glycol.

33. A polyurethane as defined in claim 32, wherein said polyalkylene glycol is selected from poly(ethylene glycol), poly(propylene glycol), poly(butylene glycol), and mixtures thereof.

34. A polyurethane as defined in any one of claims 21 to 31, wherein said high molecular weight polyhydric alcohol, component (B)(i), is a polyester polyol.

35. A polyurethane as defined in any one of claims 21 to 34, wherein said low molecular weight polyhydric alcohol, component (B)(ii), is selected from glycerol, 1,4-butanediol, pentaerythritol, trimethylolpropane, 1,2-propylene glycol, 1,6-hexanediol, 2-ethyl-hexane-1,3-diol, and the bis (hydroxyethyl) ether of hydroquinone.

36. A polyurethane as defined in any one of claims 21 to 34, wherein said low molecular weight polyhydric alcohol, component (B)(ii), is an oligomeric poly(ethylene glycol) or poly(propylene glycol).

37. A polyurethane as defined in any one of claims 21 to 36, wherein, in said secondary monoamine, R and R' independently contain 1 to 13 carbon atoms.

38. A polyurethane as defined in claim 37, wherein R and R' independently contain 1 to 6 carbon atoms.

39. A polyurethane as defined in any one of claims 21 to 38, wherein said secondary monoamine is selected from di-n-butylamine, di-n-propylamine, diethylamine, and dodecylamine.

40. A polyurethane as defined in any one of claims 21 to 39, further comprising up to 50 weight percent of additives based on the total weight of the system.

41. A molded article made from a polyurethane as defined in any one of claims 21 to 40, by an open or closed




casting process.

42. An article as defined in claim 41, in the form of a shoe insole.

43. An article as defined in claim 41, in the form of a body portion for a doll.

10



20



30



39

-36-

GD

44. An active hydrogen composition comprising, in the proportions noted,

5 (i) 100 parts by weight of a polyhydric alcohol having an average molecular weight in the range of about 1000 to about 8000 and an average functionality of about 2 to about 4;

10 (ii) 2 to 10 parts by weight of a polyhydric alcohol having 2 to 12 carbon atoms and an average functionality of about 2 to about 3; and

(iii) 2 to 60 parts by weight of a secondary monoamine of the formula



15 wherein R and R' are independently saturated aliphatic groups having 1 to 20 carbon atoms, provided that R and R' together contain at least 4 carbon atoms.

20 45. A composition as defined in Claim 44 wherein said high molecular weight polyhydric alcohol, component (B)(i), is a polyoxyalkylene glycol.

25 46. A composition as defined in Claim 45 wherein said polyalkylene glycol is selected from poly(ethylene glycol), poly(propylene glycol), poly(butylene glycol), and mixtures thereof.

30 47. A composition as defined in Claim 44 wherein said high molecular weight polyhydric alcohol, component (B)(i), is a polyester polyol.

48. A composition as defined in any one of claims 44 to 47 wherein said low molecular weight polyhydric alcohol, component (B)(ii), is selected from glycerol, 1,4-butane-diol, pentaerythritol, trimethylolpropane, 1,2-propylene glycol, 1,6-hexanediol, 2-ethyl-hexane-1,3-diol, and the bis (hydroxyethyl) ether of hydroquinone.

49. A composition as defined in claim 44 wherein said low molecular weight polyhydric alcohol, component (B)(ii), is an oligomeric poly(ethylene glycol) or poly-
10 (propylene glycol).

50. A composition as defined in any one of claims 44 to 49 wherein, in said secondary monoamine, R and R' independently contain 2 to 13 carbon atoms.

51. A composition as defined in claim 50 wherein R and R' independently contain 2 to 6 carbon atoms.

52. A composition as defined in claim 44 wherein said secondary monoamine is selected from di-n-butylamine, di-n-propylamine, diethylamine, and ditridecylamine.

53. A reaction system as claimed in claim 1
20 substantially as hereinbefore described with reference to any one of the examples other than the comparative examples.

54. A polyurethane as claimed in claim 21 substantially as hereinbefore described with reference to any one of the examples other than the comparative examples.

55. A composition as claimed in claim 44 substantially as hereinbefore described with reference to any one of the examples other than the comparative examples.

DATED: 3 January 1990.

30 PHILLIPS ORMONDE & FITZPATRICK

Attorneys for:

ICI AMERICAS INC.

Philip J. Fitzpatrick

0862x