

(22) Date de dépôt/Filing Date: 2001/05/23

(41) Mise à la disp. pub./Open to Public Insp.: 2001/12/26

(45) Date de délivrance/Issue Date: 2008/08/26

(30) **Priorité/Priority:** 2000/06/26 (NL1015525)

(51) Cl.Int./Int.Cl. *A01K 1/12* (2006.01),
A01J 5/013 (2006.01), *A01J 5/017* (2006.01),
A01J 7/00 (2006.01), *A01J 9/00* (2006.01),
A01J 99/00 (2006.01)


(72) Inventeurs/Inventors:
FRANSEN, RENATUS IGNATIUS JOSEPHUS, NL;
DEELSTRA, JENTJE, NL

(73) Propriétaire/Owner:
LELY ENTERPRISES AG, CH

(74) **Agent:** FETHERSTONHAUGH & CO.

(54) Titre : DISPOSITIF DE TRAITE D'ANIMAUX

(54) Title: AN IMPLEMENT FOR MILKING ANIMALS

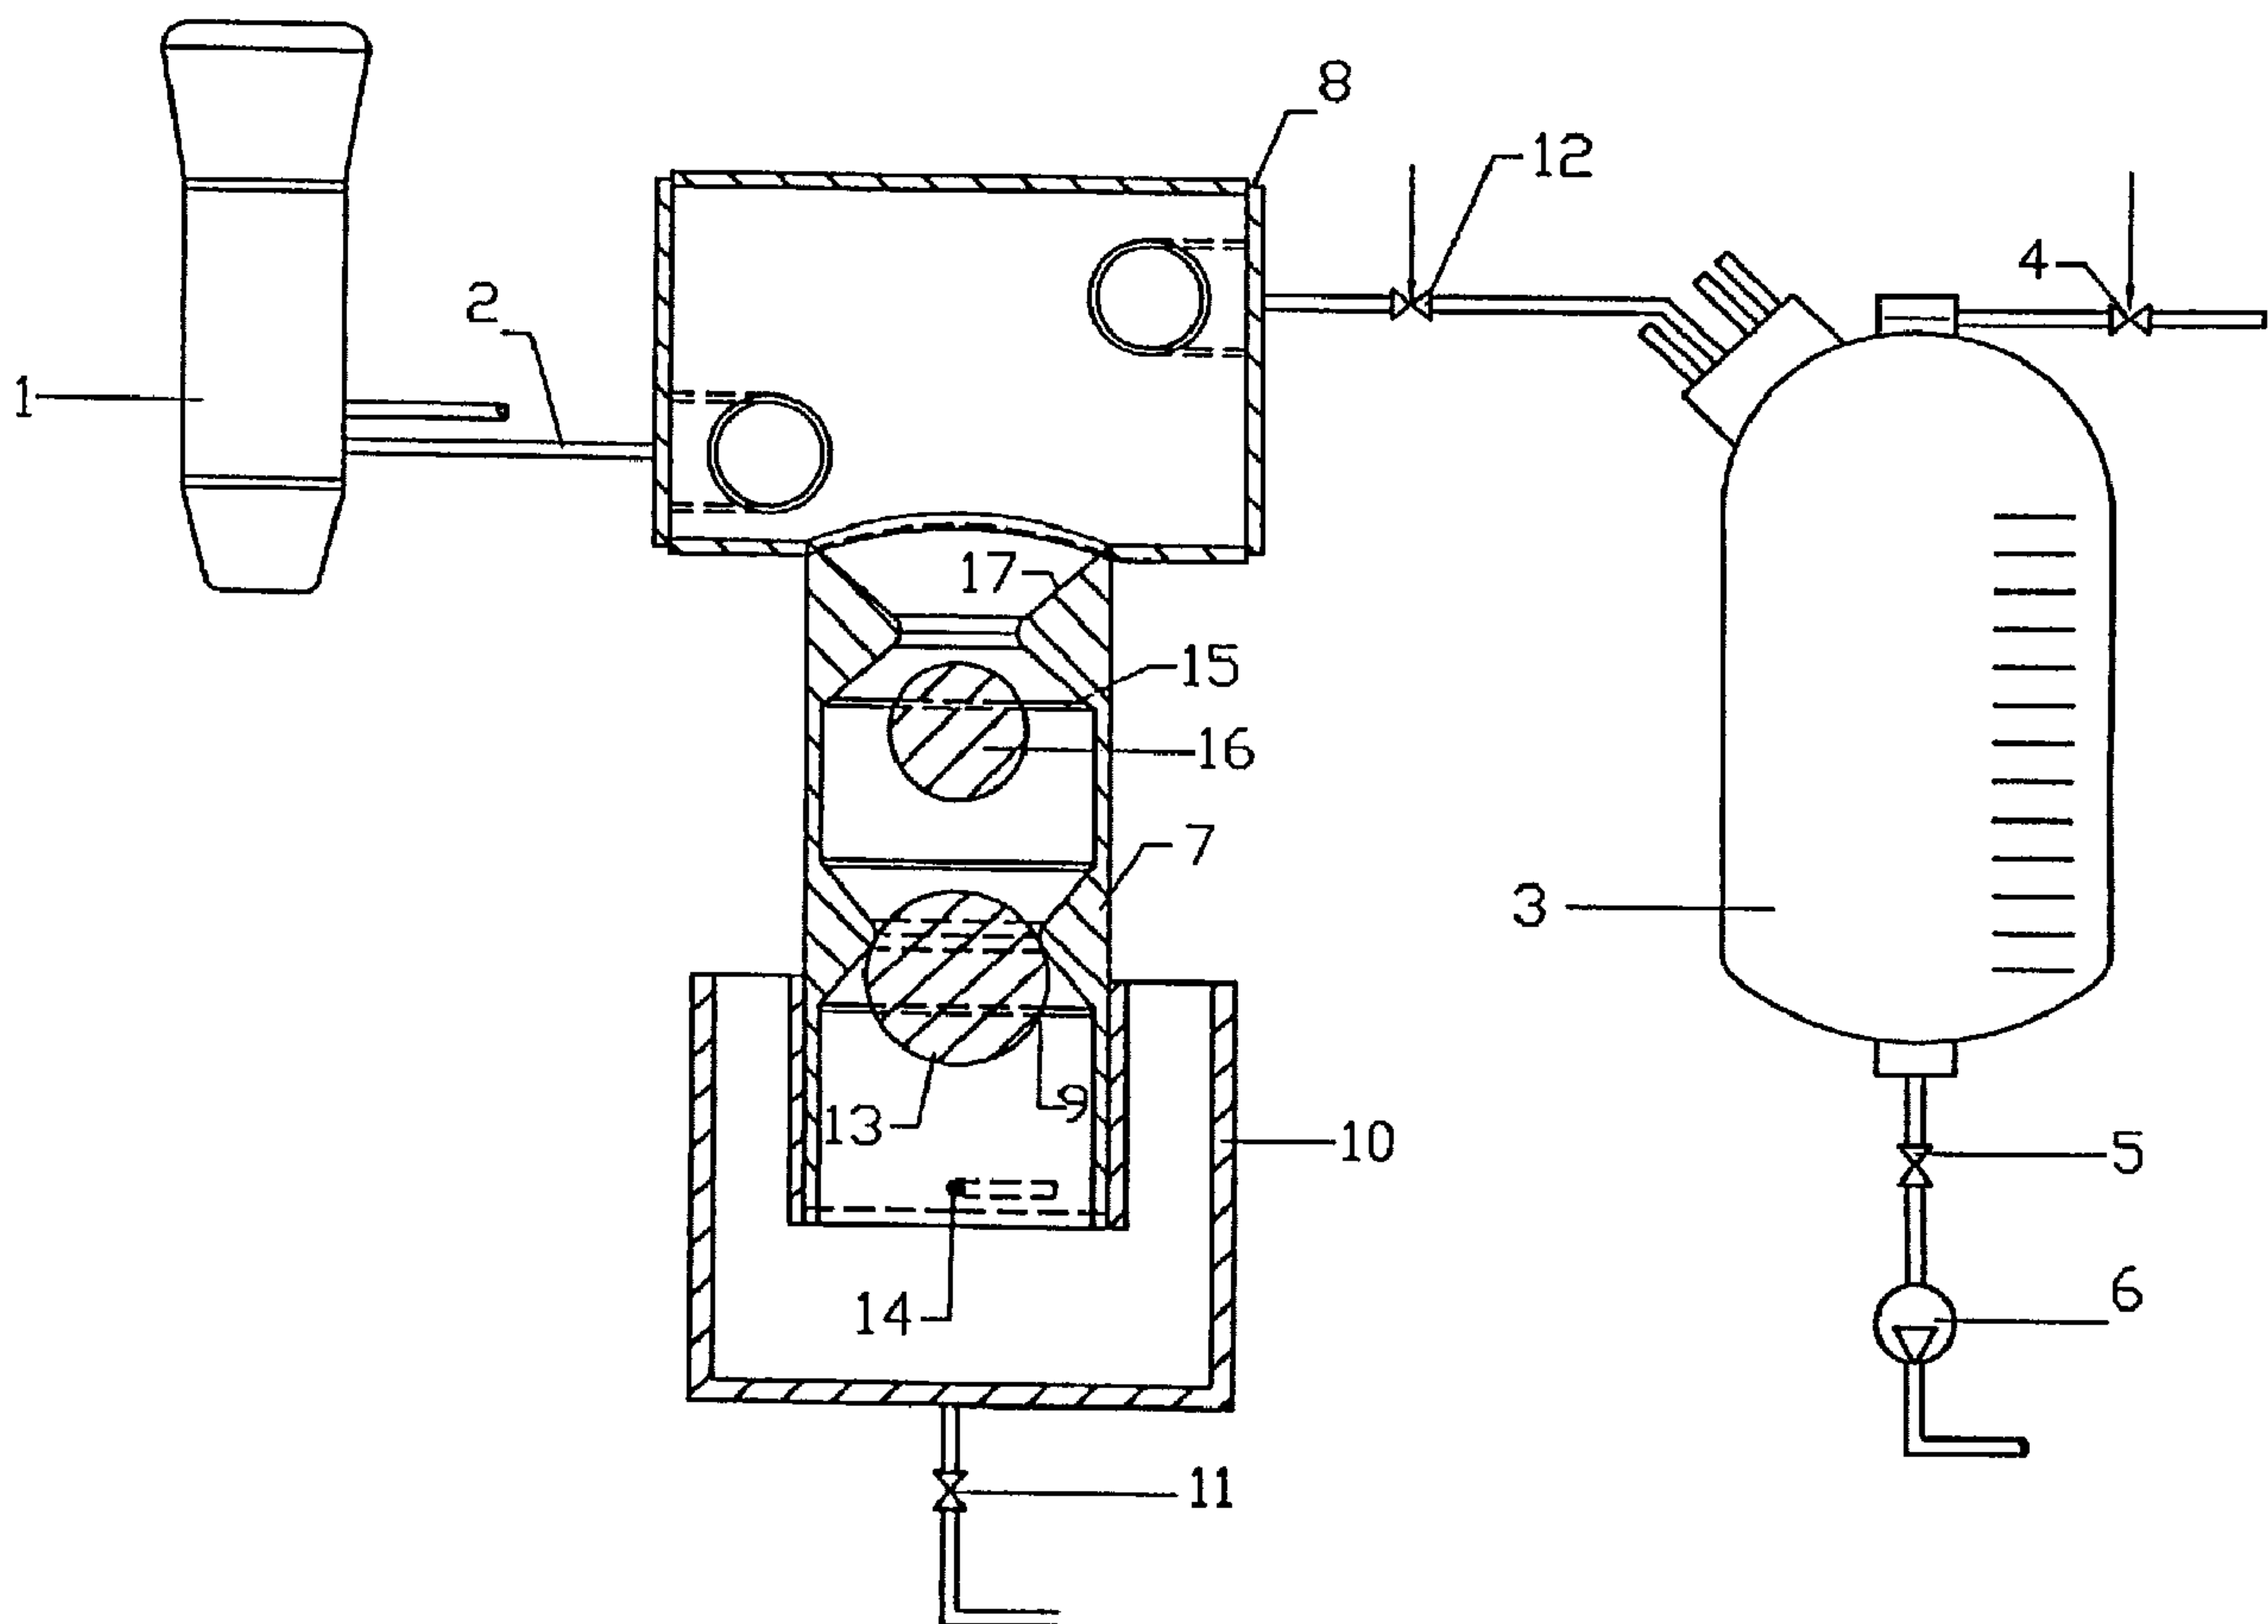

(57) **Abrégé/Abstract:**

An implement for milking animals, such as cows, provided with a milking parlour with a milking robot for automatically attaching teat cups (1) to the teats of an animal to be milked, said implement further being provided with milk container means for the milk

(57) **Abrégé(suite)/Abstract(continued):**

obtained, while in at least one milk line (2) between the teat cups (1) and the milk container means there is provided an auxiliary reservoir (7) in which a certain quantity of milk, substantially obtained at the beginning of the milking process, is collected via an inlet opening and can leave said auxiliary reservoir (7) via an outlet opening with shutting off means (9), while the milk obtained thereafter is substantially led to the milk container means. The inlet opening is provided with further shutting off means (13) which are at least suitable for preventing the milk collected in the auxiliary reservoir (7) from being discharged to the milk container means.

ABSTRACT

AN IMPLEMENT FOR MILKING ANIMALS

5 An implement for milking animals, such as cows,
provided with a milking parlour with a milking robot for
automatically attaching teat cups (1) to the teats of an
animal to be milked, said implement further being provided
with milk container means for the milk obtained, while in at
10 least one milk line (2) between the teat cups (1) and the milk
container means there is provided an auxiliary reservoir (7)
in which a certain quantity of milk, substantially obtained at
the beginning of the milking process, is collected via an
inlet opening and can leave said auxiliary reservoir (7) via
15 an outlet opening with shutting off means (9), while the milk
obtained thereafter is substantially led to the milk container
means. The inlet opening is provided with further shutting off
means (13) which are at least suitable for preventing the milk
collected in the auxiliary reservoir (7) from being discharged
20 to the milk container means.

24268-421

1

AN IMPLEMENT FOR MILKING ANIMALS

The present invention relates to an implement for milking animals.

Such an implement is known from
5 Dutch patent 1004196.

Upon milking animals in such an implement it is of importance that the foremilk is automatically separated from the further milk, as the foremilk is usually somewhat infected and/or of another quality.

10 According to an aspect of the invention, there is provided an implement for milking animals provided with a milking parlour with a milking robot for automatically attaching teat cups to the teats of an animal to be milked, said implement further being provided with milk container
15 means for the milk obtained, while in at least one milk line between the teat cups and the milk container means there is provided an auxiliary reservoir in which a certain quantity of milk, substantially obtained at the beginning of the milking process, is collected via an inlet opening and can
20 leave said auxiliary reservoir via an outlet opening with shutting off means, while the milk obtained thereafter is substantially led to the milk container means, wherein the inlet opening is provided with further shutting off means for preventing the milk collected in the auxiliary reservoir
25 from being discharged to the milk container means; and wherein the outlet valve of the shutting off means of the outlet opening of the auxiliary reservoir is a further controllable shut-off valve.

The implement according to an aspect of the
30 invention has the advantage that mixing of the foremilk collected with the milk that is led to the milk container

24268-421

1a

means is prevented or at least minimized to a considerable extent. When the foremilk from each of the udder quarters has to be collected, while the milk flow from the individual udder quarters does not start simultaneously, e.g. because
5 the teat cups are attached consecutively to the teats, it is of importance that there is provided an auxiliary reservoir in each of the milk lines between a teat cup and the milk container means. For the purpose of adequately separating the foremilk from the milk obtained thereafter, the content
10 of the auxiliary reservoir will have to be larger than the to be expected quantity of foremilk. Preferably the content of the auxiliary reservoir is approximately two to three times as large as the to be expected quantity of foremilk.

In a particular embodiment, only at the beginning
15 of the milking process the auxiliary reservoir is in open connection with the relevant milk line between a teat cup and the milk container means. As a result thereof the first milk obtained will automatically fill the auxiliary reservoir and, when the latter is completely filled, the
20 subsequent milk flow will be led to the milk container means. In a concrete embodiment, in the relevant milk line there is included a connecting element to which the interrupted ends of the milk line are connected, the lower side of said connecting element being provided with an
25 aperture to which the auxiliary

reservoir is connected. In order to prevent foremilk from flowing beyond said aperture to the milk container means, the two ends of the milk line are connected to the connecting element in a substantially horizontal plane, in a staggered position opposite each other. In this way the connecting element forms a resistance ensuring that the first milk, so including the foremilk, arrives in the auxiliary reservoir and, only when the latter is completely filled, the milk obtained thereafter can flow to the milk container means.

For the purpose of discharging the milk collected in the auxiliary reservoir, according to the invention the shutting off means comprise an outlet valve that shuts off the auxiliary reservoir by means of the vacuum present in the milk line. Said outlet valve releases the outflow opening of the auxiliary reservoir when after milking the teat cup comes in open connection with the outside air, or when the teat cup is included in a rinsing line system for only cleaning the teat cup or when the teat cup is included in a rinsing line system and rinsing of the teat cup and the milk line system connected thereto is ended. In other words, as soon as an animal has been milked out and a relevant teat cup is detached, the vacuum in said teat cup and the milk line connected thereto is removed and the outlet valve of the relevant auxiliary reservoir is released, so that the milk present in the auxiliary reservoir can flow away. However, also when the teat cups and, if desired, the milk line system have to be cleaned and a rinsing liquid is brought into the teat cup and the milk line connected thereto in the usual way by means of a rinsing member that is attached to a teat cup, because of the fact that the auxiliary reservoir is then being filled with rinsing liquid, said rinsing liquid will have to be discharged, i.e. as soon as the teat cup is detached from the rinsing member. According to a further inventive feature, the outlet valve is constituted by a first ball. Such an outlet valve has the advantage of being less sensitive to contamination. According to another inventive feature, the further shutting off means of the inlet opening of the auxiliary reservoir comprise an

inlet valve which is designed as a float. When the auxiliary reservoir is filled with the foremilk, the float continues to float on the milk and shuts off the inlet opening when the auxiliary reservoir is completely filled with foremilk. In a preferred embodiment of the invention the float is also designed as a ball. To facilitate mounting of the balls in the foremilking implement the diameter of the first ball is smaller than the diameter of the second ball. In a preferred embodiment of the invention the balls are made from synthetic material or rubber. According to again another embodiment of the invention, the shutting off means of the inlet opening of the auxiliary reservoir comprise an inlet valve which is designed as a controllable shut-off valve. According to a further inventive feature, the controllable shut-off valve is suitable for operating under the control of a milk level sensor, such as e.g. a milk conductivity sensor or an optical or an acoustic sensor. According to a further inventive feature, the sensor is disposed in the auxiliary reservoir. According to again another aspect of the invention, the outlet valve of the shutting off means of the outlet opening of the auxiliary reservoir is designed as a further controllable shut-off valve. According to a further inventive feature, the further controllable shut-off valve is computer-controlled. To prevent the milk streaming out of the auxiliary reservoir from constantly arriving on the ground and flowing away, the auxiliary reservoir has an outflow opening that debouches into a collecting element. In other words, the milk, and in particular the foremilk, is collected in a special collecting element. The (fore)milk collected herein after one or more milkings may be further utilized; this also holds for the rinsing liquid collected in the auxiliary reservoir, in particular when it does not contain chemical components that are harmful to the animals, but substantially only consists of water with milk residues that may be present therein. For that purpose, according to the invention, the foremilk separated by means of the auxiliary reservoir and/or, when the relevant teat cup would be included in a rinsing line system, the

24268-421

4

rinsing fluid discharged via the auxiliary reservoir are/is conveyed to an implement for supplying fodder and/or drink to an animal. In this manner, neither the milk collected in the auxiliary reservoir, in particular the foremilk, nor - as far
5 as water has been used as a rinsing liquid - the water with milk residues that may be present therein which flows out of the auxiliary reservoir, needs to be wasted.

The invention will now be explained in further detail
10 with reference to the accompanying drawing in which

Figure 1 shows schematically the milk line system between a milk glass and the milk container means.

Of the teat cups to be attached automatically to the
15 teats of an animal to be milked by means of a (non-shown) milking robot, only one teat cup 1 is shown in Figure 1. Like the other teat cups, said teat cup 1 is connected to milk collecting means or milk glass 3 via a milk line 2. In the embodiment shown in this figure the milk collecting means are constituted by a
20 milk glass. Into said milk glass 3 debouch the four milk lines 2 coming from the teat cups, while the milk glass is further connected via a valve 4 to the vacuum system of the milking implement. Via a valve 5 and by means of a pump 6, the milk is discharged from the milk glass 3 to a (non-shown) milk tank.
25 In each of the milk lines 2 there is included an auxiliary reservoir 7. In Figure 1 said provision is only depicted for one milk line. The content of the auxiliary reservoir is larger than the to be expected quantity of foremilk which is obtained via the relevant teat cup 1 at the beginning of the
30 milking process. Preferably the content of the auxiliary reservoir is approximately two to three times as large as the to be expected quantity of foremilk. Via a connecting element 8 the auxiliary reservoir 7 is in open connection with the relevant milk line 2. The connecting element 8 is constituted
35 by a space to which the interrupted ends of a milk line 2 are connected. In the bottom of said space there is provided an aperture which is in direct connection with the auxiliary

reservoir 7. As shown in Figure 2, the two ends of the milk line 2 are connected to the connecting element 8 in a substantially horizontal plane, in a staggered position opposite each other. Between the connecting element 8 and the milk glass 3 there is disposed a valve 12.

The auxiliary reservoir 7 is provided with an outlet valve 9, constituted by shutting off means, which is designed as a first ball that shuts off the auxiliary reservoir 7 by means of the vacuum present in a milk line 2. When the valve 12 is shut off and the vacuum in the milk line 2 is removed, then the auxiliary reservoir 7 is no longer shut off by the outlet valve 9. To prevent the first ball 13 from falling out of the outlet opening of the auxiliary reservoir 7, the outlet opening is blocked by means of a pin 14. Because of the pressure of the (fore)milk present in the auxiliary reservoir 7 the outlet valve 9 can easily give way and the (fore)milk flows into a collecting element 10. The (fore)milk collected in the collecting element 10 can be discharged via the valve 11 and a (non-shown) pump, in particular to an implement for supplying fodder and/or drink to an animal.

The milk obtained by means of the teat cups will not flow directly to the milk collecting means 3 because of the presence of the connecting element 8 in the milk line 2 and the aperture provided at the lower side thereof, said aperture being in connection with the auxiliary reservoir 7, as a result of the fact that the connecting element forms a resistance to the milk flow. Said resistance is realized by the staggered interruption, located in a substantially horizontal plane, in the milk line 2. Therefore, the first milk obtained will fill in the first instance the auxiliary reservoir 7 via the inlet opening at the lower side of the connecting element. In the auxiliary reservoir 7 there are provided further shutting off means 15 that shut off the auxiliary reservoir as soon as the latter is filled with the foremilk. The further shutting off means 15 comprise a float which is designed as a second ball 16 in the present embodiment. After the auxiliary reservoir 7 has been filled,

the second ball 16 comes against a seat 17 so that the auxiliary reservoir 7 is shut off and the subsequent milk flow will stream via the connecting element 8 to the milk glass 3. It has appeared in practice that the milk streaming from the teat cup 1 to the milk glass 3 does hardly mix, if at all, with the foremilk which is present in the lower part of the auxiliary reservoir.

When only the teat cups have to be cleaned, the teat cups are attached in the usual manner to rinsing members, with the aid of which a rinsing liquid is led into the teat cups and, if desired, also beyond the edge thereof. By closing the valve 12 provided behind the connecting element 8, said rinsing liquid can directly be discharged via the auxiliary reservoir 7; in that situation the valve 11 will in principle be opened. In this manner a very short discharge of rinsing liquid is possible, so that the teat cups can be cleaned easily, i.e. after each milking of an animal. In the same way drying air can be pressed through the teat cups and escape via the auxiliary reservoir 7. When the teat cups and also the milk line system have to be cleaned, the teat cups are again attached in the usual manner to rinsing members and are now also included in a rinsing line system. The rinsing liquid, like the (fore)milk, will fill in the first instance the auxiliary reservoir 7, and be led subsequently via the valve 12 further to the milk glass 3 and be discharged via the valve 5 and the pump 6. In this manner the teat cups and the lines connected thereto, the milk glass 3 included, are rinsed. When cleaning of the teat cups and the milk line system has been ended, rinsing liquid will remain in the auxiliary reservoir 7. When the rinsing members are detached from the teat cups and the teat cups are consequently again in open connection with the outside air, so that the vacuum is removed from the milk line 2, in the same manner as described in the foregoing for the (fore)milk present in the auxiliary reservoir, the rinsing liquid will arrive via the outlet valve 9 in the collecting element 10, while it can be discharged via the valve 11. In that situation the valve 12 is closed. When it

has been ensured that the rinsing liquid does not contain chemical components that are harmful to the animals, and thus only consists of water with milk residues that may be present therein, the rinsing liquid collected in the collecting
5 element 10 can also be conveyed as drinking-water to the implement for supplying fodder and/or drink to the animals.

24268-421

8

CLAIMS:

1. An implement for milking animals provided with a milking parlour with a milking robot for automatically attaching teat cups to the teats of an animal to be milked, said implement further being provided with milk container means for the milk obtained, while in at least one milk line between the teat cups and the milk container means there is provided an auxiliary reservoir in which a certain quantity of milk, substantially obtained at the beginning of the milking process, is collected via an inlet opening and can leave said auxiliary reservoir via an outlet opening with shutting off means, while the milk obtained thereafter is substantially led to the milk container means, wherein the inlet opening is provided with further shutting off means for preventing the milk collected in the auxiliary reservoir from being discharged to the milk container means; and wherein the outlet valve of the shutting off means of the outlet opening of the auxiliary reservoir is a further controllable shut-off valve.

2. An implement as claimed in claim 1, wherein there is provided an auxiliary reservoir in each of the milk lines between a teat cup and the milk container means.

3. An implement as claimed in claim 1 or 2, wherein the content of the auxiliary reservoir is larger than an expected quantity of foremilk.

4. An implement as claimed in claim 3, wherein the content of the auxiliary reservoir is two to three times as large as an expected quantity of foremilk.

5. An implement as claimed in any one of claims 1 to 4 wherein only at the beginning of the milking process the auxiliary reservoir is in open connection with

24268-421

9

the relevant milk line between a teat cup and the milk container means.

6. An implement as claimed in claim 5, wherein in the relevant milk line there is included a connecting element to which the interrupted ends of the milk line are connected, the lower side of said connecting element being provided with an aperture to which the auxiliary reservoir is connected.

7. An implement as claimed in claim 6, wherein the two ends of the milk lines are connected to the connecting element in a substantially horizontal plane, in a staggered position opposite each other.

8. An implement as claimed in any one of claims 1 to 7 wherein the shutting off means comprise an outlet valve that shuts off the auxiliary reservoir by means of the vacuum present in the milk line.

9. An implement as claimed in claim 8, wherein the outlet valve releases the outflow opening of the auxiliary reservoir when after milking the teat cup comes in open connection with the outside air, or when the teat cup is included in a rinsing line system for only cleaning the teat cup or when the teat cup is included in a rinsing line system and rinsing of the teat cup and the milk line system connected thereto is ended.

10. An implement as claimed in claim 8 or 9, wherein the outlet valve is constituted by a first ball.

11. An implement as claimed in any one of claims 1 to 10 wherein the further shutting off means of the inlet opening of the auxiliary reservoir comprise an inlet valve which is designed as a float.

24268-421

10

12. An implement as claimed in claim 11, wherein the float is designed as a second ball.

13. An implement as claimed in any one of claims 10 to 12, wherein the diameter of the first ball is smaller
5 than the diameter of the second ball.

14. An implement as claimed in any one of claims 10 to 13, wherein the balls are made from synthetic material or rubber.

15. An implement as claimed in any one of
10 claims 1 to 10, wherein the further shutting off means of the inlet opening of the auxiliary reservoir comprise an inlet valve which is a controllable shut-off valve.

16. An implement as claimed in claim 15, wherein the controllable shut-off valve is suitable for operating under
15 the control of a milk level sensor.

17. An implement as claimed in claim 16 wherein the milk level sensor comprises a milk conductivity sensor or an optical or an acoustic sensor.

18. An implement as claimed in claim 16, wherein the
20 sensor is disposed in the auxiliary reservoir.

19. An implement as claimed in claim 1, wherein the further controllable shut-off valve is computer-controlled.

20. An implement as claimed in any one of claims 1 to 19 wherein the auxiliary reservoir has an
25 outflow opening that debouches into a collecting element.

21. An implement as claimed in claim 20, wherein the foremilk separated at least one of by means of the auxiliary reservoir and, when the relevant teat cup is included in a

• • 24268-421

11

rinsing line system, the rinsing liquid discharged via the auxiliary reservoir can be conveyed to an implement for supplying at least one of fodder and drink to an animal.

FETHERSTONHAUGH & CO.

OTTAWA, CANADA

PATENT AGENTS

1/1

