

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 May 2002 (23.05.2002)

PCT

(10) International Publication Number
WO 02/40417 A2

(51) International Patent Classification⁷: **C03C 17/00** (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(21) International Application Number: PCT/US01/27355

(22) International Filing Date: 31 August 2001 (31.08.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/229,449 31 August 2000 (31.08.2000) US
09/ 30 August 2001 (30.08.2001) US

(71) Applicant: **PPG INDUSTRIES OHIO, INC. [US/US]**
3800 West 143rd Street, Cleveland, OH 44111 (US).

(72) Inventor: **FINLEY, James J.**; 111 Cornwall Drive, Pittsburgh, PA 15238 (US).

(74) Agents: **LEPIANE, Donald C.** et al.; PPG Industries, INC., One PPG Place, Pittsburgh, PA 15272 (US).


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHODS OF OBTAINING PHOTOACTIVE COATINGS AND/OR ANATASE CRYSTALLINE PHASE OF TITANIUM OXIDES AND ARTICLES MADE THEREBY

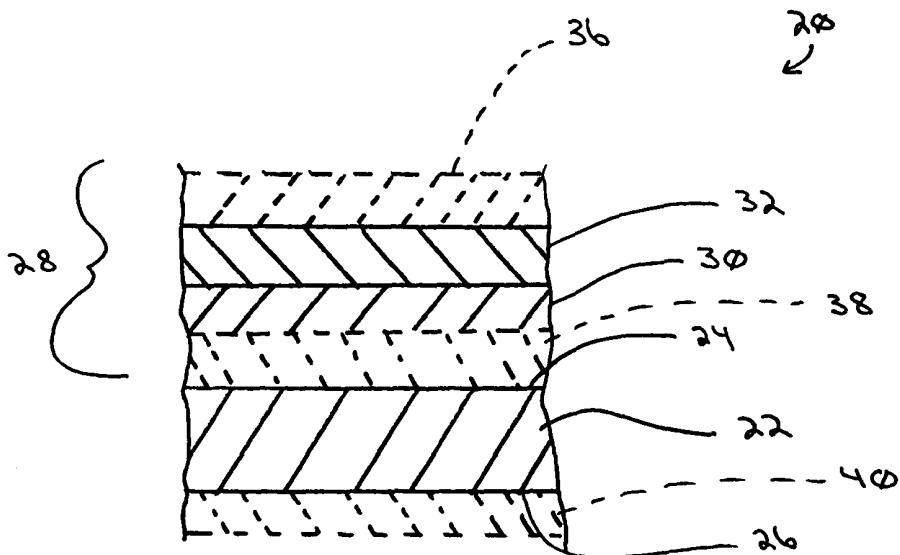

WO 02/40417 A2

(57) Abstract: Hydrophilic and/or rutile and anatase titanium oxide are obtained by sputter depositing titanium metal oxide on a film of zirconium oxide in the cubic phase. Another technique is to deposit a titanium metal on a film of zinc oxide in the cubic phase and heating the coating in an oxidizing atmosphere to provide an anatase and/or rutile phase(s) of titanium oxide.

- 1 -

METHODS OF OBTAINING PHOTOACTIVE COATINGS AND/OR ANATASE
CRYSTALLINE PHASE OF TITANIUM OXIDES AND ARTICLES MADE THEREBY

CROSS-REFERENCE TO RELATED APPLICATION

5 This application claims the benefits of U.S. Provisional Application Serial No. 60/229,449 filed August 31, 2000, which is herein incorporated by reference in its entirety.

BACKGROUND OF THE INVENTION

10 1. Field of the Invention

 This invention relates to photoactive coatings and to methods of changing or obtaining the phase of a material, e.g., an anatase crystalline phase of titanium oxide from an amorphous phase of titanium oxide or from titanium metal and, 15 more particularly, to methods of obtaining a photoactively hydrophilic and/or photocatalytic coating, and/or to articles made thereby.

2. Technical Considerations

20 For many substrates, e.g., glass substrates such as architectural windows, automotive transparencies, and aircraft windows, it is desirable that the surface of the substrate is substantially free of surface contaminants, such as common organic and inorganic surface contaminants, for as long a 25 duration as possible. Traditionally, this has meant that these surfaces are cleaned frequently. This cleaning operation is typically performed by manually wiping the surface with or without the aid of chemical cleaning solutions. This approach can be labor, time, and/or cost 30 intensive. Therefore, a need exists for methods to clean glass substrates that reduce the frequency and/or need for such manual cleaning operations.

 It is known that certain semiconductor metal oxides provide a photoactive (hereinafter "PA") coating. The terms 35 "photoactive" or "photoactively" refer to the photogeneration

- 2 -

of a hole-electron pair when illuminated by electromagnetic radiation of a particular frequency, typically ultraviolet ("UV") light. Above a certain minimum thickness, these PA coatings are typically photocatalytic (hereinafter "PC"). By 5 "photocatalytic" is meant a coating which upon exposure to certain electromagnetic radiation, such as UV, interacts with organic contaminants on the coating surface to degrade or decompose the organic contaminants. With sufficient PC activity, these PC coatings are also self-cleaning. By "self- 10 cleaning" is meant having sufficient PC activity to decompose organic contaminants fast enough that manual wiping to remove organic contaminants is not required. In addition, PC coatings are also typically hydrophilic. By "hydrophilic" is meant water wetting with a contact angle with water of 15 generally less than 20 degrees. The hydrophilicity of the PC coatings helps reduce fogging, i.e., the accumulation of water droplets on the coating, which may decrease visible light transmission and visibility through the coated substrate.

Titanium dioxide (TiO_2) coatings are known to have 20 hydrophilic and/or self-cleaning properties. However, not all phases of titanium dioxide are acceptable for providing self-cleaning and/or hydrophilic coatings. It is currently preferred to use the anatase crystalline phase rather than the amorphous phase or rutile crystalline phase of titanium 25 dioxide to form PC coatings.

Sputter coating titanium dioxide, e.g., as a protective overcoat, has been used and is disclosed in U.S. Patent No. 4,716,086. A limitation of conventionally sputter depositing titanium dioxide is that the anatase crystalline 30 phase is not obtained. Another limitation is that sputter depositing a metal film is more efficient than depositing a metal oxide film. In the instance where a metal oxide film is desired, an efficient method is to sputter deposit a metal film on a substrate, and thereafter heat the deposited metal 35 film in air. In the case of sputter deposited titanium metal

- 3 -

film, the oxide film formed after heating is usually not the anatase phase but rather the rutile phase of titanium dioxide. Publications directed to the formation of titanium dioxide coatings on a glass substrate include U.S. Patent Nos. 5 5,595,813 and 6,027,766, and "Photooxidative Self-cleaning Transparent Titanium Dioxide Films on Glass", Paz et al., J. Mater. Res., Vol. 10, No. 11, pp. 2842-48 (November 1995).

As can be appreciated, it would be advantageous to provide a method of making a sputter deposited hydrophilic and/or photocatalytic coating, e.g., by heating sputter deposited titanium metal films to convert the films to titanium dioxide films that are at least partly in the anatase phase.

15

SUMMARY OF THE INVENTION

This invention relates to a method of changing or obtaining the phase of a material and includes depositing a film that enhances the change or preferred deposition of a phase. In an embodiment of the invention, a titanium oxide film is deposited on a zirconium oxide film in the cubic or orthorhombic phase. In one embodiment of the invention, the deposited titanium oxide film is in the anatase phase. In another embodiment, a titanium metal film is deposited on a zirconium oxide film in the cubic or orthorhombic phase and the titanium metal film is heated in the presence of oxygen to provide a titanium oxide, e.g., titanium dioxide, film at least partly in the anatase phase.

In another embodiment of the invention, methods are provided for making a photoactive, e.g., photoactively hydrophilic and/or photocatalytic, coating. One method for making a photoactive coating includes depositing a first coating layer comprising zirconium oxide over at least a portion of a substrate and depositing a second coating layer comprising a photoactive material, such as titanium dioxide, over at least a portion of the first coating layer to provide

- 4 -

a coated substrate. In one embodiment, the method includes heating at least one of the substrate, and/or the first coating layer, and/or the second coating layer to make the photoactive article.

5 The invention also relates to articles, e.g., windows for residential and commercial use, windows for land, air, sea, space and underwater vehicles, made using coated substrates of the invention. In one embodiment, the article includes a substrate, a zirconium oxide layer having a
10 thickness of 10Å to 200Å deposited over at least a portion of the substrate, and a titanium oxide layer deposited over the zirconium oxide layer. In another embodiment, the article includes a first layer including a first material in a cubic or orthorhombic crystalline phase deposited over at least a
15 portion of a substrate. A second layer having at least one photoactive material is deposited over, e.g., on the first layer.

BRIEF DESCRIPTION OF THE DRAWINGS

20 Fig. 1 is a fragmented side, sectional view (not to scale) of a substrate having a coating stack incorporating features of the invention;

Fig. 2 is a side, sectional view (not to scale) of an insulating glass unit having a coating stack of the
25 invention;

Fig. 3 is a graph having curves of film thickness versus peak height counts for cubic zirconium oxide phase, rutile titanium oxide phase, and anatase titanium oxide phase;

Figs. 4-11 are graphs showing the contact angle of a
30 water droplet versus minutes of exposure to ultraviolet radiation for titanium dioxide coatings (Figs. 4-7) and various coatings incorporating features of the invention (Figs. 8-11);

- 5 -

Fig. 12 is a graph showing contact angle versus post-heat temperature for a coating similar to that of Fig. 10;

10;

Fig. 13 is a graph showing contact angle versus 5 preheat temperature for a coating similar to that of Fig. 10;

Figs. 14-21 are graphs showing the results of Cleveland Condensation Tests of coatings similar to those of Figs. 4-11, respectively;

Figs. 22-24 are graphs showing reflectance versus 10 Cleveland Condensation Test (CCC) exposure time for a coating similar to that of Fig. 10 at preheat temperatures of 250°F (121°C), 300°F (149°C), and 370°F (188°C), respectively; and

Fig. 25 is a graph showing CCC reflectance results versus preheat temperatures for coatings similar to that shown 15 in Fig. 10.

DETAILED DESCRIPTION OF THE INVENTION

As used herein, spatial or directional terms, such as "inner", "outer", "above", "below", "top", "bottom", and 20 the like, relate to the invention as it is shown in the drawing figures. However, it is to be understood that the invention may assume various alternative orientations and, accordingly, such terms are not to be considered as limiting. Further, all numbers expressing dimensions, physical 25 characteristics, processing parameters, quantities of ingredients, reaction conditions, and the like used in the specification and claims are to be understood as being modified in all instances by the term "about". Accordingly, unless indicated to the contrary, the numerical values set 30 forth in the following specification and claims are approximations that may vary depending upon the desired properties sought to be obtained by the present invention. At the very least, and not as an attempt to limit the application of the doctrine of equivalents to the scope of the claims, 35 each numerical value should at least be construed in light of

- 6 -

the number of reported significant digits and by applying ordinary rounding techniques. Moreover, all ranges disclosed herein are to be understood to include the beginning and ending values and to encompass any and all subranges subsumed 5 therein. For example, a stated range of "1 to 10" should be considered to include any and all subranges between (and inclusive of) the minimum value of 1 and the maximum value of 10; that is, all subranges beginning with a minimum value of 1 or more and ending with a maximum value of 10 or less, e.g., 10 5.5 to 10. Further, as used herein, the terms "deposited over" or "provided over" mean deposited or provided on but not necessarily in surface contact with. For example, a coating "deposited over" a substrate does not preclude the presence of one or more other coating films of the same or different 15 composition located between the deposited coating and the substrate. Additionally, all percentages disclosed herein are "by weight" unless indicated to the contrary. All photocatalytic activity values discussed herein are those determined by the conventional stearic acid test described in 20 U. S. Patent No. 6,027,766, herein incorporated by reference.

Referring now to Fig. 1, there is shown an article 20 having features of the present invention. The article 20 includes a substrate 22 having a first surface 24 and an opposite or second surface 26. The substrate 22 is not 25 limiting to the invention and may be of any desired material having any desired characteristics, such as opaque, translucent, transparent or substantially transparent substrates. By "substantially transparent" is meant having a visible light transmittance of 60% or greater. By 30 "translucent" is meant having a visible light transmittance of greater than 0% to less than 60%. By "opaque" is meant having a visible light transmittance of 0%. Additionally, the substrate 22 can be of any desired shape, such as flat or curved. Examples of suitable substrates include, but are not 35 limited to, plastic substrates (such as polyacrylates,

- 7 -

polycarbonates, and polyethyleneterephthalate (PET)); metal substrates; ceramic substrates; glass substrates; or mixtures or combinations thereof. For example, the substrate can be conventional untinted soda-lime-silica glass, i.e., "clear 5 glass", or can be tinted or otherwise colored glass, borosilicate glass, leaded glass, and/or tempered, untempered, annealed, or heat strengthened glass. The glass may be of any type, such as conventional float glass, flat glass, or a float glass ribbon, and may be of any composition having any optical 10 properties, e.g., any value of visible transmission, ultraviolet transmission, infrared transmission, and/or total solar energy transmission. Types of glass suitable for the practice of the invention are described, for example but not to be considered as limiting, in United States Patent Nos. 15 4,746,347; 4,792,536; 5,240,886; 5,385,872; and 5,393,593. For example, the substrate 22 may be a glass pane of an architectural window, a skylight, one pane of an insulating glass unit, or a ply for a conventional automotive windshield, side or back window, sun roof, or an aircraft transparency, 20 just to name a few.

The substrate 22 may have a coating stack or coating 28 of the invention deposited over all or at least a portion of the substrate 22, e.g., over all or a portion of the surface 24 to make a substantially transparent article, a substantially translucent article, or a substantially opaque article. As used herein, the terms "coating" or "coating stack" include one or more coating layers or films. The terms "layer" or "film" refer to a region of the coating having a desired or selected coating composition. The coating 28 can 25 be photocatalytic, photoactively hydrophilic, or both. By "photoactively hydrophilic" is meant a coating in which the contact angle of a water droplet on the coating decreases with time as a result of exposure of the coating to electromagnetic 30 radiation within the photoabsorption band of the coating. If

- 8 -

photoactively hydrophilic, the coating 28 may not necessarily be photocatalytic.

The exemplary coating 28 of the invention shown in Fig. 1 includes a first film 30 deposited over, e.g., on, at 5 least a portion of the surface 24 of the substrate 22 and a second film 32 deposited over, e.g., on, at least a portion of the first film 30. In this exemplary coating 28, the first and second films 30, 32 are discrete coating layers, i.e., the coating 28 is not a mixture of the materials of the first and 10 second films 30, 32. In one embodiment, the first film 30 includes a material that enhances the photoactivity, e.g., photoactive hydrophilicity and/or photocatalytic activity, of the second film 32 over that of the second film 32 alone. In another embodiment, the first film 30 includes a material that 15 facilitates or enhances the growth of a particular crystalline phase of the second film 32. The first film 30 can be the same film (i.e., can be of the same material) to achieve both of these goals or different materials can be used.

The first film 30 can include any material and can 20 be of any thickness to provide one or more of the results described above. For example, the first film 30 can include at least one metal oxide. As used herein, the term "metal oxide" includes oxides, super-oxides, or sub-oxides of the metal. For example, as used herein, terms such as "zirconium 25 oxide", "titanium oxide", and the like are to be understood to include dioxides, sub-oxides, and super-oxides and combinations of these with other materials, such as zirconium hafnium oxide, and/or oxynitrides, such as titanium oxynitride. In one exemplary embodiment, the first film 30 is 30 zirconium oxide (ZrO_2). The zirconium oxide film should be sufficiently thick so as to achieve one or more of the above-described goals. In one embodiment, the zirconium oxide first film 30 can have a thickness greater than 0Å, such as greater than or equal to 15Å, such as greater than or equal to 25Å, 35 such as in the range of 25Å to 500Å. For example, the

- 9 -

zirconium oxide film 30 can have a thickness in the ranges of 25Å to 150Å; 40Å to 80Å; and/or 60Å to 70Å. In another exemplary embodiment, the zirconium oxide film 30 can have a thickness greater than or equal to 100Å, e.g., in the range of 5 100Å to 500Å, e.g., 120Å to 200Å, e.g., 140Å to 160Å.

The second film 32 includes a photoactive material. The photoactive material can include at least one metal oxide, such as but not limited to, one or more metal oxides or semiconductor metal oxides. Suitable metal oxides include 10 titanium oxides, silicon oxides, iron oxides, tungsten oxides, zinc oxides, tin oxides, zinc/tin oxides, calcium titanium oxides, molybdenum oxides, niobium oxides, and mixtures thereof, just to name a few. The second film 32 can be crystalline or at least partially crystalline. However, 15 crystallinity is not necessarily needed to achieve photoactive hydrophilicity.

In one exemplary coating 28 of the invention, the photoactive coating material of the second film 32 is titanium dioxide (TiO₂). Titanium dioxide can exist in an amorphous form or one of three crystalline forms, i.e., the anatase, rutile, and brookite crystalline forms. Anatase phase titanium dioxide is particularly useful because it exhibits strong photoactivity while also possessing excellent resistance to chemical attack and excellent physical 25 durability. The second film 32 can have any desired thickness. In one exemplary embodiment, a titanium dioxide second film has a thickness greater than or equal to 100Å, e.g., greater than or equal to 200Å, e.g., in the range of 100Å to 500Å, e.g., 300Å to 400Å.

30 The first and second films 30, 32 of the coating 28 should be sufficiently thick so as to provide an acceptable level of photoactivity, e.g., photocatalytic activity and/or photoactive hydrophilicity, for a desired purpose. There is no absolute value which renders the coating 28 "acceptable" or 35 "unacceptable" because whether the coating 28 has an

- 10 -

acceptable level of photoactivity varies depending largely on the purpose and conditions under which the coated article is being used and the performance standards selected to match that purpose. However, the thickness of the coating 28 to 5 achieve photoactive hydrophilicity can be much less than is needed to achieve a commercially acceptable level of photocatalytic activity. For example, the zirconium oxide/titanium oxide coating described above can have any desired thickness. However, for most automotive uses, the 10 coating 28 should not be so thick that it cannot be seen through. For example, the coating 28 can have a total thickness of 50 Å to 5000 Å. As the coating thickness decreases in such ranges as 50 Å to 3000 Å, e.g., 100 Å to 1000 Å, e.g., 200 Å to 600 Å, e.g., 200 Å to 300 Å, 15 photocatalytic activity may be very low or even unmeasurable by the conventional stearic acid test but photoactive hydrophilicity may still be present in the presence of electromagnetic radiation within the photoabsorption band of the photoactive material.

20 The coating 28 may be an outer or the outermost coating of a multi-layer stack of coatings present on substrate 22 or the coating 28 may be embedded as one of the coatings other than the outermost coating within such a multi-layer stack. For example, as shown in Fig. 1, an optional 25 temporary or removable protective material or protective film 36 can be applied over all or a portion of the coating 28. The protective film 36 can include, for example, an organic material such that upon exposure of the coated substrate 22 to electromagnetic energy within the photoabsorption band of the 30 photoactive material of the second film 32, the protective film 36 will be photocatalytically removed from the coating 28 surface. This protective film 36 can be applied to form a desired pattern on the coating 28 and can be transparent, translucent, or opaque.

- 11 -

The coating 28 may be deposited directly on, i.e., in surface contact with, the surface 24 of the substrate 22. Alternatively, one or more optional functional coatings 38 may be interposed between the coating 28 and the substrate 22. As used herein, the term "functional coating" refers to a coating which modifies one or more physical properties of the substrate on which it is deposited, e.g., optical, thermal, chemical or mechanical properties, and is not intended to be removed from the substrate during subsequent processing. The functional coating 38 may have one or more functional coating films of the same or different composition or functionality. The functional coating 38 may be an electrically conductive coating, such as, for example, an electrically conductive heated window coating as disclosed in U.S. Patent Nos. 5,653,903 and 5,028,759, or a single-film or multi-film coating. Likewise, the functional coating 38 may be a solar control coating, for example, a visible, infrared or ultraviolet energy reflecting or absorbing coating. Examples of suitable solar control coatings are found, for example, in U.S. Patent Nos. 4,898,789; 5,821,001; 4,716,086; 4,610,771; 4,902,580; 4,716,086; 4,806,220; 4,898,790; 4,834,857; 4,948,677; 5,059,295; and 5,028,759, and also in U.S. Patent Application No. 09/058,440. Similarly, the functional coating 38 can be a low emissivity coating. "Low emissivity coatings" allow visible wavelength energy, e.g., 400 nm to about 800 nm (e.g., to about 780 nm), to be transmitted through the coating but reflect longer-wavelength solar infrared energy and/or thermal infrared energy and are typically intended to improve the thermal insulating properties of architectural glazings. By "low emissivity" is meant emissivity less than 0.4, preferably less than 0.3, more preferably less than 0.2. Examples of low emissivity coatings are found, for example, in U.S. Patent Nos. 4,952,423 and 4,504,109 and British reference GB 2,302,102. The functional coating 38 may be a single layer or multiple layer coating and may comprise one or more metals,

- 12 -

non-metals, semi-metals, semiconductors, and/or alloys, compounds, composites, combinations, or blends thereof. For example, the functional coating 38 may be a single layer metal oxide coating, a multiple layer metal oxide coating, a non-
5 metal oxide coating, or a multiple layer coating. The functional coating 38 may include one or more transparent conductive oxides (such as Indium Tin oxide or tin oxide) or doped metal oxides (such as tin oxide doped with fluorine or antimony). Moreover, the functional coating 38 can include
10 one or more nitrides (such as titanium nitride, silicon nitride, or zirconium nitride), borides (such as titanium diboride), or carbides (such as titanium carbide). Additionally or alternatively, another optional functional coating 40 can be deposited over all or a portion of the
15 second surface 26.

Examples of suitable functional coatings for use with the invention are commercially available from PPG Industries, Inc. of Pittsburgh, Pennsylvania under the SUNGATE® and SOLARBAN® families of coatings. Such functional
20 coatings typically include one or more anti-reflective coating films comprising dielectric or anti-reflective materials, such as metal oxides or oxides of metal alloys, which are preferably transparent or substantially transparent to visible light. The functional coating(s) may also include infrared
25 reflective films comprising a reflective metal, e.g., a noble metal such as gold, copper or silver, or combinations or alloys thereof, and may further comprise a primer film or barrier film, such as titanium, as is known in the art, located over and/or under the metal reflective layer.

30 An exemplary article of manufacture of the invention is shown in Fig. 2 in the form of an insulating glass (IG) unit 42. The insulating glass unit has a first pane 44 spaced from a second pane 46 by a spacer assembly (not shown) and held in place by a sealant system to form a chamber between
35 the two panes 44,46. The first pane 44 has a first surface 48

- 13 -

(number 1 surface) and a second surface 50 (number 2 surface). The second pane 46 has a first surface 52 (number 3 surface) and a second surface 54 (number 4 surface). The first surface 48 can be the exterior surface of the IG unit 42, i.e., the 5 surface exposed to the environment, and the second surface 54 can be the interior surface, i.e., the surface forming the inside of the structure. Examples of IG units are disclosed in U.S. Patent Nos. 4,193,236; 4,464,874; 5,088,258; and 5,106,663, herein incorporated by reference. A coating 28 of 10 the invention can be deposited over one or more of the surfaces (any one or more of the number 1-number 4 surfaces). In the non-limiting embodiment shown in Fig. 2, the coating 28 is positioned on the number 1 surface 48. The coating 28 reduces fogging and makes the IG unit 42 easier to clean and 15 maintain. One or more optional functional coatings 62 as described above may be deposited over one or more of the surfaces (number 1-number 4), e.g., the number 2, number 3, or number 4 surfaces.

One or both of the films 30,32 of the coating 28 of 20 the invention can be formed on the substrate 22 by any conventional method, such as but not limited to spray pyrolysis, chemical vapor deposition (CVD), or magnetron sputtered vacuum deposition (MSVD). For example, both films 30,32 may be deposited by the same method or one film may be 25 deposited by one method and one or more of the other films of the coating 28 may be deposited by one or more other methods. Each of the methods has advantages and limitations depending upon the desired characteristics of the coating 28 and the type of glass fabrication process. For example, for a 30 conventional float glass process the CVD and spray pyrolysis methods may be preferred over the MSVD method because they are more compatible with coating continuous substrates, such as float glass ribbons, at elevated temperatures. Exemplary CVD and spray pyrolysis coating methods are described in U.S. 35 Patent Nos. 4,344,986; 4,393,095; 4,400,412; 4,719,126;

- 14 -

4,853,257; 5,536,718; 5,464,657; 5,714,199; 5,599,387; and 4,971,843, which patents are hereby incorporated by reference.

U.S. Patent Nos. 4,379,040; 4,861,669; 4,900,633; 4,920,006; 4,938,857; 5,328,768; and 5,492,750, hereby incorporated by reference, describe MSVD apparatus and methods to sputter coat metal oxide films on a substrate, including a glass substrate. The MSVD method is acceptable to deposit one or more of the coating films 30, 32 on the substrate 22, e.g., a glass sheet. In one embodiment, the substrate 22 may be heated prior to deposition of one or more of the coating films, e.g., films 30 and/or 32. Alternatively or in addition thereto, the substrate 22 can be heated during the sputtering process itself.

In one embodiment, the coating 28 can be sputter deposited on the first surface 24 of the substrate 22 and the functional coating 40 deposited on the second surface 26 in the same coater. International Publication WO 00/37377, herein incorporated by reference, discloses a sputtering method which is suitable for this embodiment. As will be appreciated, since the sputtering takes place in a vacuum, the substrate 22 can be in any orientation during the sputtering process of this embodiment of the invention as long as the targets for deposition of the coating 28 and the functional coating 40 are on opposite sides of the substrate 22.

An exemplary method to provide a coating 28 by an MSVD process will now be described. A substrate 22, such as a glass substrate, can be preheated prior to deposition of the coating 28. For example, the substrate can be heated to a temperature greater than or equal to 100°F (38°C), such as in the range of about 100°F to 1000°F (38°C to 537°C), such as greater than or equal to 150°F (65°C), 200°F to 500°F (93°C to 260°C), such as 300°F to 400°F (149°C to 204°C), prior to deposition of the coating 28 (i.e., the temperature of the substrate at the beginning of the coating process is within one of these temperature ranges). The heated substrate can

- 15 -

then be placed in a conventional MSVD coating device having an argon/oxygen atmosphere, e.g., 5 vol.% to 100 vol.% oxygen, e.g., 5 vol.% to 50 vol.% oxygen, e.g., 20 vol.% oxygen, at a pressure of 5 to 10 millitorr. To deposit a zirconium oxide 5 first film 30, a zirconium containing target can be sputtered in conventional manner to form a zirconium oxide first film 30 of a desired thickness. The zirconium containing target preferably includes 50 weight percent (wt.%) or more zirconium, e.g., 80 wt.% or more zirconium. However, the 10 zirconium target can also include one or more other metals or dopants, such as boron, strontium, titanium, lead, barium, silicon, calcium, hafnium, lanthanum, chromium, vanadium, manganese, copper, iron, magnesium, scandium, yttrium, niobium, molybdenum, ruthenium, tantalum, tungsten, silver, 15 nickel, rhenium, aluminum, or mixtures thereof, or the zirconium target can be a zirconium oxide target.

A titanium-containing target can then be used to form a titanium oxide (e.g., titanium dioxide) second film 32 over the zirconium oxide first film 30. If the coating is not 20 crystallized, the coated substrate can be removed from the coater and heated to a temperature sufficient to form a crystalline coating. For example, the coated substrate can be heated to a temperature in the range of 100°C (212°F) to 650°C (1200°F), such as 400°C (752°F) to 650°C (1200°F), for a time 25 period sufficient to promote formation of a crystalline form of titanium dioxide. Generally, less than an hour at a temperature in the range of 100°C (212°F) to 600°C (1112°F) is sufficient. Where the substrate 22 is a glass sheet cut from a float glass ribbon, the coating 28 may be sputter deposited 30 on the air side and/or the tin side of the glass. Alternatively, the substrate 22 can be coated without preheating the substrate 22 prior to coating.

The substrate 22 having the coating 28 deposited by the CVD, spray pyrolysis or MSVD methods can be subsequently

- 16 -

subjected to one or more post-coating heating operations, such as annealing or tempering. As may be appreciated, the time and temperatures of the post-heating may be affected by several factors, including the makeup of substrate 22, the 5 makeup of coating 28, the thickness of the coating 28, and whether the coating 28 is directly in contact with the substrate 22 or is one layer of a multi-layer stack on substrate 22. Alternatively, in one exemplary embodiment of the invention discussed below under the heading FEATURE 2, a 10 photoactive hydrophilic coating 28 can be formed by the practice of the invention without the need for any post-heating steps.

In the embodiment described immediately above, the coating films 30,32 were sputtered in an oxygen-containing 15 atmosphere to form a metal oxide-containing coating 28. However, it is to be understood that the first and/or second films 30 and 32 can be sputtered as metal films in a non-reactive atmosphere, or in an active atmosphere below the switching point of the material as defined in U.S. Patent No. 20 5,830,252 and U.S. Patent Application No. 09/156,730, both of which are herein incorporated by reference, to oxidize the metal films to metal oxide films.

The coatings 28 of the present invention are preferably photoactive, e.g., photocatalytic and/or 25 photoactively hydrophilic, upon exposure to radiation in the ultraviolet range, e.g., 300 nm to 400 nm and/or the visible range, e.g., 400 nm to 700 nm, of the electromagnetic spectrum. Sources of ultraviolet radiation include natural 30 sources, e.g., solar radiation, and artificial sources such as a black light or an ultraviolet light source such as a UVA-340 light source commercially available from the Q-Panel Company of Cleveland, Ohio.

The present invention provides several features which make it advantageous for use in various industrial 35 fields. Four of these features (crystalline phase selection,

- 17 -

hydrophilicity, chemical durability, and photocatalytic activity) will now be discussed.

FEATURE 1 (Crystalline Phase Selection)

In one embodiment, the invention is directed to 5 techniques or methods to alter or change the phase of a film. The term "phase" is used to describe crystallinity or non-crystallinity of the film. For example, the term "amorphous phase" means the film is totally or substantially amorphous, i.e., exhibits no detectable intensity as measured in counts 10 of a diffraction peak for the amorphous phase as measured by conventional x-ray diffraction (XRD). The term "rutile phase" means the film or coating totally or substantially has a rutile crystal structure (i.e., exhibits a detectable intensity as measured in counts of a diffraction peak for the 15 rutile phase as measured by XRD) and the term "anatase phase" means the film or coating totally or substantially has an anatase crystal structure (i.e., exhibits a detectable intensity as measured in counts of a diffraction peak for the anatase phase as measured by XRD). An additional aspect of 20 the invention is directed to changing the phase of a titanium oxide film, e.g., changing the phase(s) of a sputter deposited film from the amorphous phase to a film that includes the anatase and/or rutile phase(s). This aspect of the invention will be appreciated from the following discussion.

25 In the following discussion, unless indicated to the contrary, the following conditions apply. The substrates were pieces of 12 inches (30 centimeters ("cm")) square or 6 inches by 12 inches (15 cm by 30 cm) clear glass having a thickness of about 0.088 inch (2.3 millimeters ("mm")) made by the float 30 process. The air side of the glass pieces was coated. The air side of glass made by the float process is the side opposite of the side floating on the molten metal bath as the glass ribbon moves through the forming chamber. Reference may be made to U.S. Patent Nos. 6,027,766 and 4,091,156 for a 35 discussion of forming a flat glass ribbon. The glass pieces

- 18 -

were cut from glass sheets cut from a glass ribbon. As can be appreciated, the composition, type, configuration, and dimensions of the substrates are not limiting to the invention and any type of substrate may be used, e.g., colored glass, 5 plastics, metal, ceramics, and wood to name a few types of materials that may be used. Each of the glass pieces was sputter coated in an Airco ILS 1600 magnetron sputter vacuum coater. As can be appreciated, the invention is not limited to the type of sputtering or the apparatus used. For example, 10 all types of sputter techniques may be used. A titanium metal film was sputter deposited on a glass piece or substrate by energizing a titanium metal target contained in a chamber having a 100% argon gas atmosphere; a zirconium metal film was deposited on a glass piece or substrate by energizing a 15 zirconium metal target contained in a chamber having a 100% argon gas atmosphere. A titanium oxide film was deposited on a glass piece or substrate by energizing a titanium target contained in a chamber having about a 50% oxygen, 50% argon gas atmosphere. The term "titanium oxide" used herein when 20 referring to the anatase phase, rutile phase, and amorphous phase includes a film having titanium dioxide and/or sub-oxides and/or super-oxides of titanium. A zirconium oxide film was deposited on a glass piece or substrate by energizing a zirconium metal target contained in a chamber having about a 25 50% oxygen, 50% argon gas atmosphere. The percentages of oxygen and argon in the chamber when sputter depositing the titanium oxide and zirconium oxide films was based on the combined flow of oxygen and argon gases into the chamber. A titanium nitride film was deposited on a glass piece or 30 substrate by energizing a titanium metal target contained in a chamber having about a 100% nitrogen gas atmosphere. The operating gas pressure for all atmospheres was 4 microns. Prior to filling the chamber with the desired atmosphere, the chamber was pumped down, i.e., evacuating the atmosphere from

- 19 -

the chamber to a value within the range of about 5 to 9×10^{-6} Torr.

Table I below shows the power in kilowatts and the number of passes the samples made at a line speed of 120 5 inches (304.8 cm) per minute. The sputter coated substrates were cut into 4 inch (10.2 cm) square pieces and heated in a furnace. The pieces were moved into the furnace set at a temperature of about 1300°F (704.4°C) and heated for a period of about 2-1/2 minutes. The temperature of the furnace was 10 calculated using a piece of uncoated glass sized similar to the coated pieces. The temperature was measured using a thermocouple contacting the surface of the calculation piece; the measured temperature was about 1216°F (657.8°C) after about 2-1/2 minutes. After heating, the pieces were removed 15 and placed in an oven heated to about 275°F (135°C) for about 4 minutes and removed. The pieces were placed in the oven to anneal the glass pieces to prevent fracturing of the glass pieces and for ease of cutting. The crystalline phases of the sputter deposited films of titanium metal, titanium oxide, 20 titanium nitride, and titanium oxynitride, and of zirconium metal and zirconium oxide were measured using x-ray diffraction (XRD). The samples measured were about one inch (2.54 cm) square cut from the 4 inch (10.2 cm) square pieces. The x-ray diffraction analysis was performed using a Philips 25 X-Pert MPD using the grazing angle method and comparing the peaks to standard x-ray diffraction identification cards (PDF cards) commercially available from JCPDS International Center for Diffraction Data. The generated pattern or curve has on the "x" axis 2-Theta (degree) and on the "y" axis intensity in 30 counts. For zirconium oxide in the cubic phase, the (1,1,1) plane has a peak at a 2-Theta of about 30.484 degrees (PDF # 27-0997). While orthorhombic zirconium oxide has a peak at a 2-Theta of 30.537 (PDF #34-1084), it is believed the peaks observed in the present invention were for cubic rather than 35 for orthorhombic zirconium oxide. However, orthorhombic

- 20 -

zirconium oxide could be present. Alternatively, in another embodiment the zirconium oxide can be in the baddeleyite structure (PDF #37-1484). For titanium oxide in the rutile phase, the (1,1,0) plane has a peak at a 2-Theta of about 5 27.446 degrees and for titanium oxide in the anatase phase, the (1,0,1) plane has a peak at a 2-Theta of about 25.281 degrees. Amorphous titanium oxide and amorphous zirconium oxide show no peaks when analyzed using x-ray diffraction. The intensity count for peaks was determined by either using 10 software that is part of the Philips equipment or by estimating the peak height. The peak count indicates the presence of a phase; the higher the count, the more dominant is the presence of the phase. A count was made every 10 seconds or equivalent to a 10 second count. The values 15 presented herein unless indicated otherwise are relative values one to the other because the equipment was not calculated using a standard before the measurements were made. When the peak was estimated, operator judgment is used to determine the count range, more particularly, the operator 20 selects one point on the curve or pattern to be the start point and another point on the curve to be the end point of the peak and interpolates the height from the curve portions between the start and end points. Although operator judgment is involved, the object is to identify the presence of anatase 25 crystalline phase and the relative amount. For purposes of appreciating the invention, the x-ray diffraction technique is acceptable for determining the presence of different phases of zirconium oxide and titanium oxide. Using this technique to determine the presence, type, and intensity of phases present, 30 it must be appreciated that absence of a peak is not an indication that the oxide is amorphous. To determine if any crystals are present a more sensitive technique is required, e.g., electron diffraction.

The area under the curve between the start and end 35 points gives the crystal size for a calibrated instrument. In

- 21 -

the present case, the area under the curve gives relative size. The interest in this investigation was to determine the presence of anatase phase and, therefore, the peak height was of major interest. Table I lists the peak height in counts 5 for samples that had their x-ray diffractive patterns analyzed using the software. Peak heights for the other samples were not made using the software but were estimated from an x-ray diffraction curve. The estimate for those samples is given in the discussion of the samples and identified as an estimate by 10 a check "✓" on Table I.

Table I lists the target material; the atmosphere (gas) in the chamber during coating; the power in kilowatts; the number of passes; the thickness of the sputter deposited film after coating; the thickness of the sputter deposited 15 metal films after heating; and the height of the peaks in 10 second counts for each of the phases that were identified as being present, when the peak height was determined by an operator the value is given in the discussion of the sample and shown as a check "✓" on Table I. The value determined 20 using the software is given in numerical value on Table I. The reported thicknesses of the sputter deposited films (except for samples 19 and 25) and/or coatings were measured by conventional x-ray fluorescence and stylus profilometer measurements. The reported thicknesses for samples 19 and 25 25 were estimated using curves developed from past coater performance.

When no peaks were observed for the zirconium oxide and titanium oxide films, a check "✓" is put in the amorphous column. When reference is made to the presence of peaks, it 30 is the presence of peaks at the 2-Theta angles. Further, the samples were not run in the order presented. The samples are presented to compare like coatings where practical.

- 22 -

SAMPLE 1

A zirconium oxide film having a thickness of about 68 Angstroms was deposited on a glass substrate. The x-ray diffraction pattern of the zirconium oxide film after heating 5 showed the cubic phase. It is estimated that the peak height in counts is in the range of about 250-350 counts.

SAMPLE 2

A zirconium oxide film having a thickness of about 10 187 Angstroms was deposited on a glass substrate. The x-ray diffraction pattern of the zirconium oxide after heating showed the cubic phase. It is estimated that the peak height in counts is in the range of about 1000-1100 counts.

15

SAMPLE 3

A zirconium metal film having a thickness of 177 Angstroms was deposited on a glass substrate; the coated glass substrate was heated. The zirconium oxide film formed during heating had a thickness of about 256 Angstroms. The x-ray 20 diffraction pattern of the zirconium oxide film showed the cubic phase. It is estimated that the peak height in counts is in the range of about 250-350 counts. An additional peak was observed at about 28.5 2-Theta degrees. The peak or its cause have not been identified; however, the peak was not 25 present in the x-ray diffraction curve for Sample 2.

Samples 1-3 were made, and the films analyzed to determine if zirconium metal and/or zirconium metal oxide have a peak at the same 2-Theta value as an anatase peak for titanium oxide. The zirconium oxide films did not show any 30 peak at the 2-Theta value.

SAMPLE 4

A titanium oxide film having a thickness of 218 Angstroms was deposited on a glass substrate. After heating,

- 23 -

the film was analyzed by x-ray diffraction. No peaks were noted.

SAMPLE 5

5 A titanium film having a thickness of 109 Angstroms was deposited on a glass substrate and the coated substrate was heated. The film thickness after heating was 207 Angstroms. The titanium oxide film was analyzed by x-ray diffraction. No peaks were observed.

10

SAMPLE 6

A zirconium oxide film having a thickness of 20 Angstroms was deposited on a glass substrate and a titanium oxide film having a thickness of 220 Angstroms was deposited 15 on the zirconium oxide film. The x-ray diffraction pattern showed no peaks for the zirconium oxide film or the titanium oxide film. No peaks indicated that the zirconium oxide film and the titanium oxide film were amorphous.

20

SAMPLE 7

Sample 7 was a repeat of Sample 6 and confirmed that neither the zirconium oxide film nor the titanium oxide film had peaks.

25

SAMPLE 8

A zirconium oxide film having a thickness of 31 Angstroms was deposited on a glass substrate and a titanium oxide film having a thickness of 221 Angstroms was deposited 30 on the zirconium oxide film. After heating, the coated substrate was analyzed by x-ray diffraction. The zirconium oxide film had no peaks to indicate the presence of cubic zirconium. The titanium oxide had the rutile phase with a peak height of about 94 counts. No anatase was observed.

- 24 -

SAMPLE 9

A zirconium oxide film having a thickness of 45 Angstroms was deposited on a glass substrate and a titanium oxide film having a thickness of 215 Angstroms deposited on 5 the zirconium oxide film. After heating, the coated substrate was analyzed by x-ray diffraction. No cubic zirconium oxide peaks were observed. The titanium oxide had a rutile peak height of 171 counts and an anatase peak height of 310 counts.

10

SAMPLE 10

A zirconium oxide film having a thickness of 45 Angstroms was deposited on a glass substrate and a titanium oxide film having a thickness of 215 Angstroms deposited on the zirconium oxide film. The x-ray diffraction pattern of 15 the heated substrate had no cubic zirconium oxide peaks. The pattern showed a titanium oxide rutile peak having a peak height of 235 counts and an anatase peak height of 475 counts. Samples 9 and 10 are similar and the differences in the value between the peak counts are within the expected variations.

20

SAMPLE 11

A zirconium oxide film having a thickness of 65 Angstroms was deposited on a glass substrate and a titanium oxide film having a thickness of 215 Angstroms was deposited 25 on the zirconium oxide film. The x-ray diffraction pattern had a measured peak height for cubic zirconium oxide of 283 counts and a measured peak height for the rutile phase of titanium oxide of 158 counts and for the anatase phase of 665 counts.

30

SAMPLE 12

A zirconium oxide film having a thickness of 91 Angstroms was deposited on a glass substrate and a titanium oxide film having a thickness of 217 Angstroms was deposited 35 on the zirconium oxide film. The x-ray diffraction pattern

- 25 -

had a measured peak height for cubic zirconium oxide of 416 counts and a measured peak height for the rutile phase of titanium oxide of 210 counts and a measured peak height for the anatase phase of titanium oxide of 258 counts.

5

SAMPLE 13

A zirconium oxide film having a thickness of 105 Angstroms was deposited on a glass substrate and a titanium oxide film having a thickness of 221 Angstroms was deposited 10 on the titanium oxide film. The x-ray diffraction pattern had a measured peak height for cubic zirconium oxide of 548 counts, a measured peak height for rutile phase of titanium oxide of 171 counts and a measured peak height for anatase phase of titanium oxide of 62 counts.

15

SAMPLE 14

A zirconium oxide film having a thickness of 153 Angstroms was deposited on a glass substrate and a titanium oxide film having a thickness of 221 Angstroms was deposited 20 on the zirconium oxide film. The x-ray diffraction pattern had a measured peak height for cubic zirconium oxide of 555 counts and a measured peak height for rutile titanium oxide of 85 counts. No measurable anatase titanium oxide peak was observed.

25

SAMPLE 15

A zirconium oxide film having a thickness of 190 Angstroms was deposited on a glass substrate and a titanium oxide film having a thickness of 215 Angstroms was deposited 30 on the zirconium oxide film. The x-ray diffractive pattern had a measured peak height for cubic zirconium oxide of 690 counts and a measured peak height for rutile titanium oxide of 19 counts. No measurable anatase titanium oxide peak was observed.

35

- 26 -

SAMPLE 16

Sample 16 was a repeat of Sample 15. The measured peak height for cubic zirconium oxide peak was 687 counts and the measured peak height for rutile titanium oxide was 206 counts. No anatase titanium oxide peak was observed. Although there is a difference in peak height counts for the rutile titanium oxide in Samples 15 and 16, the interest here is that no anatase peak was observed in Samples 15 and 16.

10

SAMPLE 17

A zirconium oxide film having a thickness of 184 Angstroms was deposited on a glass substrate and a titanium metal film having a thickness of 106 Angstroms was deposited on the zirconium oxide film. After heating, the titanium oxide film had a thickness of 205 Angstroms. It is expected from the x-ray diffraction pattern that the cubic zirconium oxide will have a peak height between 1000-1100 counts. No peaks for rutile and anatase were observed.

20

SAMPLE 18

A zirconium metal film having a thickness of 64 Angstroms was deposited on a glass substrate. A titanium oxide film was deposited on the zirconium metal film and had a thickness of 220 Angstroms. After heating, the zirconium oxide had a thickness of 93 Angstroms. The x-ray diffraction pattern had a measured peak height for cubic zirconium oxide of 208 counts, and a measured peak height for rutile phase of titanium oxide of 146 counts. No measurable anatase titanium oxide peak was observed.

30

SAMPLE 19

A zirconium metal film having a thickness of 148 Angstroms was deposited on a glass substrate. A titanium oxide film having a thickness of 215 Angstroms was deposited on the zirconium metal film. The zirconium oxide film after

- 27 -

heating had a thickness of 264 Angstroms. No cubic, zirconium oxide, or rutile or anatase titanium oxide peaks were observed on the x-ray diffraction curve.

5

SAMPLE 20

A zirconium metal film having a thickness of 87 Angstroms was deposited on a glass substrate. A titanium oxide film having a thickness of 225 Angstroms was deposited on the zirconium metal film. The zirconium oxide film after 10 heating had a thickness of 126 Angstroms. The x-ray diffraction pattern had a measured height for cubic zirconium oxide of 259 counts, a measured peak height for rutile titanium oxide of 146 counts and a measured peak height for anatase oxides of 80 counts.

15

SAMPLE 21

A zirconium metal film having a thickness of 182 Angstroms was deposited on a glass substrate, and a titanium metal film having a thickness of 113 Angstroms was deposited 20 on the zirconium metal film. After heating, the zirconium oxide film had a thickness of 263 Angstroms, and the titanium oxide film had a thickness of 214 Angstroms. The x-ray diffraction pattern shows no measurable peaks for cubic zirconium oxide and anatase titanium oxide. It is expected 25 from the x-ray diffraction pattern that the rutile titanium oxide will have peak height between 900-1000 counts.

SAMPLE 22

A zirconium metal film having a thickness of 87 Angstroms was deposited on a glass substrate, and a titanium metal film having a thickness of 115 Angstroms was deposited 30 on the zirconium metal film. After heating, the zirconium oxide film had a thickness of 126 Angstroms, and the titanium oxide film had a thickness of 217 Angstroms. The x-ray

- 28 -

diffraction pattern had no observable peak for the cubic zirconium oxide, and rutile and anatase titanium oxide.

SAMPLE 23

5 A titanium oxide film having a thickness of 218 Angstroms was deposited on a glass substrate, and a titanium metal film having a thickness of 110 Angstroms was deposited on the titanium oxide film. After heating, the titanium metal film had a thickness of 208 Angstroms. The x-ray diffraction 10 pattern had no observable peaks for rutile and anatase titanium oxide.

SAMPLE 24

15 A titanium metal film having a thickness of 58 Angstroms was deposited on a glass substrate; the film after heating, was a titanium oxide film having a thickness of 110 Angstroms. A titanium oxide film having a thickness of 223 Angstroms was deposited on the titanium metal film. The x-ray diffraction pattern had no observable peaks for the rutile and 20 anatase titanium oxide.

SAMPLE 25

25 A titanium metal film having a thickness of 119 Angstroms was deposited on a glass substrate; the film after heating was a titanium oxide film having a thickness of 249 Angstroms. A titanium oxide film having a thickness of 215 Angstroms was deposited on the titanium metal film. The x-ray diffraction pattern had no measurable peak for rutile and 30 anatase titanium oxide.

30

SAMPLE 26

35 A titanium nitride film having a thickness of 216 Angstroms was deposited on a glass substrate. The film thickness after heating was 384 Å. The composition of the film was not analyzed. The film during heating is expected to

- 29 -

oxidize but to what extent was not determined; therefore, the film can include titanium nitride, titanium oxynitride or titanium oxide. A titanium film having a thickness of 119 Angstroms was deposited on the titanium nitride film; after 5 heating, the titanium oxide film had a thickness of 223 Angstroms. The x-ray diffraction pattern showed a rutile peak. It is not known if the peak was from the heated titanium rutile film or the heated titanium metal film or combinations thereof. It is expected that the rutile will 10 have a peak height between 100-250 counts. No anatase peaks were observed.

SAMPLE 27

A zirconium oxide film having a thickness of 190 15 Angstroms was deposited on a glass substrate. A titanium nitride film having an unknown thickness was deposited on the zirconium oxide film. The titanium nitride film after heating had a thickness of 364 Å. See discussion in Sample 26 regarding composition of heated titanium nitride film. It is 20 expected from the x-ray diffraction pattern that the cubic zirconium oxide will have a peak height between 900-1000. The rutile of the heated titanium nitride film will have a peak height between 100-200 counts and the anatase will have a peak height between 250-300 counts.

25

SAMPLE 28

A 4 inch (10.2 cm) square piece of Sample 2 was heated and a titanium oxide film having a thickness of 220 Angstroms was deposited on the heated coating of Sample 2. 30 The sample was not heated after depositing the titanium oxide film. The peak for cubic zirconium oxide was observed as discussed in Sample 2. No peaks were observed for rutile or anatase titanium oxide.

- 30 -

SAMPLE 29

A 4 inch (10.2 cm) square piece of Sample 1 was heated and a titanium oxide film having a thickness of 220 Angstroms was deposited on the heated coating of Sample 1. 5 After coating, the coated piece was not heated. The peak for cubic zirconium oxide was observed as discussed in Sample 1. No peaks were observed for rutile or anatase titanium oxide.

SAMPLE 30

10 Sample 30 was a repeat of Sample 28 except after the titanium oxide film was deposited, the coated sample was heated for the second time. The x-ray diffraction pattern had a cubic zirconium oxide peak height of 1036 counts, and a rutile titanium oxide peak height of 167 counts. No anatase 15 peaks were noted.

SAMPLE 31

Sample 31 was a repeat of Sample 29 except after the titanium oxide film was deposited, the coated glass was heated 20 for the second time. The x-ray diffraction pattern had a cubic zirconium oxide peak height of 285 counts and a rutile titanium oxide peak height of 246 counts. No anatase peak was noted.

25

SAMPLE 32

A zirconium oxide film having a thickness of 173 Angstroms was deposited on a glass substrate. The glass substrate was heated after which a titanium metal film having a thickness of 115 Angstroms was deposited on the heated 30 zirconium oxide coated glass substrate. The coated glass substrate was heated, and the titanium oxide film had a thickness of 217 Angstroms. The x-ray diffraction pattern had a cubic zirconium oxide peak height of 932 counts. No rutile or anatase titanium oxide peaks were observed.

35

- 31 -

SAMPLE 33

A zirconium oxide film having a thickness of 65 Angstroms was deposited on a glass substrate and a titanium metal having a thickness of 115 Angstroms deposited on the 5 zirconium oxide. The glass substrate was heated. After heating, a titanium oxide film having a thickness of 217 Angstroms was deposited on the heated zirconium oxide coated glass substrate. The x-ray diffraction pattern had a cubic zirconium oxide peak height of 288 counts. No rutile or 10 anatase titanium oxide peaks were noted.

A study of Samples 1-33 shows that the peak height for both the anatase titanium oxide phase and the rutile titanium oxide phase of Samples 6-16 follow an approximate 15 bell-shaped curve (see Fig. 3) when plotted as a function of thickness of the zirconium oxide layer. Table II below shows the peak counts for the cubic zirconium oxide phase and the rutile and anatase titanium oxide phase for Samples 6-16. The first layer for each of the Samples 6-16 is zirconium oxide 20 and the second layer for each of the Samples 6-16 is titanium oxide. It should be noted that the thickness of the titanium oxide layer for Samples 6-16 is the same. This is unexpected because the bell-shaped curve for peak heights is a result of the change in the thickness of the zirconium oxide layer, not 25 the thickness of the titanium oxide layer. Support for this conclusion is the fact that the shape of the increase in peak heights for the zirconium oxide phase is not bell shaped.

TABLE I

TABLE I (cont'd.)

Sample No.	Layers	Target Material	Chamber Atmosphere	Power KW	No. of Passes	Coating Thickness (Angstroms)			Peak Count			
						After Coating	After Heating	Amorphous	Titanium Oxide	Rutile	Anatase	Zirconium Oxide
14	1	Zr	O ₂	3.7	7	153						555
	2	Ti	O ₂	6	14	221			85			
15	1	Zr	O ₂	5.2	6	190						690
	2	Ti	O ₂	6	14	215			19			
16	1	Zr	O ₂	5.2	6	181						687
	2	Ti	O ₂	6.0	14	223				206		
17	1	Zr	O ₂	5.2	6	184						✓
	2	Ti	Ar	2.8	1	106	205	✓				
18	1	Zr	Ar	0.5	1	64	93					208
	2	Ti	O ₂	6	14	220			146			
19	1	Zr	Ar	2.3	1	148	264	✓				
	2	Ti	O ₂	6	14	215		✓				
20	1	Zr	Ar	0.8	1	87	126					259
	2	Ti	O ₂	6	14	225				146	80	
21	1	Zr	Ar	2.3	1	182	263	✓			✓	
	2	Ti	Ar	2.8	1	113	214					
22	1	Zr	Ar	0.8	1	87	126	✓				
	2	Ti	Ar	2.8	1	115	217	✓				
23	1	Ti	O ₂	6.0	14	218		✓				
	2	Ti	Ar	2.8	1	110	208	✓				
24	1	Ti	Ar	1.4	1	58	110	✓				
	2	Ti	O ₂	6.0	14	223		✓				

TABLE I (cont'd.)

Sample No.	Layers	Target Material	Chamber Atmosphere	Power KW	No. of Passes	Coating Thickness (Angstroms)		Peak Count			
						After Coating	After Heating	Amorphous	Rutile	Anatase	Zirconium Oxide
25	1	Ti	Ar	2.8	1	1.19	249	✓			
	2	Ti	O ₂	6.0	14	215		✓			
26	1	Ti	N ₂	4.4	5	UK	384		✓		
	2	Ti	Ar	2.8	1	UK	223	✓			
27	1	Zr	O ₂	5.2	6	190				✓	
	2	Ti	N ₂	4.4	5	UK	364	✓	✓	✓	
28	1	Sample 2 heated									✓
	2	Ti	O ₂	6	14	220		✓			
29	1	Sample 1 heated									✓
	2	Ti	O ₂	6	14	220		✓			
30	1	Replicate Sample 2 heated									1036
	2	Ti	O ₂	6	14	220		✓			
31	1	Replicate Sample 1 heated									285
	2	Ti	O ₂	6	14	220			246		
32	1	Zr	O ₂	5.2	6	173					932
	2	Ti	Ar	2.8	1	115	217	✓			
33	1	Zr	O ₂	3.7	3	65					288
	2	Ti	Ar	2.8	1	115	217	✓			

- 35 -

TABLE II

<u>Sample No.</u>	<u>Thickness Angstroms</u>		<u>Counts</u>		
	<u>Layer 1</u>	<u>Layer 2</u>	<u>Rutile</u>	<u>Anatase</u>	<u>Cubic</u>
6	20	216	0	0	0
7	20	220	0	0	0
8	31	221	94	0	0
9	45	215	171	310	0
10	45	215	235	475	0
11	65	219	158	665	283
12	91	217	210	258	416
13	105	221	171	62	548
14	153	221	85	0	555
15	190	215	19	0	690
16	181	223	206	0	687

It should be further noted that the value for Sample 16 was not plotted in the curves shown in Fig. 3 because the 5 peak count for the titanium oxide phase rutile was exceptionally greater than the peak height for the rutile titanium oxide phase of Sample 15 and did not follow the bell-shape pattern. The curves of Fig. 3 and the data of Table II show an increase of peak counts for the anatase titanium oxide 10 phase at a zirconium oxide thickness of about 65-75 Angstroms and thereafter the counts for peak height of the anatase titanium oxide phase decreases. The rutile titanium oxide phase has an increase in counts for peak height at zirconium oxide up to a thickness in the range of about 51-102 15 Angstroms, and thereafter the counts for peak height decreases.

In the following Samples 34-37, the deposition parameters were controlled to try to deposit coatings having a thickness each of the zirconium oxide layer of about 65-75 20 Angstroms which appeared to provide the maximum peak height

- 36 -

count for anatase titanium oxide phase (see Table II). The deposition parameters for Samples 34-45 are shown in Table III below. In the following Sample 38, the titanium oxide layer thickness was similar to the titanium oxide thickness of 5 Samples 34-37 with the zirconium oxide layer thickness increased. In the following Samples 39-43, the thickness of the zirconium oxide layer and the first layer of the titanium oxide were kept constant and the thickness of the second layer of titanium oxide varied. In the following Samples 44 and 45, 10 the thickness of the zirconium oxide and titanium oxide layers was varied. Samples 38-45 were coated as discussed above except that Samples 34-45 were heated and after heating the samples were removed from the furnace and allowed to cool to room temperature instead of being placed in an oven.

15

SAMPLE 34

A zirconium oxide film having a thickness of 71 Angstroms was deposited on a glass substrate after which a titanium oxide film having a thickness of 130 Angstroms was 20 deposited on the zirconium oxide film. The x-ray diffraction pattern had a measured peak height for cubic zirconium oxide phase of 241 counts and for rutile titanium oxide phase of 164 counts. No anatase titanium oxide peak was observed.

25

SAMPLE 35

A zirconium oxide film having a thickness of 65 Angstroms was deposited on a glass substrate after which a titanium oxide film having a film thickness of 65 Angstroms was deposited on the zirconium oxide film. The x-ray 30 diffraction pattern had a measured peak height for cubic zirconium oxide phase of 267 counts. No rutile or anatase titanium oxide phase peaks were noted.

(Note: for Samples 36 and 37 the counts for peak 35 heights were made using an x-ray tube different than the x-ray

- 37 -

tube used for the samples. The counts for peaks are significantly higher and should be taken into account when comparisons are made.)

5

SAMPLE 36

A zirconium oxide film having a thickness of 65 Angstroms was deposited on a glass substrate after which a titanium oxide film having a thickness of 177 Angstroms was deposited on the zirconium oxide film. The x-ray diffraction 10 pattern had a measured peak height for cubic zirconium oxide phase of 1136 and for rutile titanium oxide phase of 1169. A trace of the anatase titanium oxide peak was observed.

15

SAMPLE 37

A zirconium oxide film having a thickness of 62 Angstroms was deposited on a glass substrate after which a titanium oxide film having a thickness of 192 Angstroms was deposited on the zirconium oxide film. The x-ray diffraction pattern had a measured peak height for cubic zirconium oxide 20 phase of 1315, for rutile titanium oxide phase of 845, and for anatase titanium oxide phase of 2284.

25

SAMPLE 38

A zirconium oxide film having a thickness of 173 Angstroms was deposited on a glass substrate. A titanium oxide film having a thickness of 114 Angstroms was deposited on the zirconium oxide film. An x-ray diffraction pattern was made; however, peak heights were not estimated or calculated. From the x-ray diffraction pattern, a peak for cubic zirconium 30 oxide phase and what appears to be a displaced peak for rutile titanium oxide phase were observed. The zirconium oxide phase was more noticeable than the rutile titanium oxide phase. No peak was observed for the anatase titanium oxide phase.

- 38 -

SAMPLE 39

Sample 39 is similar to Sample 34 except prior to heating the coated substrate having zirconium oxide and titanium oxide film, an additional titanium metal film having 5 a thickness of 48 Angstroms was deposited on the titanium oxide film. The coated substrate was heated and the heated titanium metal film oxidized and the resulting titanium oxide film had a thickness of 90 Angstroms. The x-ray diffraction pattern showed a cubic zirconium oxide phase having a peak 10 count of 240, a rutile titanium oxide phase having a peak count of 178, and an anatase titanium oxide phase having a peak count of 187 counts.

SAMPLE 40

15 Sample 40 is similar to Sample 35 except a titanium metal film having a thickness of 80 Angstroms was deposited on the titanium oxide film. The coated substrate was heated and the heated titanium metal film oxidized and the resulting titanium oxide film had a thickness of 151 Angstroms. The x- 20 ray diffraction pattern had a cubic zirconium oxide phase peak count of 241. No rutile or anatase titanium oxide peaks were observed.

SAMPLE 41

25 Sample 41 is similar to Sample 35 except a titanium metal having a thickness of 25 Angstroms was deposited on the titanium oxide film. The coated substrate was heated and the heated titanium metal film oxidized and the resulting titanium oxide film had a thickness of 47 Angstroms. An x-ray 30 diffraction pattern was made; however, peak heights were not estimated or made. From the x-ray diffraction pattern a peak was observed for the cubic zirconium oxide phase; no peaks were observed for the rutile and anatase titanium oxide phases.

- 39 -

SAMPLE 42

A zirconium oxide film having a thickness of 62 Angstroms was deposited on a glass substrate, a titanium oxide film having a thickness of 98 Angstroms was deposited on the 5 zirconium oxide, and a titanium metal film having a thickness of 46 Angstroms was deposited on the titanium oxide film. The coated substrate was heated and the thickness of the titanium oxide from oxidizing the titanium metal was calculated to be 87 Angstroms. An x-ray diffraction pattern was made; however, 10 peak heights were not estimated or calculated. From the x-ray diffraction pattern a peak was observed for the zirconium oxide phase and for the rutile titanium oxide phase. No peak or a slight trace was observed for the anatase titanium oxide phase.

15

SAMPLE 43

Sample 43 is similar to Sample 42 except a titanium metal having a thickness of 61 Angstroms was deposited on the titanium oxide film. The calculated thickness of the titanium 20 oxide film from oxidizing the titanium metal film was 116 Angstroms. An x-ray diffraction pattern was made; however, peak heights were not estimated or calculated. From the x-ray diffraction pattern a peak was observed for the zirconium oxide phase and the rutile titanium oxide phase. No peak was 25 observed for the anatase titanium oxide phase.

SAMPLE 44

A zirconium oxide film having a thickness of 57 Angstroms was deposited on a glass substrate; a titanium metal 30 having a thickness of 25 Angstroms was deposited on the zirconium oxide, and a titanium oxide film having a thickness of 65 Angstroms was deposited on the titanium metal. The coated glass was heated in air and the calculated thickness of titanium oxide film from oxidizing the titanium metal film was 35 47 Angstroms. An x-ray diffraction pattern was made; however,

- 40 -

peak heights were not estimated or made. From the x-ray diffraction pattern a peak was observed for the cubic zirconium oxide phase. No peaks were observed for the rutile and anatase titanium oxide phases.

5

SAMPLE 45

Sample 45 is similar to Sample 38 except a titanium metal having a thickness of 48 Angstroms was deposited on the titanium oxide film. The titanium oxide film after heating 10 the titanium metal film had a calculated thickness of 91 Angstroms. An x-ray diffraction pattern was made; however, peak heights were not measured or calculated. From the x-ray diffraction pattern a peak was observed for cubic zirconium oxide and what appears to be a displaced peak for rutile 15 titanium oxide phase. No peak for anatase titanium oxide phase was observed.

From the results of Samples 34-37, it is observed that anatase titanium oxide phase was developed in titanium 20 oxide films having a thickness of about 169 Angstroms. As can be appreciated, the thickness at which anatase titanium oxide can be developed may be lower. Sample 38 supports the conclusion from Table II that a thick zirconium oxide first layer is not efficient to the development of anatase titanium 25 oxide phase for the titanium dioxide phase in this thickness range of the curve of Fig. 3. This could be dependent upon the thickness of the titanium dioxide film. From the results of Samples 37-45, it is concluded that an anatase titanium oxide phase can be developed from a titanium metal film (see 30 Sample 39). However if the zirconium oxide film is increased, the efficiency for developing an anatase titanium oxide phase appears to significantly decrease (see Sample 45).

The invention may be practiced to provide a self-cleaning film of anatase and/or rutile titanium oxide for 35 residential and commercial windows, for automotive

- 41 -

transparencies e.g. side lites, rear windows, windshields,
roof windows, oven doors, mirrors, etc.

TABLE III (cont'd.)

Sample No.	Layers	Target Material	Chamber Atmosphere	Power KW	No. of Passes	Coating Thickness	Peak Count		
							After Coating	After Heating	Rutile Anatase Cubic
42	1	Zr	O ₂	3.7	3	62			✓
	2	Ti	O ₂	6.0	6	98			
3	Ti	Ar	1.2	1	46	87	✓		
43	1	Zr	O ₂	3.7	3	62			✓
	2	Ti	O ₂	6.0	6	98			
3	Ti	Ar	1.6	1	61	116	✓		
44	1	Zr	O ₂	3.7	3	57			✓
	2	Ti	Ar	0.8	1	25	47		
3	Ti	O ₂	6.0	4	65		✓		
45	1	Zr	O ₂	5.2	6	184			✓
	2	Ti	O ₂	6.0	8	130			
3	Ti	Ar	1.2	1	48	91	✓		

* x-ray tube changed

- 44 -

Additional glass substrates were coated with titanium oxide, zirconium oxide, and coatings of the invention having a titanium oxide coating deposited over zirconium oxide 5 (Samples 54-68 shown in Table IV). The deposition parameters and intensity measurements for these Samples 54-68 are shown in Table IV.

Samples 54-57 show the influence of zirconium oxide layer thickness on the anatase peak for the titanium oxide 10 layer. The behavior is similar to that of the samples discussed above and shown in Fig. 3. However, Samples 54-57 were post-heated at temperatures lower than those of the above Samples 1-45.

Samples 58-62 show the influence of zirconium oxide 15 layer thickness (70Å-166Å) with titanium oxide layer thickness (382Å-441Å). The thicker zirconium oxide layer does not decrease the intensity of the anatase peak (1,0,1) intensity.

Samples 63 and 64 are comparative examples of titanium dioxide. Compared to Samples 58-62, the Samples 58-20 62 of the invention show a notably higher anatase peak (1,0,1) intensity.

Samples 65-68 are zirconium oxide coatings and show the peak intensity of zirconium oxide in the cubic phase 25 (1,1,1), they clearly show a distinction between the peak positions for the anatase, rutile, and cubic phases for thin films.

Table IV also shows the presence of rutile, although of significantly lower intensity.

TABLE IV

Sample No.	Layers	Target Material	Gas (%)	Power kW	No. of Passes	Thickness (Å)	XRD Intensity (Counts)						
							TiO ₂			Anatase (1,0,1)			
							Postheat Temp (°C)	Preheat Temp (°F)	Postheat Temp (°C)	Postheat Temp (°C)	Postheat Temp (°C)	Postheat Temp (°C)	Noise
54	1	Zr	Ar 02	50	3.7	2	48	Room	110	333	360	317	0
54	2	Ti	Ar 02	50	5.9	11	183	Room	0	42	64	64	0
55	1	Zr	Ar 02	50	3.7	4	93	Room	194	286	264	279	0
55	2	Ti	Ar 02	50	5.9	11	183	Room	0	0	0	0	0
56	1	Zr	Ar 02	80	20	3.2	3	70	194	286	264	279	0
56	2	Ti	Ar 02	50	5.9	11	186	Room	0	0	0	0	0
57	1	Zr	Ar 02	80	20	3.6	6	158	Room	0	0	0	0
57	2	Ti	Ar 02	50	5.9	11	185	Room	258	500	524	453	28
58	1	Zr	Ar 02	50	5.9	3	70	Room	258	500	524	453	28
58	2	Ti	Ar 02	80	20	5.9	11	382	Room	387	387	561	491
59	1	Zr	Ar 02	50	3.7	6	127	Room	0	40	44	60	0
59	2	Ti	Ar 02	80	20	5.9	11	391	Room	65	507	648	552
60	1	Zr	Ar 02	50	3.7	6	132	Room	65	507	648	552	0
60	2	Ti	Ar 02	80	20	5.9	11	427	Room	120	584	592	598
61	1	Zr	Ar 02	80	20	3.2	3	65	Room	0	0	0	0
61	2	Ti	Ar 02	80	20	5.9	11	399	Room	261	532	554	554
62	1	Zr	Ar 02	80	20	3.7	6	166	Room	0	0	0	0
62	2	Ti	Ar 02	80	20	5.9	11	441	Room	0	83	159	82
63	1	Zr	Ar 02	80	20	5.9	11	347	Room	0	5.9	67	92
64	1	Ti	Ar 02	80	20	5.9	11	392	Room	0	0	0	0
65	1	Zr	Ar 02	80	20	3.7	6	144	Room	0	0	0	0
66	1	Zr	Ar 02	50	50	3.7	6	135	Room	0	0	0	0
67	1	Zr	Ar 02	80	20	3.7	3	82	Room	0	0	0	0
68	1	Zr	Ar 02	50	50	3.7	3	73	Room	0	0	0	0

FEATURE 2 (Hydrophilicity)

Coatings of the invention were compared to conventional titanium dioxide coatings under various 5 conditions to determine the impact of the invention on coating hydrophilicity.

Clear glass substrates having a thickness of 2.3 nm were coated using a commercially available Airco ILS 1600 magnetron sputter vacuum coater. Samples 46-49 were coated 10 only with a titania coating as comparative samples. Samples 50-53 were coated with a coating of the invention having a zirconium oxide film (first film) deposited on the glass substrate and a titanium dioxide film (second film) deposited on the zirconium oxide film. The deposition parameters for 15 Samples 46-53 are shown in Table V below. As shown in Table V, the substrates of Samples 48, 49, 52, and 53 were preheated in a furnace external to the vacuum coater such that the substrates had a temperature of about 370°F (188°C) at the beginning of the coating operation. The substrates were not 20 further heated during the coating process. After coating, the samples were evaluated at room temperature of 70°F (21°C) and were post-heated to temperatures of 470°F (243°C), 579°F (304°C), and 686°F (363°C) to evaluate the affect of post-coating heat treatment on the hydrophilicity of the coatings.

25 The phase peak counts were also measured as described above under Feature 1. It should be noted that the phase peak counts herein can be directly compared within a given Table but caution is advised when comparing counts from different Tables because no attempt was made to standardize 30 measurements for different sets of samples. It should be noted that the post-heat temperatures of Samples 46-53 were much lower than for the samples discussed under Feature 1 and that Samples 48, 49, 52, and 53 were preheated. The Samples 46 and 47 (titanium oxide, no preheat) were amorphous. 35 Whereas preheating the substrate showed an XRD intensity for

- 47 -

anatase (1,0,1) peak at the highest preheat temperatures (363°C) for Samples 48 and 49. The coatings with zirconium oxide first layer and no preheat (Samples 50 and 51) showed anatase (1,0,1) peak at 363°C (Sample 50) and 304°C (Sample 51), which are lower temperatures than for the samples described in Feature 1. No other peak intensities were present in Samples 48-51 at these temperatures. This indicates that the zirconium oxide first layer influenced the presence of the anatase.

Surprisingly, for the titanium oxide with zirconium oxide first layer that were preheated to 370°F (188°C), Sample 52 shows the coating to be amorphous and Sample 53 appears to have small rutile and anatase peaks. Most notably, the peaks are present at about an equal intensity over the range from room temperature to 363°C. Also, for Sample 53, the rutile peak intensity appears to be shifted to a higher 2-Theta value.

TABLE V

- 49 -

The coated substrates were exposed to UV radiation from a UVA-340 light source at an intensity of 24 W/m² at the coating surface and the contact angle of a water droplet on the coating measured over time. The results of this procedure 5 for Samples 46-53 are shown in Figs. 4-11, respectively. The numbers in the figure legends indicate the temperatures (°F) of post-heating as described above.

From Figs. 4-11, it can be seen that for a zirconium oxide (73Å)/titanium oxide (164Å) coating (Sample 50) with no 10 pre-heating (Fig. 8), the coating of the invention significantly reduces the contact angle of water for post-heating greater than 470°F (243°C) compared to a titania (173Å) coating (Sample 46) alone (Fig. 4). For a similar coating of the invention (Sample 52) with pre-heating to 370°F 15 (188°C), the contact angle compared to a similarly preheated titania coating alone (Sample 48) is lower even with no post-heating (compare Figs. 10 and 6).

As shown in Fig. 9, for a zirconium oxide (155Å)/titania (287Å) coating (Sample 51) with no preheating, 20 the coating shows a lower contact angle than with a titanium dioxide (397Å) coating (Sample 47) alone (Fig. 5) and the contact angle continues to decrease with post-heating. For a similar coating (Sample 53) with preheating to 370°F (188°C), the coating of the invention shows good hydrophilicity even 25 with no post-heating. By not requiring post-heating to achieve hydrophilicity or super-hydrophilicity (i.e., contact angle less than or equal to 5°), significant time and energy savings can be achieved by practicing the method of the invention.

30 Figs. 12 and 13 illustrate the effects of preheat and post-heat temperature for a replicate coating to that of Sample 52. Fig. 12 is a graph of contact angle for 60 minutes of UV exposure (340 nm having an intensity of 24 W/m² at the coating surface) versus post-heat temperature for substrates 35 preheated to 250°F (121°C), 300°F (149°C), and 370°F (188°C).

- 50 -

From Fig. 12, it is seen that as the preheat temperature increases, the contact angle decreases. It appears that preheating has a larger affect on the resultant contact angle than post-heating for post-heat temperatures up to about 500°F (260°C). Fig. 13 shows that for post-heat temperatures of 261°F (127°C), 388°F (198°C), and 495°F (257°C), preheating the substrate appears to have a larger impact on contact angle than post-heating.

FEATURE 3 (Chemical Durability)

10 Replicate coatings of Samples 46-53 were also tested in accordance with a conventional Cleveland Condensation Test (CCC) apparatus (Q.C.T. Condensation Tester commercially available from the Q-Panel Company of Cleveland, Ohio). The degree of coating degradation was determined by measuring the 15 reflectance (expressed in terms of the tristimulus value and designated Y or Y(R1) in the Figs.) of the coating using a commercially available BYK-Gardner TCS Meter. The results are shown in Figs. 14-21. As shown in Figs. 14 and 15, Samples 46 and 47 (titania alone; no preheat) showed poor CCC results.

20 As used herein, "poor" means that the coating did not survive the CCC test for more than 400 hours as evidenced by a drop in the observed reflectance indicating a degradation of the coating. Samples 48 and 49 (titania alone; with preheat) in Figs. 16 and 17 showed somewhat better results. However,

25 Samples 50 and 51 (zirconia/titania; no preheat) in Figs. 18 and 19 showed better CCC results than the titania coatings without preheat. Surprisingly, Samples 52 and 53 (zirconia/titania; with preheat) in Figs. 20 and 21 showed markedly improved CCC results over titania coatings with

30 preheat. For example, Sample 53 (Fig. 21) not only provided a coating with photoactive hydrophilicity less than 10° after 40 minutes exposure to UV radiation (340 nm at an intensity of 24 w/m²) even with no post-heating, but also had surprisingly good CCC results.

- 51 -

Figs. 22-25 show the results of the CCC test for a replicate coating of Sample 52 for post-heat temperatures of 261°F (127°C), 388°F (198°C), 495°F (257°C), 561°F (294°C), and room temperature for preheat temperatures of 250°F (121°C) 5 (Fig. 22), 300°F (149°C) (Fig. 23), and 370°F (188°C) (Fig. 24). From these results, it appears that as the preheat temperature increases, post-heating has less and less effect on the chemical durability of the coating. Fig. 25 shows that for this coating, if the substrate is heated to about 370°F 10 (188°C), post-heating below about 561°F (294°C) appears to have little or no affect on the chemical durability of the coating.

FEATURE 4 (Photocatalysis)

Some of the coatings of the invention were measured 15 for photocatalytic activity in accordance with the standard stearic acid test. Table VI shows the results for those measurements having a statisticiel R^2 value of greater than 0.93. The photocatalytic activity values are in units of centimeter⁻¹/min (cm⁻¹/min).
20

TABLE VI		
Sample	Post-heat (°C)	Photocatalytic Activity
49	303	0.0031
48	303	0.0038
52	243	0.0024
52	303	0.0025

As can be seen from Table VI, the tested coatings show photocatalytic activity under the conditions evaluated. For the other samples tested for photocatalytic activity, the 25 results showed an R^2 value of less than 0.93, making the results not statistically valuable and, hence, those values are not listed.

It will be readily appreciated by those skilled in the art that modifications may be made to the invention

- 52 -

without departing from the concepts disclosed in the foregoing description. Accordingly, the particular embodiments described in detail herein are illustrative only and are not limiting to the scope of the invention, which is to be given 5 the full breadth of the appended claims and any and all equivalents thereof.

- 53 -

What is claimed is:

1. A method of depositing a material having a predetermined crystalline phase, comprising the steps of:

5 depositing a film over at least a portion of a substrate surface that will enhance the growth of the predetermined crystal phase defined as a first depositing step; and

10 depositing the material on the film defined as a second depositing step.

2. The method of claim 1, including heating at least one of the substrate, the film or the material to have the material have at least one predetermined crystalline 15 phase.

3. The method of claim 1, wherein the first depositing step includes depositing a film in the cubic or orthorhombic crystalline phase.

20

4. The method of claim 1, wherein the first depositing step includes depositing a zirconium oxide film in the cubic phase.

25

5. The method of claim 4, wherein the second depositing step includes depositing a titanium oxide film over the zirconium oxide film, the titanium oxide film having anatase and/or rutile and/or amorphous phase(s) after heating.

30

6. The method of claim 5, wherein the first and second depositing steps are accomplished by sputter deposition.

35

7. The method of claim 6, wherein the substrate is glass.

8. An article made by the method of claim 5.
9. A transparency made by the method of claim 7.
5
10. The transparency of claim 9, wherein the transparency is a window.
11. A method of making a photoactive coating,
10 comprising the steps of:
 - depositing a first coating layer comprising zirconium oxide over at least a portion of a substrate defined as a first depositing step; and
 - depositing a second coating layer comprising 15 titanium oxide over at least a portion of the first coating layer defined as a second depositing step to provide a coated substrate.
12. The method of claim 11, including heating at
20 least one of the substrate, the first coating layer, or the second coating layer to make the photoactive coating.
13. The method of claim 11, including heating the substrate prior to or during the first depositing step such
25 that the substrate has a temperature greater than or equal to 150°F (65°C) at the beginning of the first depositing step.
14. The method of claim 11, including heating the substrate such that the substrate has a temperature in the
30 range of 100°F (38°C) to 1000°F (537°C) during the first depositing step.
15. The method of claim 14, including heating the substrate to a temperature in the range of 300°F (148°C) to
35 500°F (259°C).

- 55 -

16. The method of claim 11, including heating the substrate to a temperature in one or more of the following temperature ranges prior to depositing the first coating 5 layer: 70°F to 500°F (21°C to 259°C); greater than or equal to 200°F (93°C); 200°F to 1000°F (93°C to 537°C); or 300°F to 500°F (148°C to 259°C).

17. The method of claim 11, wherein the first 10 coating layer has a thickness greater than or equal to 15Å.

18. The method of claim 11, wherein the first coating layer has a thickness less than or equal to 150Å.

15 19. The method of claim 11, wherein the first coating layer has a thickness greater than 100Å.

20. The method of claim 11, wherein the first coating layer has a thickness less than 500Å.

20

21. The method of claim 11, wherein the first coating layer has a thickness in one or more of the following thickness ranges: greater than or equal to 15Å; greater than or equal to 25Å; greater than 0Å and less than or equal to 25Å; 40Å to 80Å; 60Å to 70Å; greater than or equal to 100Å; greater than 0Å and less than 500Å; or greater than or equal to 400Å.

30 22. The method of claim 11, including heating the coated substrate to a temperature greater than or equal to about 400°F (204°C).

35 23. The method of claim 11, including heating the coated substrate to a temperature greater than or equal to 500°F (259°C).

- 56 -

24. The method of claim 11, including heating the coated substrate to a temperature greater than or equal to 600°F (315°C).

5

25. The method of claim 11, wherein the second coating layer has a thickness greater than or equal to 100Å.

10 26. The method of claim 11, wherein the second coating layer has a thickness greater than or equal to 200Å.

27. The method of claim 11, wherein the second coating layer has a thickness in the range of 100Å to 500Å.

15 28. The method of claim 11, wherein the second coating layer has a thickness in one of the following thickness ranges: greater than or equal to 100Å; greater than or equal to 200Å; 100Å to 500Å; 300Å to 400Å.

20 29. The method of claim 11, wherein the substrate is glass.

30. The method of claim 11, wherein the photoactive coating is photohydrophilic.

25

31. The method of claim 11, wherein the photoactive coating is photocatalytic.

30 32. The method of claim 11, wherein the coated substrate has a contact angle with water of less than or equal to 20° after 60 to 90 minutes exposure to electromagnetic radiation having a wavelength of 340 nm at an intensity of 24 W/m² at the coating surface.

- 57 -

33. The method of claim 23, wherein the contact angle is less than 10°.

34. A coated substrate made by the method of claim 5 11.

35. An article, comprising:
a substrate;
a zirconium oxide layer having a thickness of 10Å to 10 200Å deposited over at least a portion of the substrate; and
a titanium oxide layer deposited over the zirconium oxide layer.

36. The article of claim 35, wherein the zirconium oxide layer has a thickness of 25Å to 150Å. 15

37. The article of claim 35, wherein the zirconium oxide layer is in the cubic or orthorhombic crystalline phase.

20 38. The article of claim 35, wherein the titanium oxide layer is on the zirconium oxide layer.

39. The article of claim 35, wherein the titanium dioxide layer has a thickness of 100Å to 400Å.

25 40. The article of claim 39, wherein the titanium dioxide layer has a thickness of 150Å to 300Å.

30 41. The article of claim 35, wherein the titanium oxide layer is in the anatase, and/or rutile, and/or amorphous phase(s).

42. An article, comprising:
a substrate;

- 58 -

a first layer deposited over at least a portion of the substrate and comprising a first material in a cubic or orthorhombic crystalline phase; and

5 a second layer deposited over the first layer and comprising at least one photoactive material.

43. The article of claim 42, wherein the first material comprises zirconium oxide.

10 44. The article of claim 43, wherein the first layer has a thickness of 10Å to 200Å.

45. The article of claim 42, wherein the photoactive material includes titanium dioxide.

15 46. The article of claim 45, wherein the second layer has a thickness of 100Å to 400Å.

20 47. The article of claim 45, wherein the titanium dioxide is in the anatase, and/or rutile, and/or amorphous phase(s).

48. A method of coating a substrate having a first surface and a second surface, comprising the steps of:

25 depositing a photoactive coating comprising a titanium oxide layer on a zirconium oxide layer over at least a portion of the first surface defined as a first depositing step; and

30 depositing a functional coating over at least a portion of the second surface defined as a second depositing step.

49. The method of claim 48, wherein the first and second depositing steps are conducted in the same coater.

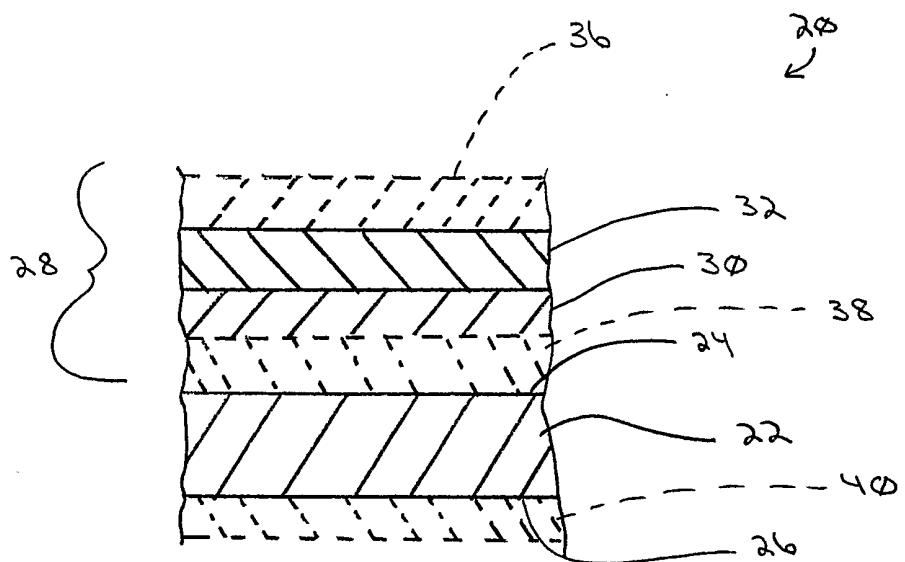


Fig. 1

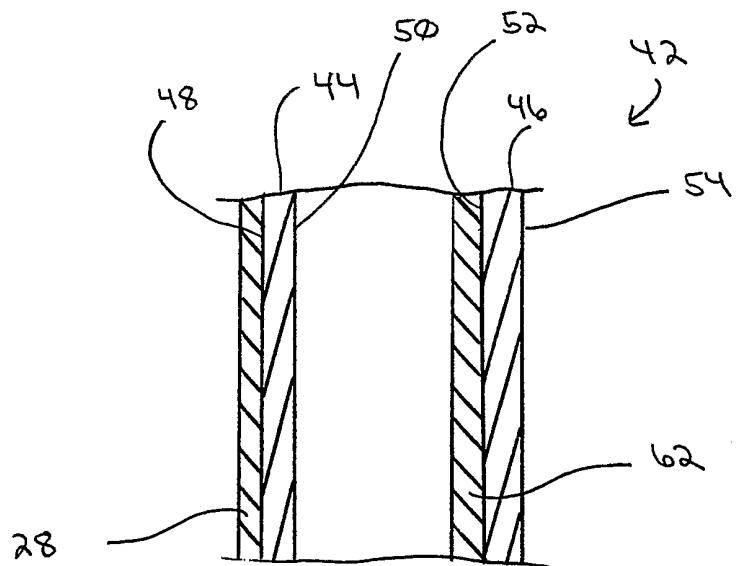
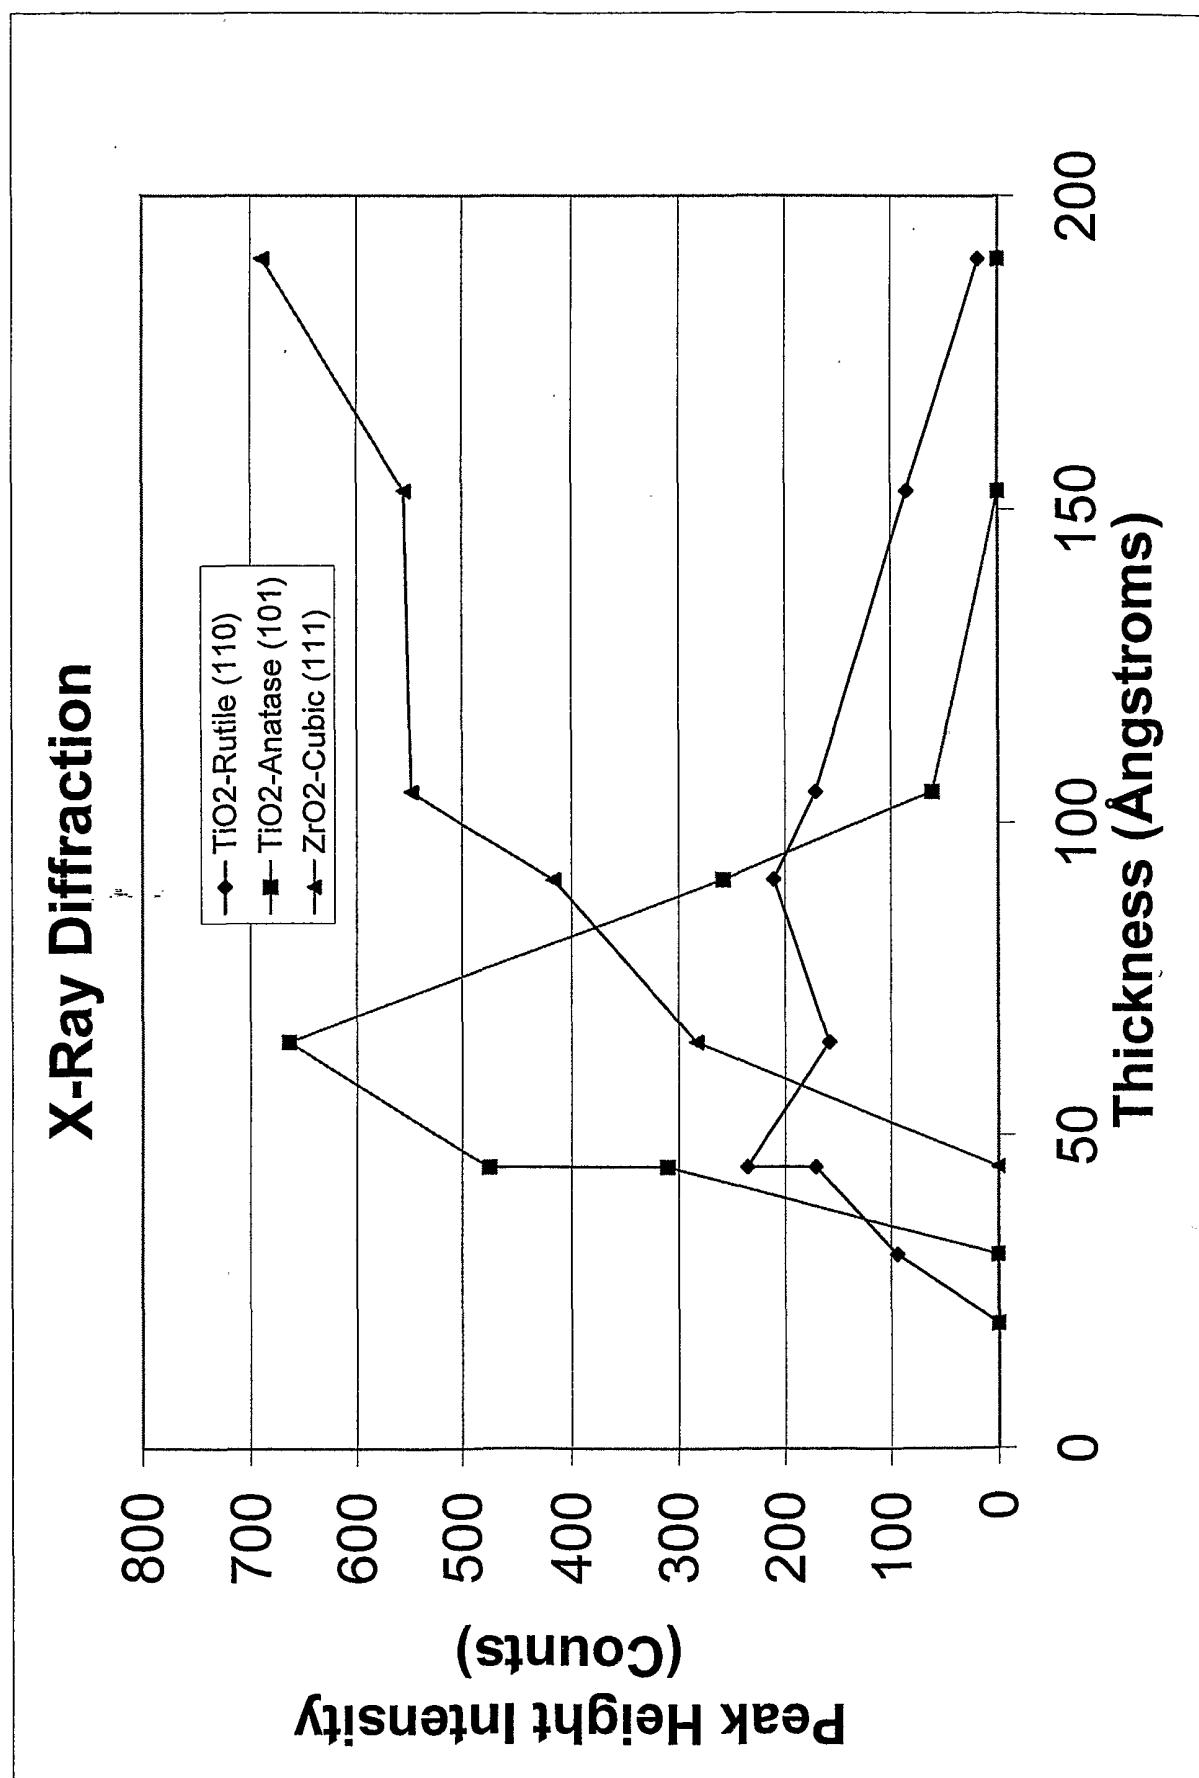


Fig. 2



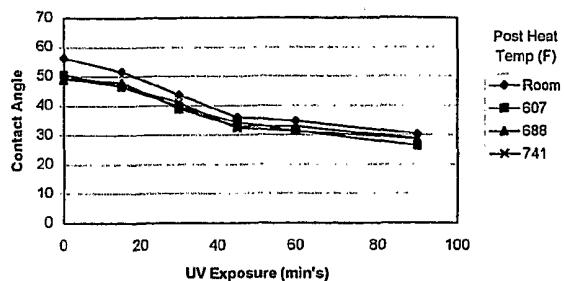


Fig. 4 (Sample 46)

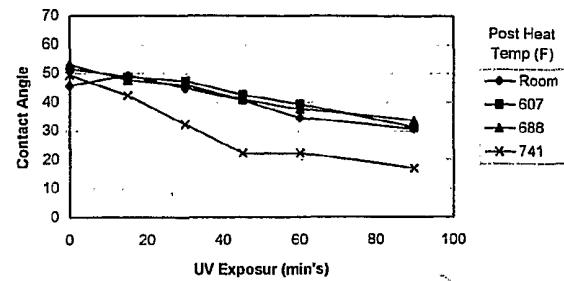


Fig. 5 (Sample 47)

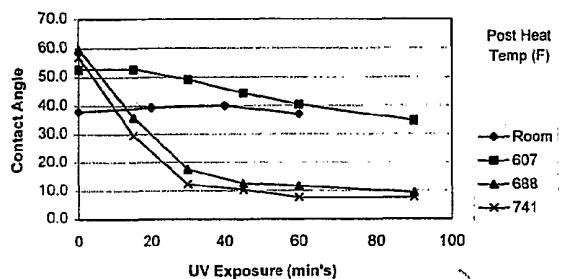


Fig. 6 (Sample 48)

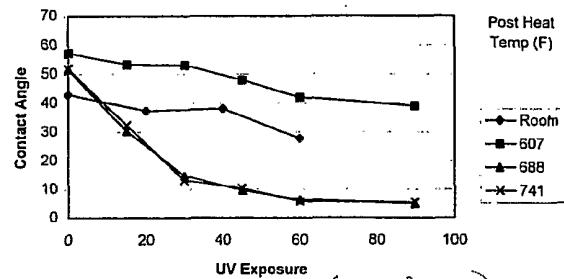


Fig. 7 (Sample 49)

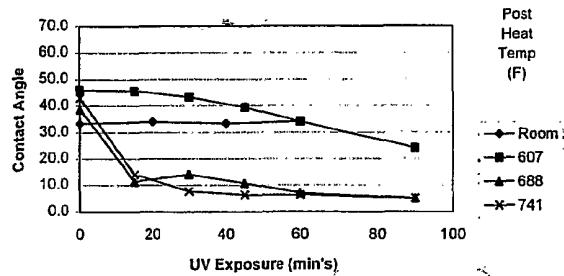


Fig. 8 (Sample 50)

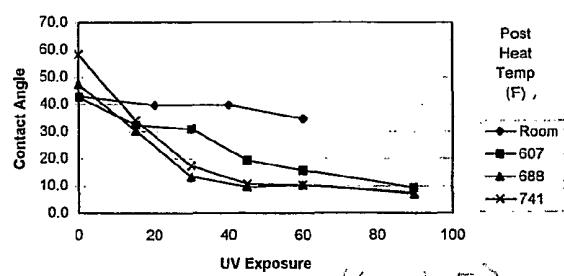


Fig. 9 (Sample 51)

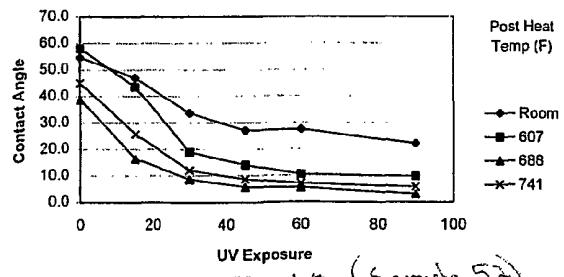


Fig. 10 (Sample 52)

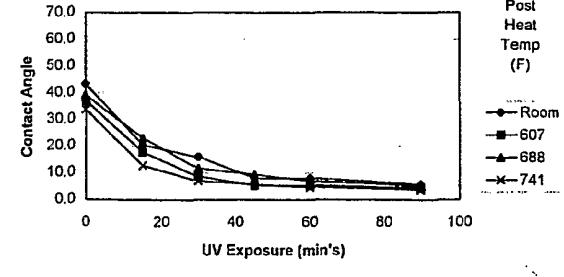


Fig. 11 (Sample 53)

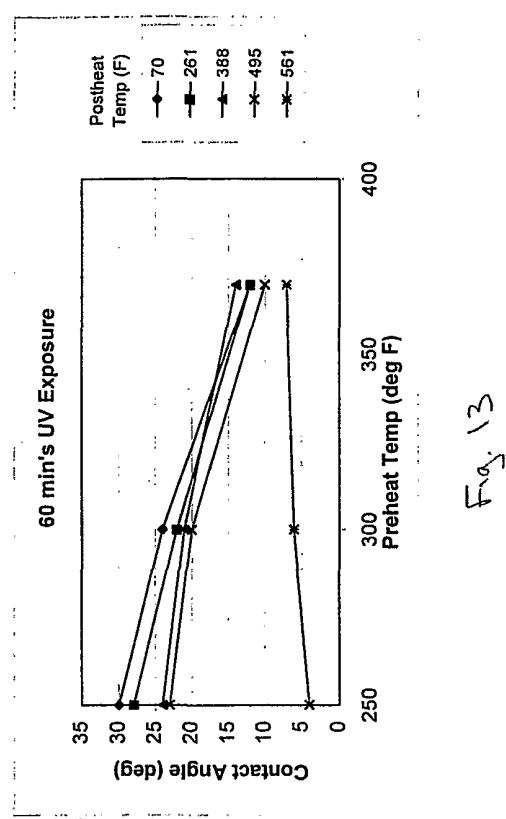


Fig. 13

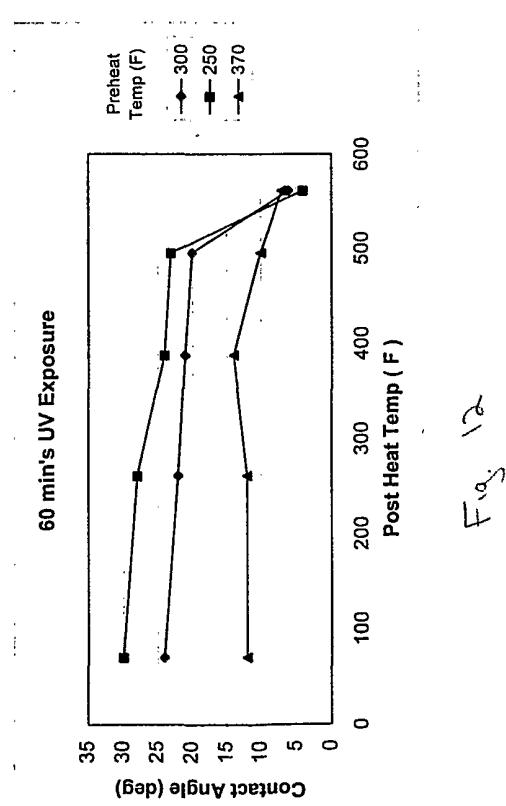


Fig. 12

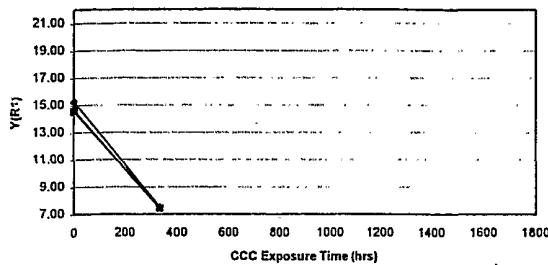


Fig. 14 (Sample 46)

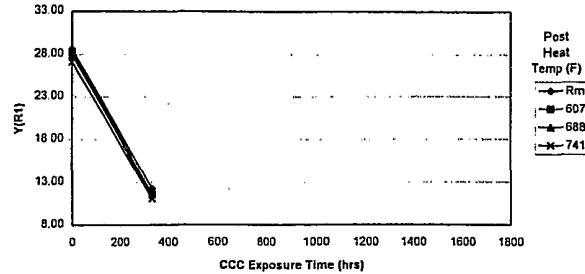


Fig. 15 (Sample 47)

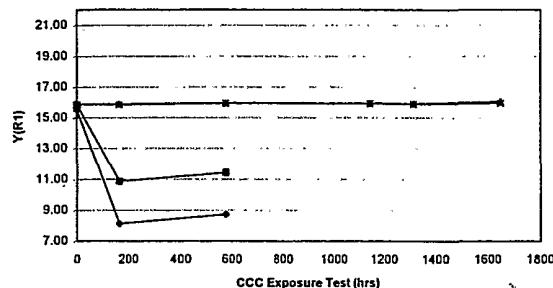


Fig. 16 (Sample 48)

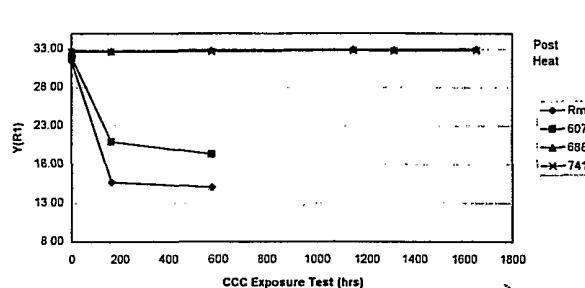


Fig. 17 (Sample 49)

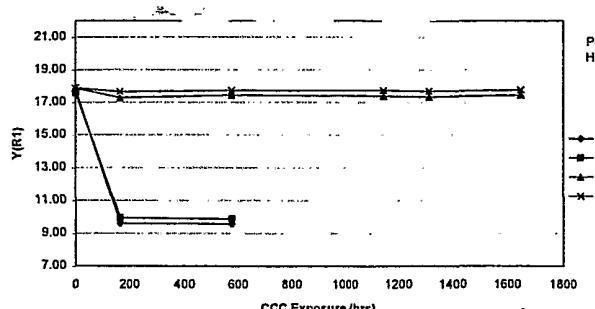


Fig. 18 (Sample 50)

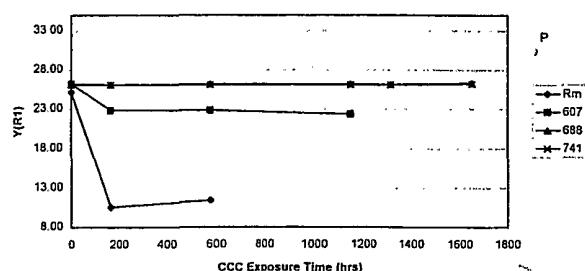


Fig. 19 (Sample 51)

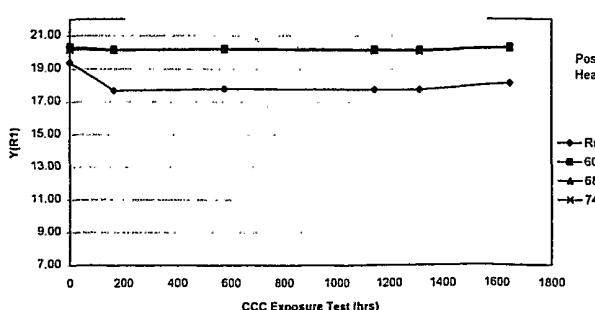


Fig. 20 (Sample 52)





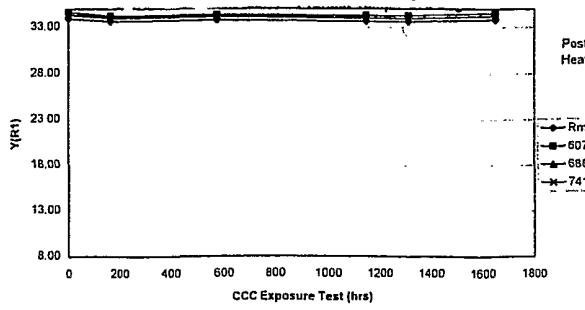


Fig. 21 (Sample 53)

3-4436_patent.xls

Preheat Temp 250 F ZrO₂=59 / TiO₂=187Pre Heat Temp 370 deg ZrO₂=62 / TiO₂=183Preheat Temp 300 F ZrO₂=59 / TiO₂=188

Exposure Time 928 Hours

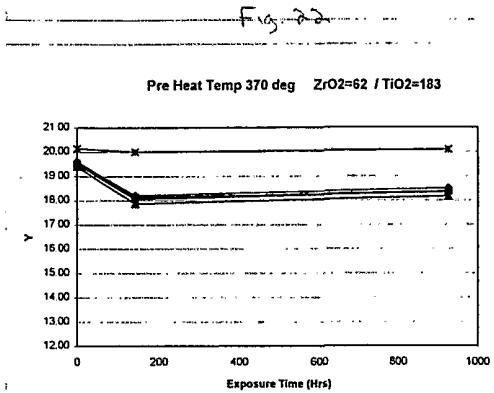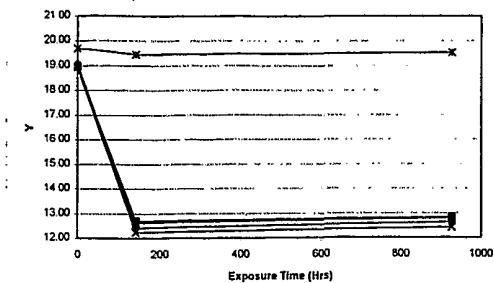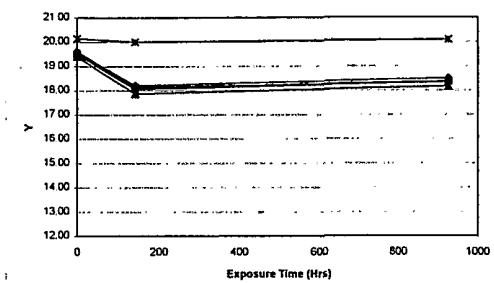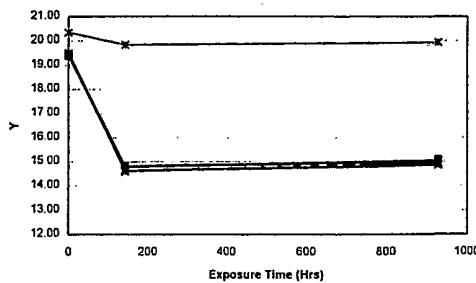