

(19) **United States**

(12) **Patent Application Publication**
McCune et al.

(10) **Pub. No.: US 2017/0298768 A1**

(43) **Pub. Date: Oct. 19, 2017**

(54) **FLEXIBLE SUPPORT STRUCTURE FOR A GEARED ARCHITECTURE GAS TURBINE ENGINE**

(71) Applicant: **United Technologies Corporation**, Farmington, CT (US)

(72) Inventors: **Michael E. McCune**, Colchester, CT (US); **Jason Husband**, South Glastonbury, CT (US)

(21) Appl. No.: **15/485,732**

(22) Filed: **Apr. 12, 2017**

Related U.S. Application Data

(63) Continuation of application No. 14/859,381, filed on Sep. 21, 2015, which is a continuation of application No. 14/604,811, filed on Jan. 26, 2015, now Pat. No. 9,239,012, which is a continuation-in-part of application No. 13/623,309, filed on Sep. 20, 2012, now Pat. No. 9,133,729, which is a continuation-in-part of application No. 13/342,508, filed on Jan. 3, 2012, now Pat. No. 8,297,916.

(60) Provisional application No. 61/494,453, filed on Jun. 8, 2011.


Publication Classification

(51) **Int. Cl.**
F01D 25/16 (2006.01)
F02C 7/32 (2006.01)
F01D 25/28 (2006.01)
F02C 7/36 (2006.01)
F01D 15/12 (2006.01)

(52) **U.S. Cl.**
CPC *F01D 25/164* (2013.01); *F02C 7/36* (2013.01); *F01D 15/12* (2013.01); *F01D 25/28* (2013.01); *F02C 7/32* (2013.01); *Y10T 29/49321* (2015.01); *F05D 2220/32* (2013.01); *F05D 2260/40311* (2013.01); *F05D 2260/96* (2013.01); *Y02T 50/671* (2013.01)

(57) **ABSTRACT**

A gas turbine engine according to an example of the present disclosure includes, among other things, a fan shaft driving a fan having fan blades, a fan shaft support that supports the fan shaft defining a fan shaft support lateral stiffness and a fan shaft support transverse stiffness and a gear system connected to the fan shaft having a reduction ratio of greater than 2.3. A flexible support supports the gear system and defines a flexible support lateral stiffness and a flexible support transverse stiffness. A low fan pressure ratio of less than 1.45 measured across the fan blades alone. At least one of the flexible support lateral stiffness is less than 11% of the fan shaft support lateral stiffness and the flexible support transverse stiffness is less than 20% of the fan shaft support transverse stiffness.

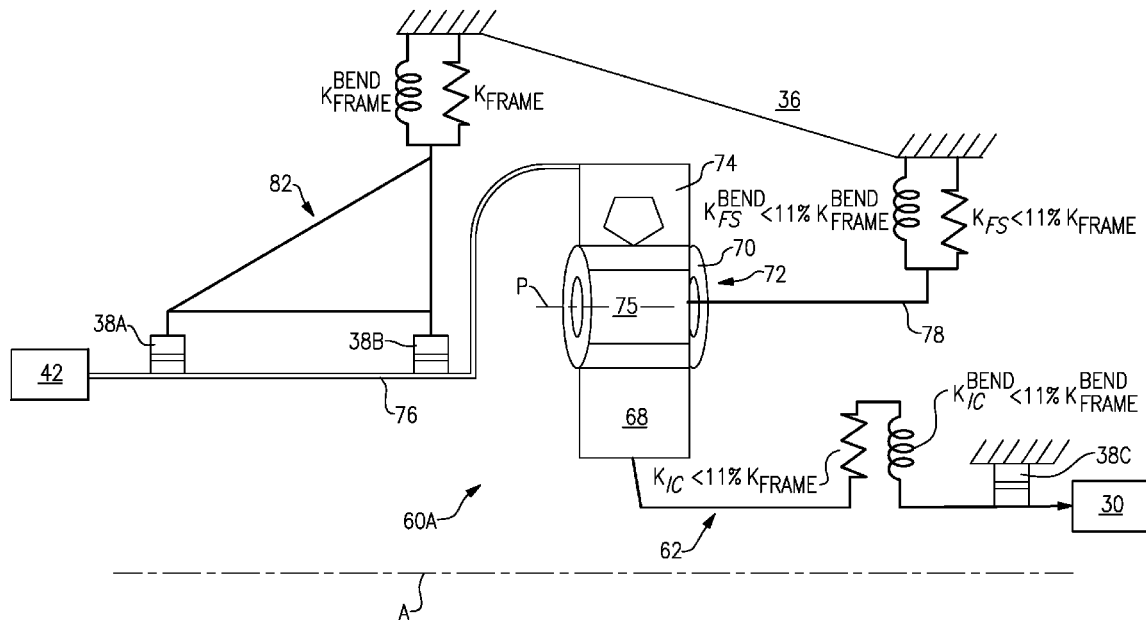

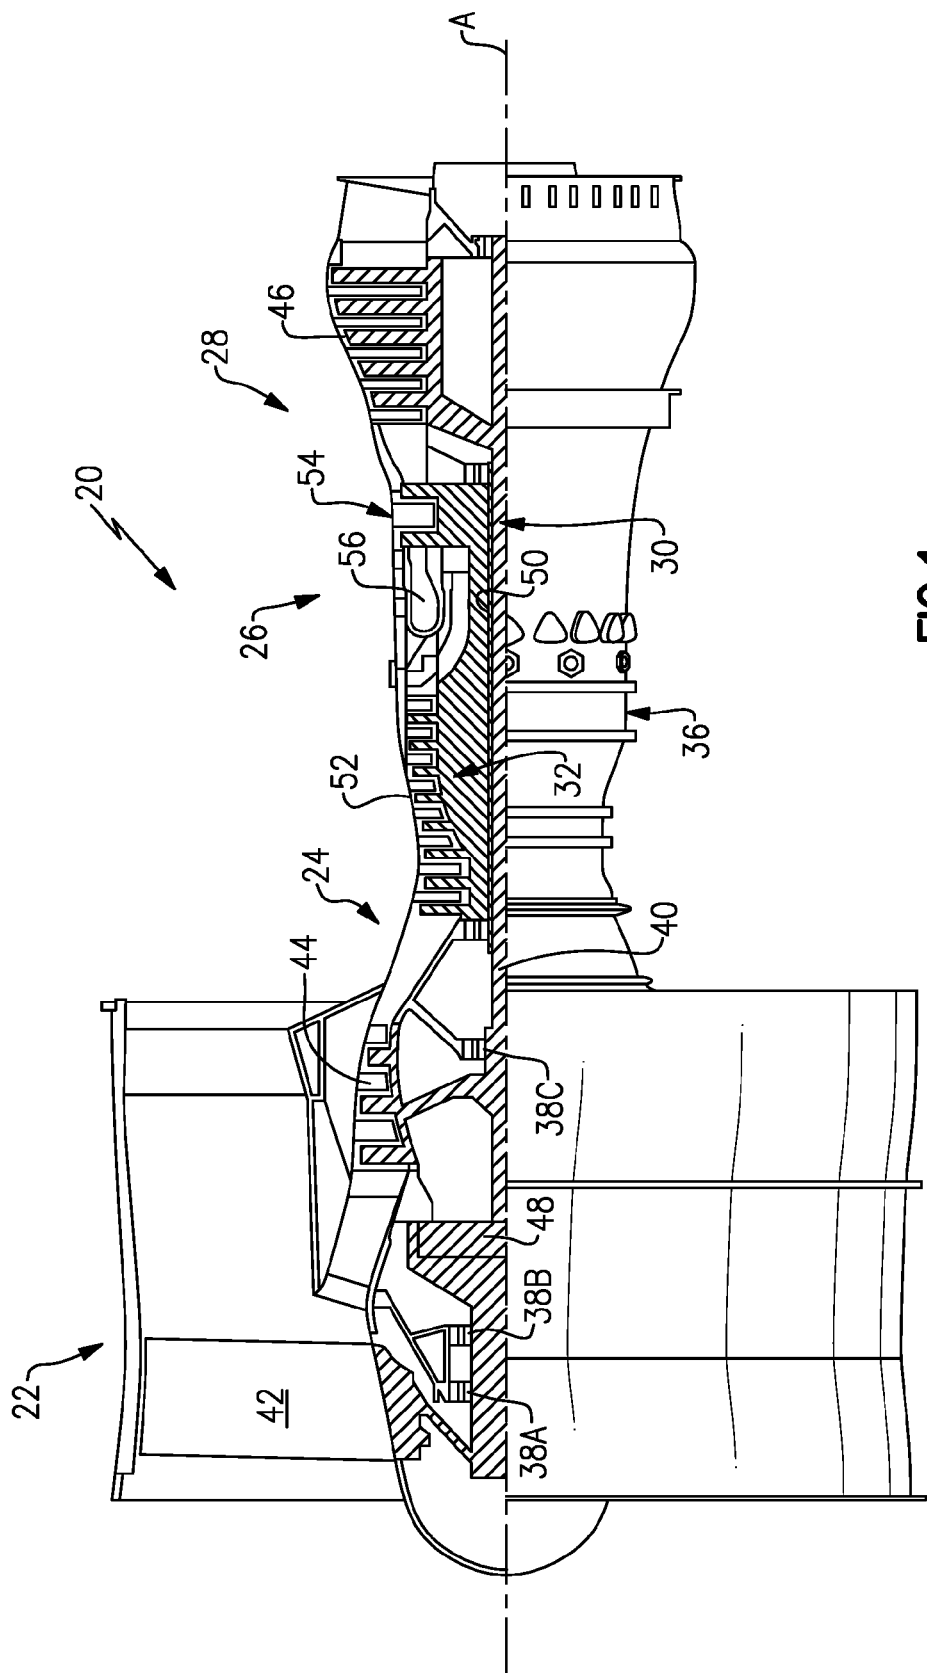


FIG. 1

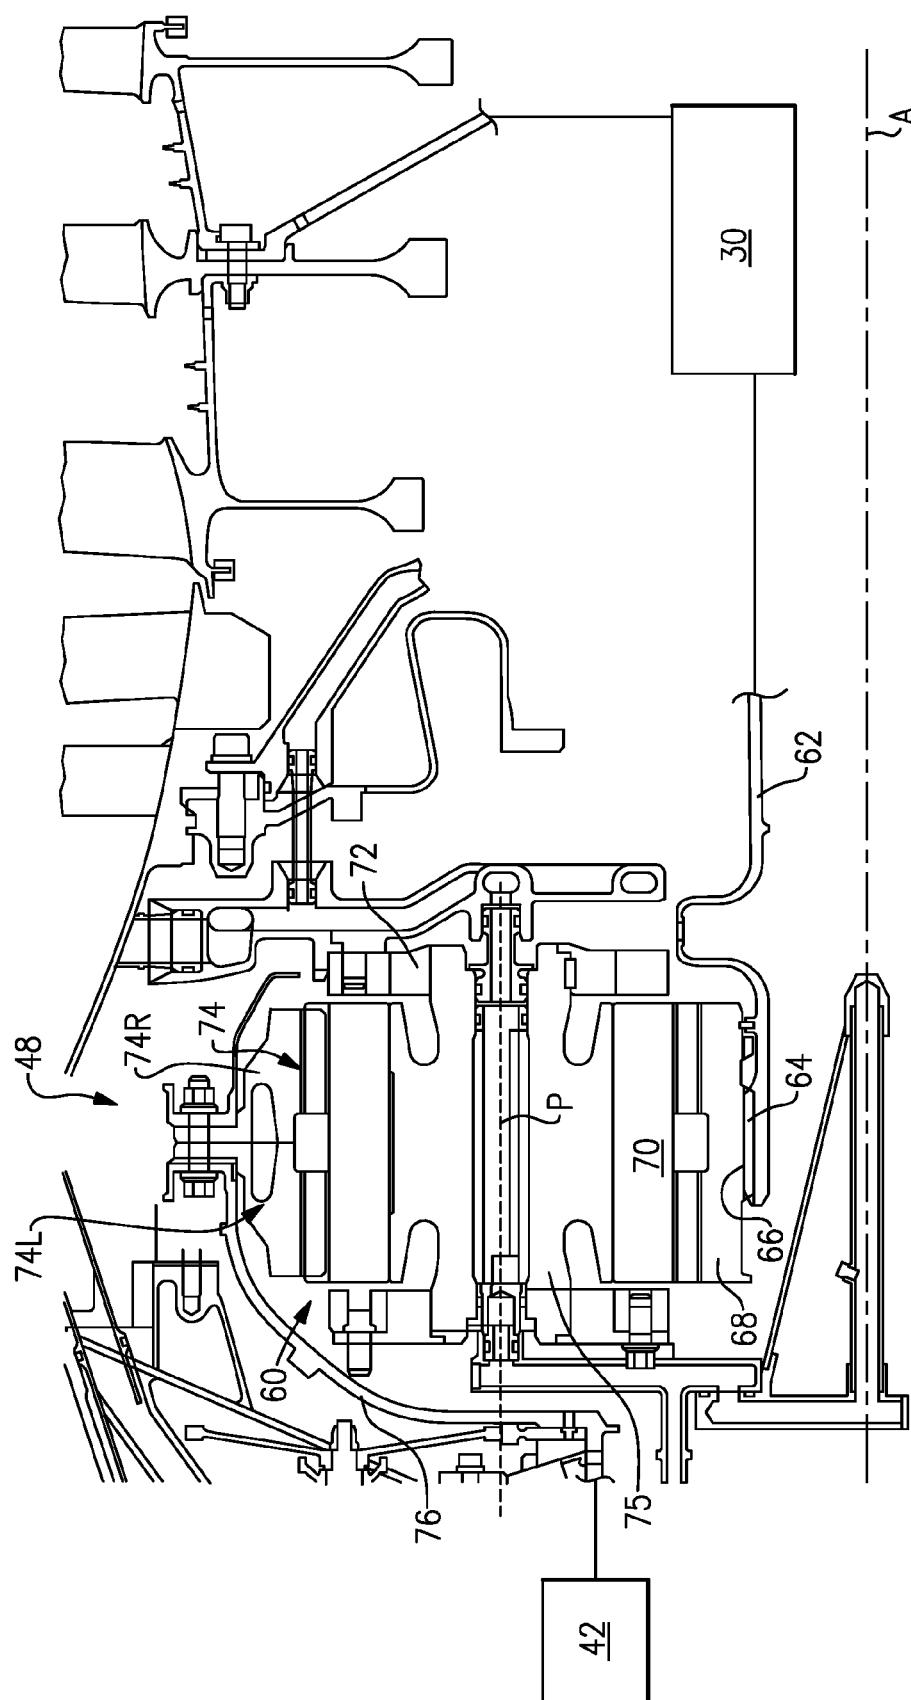
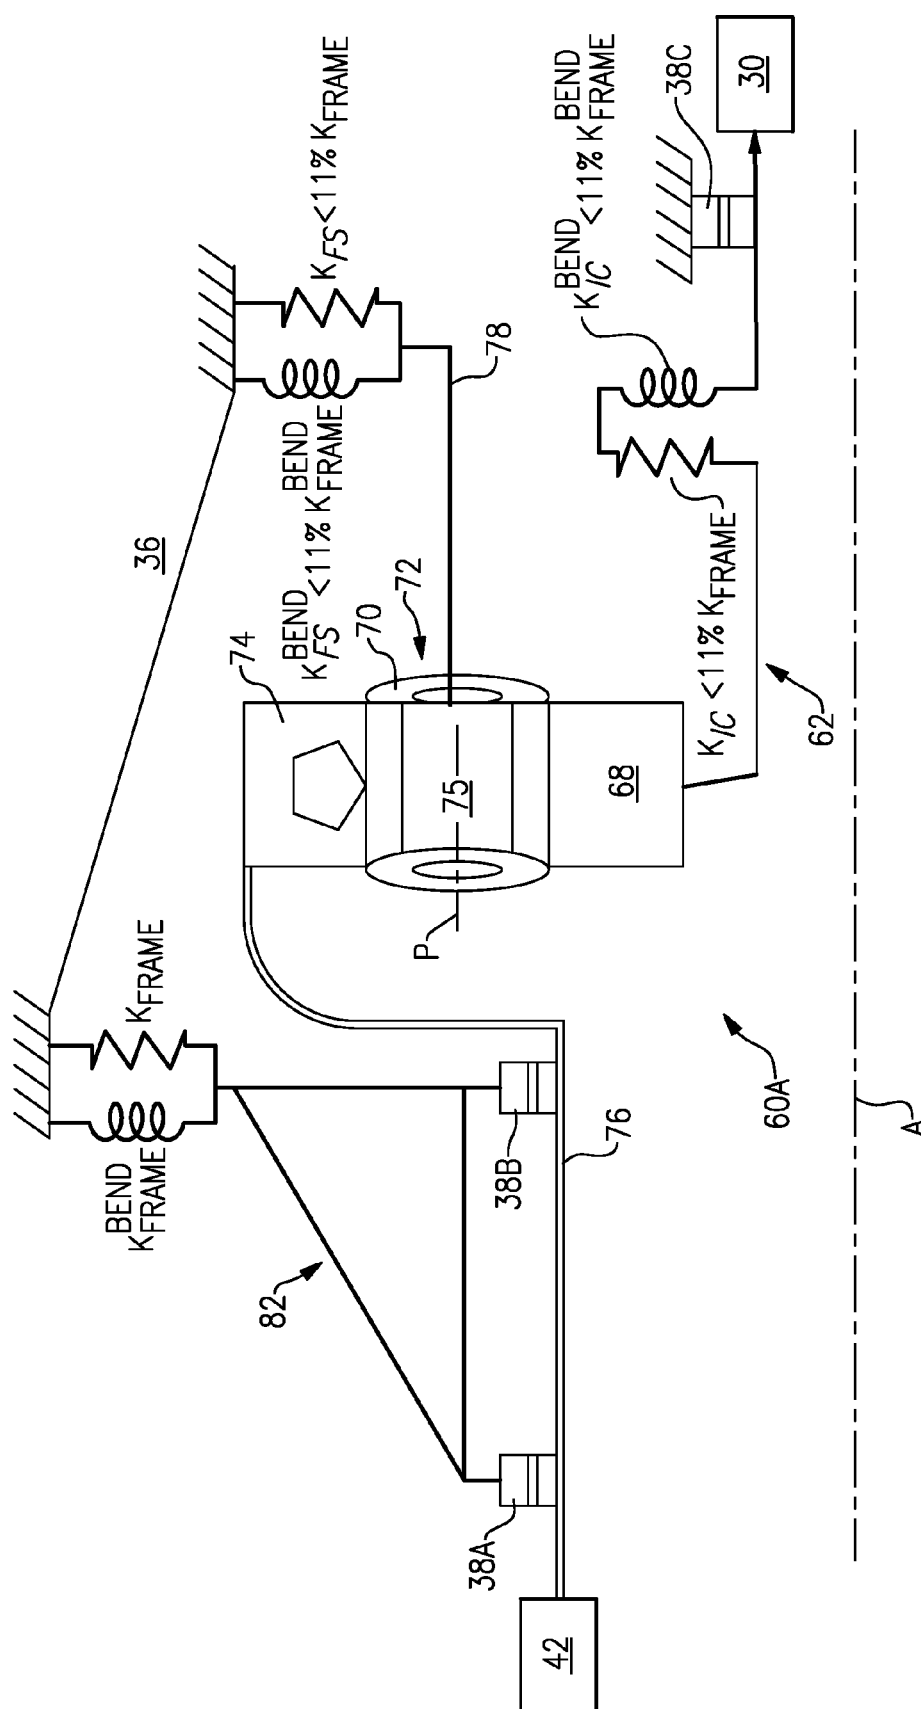


FIG. 2



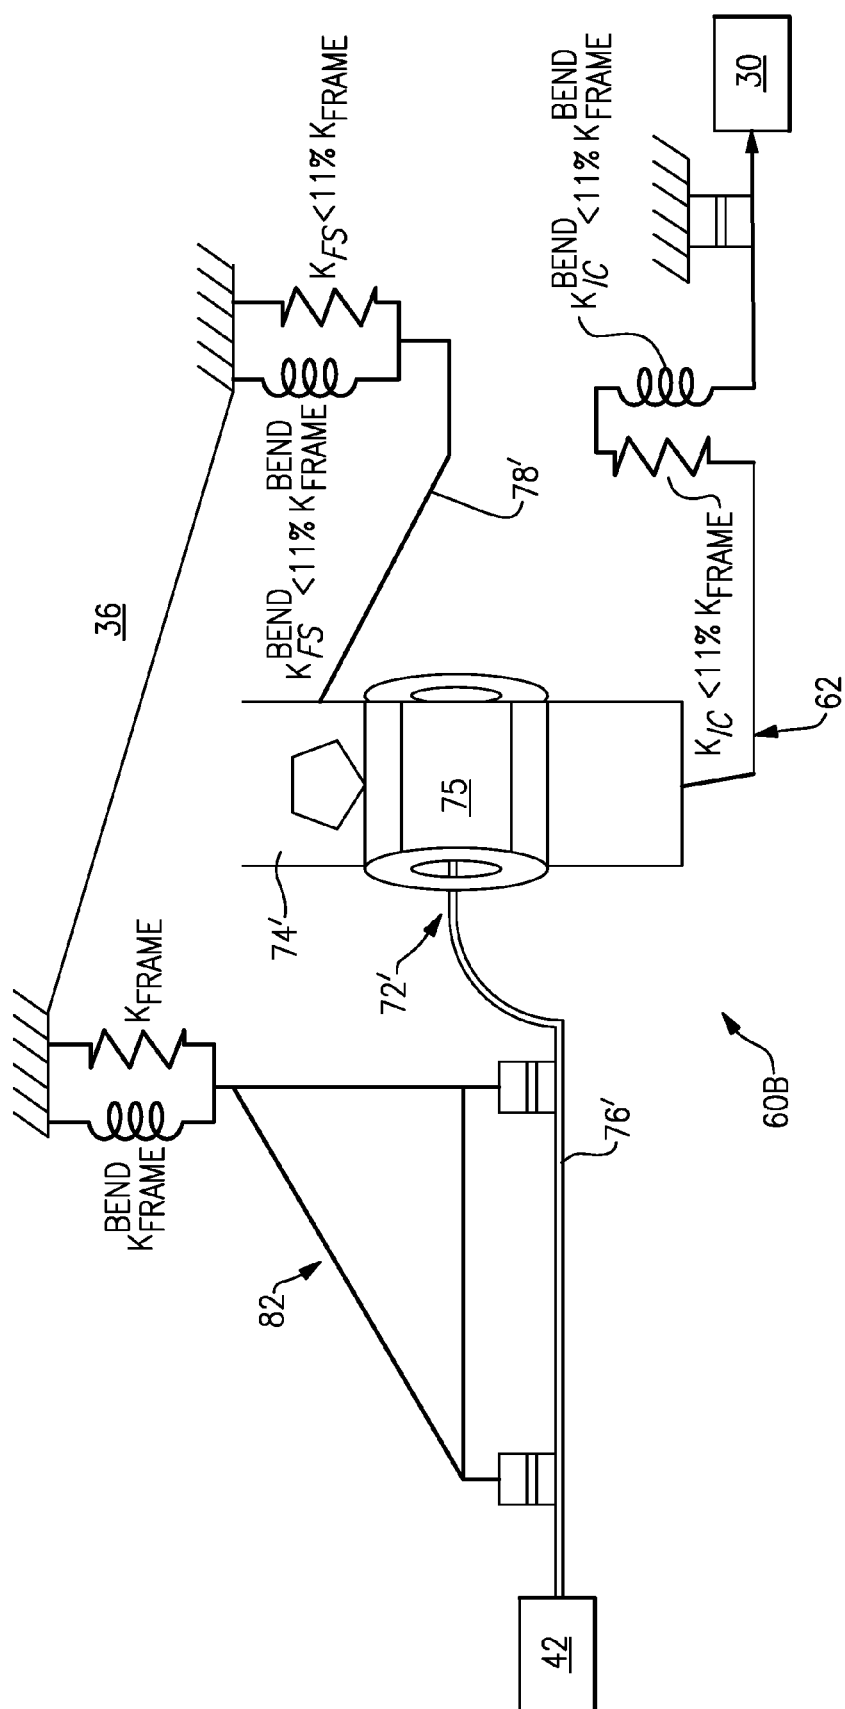


FIG. 4

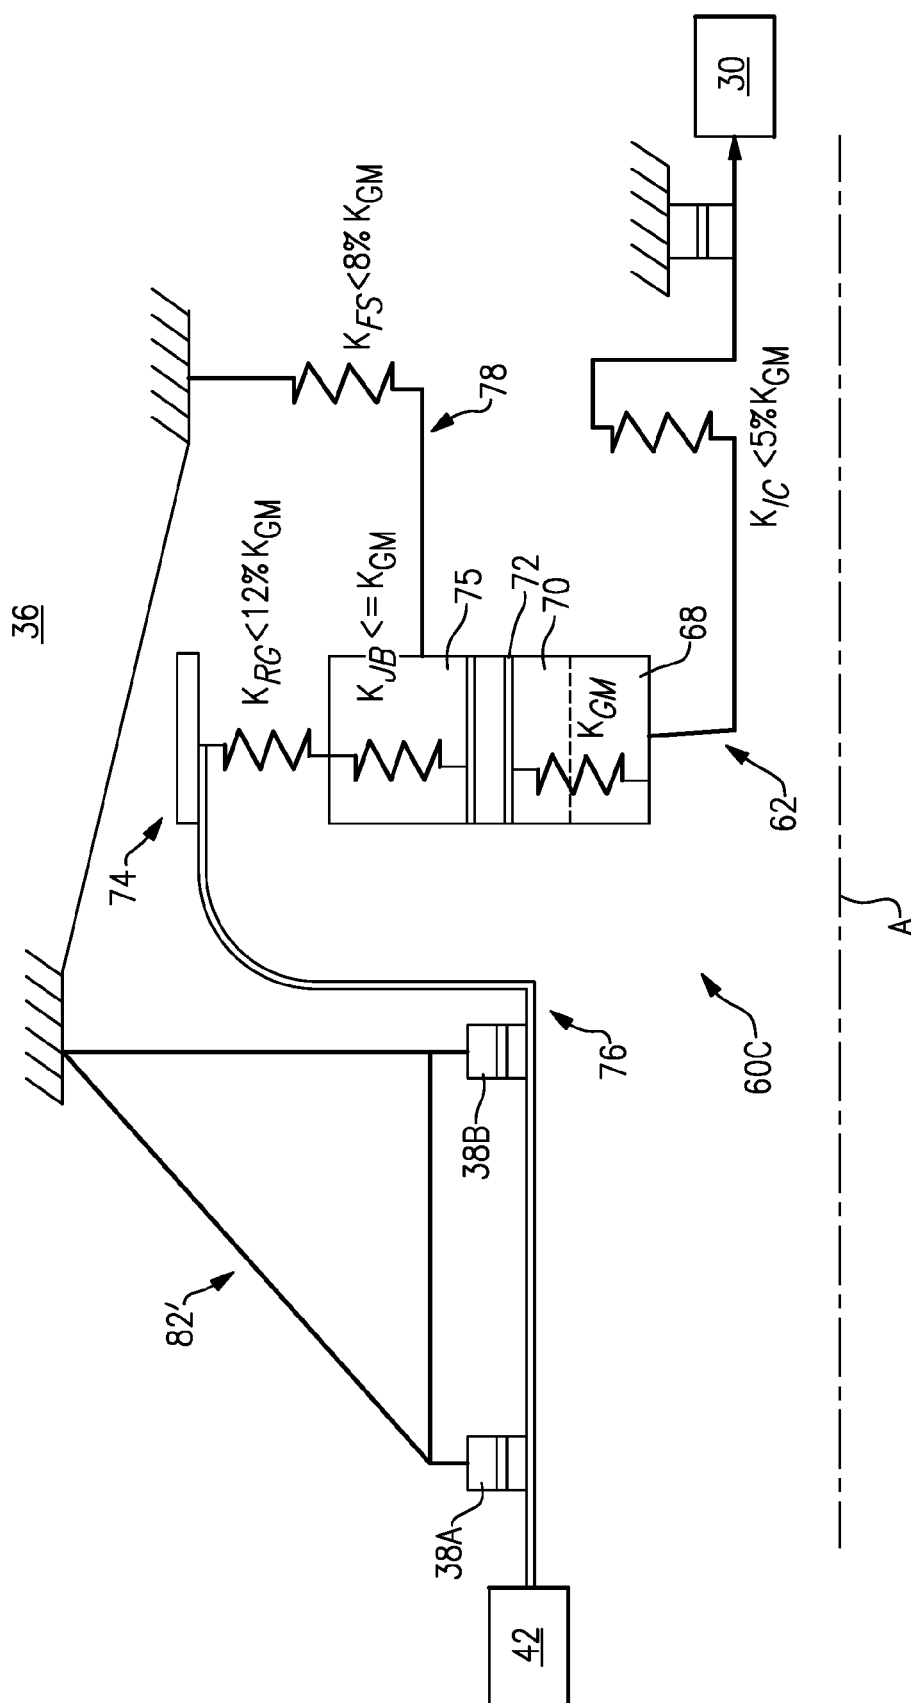
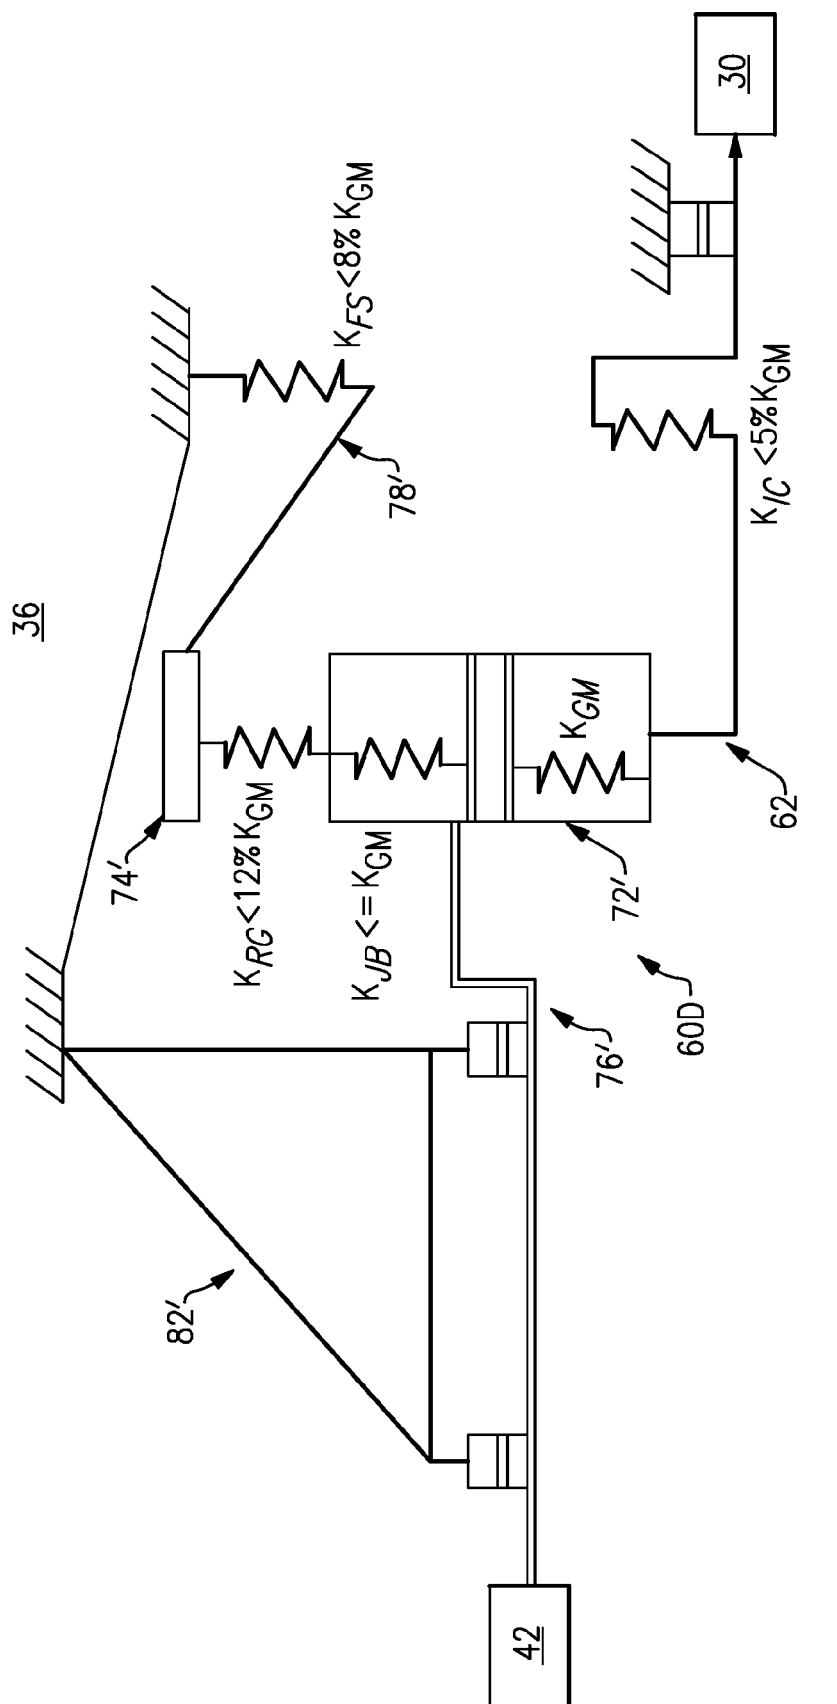


FIG. 5



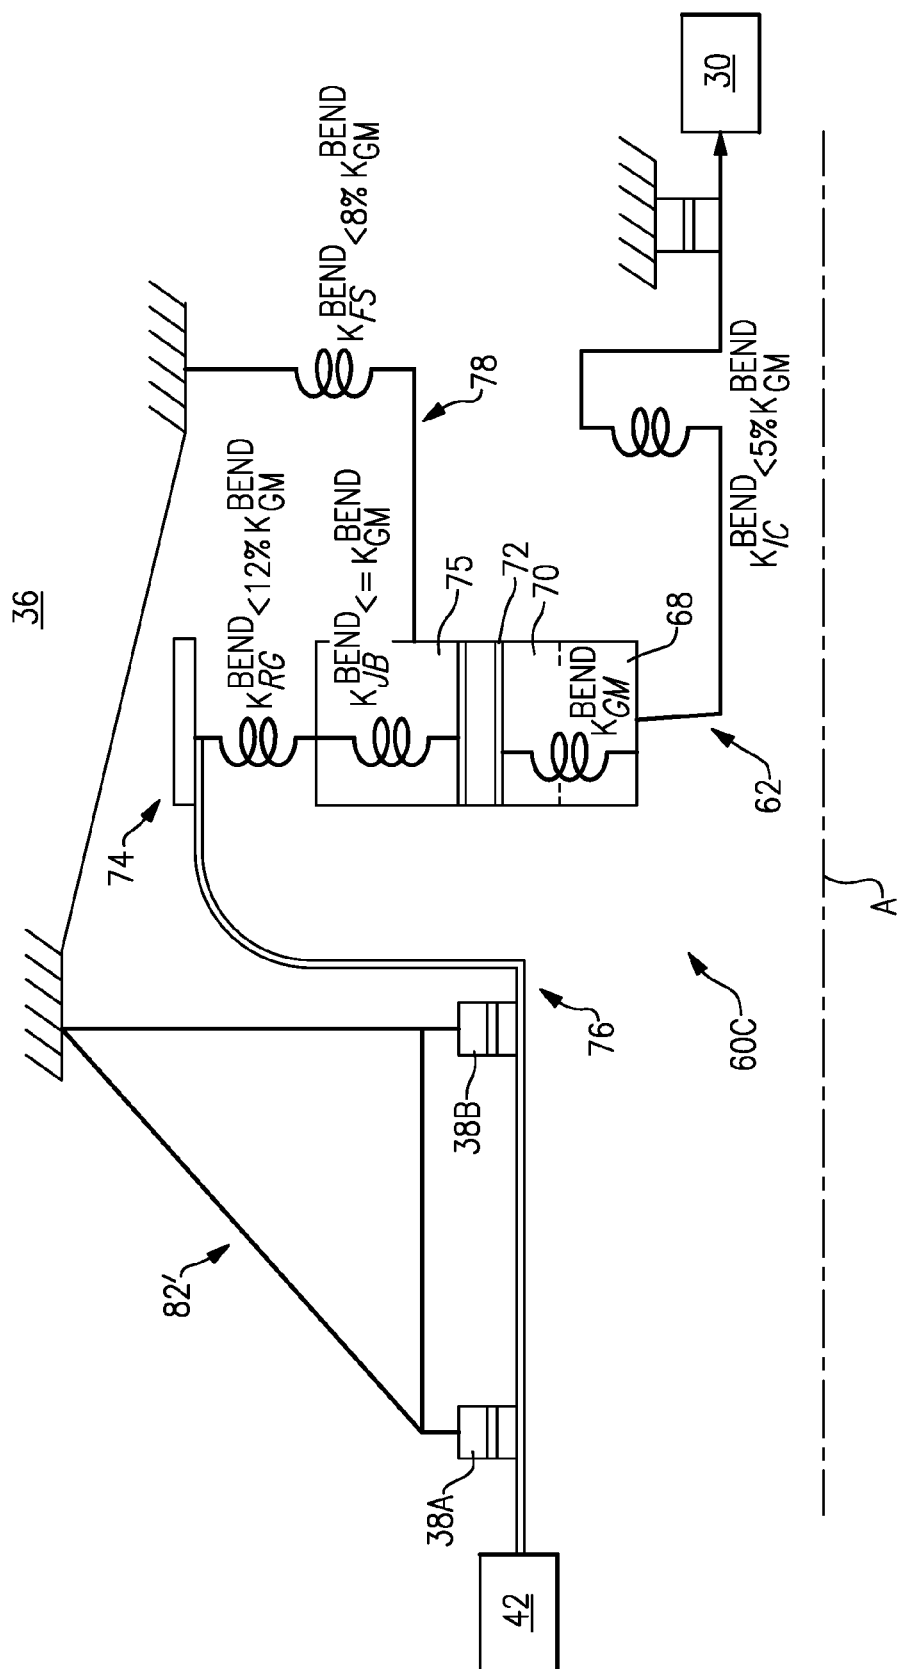


FIG. 7

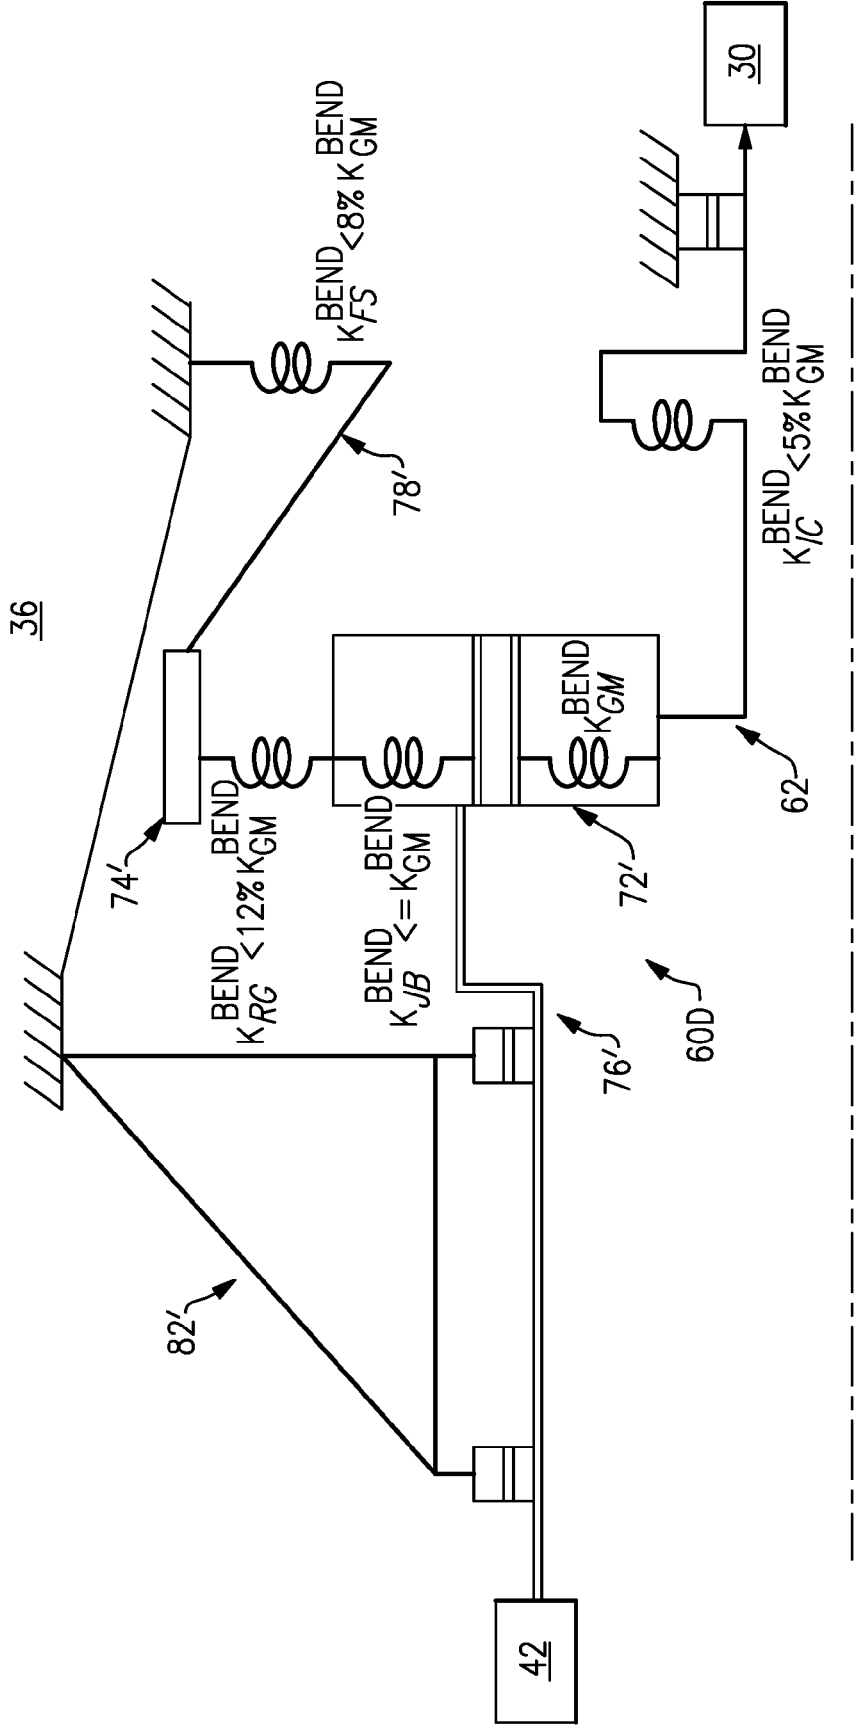


FIG.8

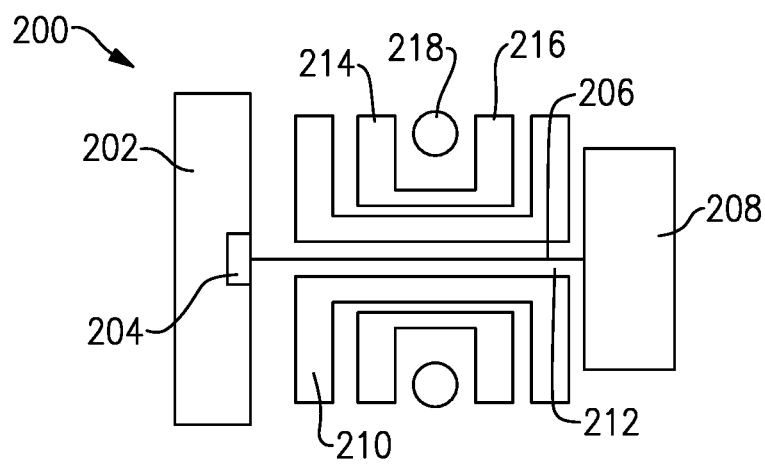


FIG. 9

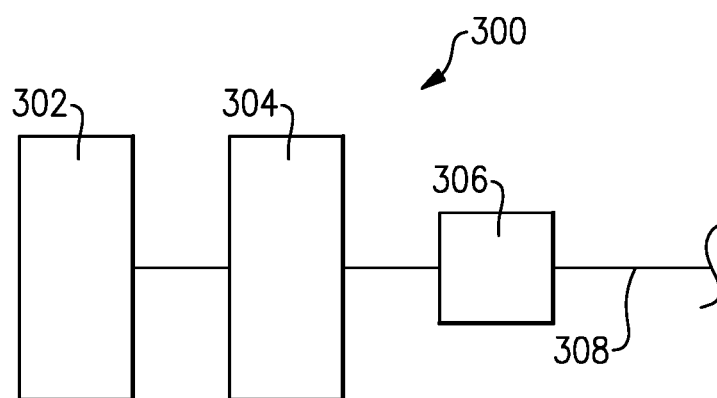


FIG. 10

FLEXIBLE SUPPORT STRUCTURE FOR A GEARED ARCHITECTURE GAS TURBINE ENGINE

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] The present disclosure is a continuation of U.S. patent application Ser. No. 14/859,381, filed Sep. 21, 2015, which is a continuation of U.S. patent application Ser. No. 14/604,811, filed Jan. 26, 2015, now U.S. Pat. No. 9,239,012, issued Jan. 19, 2016, which is a continuation-in-part of U.S. patent application Ser. No. 13/623,309, filed Sep. 20, 2012, now U.S. Pat. No. 9,133,729, issued Sep. 15, 2015, which is a continuation-in-part of U.S. application Ser. No. 13/342,508, filed Jan. 3, 2012, now U.S. Pat. No. 8,297,916, issued Oct. 30, 2012, which claimed priority to U.S. Provisional Application No. 61/494,453, filed Jun. 8, 2011.

BACKGROUND

[0002] The present disclosure relates to a gas turbine engine, and more particularly to a flexible support structure for a geared architecture therefor.

[0003] Epicyclic gearboxes with planetary or star gear trains may be used in gas turbine engines for their compact designs and efficient high gear reduction capabilities. Planetary and star gear trains generally include three gear train elements: a central sun gear, an outer ring gear with internal gear teeth, and a plurality of planet gears supported by a planet carrier between and in meshed engagement with both the sun gear and the ring gear. The gear train elements share a common longitudinal central axis, about which at least two rotate. An advantage of epicyclic gear trains is that a rotary input can be connected to any one of the three elements. One of the other two elements is then held stationary with respect to the other two to permit the third to serve as an output.

[0004] In gas turbine engine applications, where a speed reduction transmission is required, the central sun gear generally receives rotary input from the powerplant, the outer ring gear is generally held stationary and the planet gear carrier rotates in the same direction as the sun gear to provide torque output at a reduced rotational speed. In star gear trains, the planet carrier is held stationary and the output shaft is driven by the ring gear in a direction opposite that of the sun gear.

[0005] During flight, light weight structural cases deflect with aero and maneuver loads causing significant amounts of transverse deflection commonly known as backbone bending of the engine. This deflection may cause the individual sun or planet gear's axis of rotation to lose parallelism with the central axis. This deflection may result in some misalignment at gear train journal bearings and at the gear teeth mesh, which may lead to efficiency losses from the misalignment and potential reduced life from increases in the concentrated stresses.

SUMMARY

[0006] A gas turbine engine according to an example of the present disclosure includes a fan shaft configured to drive a fan, a support configured to support at least a portion of the fan shaft, the support defining a support transverse stiffness and a support lateral stiffness, a gear system coupled to the fan shaft, and a flexible support configured to at least partially support the gear system. The flexible

support defines a flexible support transverse stiffness with respect to the support transverse stiffness and a flexible support lateral stiffness with respect to the support lateral stiffness. The input defines an input transverse stiffness with respect to the support transverse stiffness and an input lateral stiffness with respect to the support lateral stiffness.

[0007] In a further embodiment of any of the forgoing embodiments, the support and the flexible support are mounted to a static structure.

[0008] In a further embodiment of any of the forgoing embodiments, the static structure is a front center body of the gas turbine engine.

[0009] In a further embodiment of any of the forgoing embodiments, the flexible support is mounted to a planet carrier of the gear system, and the input is mounted to a sun gear of the gear system.

[0010] In a further embodiment of any of the forgoing embodiments, the fan shaft is mounted to a ring gear of the gear system.

[0011] In a further embodiment of any of the forgoing embodiments, the gear system is a star system.

[0012] In a further embodiment of any of the forgoing embodiments, the flexible support is mounted to a ring gear of the gear system, and the input is mounted to a sun gear of the gear system.

[0013] In a further embodiment of any of the forgoing embodiments, the fan shaft is mounted to a planet carrier of the gear system.

[0014] In a further embodiment of any of the forgoing embodiments, the flexible support transverse stiffness and the input transverse stiffness are both less than the support transverse stiffness.

[0015] In a further embodiment of any of the forgoing embodiments, the flexible support transverse stiffness and the input transverse stiffness are each less than about 20% of the support transverse stiffness.

[0016] In a further embodiment of any of the forgoing embodiments, the flexible support transverse stiffness and the input transverse stiffness are each less than about 11% of the support transverse stiffness.

[0017] In a further embodiment of any of the forgoing embodiments, the input to the gear system is coupled to a turbine section, and the gear system is configured to drive a compressor rotor at a common speed with the fan shaft.

[0018] A gas turbine engine according to an example of the present disclosure includes a fan shaft configured to drive a fan, a support configured to support at least a portion of the fan shaft, and a gear system configured to drive the fan shaft. The gear system includes a gear mesh that defines a gear mesh transverse stiffness and a gear mesh lateral stiffness. A flexible support is configured to at least partially support the gear system. The flexible support defines a flexible support transverse stiffness with respect to the gear mesh transverse stiffness and a flexible support lateral stiffness with respect to the gear mesh lateral stiffness. The input defines an input transverse stiffness with respect to the gear mesh transverse stiffness and an input lateral stiffness with respect to the gear mesh lateral stiffness.

[0019] In a further embodiment of any of the forgoing embodiments, both the flexible support transverse stiffness and the input transverse stiffness are less than the gear mesh transverse stiffness.

[0020] In a further embodiment of any of the forgoing embodiments, the flexible support transverse stiffness is less

than about 8% of the gear mesh transverse stiffness, the input transverse stiffness is less than about 5% of the gear mesh transverse stiffness, and a transverse stiffness of a ring gear of the gear system is less than about 20% of the gear mesh transverse stiffness.

[0021] In a further embodiment of any of the forgoing embodiments, a transverse stiffness of a planet journal bearing which supports a planet gear of the gear system is less than or equal to the gear mesh transverse stiffness.

[0022] In a further embodiment of any of the forgoing embodiments, the support and the flexible support are mounted to a front center body of the gas turbine engine.

[0023] A method of designing a gas turbine engine according to an example of the present disclosure includes providing a fan shaft, and providing a support configured to support at least a portion of the fan shaft, the support defining at least one of a support transverse stiffness and a support lateral stiffness, and providing a gear system coupled to the fan shaft. The gear system includes a gear mesh that defines a gear mesh lateral stiffness and a gear mesh transverse stiffness. The method includes providing a flexible support configured to at least partially support the gear system, and providing an input to the gear system. The flexible support defines a flexible support transverse stiffness with respect to the gear mesh transverse stiffness and a flexible support lateral stiffness with respect to the gear mesh lateral stiffness. The input defines an input transverse stiffness with respect to the gear mesh transverse stiffness and an input lateral stiffness with respect to the gear mesh lateral stiffness.

[0024] In a further embodiment of any of the forgoing embodiments, the flexible support lateral stiffness is less than the gear mesh lateral stiffness, and the flexible support transverse stiffness is less than the gear mesh transverse stiffness.

[0025] In a further embodiment of any of the forgoing embodiments, both the flexible support transverse stiffness and the input transverse stiffness are less than the gear mesh transverse stiffness.

[0026] The various features and advantages of this invention will become apparent to those skilled in the art from the following detailed description of an embodiment. The drawings that accompany the detailed description can be briefly described as follows.

BRIEF DESCRIPTION OF THE DRAWINGS

[0027] Various features will become apparent to those skilled in the art from the following detailed description of the disclosed non-limiting embodiment. The drawings that accompany the detailed description can be briefly described as follows:

[0028] FIG. 1 is a schematic cross-section of a gas turbine engine;

[0029] FIG. 2 is an enlarged cross-section of a section of the gas turbine engine which illustrates a fan drive gear system (FDGS);

[0030] FIG. 3 is a schematic view of a flex mount arrangement for one non-limiting embodiment of the FDGS;

[0031] FIG. 4 is a schematic view of a flex mount arrangement for another non-limiting embodiment of the FDGS;

[0032] FIG. 5 is a schematic view of a flex mount arrangement for another non-limiting embodiment of a star system FDGS;

[0033] FIG. 6 is a schematic view of a flex mount arrangement for another non-limiting embodiment of a planetary system FDGS.

[0034] FIG. 7 is a schematic view of a flex mount arrangement for another non-limiting embodiment of a star system FDGS;

[0035] FIG. 8 is a schematic view of a flex mount arrangement for another non-limiting embodiment of a planetary system FDGS;

[0036] FIG. 9 shows another embodiment; and

[0037] FIG. 10 shows yet another embodiment.

DETAILED DESCRIPTION

[0038] FIG. 1 schematically illustrates a gas turbine engine 20. The gas turbine engine 20 is disclosed herein as a two-spool turbofan that generally incorporates a fan section 22, a compressor section 24, a combustor section 26 and a turbine section 28. Alternative engines might include an augmentor section (not shown) among other systems or features. The fan section 22 drives air along a bypass flow path B in a bypass duct defined within a nacelle 15, while the compressor section 24 drives air along a core flow path C for compression and communication into the combustor section 26 then expansion through the turbine section 28. Although depicted as a two-spool turbofan gas turbine engine in the disclosed non-limiting embodiment, it should be understood that the concepts described herein are not limited to use with two-spool turbofans as the teachings may be applied to other types of turbine engines including three-spool architectures.

[0039] The exemplary engine 20 generally includes a low speed spool 30 and a high speed spool 32 mounted for rotation about an engine central longitudinal axis A relative to an engine static structure 36 via several bearing systems 38. It should be understood that various bearing systems 38 at various locations may alternatively or additionally be provided, and the location of bearing systems 38 may be varied as appropriate to the application.

[0040] The low speed spool 30 generally includes an inner shaft 40 that interconnects a fan 42, a first (or low) pressure compressor 44 and a first (or low) pressure turbine 46. The inner shaft 40 is connected to the fan 42 through a speed change mechanism, which in exemplary gas turbine engine 20 is illustrated as a geared architecture 48 to drive the fan 42 at a lower speed than the low speed spool 30. The high speed spool 32 includes an outer shaft 50 that interconnects a second (or high) pressure compressor 52 and a second (or high) pressure turbine 54. A combustor 56 is arranged in exemplary gas turbine 20 between the high pressure compressor 52 and the high pressure turbine 54. A mid-turbine frame 57 of the engine static structure 36 is arranged generally between the high pressure turbine 54 and the low pressure turbine 46. The mid-turbine frame 57 further supports bearing systems 38 in the turbine section 28. The inner shaft 40 and the outer shaft 50 are concentric and rotate via bearing systems 38 about the engine central longitudinal axis A which is collinear with their longitudinal axes.

[0041] The core airflow is compressed by the low pressure compressor 44 then the high pressure compressor 52, mixed and burned with fuel in the combustor 56, then expanded over the high pressure turbine 54 and low pressure turbine 46. The mid-turbine frame 57 includes airfoils 59 which are in the core airflow path C. The turbines 46, 54 rotationally drive the respective low speed spool 30 and high speed spool 32 in response to the expansion. It will be appreciated that

each of the positions of the fan section 22, compressor section 24, combustor section 26, turbine section 28, and fan drive gear system 48 may be varied. For example, gear system 48 may be located aft of combustor section 26 or even aft of turbine section 28, and fan section 22 may be positioned forward or aft of the location of gear system 48.

[0042] The engine 20 in one example is a high-bypass geared aircraft engine. In a further example, the engine 20 bypass ratio is greater than about six (6), with an example embodiment being greater than about ten (10), the geared architecture 48 is an epicyclic gear train, such as a planetary gear system or other gear system, with a gear reduction ratio of greater than about 2.3 and the low pressure turbine 46 has a pressure ratio that is greater than about five. In one disclosed embodiment, the engine 20 bypass ratio is greater than about ten (10:1), the fan diameter is significantly larger than that of the low pressure compressor 44, and the low pressure turbine 46 has a pressure ratio that is greater than about five 5:1. Low pressure turbine 46 pressure ratio is pressure measured prior to inlet of low pressure turbine 46 as related to the pressure at the outlet of the low pressure turbine 46 prior to an exhaust nozzle. The geared architecture 48 may be an epicyclic gear train, such as a planetary gear system or other gear system, with a gear reduction ratio of greater than about 2.3:1. It should be understood, however, that the above parameters are only exemplary of one embodiment of a geared architecture engine and that the present invention is applicable to other gas turbine engines including direct drive turbofans.

[0043] A significant amount of thrust is provided by the bypass flow B due to the high bypass ratio. The fan section 22 of the engine 20 is designed for a particular flight condition—typically cruise at about 0.8 Mach and about 35,000 feet. The flight condition of 0.8 Mach and 35,000 ft, with the engine at its best fuel consumption—also known as “bucket cruise Thrust Specific Fuel Consumption (“TSFC”)”—is the industry standard parameter of lbf of fuel being burned divided by lbf of thrust the engine produces at that minimum point. “Low fan pressure ratio” is the pressure ratio across the fan blade alone, without a Fan Exit Guide Vane (“FEGV”) system. The low fan pressure ratio as disclosed herein according to one non-limiting embodiment is less than about 1.45. “Low corrected fan tip speed” is the actual fan tip speed in ft/sec divided by an industry standard temperature correction of $[(T_{\text{ram}} - R)/(518.7^\circ R)]^{0.5}$. The “Low corrected fan tip speed” as disclosed herein according to one non-limiting embodiment is less than about 1150 ft/second.

[0044] With reference to FIG. 2, the geared architecture 48 generally includes a fan drive gear system (FDGS) 60 driven by the low speed spool 30 (illustrated schematically) through an input 62. The input 62, which may be in the form of a coupling, both transfers torque from the low speed spool 30 to the geared architecture 48 and facilitates the segregation of vibrations and other transients therebetween. In the disclosed non-limiting embodiment, the FDGS 60 may include an epicyclic gear system which may be, for example, a star system or a planet system.

[0045] The input coupling 62 may include an interface spline 64 joined, by a gear spline 66, to a sun gear 68 of the FDGS 60. The sun gear 68 is in meshed engagement with multiple planet gears 70, of which the illustrated planet gear 70 is representative. Each planet gear 70 is rotatably mounted in a planet carrier 72 by a respective planet journal

bearing 75. Rotary motion of the sun gear 68 urges each planet gear 70 to rotate about a respective longitudinal axis P.

[0046] Each planet gear 70 is also in meshed engagement with rotating ring gear 74 that is mechanically connected to a fan shaft 76. Since the planet gears 70 mesh with both the rotating ring gear 74 as well as the rotating sun gear 68, the planet gears 70 rotate about their own axes to drive the ring gear 74 to rotate about engine axis A. The rotation of the ring gear 74 is conveyed to the fan 42 (FIG. 1) through the fan shaft 76 to thereby drive the fan 42 at a lower speed than the low speed spool 30. It should be understood that the described geared architecture 48 is but a single non-limiting embodiment and that various other geared architectures will alternatively benefit herefrom.

[0047] With reference to FIG. 3, a flexible support 78 supports the planet carrier 72 to at least partially support the FDGS 60A with respect to the static structure 36 such as a front center body which facilitates the segregation of vibrations and other transients therebetween. It should be understood that various gas turbine engine case structures may alternatively or additionally provide the static structure and flexible support 78. It should be understood that lateral as defined herein is generally transverse to the axis of rotation A and the term “transverse” refers to a pivotal bending movement with respect to the axis of rotation A which typically absorbs deflection applied to the FDGS 60. The static structure 36 may further include a number 1 and 1.5 bearing support static structure 82 which is commonly referred to as a “K-frame” which supports the number 1 and number 1.5 bearing systems 38A, 38B. Notably, the K-frame bearing support defines a lateral stiffness (represented as Kframe in FIG. 3) and a transverse stiffness (represented as Kframe^{BEND} in FIG. 3) as the referenced factors in this non-limiting embodiment.

[0048] In this disclosed non-limiting embodiment, the lateral stiffness (KFS; KIC) of both the flexible support 78 and the input coupling 62 are each less than about 11% of the lateral stiffness (Kframe). That is, the lateral stiffness of the entire FDGS 60 is controlled by this lateral stiffness relationship. Alternatively, or in addition to this relationship, the transverse stiffness of both the flexible support 78 and the input coupling 62 are each less than about 11% of the transverse stiffness (Kframe^{BEND}). That is, the transverse stiffness of the entire FDGS 60 is controlled by this transverse stiffness relationship.

[0049] With reference to FIG. 4, another non-limiting embodiment of a FDGS 60B includes a flexible support 78' that supports a rotationally fixed ring gear 74'. The fan shaft 76' is driven by the planet carrier 72' in the schematically illustrated planet system which otherwise generally follows the star system architecture of FIG. 3.

[0050] With reference to FIG. 5, the lateral stiffness relationship within a FDGS 60C itself (for a star system architecture) is schematically represented. The lateral stiffness (KIC) of an input coupling 62, a lateral stiffness (KFS) of a flexible support 78, a lateral stiffness (KRG) of a ring gear 74 and a lateral stiffness (KJB) of a planet journal bearing 75 are controlled with respect to a lateral stiffness (KGM) of a gear mesh within the FDGS 60.

[0051] In the disclosed non-limiting embodiment, the stiffness (KGM) may be defined by the gear mesh between the sun gear 68 and the multiple planet gears 70. The lateral stiffness (KGM) within the FDGS 60 is the referenced factor

and the static structure **82'** rigidly supports the fan shaft **76**. That is, the fan shaft **76** is supported upon bearing systems **38A**, **38B** which are essentially rigidly supported by the static structure **82'**. The lateral stiffness (KJB) may be mechanically defined by, for example, the stiffness within the planet journal bearing **75** and the lateral stiffness (KRG) of the ring gear **74** may be mechanically defined by, for example, the geometry of the ring gear wings **74L**, **74R** (FIG. 2).

[0052] In the disclosed non-limiting embodiment, the lateral stiffness (KRG) of the ring gear **74** is less than about 12% of the lateral stiffness (KGM) of the gear mesh; the lateral stiffness (KFS) of the flexible support **78** is less than about 8% of the lateral stiffness (KGM) of the gear mesh; the lateral stiffness (KJB) of the planet journal bearing **75** is less than or equal to the lateral stiffness (KGM) of the gear mesh; and the lateral stiffness (KIC) of an input coupling **62** is less than about 5% of the lateral stiffness (KGM) of the gear mesh.

[0053] With reference to FIG. 6, another non-limiting embodiment of a lateral stiffness relationship within a FDGS **60D** itself are schematically illustrated for a planetary gear system architecture, which otherwise generally follows the star system architecture of FIG. 5.

[0054] It should be understood that combinations of the above lateral stiffness relationships may be utilized as well. The lateral stiffness of each of structural components may be readily measured as compared to film stiffness and spline stiffness which may be relatively difficult to determine.

[0055] By flex mounting to accommodate misalignment of the shafts under design loads, the FDGS design loads have been reduced by more than 17% which reduces overall engine weight. The flex mount facilitates alignment to increase system life and reliability. The lateral flexibility in the flexible support and input coupling allows the FDGS to essentially 'float' with the fan shaft during maneuvers. This allows: (a) the torque transmissions in the fan shaft, the input coupling and the flexible support to remain constant during maneuvers; (b) maneuver induced lateral loads in the fan shaft (which may otherwise potentially misalign gears and damage teeth) to be mainly reacted to through the number 1 and 1.5 bearing support K-frame; and (c) both the flexible support and the input coupling to transmit small amounts of lateral loads into the FDGS. The splines, gear tooth stiffness, journal bearings, and ring gear ligaments are specifically designed to minimize gear tooth stress variations during maneuvers. The other connections to the FDGS are flexible mounts (turbine coupling, case flex mount). These mount spring rates have been determined from analysis and proven in rig and flight testing to isolate the gears from engine maneuver loads. In addition, the planet journal bearing spring rate may also be controlled to support system flexibility.

[0056] FIG. 7 is similar to FIG. 5 but shows the transverse stiffness relationships within the FDGS **60C** (for a star system architecture). The transverse stiffness (KIC^{BEND}) of the input coupling **62**, a transverse stiffness (KFS^{BEND}) of the flexible support **78**, a transverse stiffness (KRG^{BEND}) of the ring gear **74** and a transverse stiffness (KJB^{BEND}) of the planet journal bearing **75** are controlled with respect to a transverse stiffness (KGM^{BEND}) of the gear mesh within the FDGS **60**.

[0057] In the disclosed non-limiting embodiment, the stiffness (KGM^{BEND}) may be defined by the gear mesh

between the sun gear **68** and the multiple planet gears **70**. The transverse stiffness (KGM^{BEND}) within the FDGS **60** is the referenced factor and the static structure **82'** rigidly supports the fan shaft **76**. That is, the fan shaft **76** is supported upon bearing systems **38A**, **38B** which are essentially rigidly supported by the static structure **82'**. The transverse stiffness (KJB^{BEND}) may be mechanically defined by, for example, the stiffness within the planet journal bearing **75** and the transverse stiffness (KRG^{BEND}) of the ring gear **74** may be mechanically defined by, for example, the geometry of the ring gear wings **74L**, **74R** (FIG. 2).

[0058] In the disclosed non-limiting embodiment, the transverse stiffness (KRG^{BEND}) of the ring gear **74** is less than about 12% of the transverse stiffness (KGM^{BEND}) of the gear mesh; the transverse stiffness (KFS^{BEND}) of the flexible support **78** is less than about 8% of the transverse stiffness (KGM^{BEND}) of the gear mesh; the transverse stiffness (KJB^{BEND}) of the planet journal bearing **75** is less than or equal to the transverse stiffness (KGM^{BEND}) of the gear mesh; and the transverse stiffness (KIC^{BEND}) of an input coupling **62** is less than about 5% of the transverse stiffness (KGM^{BEND}) of the gear mesh.

[0059] FIG. 8 is similar to FIG. 6 but shows the transverse stiffness relationship within the FDGS **60D** for the planetary gear system architecture.

[0060] FIG. 9 shows an embodiment **200**, wherein there is a fan drive turbine **208** driving a shaft **206** to in turn drive a fan rotor **202**. A gear reduction **204** may be positioned between the fan drive turbine **208** and the fan rotor **202**. This gear reduction **204** may be structured, mounted and operate like the gear reduction disclosed above. A compressor rotor **210** is driven by an intermediate pressure turbine **212**, and a second stage compressor rotor **214** is driven by a turbine rotor **216**. A combustion section **218** is positioned intermediate the compressor rotor **214** and the turbine section **216**.

[0061] FIG. 10 shows yet another embodiment **300** wherein a fan rotor **302** and a first stage compressor **304** rotate at a common speed. The gear reduction **306** (which may be structured, mounted and operate as disclosed above) is intermediate the compressor rotor **304** and a shaft **308**, which is driven by a low pressure turbine section.

[0062] It should be understood that relative positional terms such as "forward," "aft," "upper," "lower," "above," "below," and the like are with reference to the normal operational attitude of the vehicle and should not be considered otherwise limiting.

[0063] It should be understood that like reference numerals identify corresponding or similar elements throughout the several drawings. It should also be understood that although a particular component arrangement is disclosed in the illustrated embodiment, other arrangements will benefit herefrom.

[0064] Although particular step sequences are shown, described, and claimed, it should be understood that steps may be performed in any order, separated or combined unless otherwise indicated and will still benefit from the present disclosure.

[0065] The foregoing description is exemplary rather than defined by the limitations within. Various non-limiting embodiments are disclosed herein, however, one of ordinary skill in the art would recognize that various modifications and variations in light of the above teachings will fall within the scope of the appended claims. It is therefore to be understood that within the scope of the appended claims, the

disclosure may be practiced other than as specifically described. For that reason the appended claims should be studied to determine true scope and content.

What is claimed is:

1. A gas turbine engine, comprising:
 - a fan shaft driving a fan having fan blades;
 - a fan shaft support that supports said fan shaft defining a fan shaft support lateral stiffness and a fan shaft support transverse stiffness;
 - a gear system connected to said fan shaft including a reduction ratio of greater than 2.3;
 - a flexible support supporting said gear system defining a flexible support lateral stiffness and a flexible support transverse stiffness;
 - a low fan pressure ratio of less than 1.45 and said low fan pressure ratio is measured across the fan blades alone; and
 wherein at least one of said flexible support lateral stiffness is less than 11% of said fan shaft support lateral stiffness and said flexible support transverse stiffness is less than 20% of said fan shaft support transverse stiffness.
2. The gas turbine engine of claim 1, wherein said gear system includes a gear mesh defining a gear mesh transverse stiffness and said flexible support transverse stiffness is less than 8% of said gear mesh transverse stiffness.
3. The gas turbine engine of claim 2, further comprising a low corrected fan tip speed less than about 1150 ft/second, wherein said low corrected fan tip speed is an actual fan tip speed at an ambient temperature divided by $[(T_{\text{amb}} - 518.7^{\circ} \text{R})/0.5]$, where T represents said ambient temperature in degrees Rankine, wherein the gear system is a planetary gear system and said flexible support lateral stiffness is less than 11% of said fan shaft support lateral stiffness.
4. The gas turbine engine of claim 3, further comprising a low pressure turbine with an inlet, an outlet, and a low pressure turbine pressure ratio greater than 5:1, wherein said low pressure turbine pressure ratio is a ratio of a pressure measured prior to said inlet as related to a pressure at said outlet prior to any exhaust nozzle and said flexible transverse stiffness is less than 11% of said fan shaft support transverse stiffness.
5. The gas turbine engine of claim 4, further comprising a bypass ratio greater than ten (10) and a two stage high pressure turbine and wherein said gear system includes a gear mesh defining a gear mesh lateral stiffness and said flexible support lateral stiffness is less than 8% of said gear mesh lateral stiffness.
6. The gas turbine engine of claim 5, further comprising a gear system input to said gear system defining a gear system input lateral stiffness, wherein said gear system input lateral stiffness is less than 11% of said fan shaft support lateral stiffness.
7. The gas turbine engine of claim 2, wherein the flexible support transverse stiffness is less than 11% of said fan shaft support transverse stiffness.
8. The gas turbine engine of claim 7, wherein said gear mesh defines a gear mesh lateral stiffness and said flexible support lateral stiffness is less than 8% of said gear mesh lateral stiffness.
9. The gas turbine engine of claim 3, further comprising a bypass ratio greater than 10 and a low pressure turbine with an inlet, an outlet, and a low pressure turbine pressure ratio greater than 5:1, wherein said low pressure turbine

pressure ratio is a ratio of a pressure measured prior to said inlet as related to a pressure at said outlet prior to any exhaust nozzle and said flexible lateral stiffness is less than 11% of said fan shaft support lateral stiffness, and said gear system is a planetary gear system.

10. The gas turbine engine of claim 9, further comprising a two stage high pressure turbine, an inner shaft and an outer shaft concentric with said inner shaft that both rotate via at least one bearing system, and a low corrected fan tip speed less than about 1150 ft/second, wherein said low corrected fan tip speed is an actual fan tip speed at an ambient temperature divided by $[(T_{\text{amb}} - 518.7^{\circ} \text{R})/0.5]$, where T represents said ambient temperature in degrees Rankine.

11. The gas turbine engine of claim 10, further comprising a gear system input to said gear system defining a gear system input lateral stiffness, wherein said gear system input lateral stiffness is less than 11% of said fan shaft support lateral stiffness.

12. The gas turbine engine of claim 1, further comprising a gear system input to said gear system defining a gear system input lateral stiffness and a low pressure turbine with an inlet, an outlet, and a low pressure turbine pressure ratio greater than 5:1, wherein said low pressure turbine pressure ratio is a ratio of a pressure measured prior to said inlet as related to a pressure at said outlet prior to any exhaust nozzle and said gear system input lateral stiffness is less than 11% of said fan shaft support lateral stiffness.

13. The gas turbine engine of claim 12, further comprising a two stage high pressure turbine, and a low corrected fan tip speed less than about 1150 ft/second, wherein said low corrected fan tip speed is an actual fan tip speed at an ambient temperature divided by $[(T_{\text{amb}} - 518.7^{\circ} \text{R})/0.5]$, where T represents said ambient temperature in degrees Rankine, wherein the gear system is a planetary gear system and said gear system defines a gear system input transverse stiffness and said gear system input transverse stiffness is less than 11% of said fan shaft support transverse stiffness.

14. A gas turbine engine, comprising:

- a fan shaft driving a fan having fan blades;
- a fan shaft support that supports said fan shaft defining a fan shaft support lateral stiffness and a fan shaft support transverse stiffness;
- a gear system connected to said fan shaft including a reduction ratio of greater than 2.3;
- a flexible support supporting said gear system defining a flexible support lateral stiffness and a flexible support transverse stiffness;
- a mid-turbine frame;
- a low fan pressure ratio of less than 1.45 and said low fan pressure ratio is measured across the fan blades alone; and

wherein at least one of said flexible support lateral stiffness is less than 11% of said fan shaft support lateral stiffness and said flexible support transverse stiffness is less than 20% of said fan shaft support transverse stiffness.

15. The gas turbine engine of claim 14, wherein said flexible support lateral stiffness is less than 11% of said fan shaft support lateral stiffness.

16. The gas turbine engine of claim 15, wherein said gear system includes a gear mesh defining a gear mesh lateral stiffness and said flexible support lateral stiffness is less than 8% of said gear mesh lateral stiffness.

17. The gas turbine engine of claim **16**, further comprising a low pressure turbine with an inlet, an outlet, and a low pressure turbine pressure ratio greater than 5:1, wherein said low pressure turbine pressure ratio is a ratio of a pressure measured prior to said inlet as related to a pressure at said outlet prior to any exhaust nozzle and said gear mesh defines a gear mesh transverse stiffness and said flexible support transverse stiffness is less than 8% of said gear mesh transverse stiffness.

18. The gas turbine engine of claim **17**, further comprising a bypass ratio greater than ten (10), wherein the gear system is a planetary gear system and said flexible support transverse stiffness is less than 11% of said fan shaft support transverse stiffness.

19. The gas turbine engine of claim **18**, further comprising a two stage high pressure turbine, and a low corrected fan tip speed less than about 1150 ft/second, wherein said low corrected fan tip speed is an actual fan tip speed at an ambient temperature divided by $[(T_{\text{amb}} \text{ } ^\circ \text{R})/(518.7^\circ \text{R})]^{0.5}$, where T represents said ambient temperature in degrees Rankine.

20. The gas turbine engine of claim **18**, further comprising an inner shaft and an outer shaft concentric with said inner shaft that both rotate via at least one bearing system, wherein said mid-turbine frame includes at least one airfoil extending into a flow path.

21. A gas turbine engine, comprising:

- a fan shaft driving a fan having fan blades;
- a fan shaft support that supports said fan shaft defining a fan shaft support lateral stiffness and a fan shaft support transverse stiffness;
- a gear system connected to said fan shaft including a gear mesh defining a gear mesh transverse stiffness and a reduction ratio of greater than 2.3;
- a flexible support supporting said gear system defining a flexible support lateral stiffness and a flexible support transverse stiffness;
- a low fan pressure ratio of less than 1.45 and said low fan pressure ratio is measured across the fan blades alone; and

wherein said flexible support lateral stiffness is less than 11% of said fan shaft support lateral stiffness, said flexible support transverse stiffness is less than 20% of said fan shaft support transverse stiffness, and said flexible support transverse stiffness is less than 8% of said gear mesh transverse stiffness.

22. The gas turbine engine of claim **21**, further comprising a low pressure turbine with an inlet, an outlet, and a low pressure turbine pressure ratio greater than 5:1, wherein said low pressure turbine pressure ratio is a ratio of a pressure measured prior to said inlet as related to a pressure at said outlet prior to any exhaust nozzle and said gear mesh defines a gear mesh lateral stiffness and the flexible support lateral stiffness is less than 8% of said gear mesh lateral stiffness.

23. The gas turbine engine of claim **22**, further comprising a two stage high pressure turbine and a bypass ratio greater than ten (10), wherein the gear system is a planetary gear system.

24. The gas turbine engine of claim **22**, further comprising:

- a three stage low pressure compressor; and
- a low corrected fan tip speed less than about 1150 ft/second, wherein said low corrected fan tip speed is an actual fan tip speed at an ambient temperature divided by $[(T_{\text{amb}} \text{ } ^\circ \text{R})/(518.7^\circ \text{R})]^{0.5}$, where T represents said ambient temperature in degrees Rankine.

25. The gas turbine engine of claim **22**, further comprising a mid-turbine frame including at least one airfoil extending into a flow path.

26. The gas turbine engine of claim **25**, further comprising:

- a three stage low pressure compressor;
- an inner shaft and an outer shaft concentric with said inner shaft that both rotate via at least one bearing system;
- a low corrected fan tip speed less than about 1150 ft/second, wherein said low corrected fan tip speed is an actual fan tip speed at an ambient temperature divided by $[(T_{\text{amb}} \text{ } ^\circ \text{R})/(518.7^\circ \text{R})]^{0.5}$, where T represents said ambient temperature in degrees Rankine; and
- wherein said mid-turbine frame includes at least one airfoil extending into a flow path.

27. The gas turbine engine of claim **22**, further comprising a gear system input to said gear system defining a gear system input lateral stiffness, wherein said gear system input lateral stiffness is less than 11% of said fan shaft support lateral stiffness.

28. The gas turbine engine of claim **21**, further comprising a low pressure turbine with an inlet, an outlet, and a low pressure turbine pressure ratio greater than 5:1, wherein said low pressure turbine pressure ratio is a ratio of a pressure measured prior to said inlet as related to a pressure at said outlet prior to any exhaust nozzle.

29. The gas turbine engine of claim **28**, further comprising a gear system input to said gear system defining a gear system input lateral stiffness and said gear system input lateral stiffness is less than 11% of said fan shaft support lateral stiffness.

30. The gas turbine engine of claim **29**, further comprising:

- a two stage high pressure turbine;
- a low corrected fan tip speed less than about 1150 ft/second, wherein said low corrected fan tip speed is an actual fan tip speed at an ambient temperature divided by $[(T_{\text{amb}} \text{ } ^\circ \text{R})/(518.7^\circ \text{R})]^{0.5}$, where T represents said ambient temperature in degrees Rankine; and
- wherein said gear system is a planetary gear system and said gear system defines a gear system input transverse stiffness and said gear system input transverse stiffness is less than 11% of said fan shaft support transverse stiffness.

* * * * *