(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
29 January 2009 (29.01.2009)

PCT

(10) International Publication Number
WO 2009/015178 A1

(51) International Patent Classification:
B01D 45/12 (2006.01)

(21) International Application Number:
PCT/US2008/070826

(22) International Filing Date: 23 July 2008 (23.07.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/951,505 24 July 2007 (24.07.2007) US
12/175,318 17 July 2008 (17.07.2008) US

(71) Applicant *(for all designated States except US)*: **HONEYWELL INTERNATIONAL INC.** [US/US]; Patent Services Group AB, 101 Columbia Road, Morristown, New Jersey 07962 (US).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **GRIFFITH, Bruce R.** [US/US]; 0s987 Mill Creek Circle E, Geneva, Illinois 60134 (US). **KOESTER, Ludger, LK.** [US/US]; 2367 Bellingham Court, Aurora, Illinois 60503 (US). **BOHANON, Mark C.** [US/US]; 2776 Rosehall Lane, Aurora, Illinois 60503 (US).

(74) Agent: **VARGO, Paul M.**; Husch Blackwell Sanders Welsh Katz, 120 South Riverside Plaza - 22nd Flr., Chicago, Illinois 60606-3912 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

(54) **Title:** APPARATUS AND METHOD OF SMOKE DETECTION

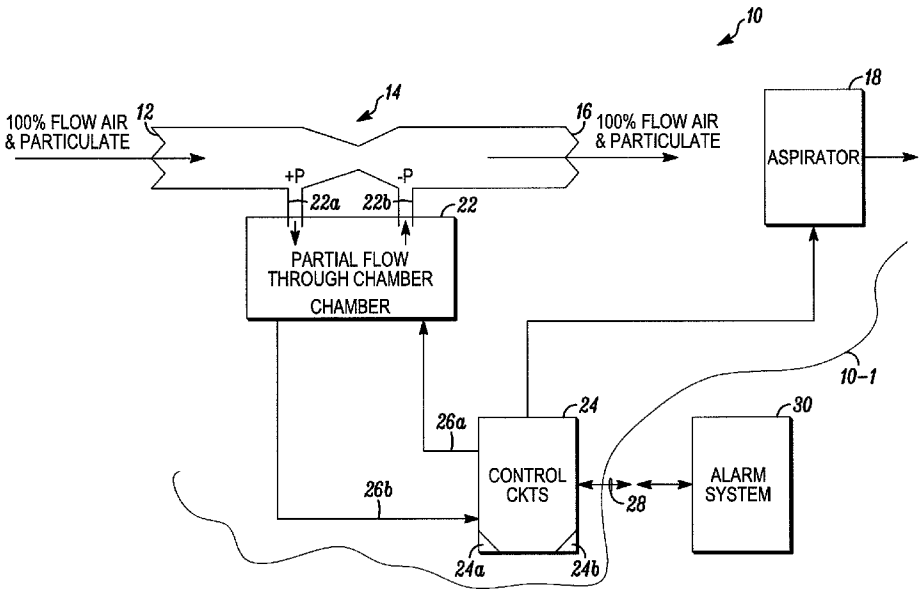


FIG. 1

(57) **Abstract:** An aspirated smoke detector includes an ambient air flow separation element in combination with a smoke sensing chamber. The flow separation element can be an active or a passive element. Separated ambient, carrying relative small particles can flow into the sensing chamber. Ambient carrying relatively larger particulate matter is excluded from the sensing chamber.

WO 2009/015178 A1

Apparatus and Method of Smoke Detection

FIELD

[0001] The invention pertains to aspirated smoke detectors. More particularly, the invention pertains to such detectors which limit the volume of ambient atmosphere that flows through an associated detection chamber.

BACKGROUND

[0002] Various types of aspirated smoke detectors are known. Such detectors usually include a detection chamber in combination with a fan or blower which draws ambient air through or injects ambient air into the chamber.

[0003] Aspirated detectors have been disclosed and claimed in US Patent No. 6,166,648, which issued December 26, 2000 and is entitled, Aspirated Detector. The '648 patent is incorporated herein by reference.

[0004] While aspirated detectors as in the '648 patent are useful and effective for their intended purpose, there is a continuing need to try to avoid polluting, filters associated with aspirated detectors as well as the detection chamber, with dust and other airborne pollutants.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] Fig. 1 is a diagram of a first embodiment of the invention;

[0006] Fig. 2 is a diagram of a second embodiment of the invention;

[0007] Fig. 3 is a diagram of a third embodiment of the invention;

[0008] Fig. 4 is a diagram of a fourth embodiment of the invention; and

[0009] Figs. 5A, 5B are front and side views respectively of a separator of ambient air usable in the embodiment of Fig. 4.

DETAILED DESCRIPTION

[0010] While embodiments of this invention can take many different forms, specific embodiments thereof are shown in the drawings and will be described herein in detail with the understanding that the present disclosure is to be considered as an exemplification of the principles of the invention, as well as the

best mode of practicing same, and is not intended to limit the invention to the specific embodiment illustrated.

[0011] Embodiments of the invention implement two functions when used for handling airflow within a High Sensitivity Smoke Detector. One function extends detector service life by keeping larger, unwanted particulate from the detection chamber. A second function aides in performing the dust discrimination function that is accomplished within the chamber with the use of both optical design and signal processing.

[0012] In accordance with embodiments of the invention, an air stream within an aspirated smoke detector can be directed off at a selected angle that will cause larger, heavier particles to be more influenced by the effects of inertia. These larger particles will tend to follow a straight forward path while the smaller particles (smoke) will more easily follow a different (alternate) path that will be off the main path at some angle. This alternate air stream will be used for detection. The heavier, larger particles will thus be excluded from the sensor cavity or chamber.

[0013] An aspirated smoke detector which embodies the invention can include a smoke detection chamber for use in detecting smoke particles and an aspirator, for example, a blower or a fan, for use in pulling air through a network of pipes to the device. The "alternate path" will direct a smaller, representative sample of air/particulate through the chamber. This detection chamber is highly sensitive to any changes in ambient conditions within itself and therefore should remain as clean as possible. Filters are another method of keeping out the particles. This "alternate path" could eliminate the need for a filter.

[0014] In yet another aspect of the invention, particles can be separated into two groups using a cyclone or virtual impactor. The small particle group is contained in the major flow and the large particles are predominantly in the minor flow outputs. The particle concentration of each group is measured with separate scattering volumes. Contamination particles such as dust are predominantly large with some small particles that may appear to be smoke. Smoke particles are predominantly small with some large particles. The small particle concentration measurement is reduced by the large particle scattering measurement in the minor flow. This offset will reduce errors due to inefficiencies in separation and desensitize the detector to dust particles that have a distribution into the small particle size range.

[0015] The sampled air can be pulled into the detector using a blower or a fan. The sampled air goes into a virtual impactor that separates particles into two separate outputs. Each output goes into its own scattering volume and is measured for particle concentration. Large particles are predominant in the minor flow and small particles predominate in the major flow.

[0016] The large particle measurement from the minor flow of the virtual impactor can be measured using backward scattering. Backward scattering is more sensitive to non-absorbing particles such as dust, water, white powders.

[0017] The small particle measurement from the major flow of the virtual impactor can be measured using forward scattering. Exemplary light sources can include a light emitting diode or a laser. Exemplary light receiver can be a photo diode. Light color is preferably blue since it produces more scattered light for small particles than infrared.

[0018] The amplifiers can be calibrated such that for a given concentration of a dust "standard" (i.e., Sodium bicarbonate, Portland cement), the outputs are the same. The output of the minor flow scattering can be subtracted from the output of the major flow scattering. The result is used to indicate a concentration of smoke.

[0019] In one aspect of the invention, the airflow divider can be implemented with a rectangular chamber. Under the divider within a predetermined distance is a hole with a selected diameter. The divider is hollow on the inside and the air sample flows thru the inside. The air flows from the pipe into the rectangular chamber, is divided at the divider and flows down on both sides.

[0020] The air is pulled into the hole under the divider with a fan. The fan also creates a negative pressure inside the divider. Since the hole restricts the air flow, part of the air will be forced thru the inside of the divider and then thru the detection chamber. The distance from the hole and the inside of the divider is selected such that heavy particles won't get lifted vertically and therefore do not enter the inside of the divider.

[0021] Additionally, since the heavy particles can be expected to flow in the center of the pipe, than those particles will flow into the hole since that path represents the shortest distance to exit the divider.

[0022] In summary, preferably, only a partial air sample will flow thru the smoke detection chamber. Limiting the flow of air going thru the chamber can be expected to reduce pollution of any associated filter and minimize pollution of the

chamber with dust and other pollutants. Thus, the air flow into the chamber will represent a sample of the entire air stream and preferably will not carry relatively large particles.

[0023] It will also be understood that the separator elements can be implemented as passive elements, such as cyclone separators. Alternately, particulate matter can be separated using active, electrically energized elements all without limitation.

[0024] Fig. 1 illustrates an aspirated detector 10 in accordance with the invention. Detector is carried, at least in part by a housing 10-1.

[0025] The embodiment of Fig. 1 has an ambient air inflow port 12, a constricted region 14, which establishes a pressure differential, and an outflow port 16. The outflow from port 16 is in fluid flow communication with an aspirator 18. As a result of the pressure differential developed at region 14, smaller, lighter particles of airborne particulate matter will be diverted from the flow from ports 12-16 as discussed below.

[0026] Aspirator 18 can be implemented as a fan, or other element which produces a reduced pressure at port 16 thereby drawing ambient air and associated particulate matter into port 12.

[0027] Chamber 22, a smoke detection chamber receives a partial flow of inflowing ambient air with larger particles excluded. Chamber 22 can be implemented as a photoelectric, an ionization, or both, sensing chamber without limitation. The exact details of smoke detection chamber 22 are not a limitation of the invention.

[0028] Control circuits 24 are coupled to aspirator 18 and chamber 22. Circuits 24, which could be implemented, at least in part, with a programmed processor 24a, and associated executable control software 24b, can activate a photoelectric implementation of chamber 22 via a conductor 26a. Smoke indicating signals can be received via conductor 26b at the control circuits 24.

[0029] Circuits 24 can process signals on line 26b to establish the presence of a potential or actual fire condition and couple that determination, via a wired or wireless communications medium 28 to an alarm system control unit 30.

[0030] In the detector 10 larger airborne particles flow from port 12 to port 16 without being diverted into chamber 22. Hence pollutants such as dust particles and the like will be excluded from chamber 22.

[0031] Fig. 2 illustrates a detector 40 having an inflow port 12-1, and an outflow port 16-1. A cyclone separator 42 is coupled between port 12-1 and sensing chamber 22-1 (comparable t o chamber 22 previously discussed). Separator 42 separates out undesired larger particulate matter, indicated at 46 from a partial inflow 48 into chamber 22-1.

[0032] The separated particulate matter 46 is coupled to the output port 16-1 by conduit 50. An aspirator, such as aspirator 18 can be coupled to output port 16-1 as discussed with respect to detector 10, Fig. 1. Alternately, an aspirator can be coupled to inflow port 12-1 and inject ambient into the separation chamber 42.

[0033] As illustrated in Fig. 2, particulate flow 52 through chamber 42 is away from inflow port 22a-1 of chamber 22-1 and toward by-pass conduit 50. In this embodiment, gravity assists in collecting particulate matter 46 at conduit 50.

[0034] Fig. 3 illustrates a detector 60 having an inflow port 12-2 and an outflow port 16-2. A cyclone separator 62 is coupled between port 12-2 and sensing chamber 22-2.

[0035] Ambient inflow to detector 60, indicated by flow arrows 64a, b enters chamber 42 and travels toward filter 66. Inflow 64c travels toward a particulate collecting region 62a.

[0036] Chamber 62 separates out the larger particulate matter which flows as indicated 68a, b, c toward the region 62a. Particulate flow and a portion of the incoming ambient atmosphere, indicated at 64c, is toward by-pass conduit 70 which is coupled to output port 16-2.

[0037] Chamber 62 directs a portion 64d of incoming ambient, without the larger heavier particulate matter toward and through filter 66. Outflow 64e from filter 66 flows through conduit 72 and into sensing chamber 22-2 via inflow port 22a-2. Chamber 22-2 could be coupled to control circuits, such as circuits 24 of Fig. 1.

[0038] Out-flowing ambient 64f is in turn coupled to output port 16-2 via conduit 70. Gravity also contributes to the separation process in the detector 60.

[0039] Fig. 4 illustrates another aspirated detector 80, contained at least in part in a housing 80-1. Detector 80 has an ambient air input port 12-3 which is coupled to a separator element 82. The structure of element 82 is illustrated in more detail in Figs. 5A, B.

[0040] Separator element 82 divides the inflowing ambient air and particulate matter 84a into a heavier, or larger, particulate matter carry portion 84b and a

second portion 84c. The portion 84c without dust or other objectionable pollutants is coupled to a smoke sensing chamber 22-3 via inflow port 22a-3.

[0041] Out-flowing ambient air 84b, 84d in conduits 90a, b is drawn into aspirator 18-1 and expelled 84e at output port 16-3. It will be understood that the configuration of the various elements of detector 80, as noted above is exemplary and other configurations, designs or arrangements come within the spirit and scope of the invention.

[0042] Detector 80 can include control circuits 24b-1 as discussed above with respect to Fig. 1 and control circuits 24. Detector 80 can be in communication with alarm system 30-1 via communications medium 28-1.

[0043] Figs. 5A, B are front and side sectional views of separator element 82. Element 82 has a housing 94 with an inflow air path 94a which extends from input port 12-3 toward a first end 96a of a hollow divider 96. Airflow 84a-1, -2 flows along first and second sides 96b, c of divider 96 toward end regions 96e, f.

[0044] Once past end regions 96e, f the flow encounters a restriction 98. Restriction 98 is sized with a diameter that forces ambient air with the smaller particles 84c to move opposite a flow direction of 84a-1, -2 and into an interior region 96e of the divider 96.

[0045] The ambient with the smaller particulate matter 84c flows through the region 96e toward an outflow port 94d, best seen in Fig. 5B, and toward the input port 22a-3 of the detection chamber 22-3. Ambient 84b carrying the heavier, larger particles flows along the channel 94c, past the restriction 98, through conduit 90a toward aspirator 18-1. Thus, larger, heavier particles are excluded from the smoke sensing chamber 22-3.

[0046] From the foregoing, it will be observed that numerous variations and modifications may be effected without departing from the spirit and scope of the invention. It is to be understood that no limitation with respect to the specific apparatus illustrated herein is intended or should be inferred. It is, of course, intended to cover by the appended claims all such modifications as fall within the scope of the claims.

Claims:

1. A smoke detector comprising:

a housing which defines an interior region and a separator element; and

a smoke sensing chamber in fluid flow communication with the interior region with the separator element directing a selected portion of ambient air in the interior region into the smoke sensing chamber.

2. A detector as in claim 1 where the housing defines an ambient inflow port and an ambient outflow port, and a second smoke sensing chamber which receives a different portion of ambient air in housing.

3. A detector as in claim 1 which includes an aspirator coupled to the housing.

4. A detector as in claim 1 where the separator element is one of a passive element, or, an active element.

5. A detector as in claim 4 where the passive element comprises a selectively shaped mechanical structure.

6. A detector as in claim 5 which includes an aspirator coupled to the housing.

7. A detector as in claim 6 where the separator element produces a first partial flow through the sensing chamber and a second partial flow which bypasses the sensing chamber, and a second smoke sensing chamber which receives at least a portion of the second partial flow.

8. A detector as in claim 7 where the first partial flow comprises smaller particulate matter than does the second partial flow.

9. A detector as in claim 6 where the separator element includes a hollow diverter having an inflow port for receipt of ambient atmosphere flowing in one

direction, the diverter being carried by the housing in the interior region with an outflow from the housing flowing substantially opposite the first direction.

10. A detector as in claim 9 where the diverter has an outflow port coupled to the sensing chamber.

11. A detector as in claim 9 where the housing has an outflow port, where the sensing chamber has an outflow port and where the aspirator is coupled to both outflow ports.

12. A detector as in claim 8 where the separator element comprises a cyclone separator.

13. A method of smoke detection comprising:

providing a flow of particulate carrying ambient atmosphere;

separating the flow into two partial flows with one partial flow including larger particulate matter than the other;

directing the other partial flow into a sensing region;

determining if the particulate matter directed into the sensing region is indicative of a potential fire condition.

14. A method as in claim 13 where separating includes providing a reduced pressure region into which the other partial flow moves.

15. A method as in claim 13 which includes, after providing, dividing the flow of particulate carrying ambient atmosphere into two parts.

16. A method as in claim 15 where dividing includes directing the two parts in a first direction, and where separating includes moving the larger particulate matter in the first direction.

17. A method as in claim 16 which includes moving the other partial flow opposite the first direction.

18. A separator comprising:

a hollow housing;

a hollow divider carried in the hollow housing;

and where the housing has a constricted flow region which induces fluid flow into the hollow divider.

19. A separator as in claim 18 where the divider has first and second ends with one end oriented toward an input port of the housing and the other end oriented toward an output port of the housing.

20. A separator as in claim 19 where the divider includes a separated fluid outflow port.

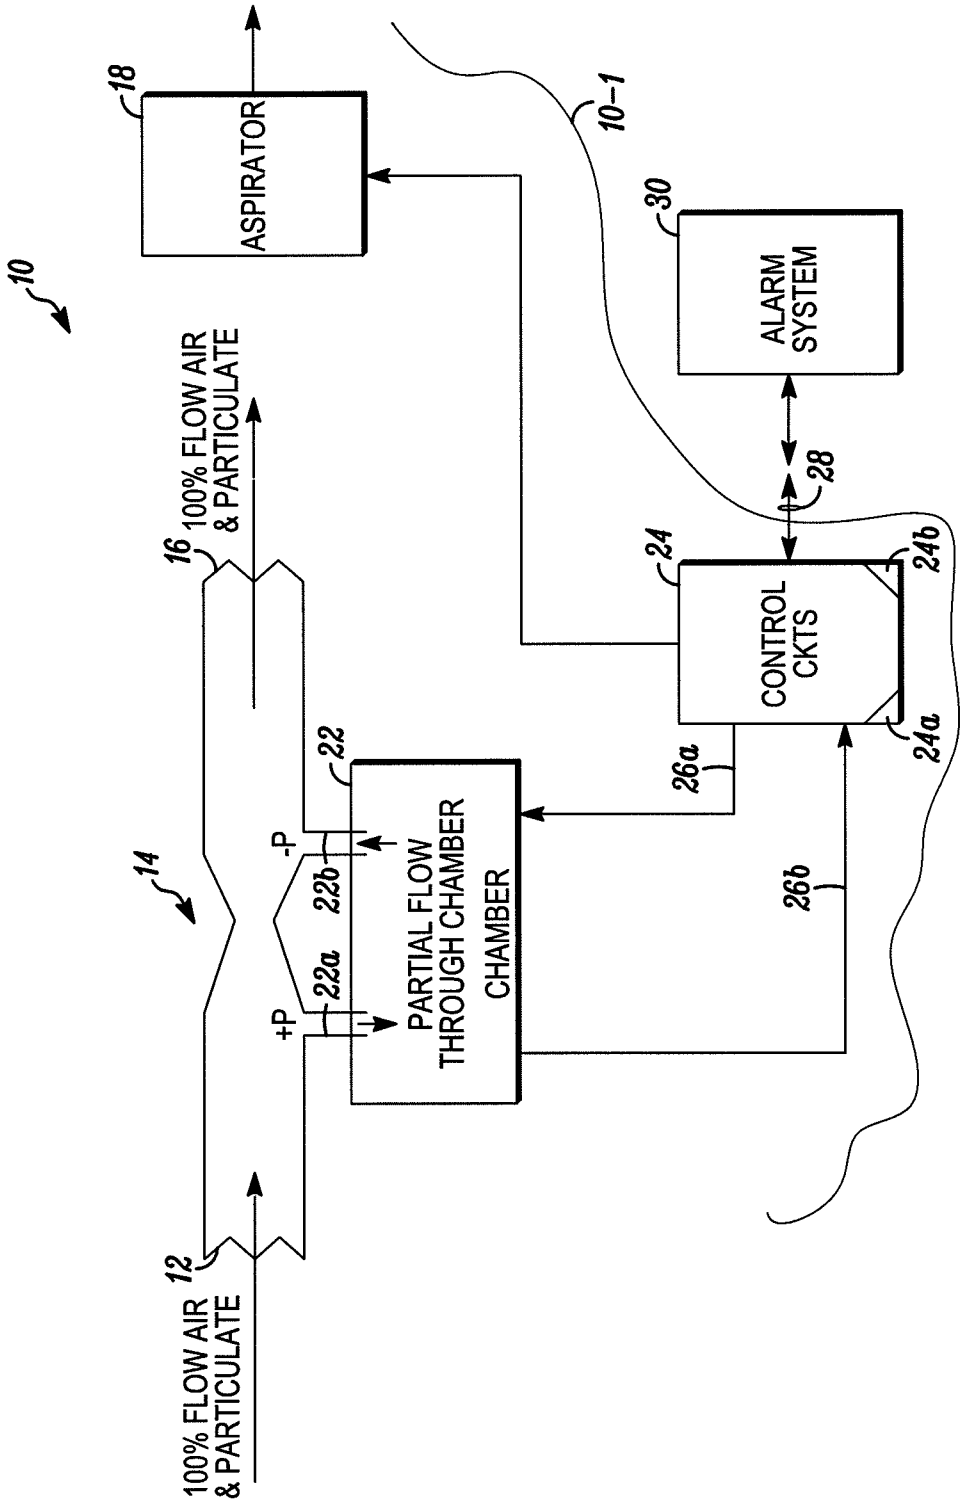

10
18
ASPIRATOR
10-1
30
ALARM SYSTEM
28
16
100% FLOW AIR & PARTICULATE
24
CONTROL CKTS
24b
24a
22
PARTIAL FLOW THROUGH CHAMBER
CHAMBER
26a
26b
14
-P
22b
22a
+P
12
100% FLOW AIR & PARTICULATE

FIG. 1

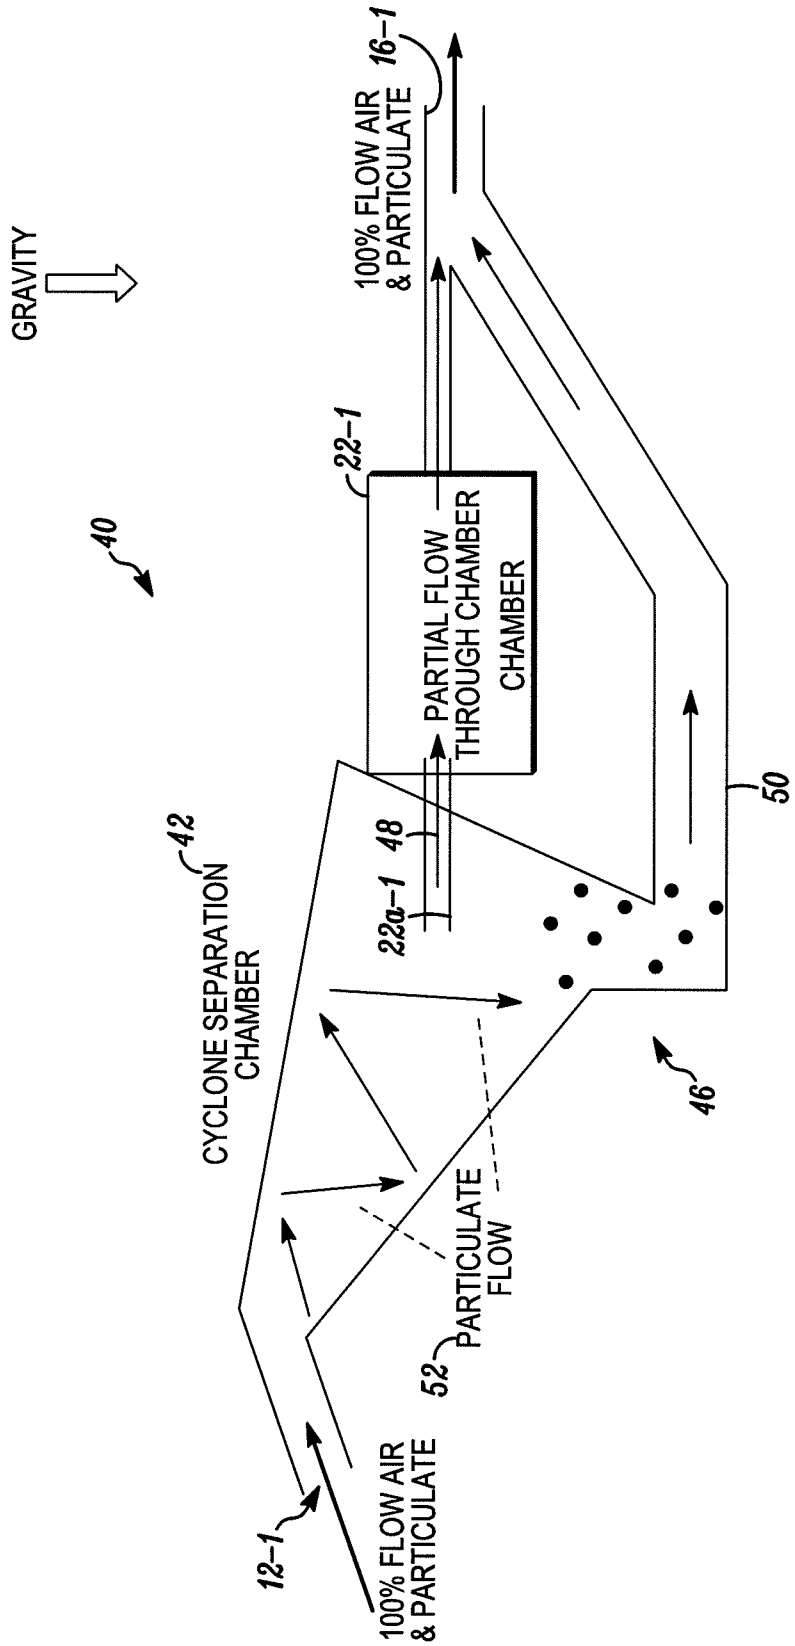

GRAVITY
40
42
CYCLONE SEPARATION CHAMBER
22-1
PARTIAL FLOW THROUGH CHAMBER
CHAMBER
16-1
100% FLOW AIR & PARTICULATE
48
22a-1
50
46
52
PARTICULATE FLOW
12-1
100% FLOW AIR & PARTICULATE

FIG. 2

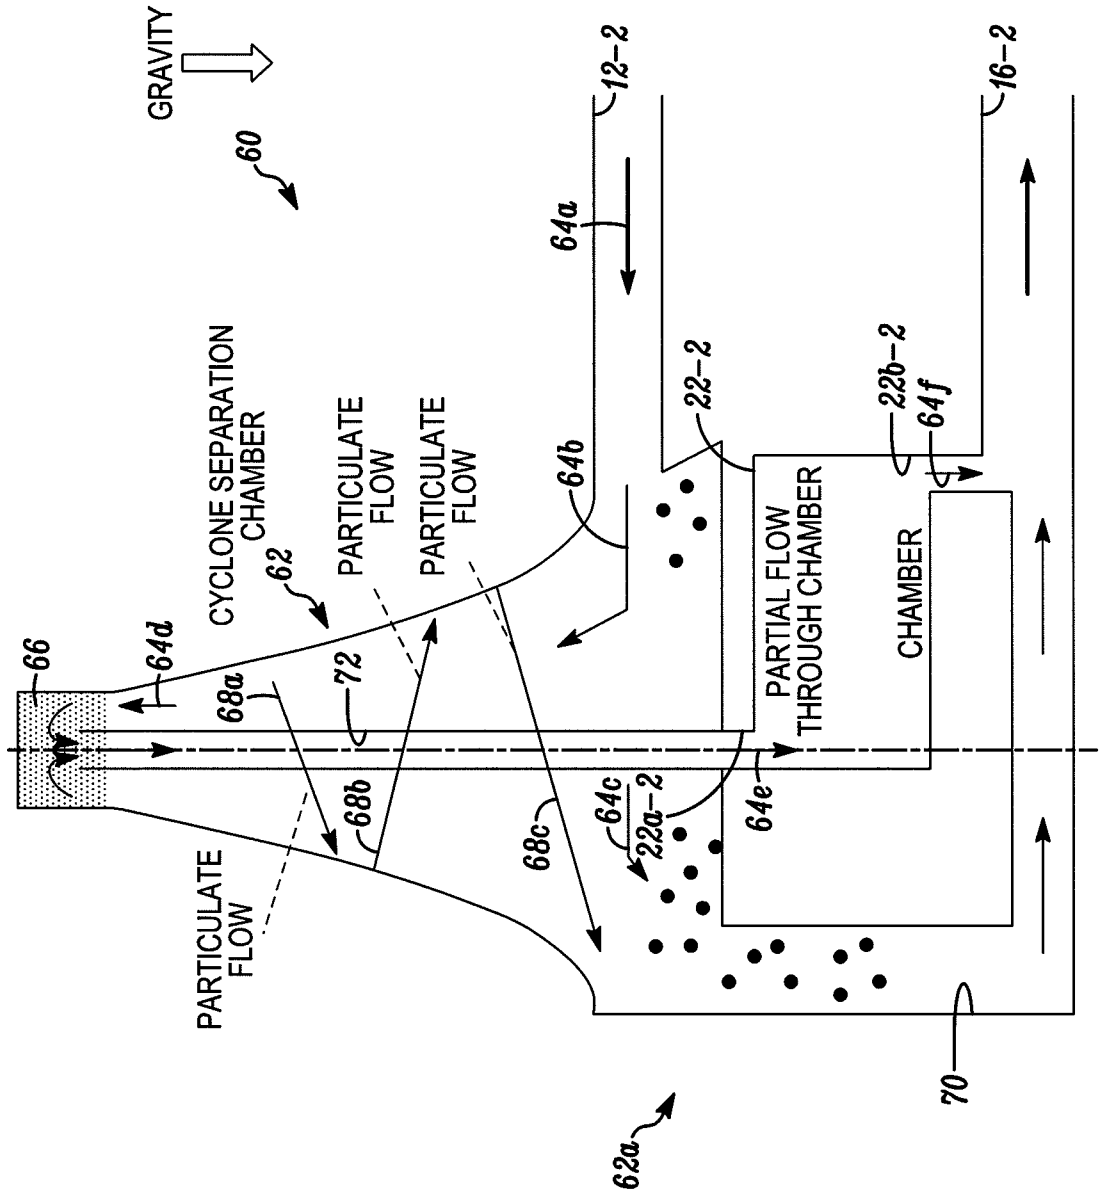

GRAVITY
60
12-2
16-2
64a
64b
22-2
22b-2
64f
CYCLONE SEPARATION CHAMBER
62
PARTICULATE FLOW
PARTICULATE FLOW
PARTIAL FLOW THROUGH CHAMBER
CHAMBER
66
64d
68a
72
68b
68c
64c
22a-2
64e
PARTICULATE FLOW
70
62a

FIG. 3

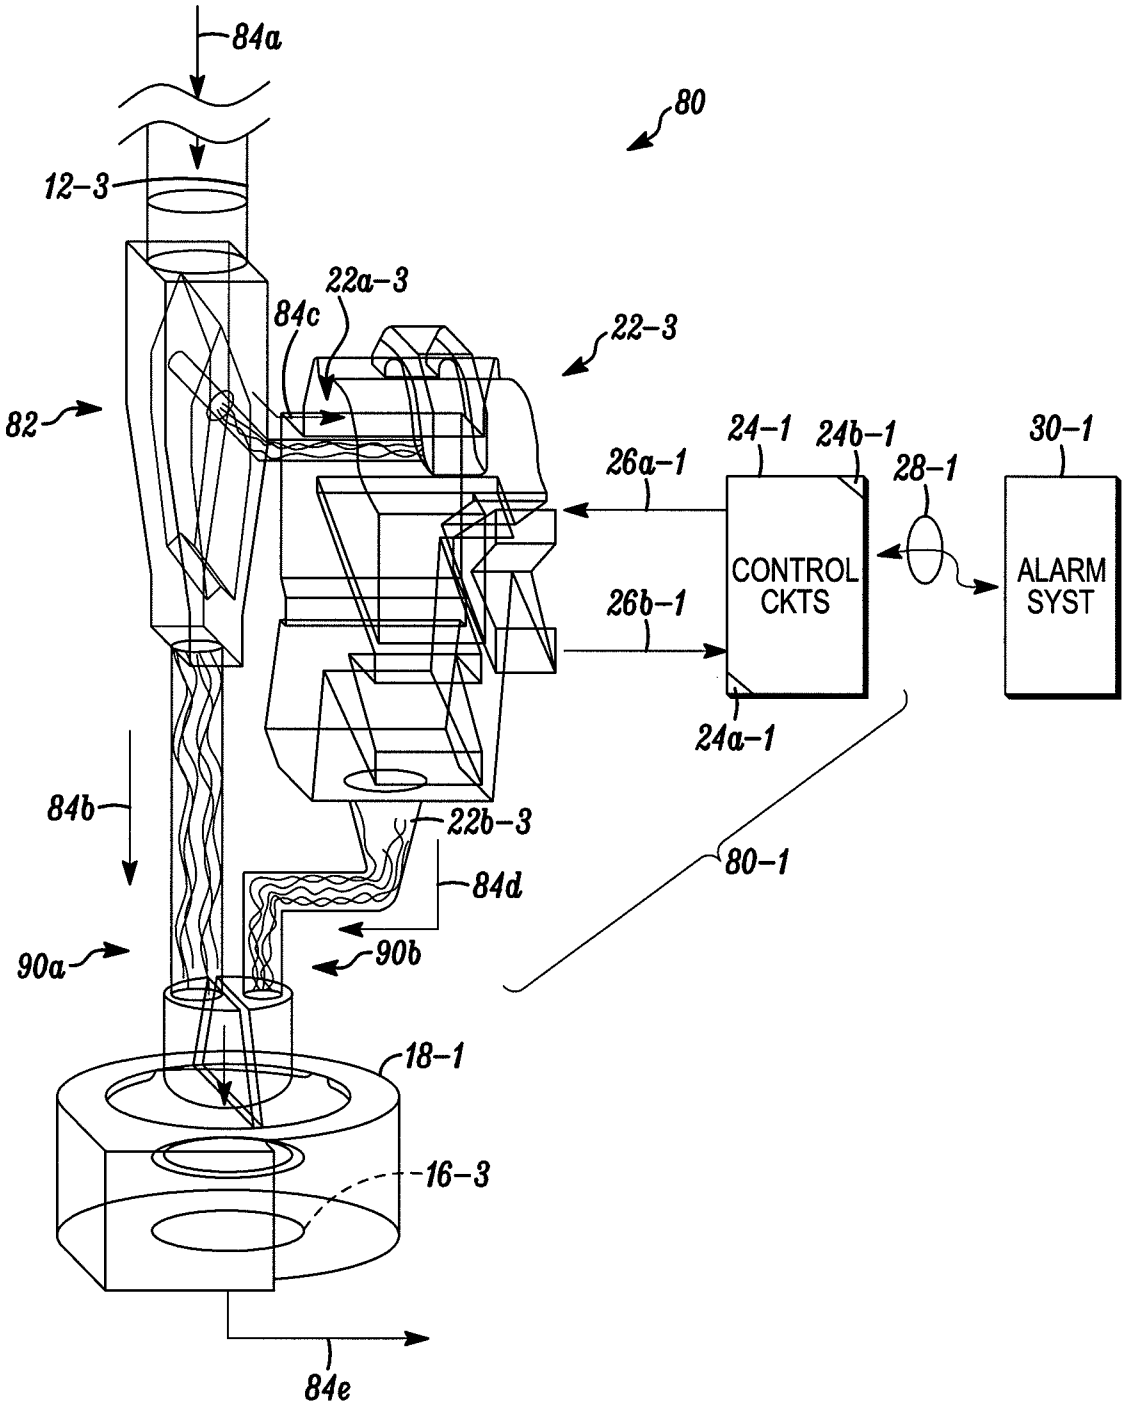

84a
80
12-3
22a-3
84c
22-3
82
24-1
24b-1
30-1
26a-1
28-1
CONTROL CKTS
ALARM SYST
26b-1
24a-1
84b
22b-3
80-1
84d
90a
90b
18-1
16-3
84e

FIG. 4

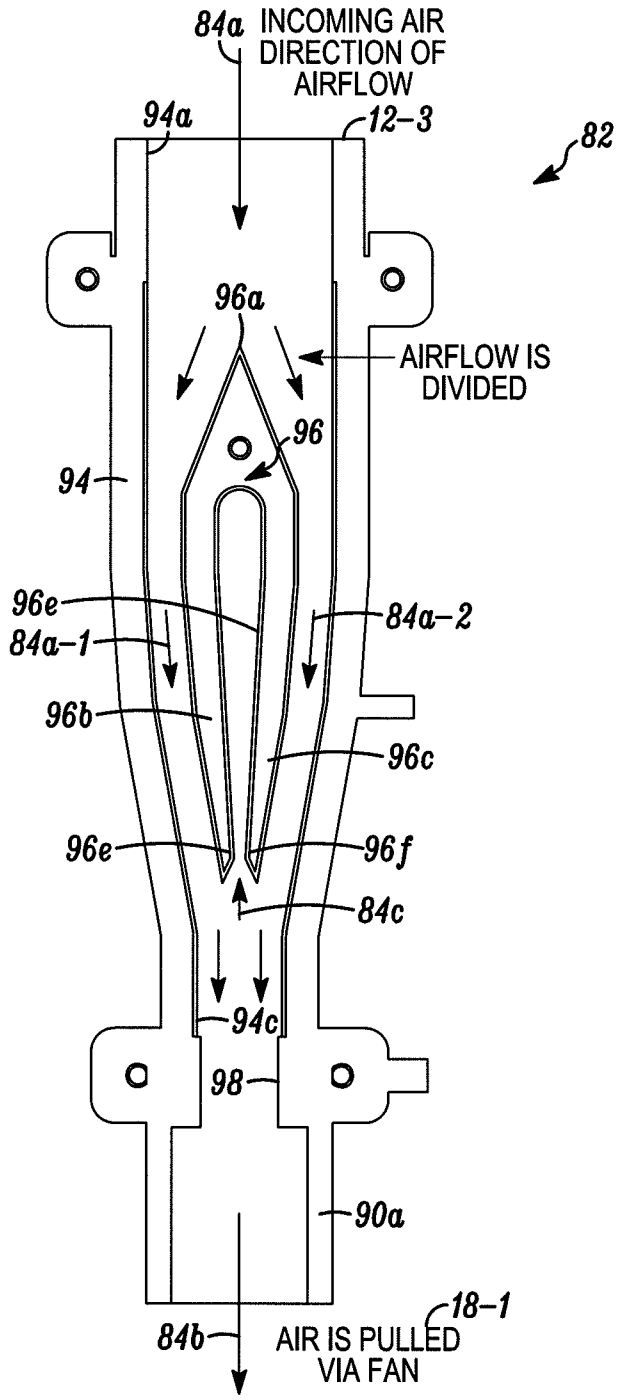

84a INCOMING AIR DIRECTION OF AIRFLOW
94a
12-3
82
96a
AIRFLOW IS DIVIDED
96
94
96e
84a-2
84a-1
96b
96c
96e
96f
84c
94c
98
90a
18-1
84b
AIR IS PULLED VIA FAN

FIG. 5A

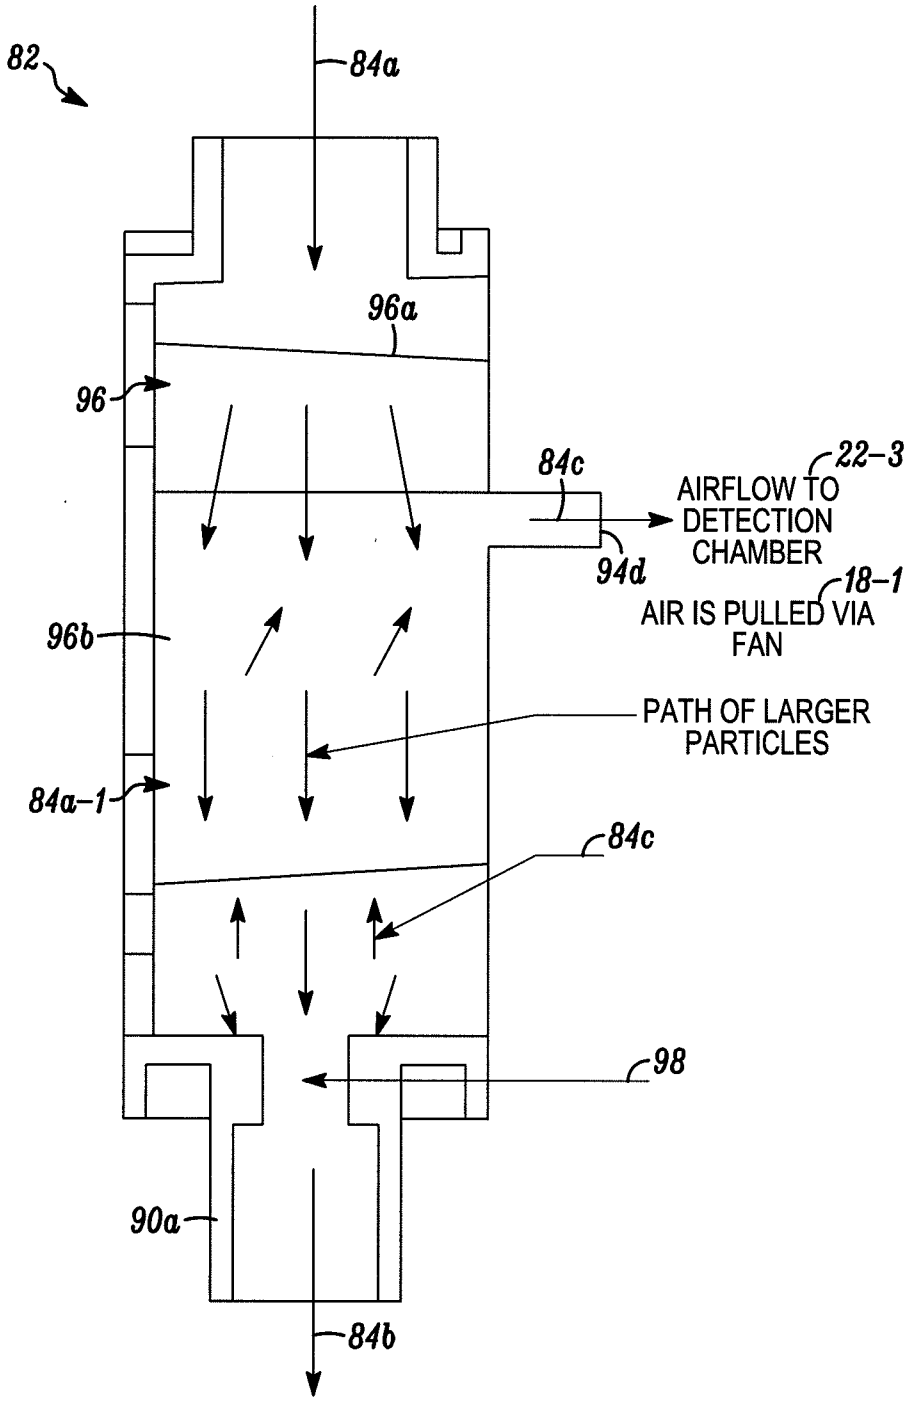

82
84a
96a
96
84c
22-3
AIRFLOW TO DETECTION CHAMBER
94d
18-1
AIR IS PULLED VIA FAN
96b
PATH OF LARGER PARTICLES
84a-1
84c
98
90a
84b

FIG. 5B

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2008/070826

A. CLASSIFICATION OF SUBJECT MATTER
IPC(8) - B01D 45/12 (2008.04)
USPC - 95/271
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC(8) - B01D 45/12 (2008.04)
USPC - 95/271

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
USPTO EAST System (US, USPG-PUB, EPO, DERWENT), Patbase

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X -- Y	US 5,420,440 A (KETLER et al) 30 March 1995 (30.03.1995) entire document	13-17 --- 1-12
X	US 3,369,346 A (WILDBOLZ et al) 20 February 1968 (20.02.1968) entire document	18-20
Y	US 5,610,592 A (OKAZAKI) 11 March 1997 (11.03.1997) entire document	1-12
Y	US 2007/0024459 A1 (COLE) 01 February 2007 (01.02.2007) entire document	12

☐ Further documents are listed in the continuation of Box C. ☐

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
25 September 2008	02 OCT 2008
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, Virginia 22313-1450 Facsimile No. 571-273-3201	Authorized officer: Blaine R. Copenheaver PCT Helpdesk: 571-272-4300 PCT OSP: 571-272-7774

Form PCT/ISA/210 (second sheet) (April 2005)