



(11)

EP 1 816 332 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
26.02.2014 Bulletin 2014/09

(51) Int Cl.:
F02D 41/32 (2006.01)

(21) Application number: **05805540.1**

(86) International application number:
PCT/JP2005/020305

(22) Date of filing: **04.11.2005**

(87) International publication number:
WO 2006/049252 (11.05.2006 Gazette 2006/19)

(54) **METHOD FOR CONTROLLING FUEL INJECTION OF MARINE DIESEL ENGINE AND DEVICE THEREFOR**

VERFAHREN ZUR STEUERUNG DER KRAFTSTOFFEINSPRITZUNG EINES
SCHIFFSDIESELMOTORS UND VORRICHTUNG DAFÜR

PROCEDE ET DISPOSITIF DE COMMANDE D'INJECTION DE CARBURANT POUR UN MOTEUR
DIESEL MARIN

(84) Designated Contracting States:
DE

(30) Priority: **04.11.2004 JP 2004321024**

(43) Date of publication of application:
08.08.2007 Bulletin 2007/32

(73) Proprietor: **National University Corporation Tokyo
University
of Marine Science and Technology
Tokyo 108-8477 (JP)**

(72) Inventors:
• **OHTSU, Kohei
1950071 (JP)**

- **ITO, Masanori
1350061 (JP)**
- **SHIMIZU, Etsuro
1350044 (JP)**
- **HIROSE, Noriki
2250011 (JP)**

(74) Representative: **Müller-Boré & Partner
Patentanwälte PartG mbB
Grafinger Straße 2
81671 München (DE)**

(56) References cited:
EP-A- 0 338 560 EP-A- 1 286 033
JP-A- 62 017 345 JP-A- 62 017 345
JP-A- 62 026 503 JP-U- 61 025 559
US-A- 5 222 022

EP 1 816 332 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**BACKGROUND OF THE INVENTION**

Field of the Invention

[0001] The present invention relates to a method for controlling the fuel injection of a marine diesel engine and a device therefor.

[0002] Provided that high-load and low-load conditions periodically occur to marine diesel engines, the present invention particularly relates to a method for controlling the fuel injection of a marine diesel engine and a device therefor, wherein the fuel injection is controlled to properly match the loading condition of the marine diesel engine at the time of fuel injection so that the rotational speed of the marine diesel engine can be kept constant.

Background Art

[0003] While navigating across the ocean, ships generally meet periodic resistance affected by waves and oscillation of the hull. Consequently, the marine diesel engines are subject periodically to high-load and low-load conditions.

[0004] For a ship, unlike a road vehicle, keeping a constant rotational speed of the marine diesel engine during cruising is more preferable for the engine to keeping a constant speed.

[0005] Conventionally, fuel injection control has been exercised to provide a constant rotational speed of a marine diesel engine.

[0006] Fig. 3 shows a conventional fuel injection control device for a marine diesel engine.

[0007] As shown in Fig. 3, a conventional fuel injection control device 31 comprises a marine diesel engine 32 to be controlled, a fuel injection valve open/close mechanism 33, and a fuel injection amount control mechanism 34.

[0008] The fuel injection control device 31 is provided in the proximity of a rotating shaft 35 of the marine diesel engine 32 and comprises a first sensor 36 for detecting the rotational speed of the marine diesel engine 32, and a second sensor 38 for detecting the opening (the travel distance of the piston of a liquid pressure cylinder 39, in actuality) of a fuel injection valve 37 of the marine diesel engine 32.

[0009] The fuel injection valve open/close mechanism 33 comprises the liquid pressure cylinder 39 for driving the fuel injection valve 37, a servo mechanism 42 for providing oil pressure switchably in separated chambers 41 formed on both sides of the piston 40 of the liquid pressure cylinder 39, an oil pressure pump 43 for delivering pressurized oil, and a driver 44 for inputting a controlling signal to the servo mechanism 42.

[0010] The oil pressure pump 43 is connected to the rotating shaft 35 of the marine diesel engine 32 and is driven by a part of the dynamic force of the rotating shaft 35.

[0011] The oil pressure pump 43 is constantly rotated by the rotating shaft 35 of the marine diesel engine 32 and allows over-pressurized oil to be released from a relief valve 45 back to a tank 46 when the rotational speed of the marine diesel engine 32 is high.

[0012] The fuel injection amount control mechanism 34 comprises a first controller 47 for inputting a set rotational speed of the marine diesel engine as a target rotational speed, and the rotational speed of the marine diesel engine 32 detected by the first sensor 36, and for outputting a primary control signal for a target opening of the fuel injection valve; and a second controller 48 for inputting said primary control signal from the first controller 47, and a signal of the opening of the fuel injection valve 37 from the second sensor 38, and for outputting a secondary control signal so as to match the actual opening of the fuel injection valve 37 with the target opening of the fuel injection valve.

[0013] In the above conventional fuel injection control device 31, the first controller 47 inputs the set rotational speed and the rotational speed of the marine diesel engine detected by the first sensor 36, compares them, and outputs the primary control signal to reduce the opening of the fuel injection valve if the rotational speed of the marine diesel engine is higher than the set rotational speed, or outputs the primary control signal to enlarge the opening of the fuel injection valve if the rotational speed of the marine diesel engine is lower than the set rotational speed.

[0014] The above primary control signal is input to the servo mechanism 42 via the driver 44, and the servo mechanism 42 provides oil pressure in one of the separated chambers 41 of the liquid pressure cylinder 39 in response to the primary control signal.

[0015] The second sensor 38 detects and inputs to the second controller 48 the travel distance of the piston of the liquid pressure cylinder 39. The second controller 48 compares the opening of the fuel injection valve to a target fuel injection amount and outputs to the driver 44 of the fuel injection valve open/close mechanism 33 the secondary control signal to further open the fuel injection valve if the target opening of the fuel injection valve is not achieved, or outputs the secondary control signal to narrow the fuel injection valve when the fuel injection valve is open wider than the target opening of the fuel injection valve. As described above, in the conventional fuel injection control device for a marine diesel engine, the loading condition of the marine diesel engine is detected by the rotational speed of the marine diesel

engine, and the rotational speed is increased by enlarging the opening of the fuel injection valve if the rotational speed becomes low, or the rotational speed is limited by reducing the opening of the fuel injection valve if the rotational speed becomes high.

[0016] However, since ships periodically meet resistance on the ocean and the marine diesel engines are subject to periodic high-load and low-load conditions as previously described, with the above fuel injection control according to the conventional art there have been occasions that the conditions were already changing to the low-load conditions when the fuel injection valve was opened, or to the contrary the conditions were already changing to the high-load conditions when the fuel injection valve was narrowed.

[0017] In other words, the conventional fuel injection control over the fuel injection amount is lagged behind the actual loading condition of the marine diesel engine always providing belated fuel injection control, and the fuel efficiency is poor.

[0018] In addition, what is not preferable is the fact that shortage of the fuel injection amount despite the high-load conditions in actuality and excess of the fuel injection amount despite the low-load conditions result in applying periodic load on the components of the engine.

[0019] Moreover, the conventional art has various problems associated with the oil pressure pump being directly connected to the rotating shaft of the marine diesel engine to be driven.

[0020] The conventional fuel injection control device is configured to allow the oil pressure pump some flexibility to be driven so that the fuel injection valve can be opened when the rotational speed of the marine diesel engine is decreased.

[0021] Consequently, when the rotational speed of the marine diesel engine is increased, the oil pressure pump rotates excessively and applies high pressure, and accordingly the oil is returned to the tank through the relief valve so that the surplus pressure is escaped. That is, in the conventional fuel injection control device, the oil pressure pump periodically rotates excessively, and as a result the oil is returned to the tank through the relief valve so that the surplus pressure is escaped. As a consequence, not only the driving efficiency of the oil pressure pump is low, but also returning of high-temperature oil to the tank leads to oil deterioration, and thus the size of the tank has been increased to suppress the temperature rise.

[0022] In addition, the fuel mileage of the marine diesel engine is low because the rotating shaft of the marine diesel engine constantly drives the oil pressure pump.

[0023] In view of the above problems of the conventional art, the present invention provides a fuel injection control method and a fuel injection control device for a marine diesel engine, wherein the periodically-occurring high-load and low-load conditions of the marine diesel engine are predicted and the control is exercised so as to match the loading condition at the time point of fuel injection, in order to solve the problems.

[0024] In addition to realization of the above fuel injection control that matches the loading condition at the time point of fuel injection, the fuel injection control device of a marine diesel engine is provided to solve the problems associated with the above oil pressure pump being directly connected to the rotating shaft of the marine diesel engine.

[0025] In the Japanese Patent Laid-Open Application No. 62-26503/1987, the art of detecting the rotational speed of a marine diesel engine and multiplying the control signal for the fuel injection valve 37 by a prescribed parameter determined by said rotational speed is disclosed.

[0026] This art is provided, as a measure against the phenomenon of the excessive increase of the rotational speed of a screw propeller which is being exposed above the sea surface and running idle when weather conditions are severe, to limit the rotation of said screw propeller by said parameter.

[0027] In a Japanese utility model application (Japanese Utility Model Registration No. 63-42836/1988), a fuel injection amount adjusting device similar to the fuel injection valve open/close mechanism of the present invention is described.

[0028] JP 62 017345 A discloses a speed governor for ship engine designed to prevent an abnormal rotational frequency rise or useless speed governing from occurring due to a load fluctuation, by performing constant torque control or constant output control on the supply of fuel to a main engine in a racing state.

[0029] EP-A-1 286 033 discloses a method of operating an internal combustion engine as well as a start-up controller in which a difference between an actual rotational speed and a calculated (model) speed is determined. In dependence of the determined difference, an ignition angle and/or a cylinder charge is affected so as to minimize the speed difference.

SUMMARY OF THE INVENTION

[0030] The invention is characterized by the features of the independent claims. Further developments of the invention are defined in the dependent claims.

[0031] In the fuel injection control method and the fuel injection control device for a marine diesel engine according to the present invention, the fuel injection amount and the rotational speed of the marine diesel engine are measured a prescribed number of times at prescribed time intervals, the measurements are input, and the relation between the fuel injection amount and the rotational speed of the marine diesel engine is determined.

[0032] The relational expression for the fuel injection amount and the rotational speed of the marine diesel engine is:

$$y_k = G(y_i, u_i) \quad (i = k-1, \dots, k-n, \quad j = k, \dots, k-n)$$

- 5 y: Rotational speed of the marine diesel engine
 u: Fuel injection amount
 k: Time (time point) of the control to be applied
 n: Number of times of the previous measurements of the rotational speed of the marine diesel engine and the fuel
 injection amount to be used for the calculation at the time of the control to be applied.

10 Since the relational expression includes the relation between the fuel injection amount and the rotational speed of the marine diesel engine obtained a prescribed number of times (n) before the time point of the control to be applied, the control of the fuel injection amount can be exercised in consideration of the variable relation between the fuel injection amount and the rotational speed of the marine diesel engine.

15 **[0033]** That is, according to the present invention, the control of the fuel injection amount can be exercised using the relation between the fuel injection amount and rotational speed in the past so as to provide a constant rotational speed at the time point of fuel injection to match the loading condition of the marine diesel engine. In this way, the control will no longer be exercised in a manner of following after the variable loading conditions of the marine diesel engine, and the control of the fuel injection amount can be exercised efficiently.

20 **[0034]** In other words, when the hull is making repetitive rolling and pitching motions during a steady operation at sea, the condition of the screw propeller in the water is changed at constant time intervals (aging parameter), resulting in loading variation and thereby change of the rotational speed of the marine diesel engine.

[0035] With the present invention, the above change of the rotational speed is measured for a predetermined time period in relation to the fuel injection amount, the regularity of the change also being estimated, the subsequent variation cycle is predicted, and thus the control can be exercised so as to always keep a constant rotational speed of the screw propeller.

25 **[0036]** Because the fuel injection amount is properly controlled, NOx and SOx in the exhaust gas can be reduced. According to the present invention, a set rotational speed of the marine diesel engine can be kept because of the optimal fuel injection amount as described above.

30 **[0037]** In addition, according to the fuel injection control device of the present invention in which the fuel injection valve open/close mechanism comprises: a liquid pressure cylinder, a check valve mechanism for providing oil pressure switchably in separated chambers formed on both sides of a piston of said liquid pressure cylinder, a bidirectional pump with a motor for delivering a pressurized fluid to said separated chambers via said check valve mechanism, and a driver for controlling the operation of said bidirectional pump, the pump to provide oil pressure is separated from the rotating shaft
 of the marine diesel engine, and the fuel injection amount can thus be controlled freely irrespective of the rotational
 speed of the marine diesel engine.

[0038] As a consequence, the rotational speed of the marine diesel engine at the time of fuel injection can be predicted to freely open or close the opening of the fuel injection valve as described above.

35 **[0039]** In addition, the oil pressure pump can be operated in response to the loading condition of the marine diesel engine wherein the rotation of the oil pressure pump is increased when the rotation of the marine diesel engine is in a decreased state or conversely the rotation of the oil pressure pump is decreased when the rotation of the marine diesel engine is in an increased state, and the pressurized oil from the oil pressure pump will no longer be returned unnecessarily to the tank as in the conventional art.

40 **[0040]** According to the fuel injection control device of the present invention comprising a first controller and a second controller, the difference between the control signal for the opening of the fuel injection valve and the actual opening of the fuel injection valve is reduced so that a constant rotational speed of the marine diesel engine can be kept more properly.

[0041] According to the present invention, the first controller inputs a set rotational speed of the marine diesel engine, the accrual rotational speed of the marine diesel engine, and the actual opening of the fuel injection valve, and outputs a primary control signal for the opening of the fuel injection valve.

45 **[0042]** That is, the first controller calculates the necessary opening of the fuel injection valve using the difference between the set rotational speed and the actual rotational speed of the marine diesel engine, and outputs the primary control signal using the difference between the calculated opening of the fuel injection valve and the actual opening of the fuel injection valve.

50 **[0043]** The second controller inputs the above primary control signal for the opening of the fuel injection valve, and the actual opening of the fuel injection valve, and outputs a secondary control signal for the opening of the fuel injection valve.

55 **[0044]** That is, the second controller inputs the opening of the fuel injection valve required according to the primary control signal, and the actual opening of the fuel injection valve, and outputs the secondary control signal so as to

compensate the difference.

[0045] As a consequence, the control can be exercised in such a way that the difference between the opening of the fuel injection valve required according to the control signal for the fuel injection valve and the actual opening of the fuel injection valve is compensated, and a constant rotational speed of the marine diesel engine can be kept more properly according to the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0046]

Fig. 1 is a block diagram showing a configuration of the fuel injection control device for a marine diesel engine according to one embodiment of the present invention.

Fig. 2 is a diagram showing a data example of the fuel injection amount stored by a first controller and the rotational speed of the marine diesel engine.

Fig. 3 is a block diagram showing a configuration of a conventional fuel injection control device for a marine diesel engine.

BEST EMBODIMENTS FOR REALIZING THE INVENTION

[0047] Embodiments of the present invention will be explained hereinafter.

[0048] Fig. 1 shows a configuration of the fuel injection control device for a marine diesel engine according to one embodiment of the present invention.

[0049] A fuel injection control device 1 in Fig. 1 comprises a marine diesel engine 2 to be controlled, a fuel injection valve open/close mechanism 3, and a fuel injection amount control mechanism 4.

[0050] As a sensor system, the fuel injection control device 1 is provided in the proximity of a rotating shaft 5 of the marine diesel engine 2, and comprises a first sensor 6 for detecting the rotational speed of the marine diesel engine 2, and a second sensor 8 for detecting the opening of a fuel injection valve 7 of the marine diesel engine 2. Preferably the second sensor 8 is made to detect the opening of the fuel injection valve 7 indirectly by detecting the travel distance of the piston of the liquid pressure cylinder of the fuel injection valve open/close mechanism 3 rather than detecting the opening of the fuel injection valve 7 directly, as will be described later. The fuel injection valve open/close mechanism 3 comprises a liquid pressure cylinder 9 for driving the fuel injection valve 7; a check valve mechanism 12 for providing oil pressure switchably in separated chambers 11 formed on both sides of a piston 10 of the liquid pressure cylinder 9; a bidirectional pump 13 for delivering a pressurized working fluid to the separated chambers 11 via the check valve mechanism 12; a motor 14 for driving the bidirectional pump 13; and a driver 15 for controlling the operation of the bidirectional pump 13 and the motor 14.

[0051] In the present embodiment, the second sensor 8 detects the travel distance of the piston 10 of the liquid pressure cylinder 9 instead of directly detecting the opening of the fuel injection valve 7.

[0052] In the check valve mechanism 12, two check valves 16 and 17 are positioned, a pipe linking therebetween, so that the flow direction allowed by each valve is opposite to each other, and another pipe is provided to direct the working fluid, flown out to the former pipe, to a tank 18.

[0053] From the pipeline on the upstream side of one of the check valves 16 and 17 to the other check valve, pipes 19 and 20 are provided respectively to direct the pressurized fluid to push up (open) the other check valve.

[0054] The fuel injection amount control mechanism 4 comprises: a first controller 21 for inputting a set rotational speed of the marine diesel engine as a target rotational speed, the rotational speed of the marine diesel engine 2 detected by the first sensor 6, and the data of the opening of the fuel injection valve 7 detected by the second sensor 8, and for outputting a primary control signal for a target opening of the fuel injection valve; and a second controller 22 for inputting said primary control signal from the first controller 21, and a signal of the opening of the fuel injection valve 7 from the second sensor 8, and outputting a secondary control signal so as to match the actual opening of the fuel injection valve 7 with the target opening of the fuel injection valve.

[0055] The control exercised by the secondary control signal in addition to the primary control signal allows the opening of the fuel injection valve to be exactly matched with the target opening of the fuel injection valve by the second sensor 8 detecting the actual travel distance of the piston of the liquid pressure cylinder 9, whereas if the primary control signal inputs to the driver 15 of the fuel injection valve open/close mechanism 3 the target fuel injection amount, i.e. the control signal for the opening of the fuel injection valve 7, it would be difficult to control the exact opening of the fuel injection valve 7 solely by the rotation of the bidirectional pump 13.

[0056] The operation of the fuel injection valve open/close mechanism 3 is as follows.

[0057] The control signal from the driver 15 allows the motor 14 to run, such as starting, stopping, and rotating in the normal/reverse direction. Here an explanation will be made by exemplifying the case where the pressurized working

fluid is delivered to the upper chamber of the separated chambers 11 of the liquid pressure cylinder 9 in Fig. 1. The bidirectional pump 13 is driven by the motor 14 to draw the working fluid from the tank 18 and deliver the pressurized working fluid to the pipe system on the upstream side of the check valve 16. From the pipe system on the upstream side of the check valve 16, the pressurized working fluid flows into the upper chamber of the separated chambers 11 of the liquid pressure cylinder 9 and pushes down the piston 10. The pressurized working fluid in the pipe system on the upstream side of the check valve 16 is made to pass at the same time through the pipe 19 and push up the valve body of the check valve 17 to open the check valve 17. With the piston 10 being pushed down, the working fluid in the lower chamber of the separated chambers 11 of the liquid pressure cylinder 9 flows out to the pipe system on the upstream side of the check valve 17. Since the check valve 17 is open, the working fluid which has flowed out to the pipe system on the upstream side of the check valve 17 flows out to the tank-18 through the check valve 17.

[0058] The reverse of the above operations takes place in the case where the pressurized working fluid is delivered to the lower chamber of the separated chambers 11 of the liquid pressure cylinder 9.

[0059] By the travel of the piston 10, the fuel injection valve 7 is opened or closed via the rod of the piston 10.

[0060] Explained next is the fuel injection control, i.e. a method for controlling the fuel injection so as to match the loading condition of the marine diesel engine at the time of fuel injection, according to the present invention.

[0061] The fuel injection control device 1 measures the fuel injection amount and the rotational speed of the marine diesel engine a prescribed number of times at prescribed time intervals and inputs the measurements. The data of the aforementioned fuel injection amount and rotational speed of the marine diesel engine are collected by the first sensor 6 and the second sensor 8. The data of the fuel injection amount and the rotational speed of the marine diesel engine are corresponded to each other, as shown in Fig. 2 for example, and stored in a storage device, not shown, of the first controller 21.

[0062] The relation between the fuel injection amount, u , and the rotational speed of the marine diesel engine, y , is expected to satisfy the following formula.

$$y_k = G(y_i, u_j) \quad (i = k-1, \dots, k-n, \quad j = k, \dots, k-n)$$

y : Rotational speed of the marine diesel engine

u : Fuel injection amount

k : Time (time point) of the control to be applied

n : Number of times of the previous measurements of the rotational speed of the marine diesel engine and the fuel injection amount to be used for the calculation at the time of the control to be applied

The above relational expression G shows that the rotational speed of the marine diesel engine at the time (time point) of control to be applied is defined by the previous rotational speed of the marine diesel engine, the fuel injection amount in the past, and the fuel injection amount at present.

[0063] At this point, the following relational expression is expected to represent an example of the relational expression G .

$$y_k = a_1 y_{k-1} + a_2 y_{k-2} + \dots + a_n y_{k-n} + b_0 u_k + b_1 u_{k-1} + b_2 u_{k-2} + \dots$$

a_m, b_n : Coefficients

[0064] By determining the coefficients a, b , the rotational speed of the marine diesel engine due to the fuel injection amount at present can be determined.

[0065] The coefficients a, b not only depend on the marine diesel engine but also change according to the loading conditions of the marine diesel engine. Accordingly, the first controller 21 of the fuel injection control device 1 calculates the above coefficients a, b while inputting the fuel injection amount and the rotational speed of the marine diesel engine as needed.

[0066] By assigning the fuel injection amount, u , and the rotational speed, y , of the marine diesel engine, shown in Fig. 2, to the above relational expression, a plurality of expressions,

$$\begin{aligned}
y_k &= a_1 y_{k-1} + a_2 y_{k-2} + \dots + b_0 u_k + b_1 u_{k-1} + \dots \\
y_{k+1} &= a_1 y_k + a_2 y_{k-1} + \dots + b_0 u_{k+1} + b_1 u_k + \dots \\
y_{k+2} &= a_1 y_{k+1} + a_2 y_k + \dots + b_0 u_{k+2} + b_1 u_{k+1} + \dots \\
&\vdots
\end{aligned}$$

are obtained as time passes. From these expressions, a matrix,

$$Y = \begin{bmatrix} y_k \\ y_{k+1} \\ y_{k+2} \\ \vdots \end{bmatrix} = \begin{bmatrix} y_{k-1} & y_{k-2} & \dots & u_k & u_{k-1} & \dots \\ y_k & y_{k-1} & \dots & u_{k+1} & u_k & \dots \\ y_{k+1} & y_k & \dots & u_{k+2} & u_{k+1} & \dots \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \end{bmatrix} \begin{bmatrix} a_1 \\ a_2 \\ \vdots \\ b_0 \\ b_1 \\ \vdots \end{bmatrix} = X A$$

is obtained. After sufficient time passes, the coefficient matrix A is determined as follows.

$$A = (X^T X)^{-1} X^T Y$$

[0067] Once the coefficient matrix A is determined, the relation between the fuel injection amount at present and the rotational speed of the marine diesel engine due to the fuel injection amount at present is obtained from the expression,

$$y_k = a_1 y_{k-1} + a_2 y_{k-2} + \dots + b_0 u_k + b_1 u_{k-1} + b_2 u_{k-2} + \dots,$$

and by designating the rotational speed of the marine diesel engine as a set rotational speed as a target, the injection amount that should be injected at present is determined.

[0068] According to the present invention, an appropriate fuel amount for the loading condition of the marine diesel engine at the time of fuel injection can be injected by exercising the fuel injection amount control that will no longer be lagged behind the actual loading condition of the marine diesel engine as the conventional fuel injection control is, and the rotational speed of the marine diesel engine can be efficiently kept at a target rotational speed, and also unstable behaviors of the engine caused by opening and closing the fuel injection valve behind the actual loading condition can be prevented. Because a proper amount of fuel can be injected, NOx and SOx in the exhaust gas from a marine diesel engine can be reduced according to the present invention.

[0069] In addition, the oil pressure pump of the fuel injection valve open/close mechanism can be driven with a proper dynamic force due to the oil pressure pump of the fuel injection valve open/close mechanism being separated from the rotating shaft of the marine diesel engine, and returning of the working fluid from the relief valve back to the tank in order to release a surplus pressure as in the conventional fuel injection control devices can be prevented, and also compactification of fuel injection control devices can be achieved, according to the present invention.

Claims

1. A method for controlling the fuel injection of a marine diesel engine comprising:

a step of measuring the fuel injection amount and the rotational speed of the marine diesel engine a prescribed number of times at prescribed time intervals and inputting the measurements,
 a step of finding the expression satisfying the relation between the fuel injection amount and the rotational speed of the marine diesel engine measured in said prescribed number of times;
 a step of calculating the fuel injection amount (u_k) that should be injected at present according to said expression when the rotational speed of the marine diesel engine is set to a constant rotational speed, and
 a step of controlling the opening of the fuel injection valve of the marine diesel engine so as to match said calculated fuel injection amount at present, **characterized in that** said expression is provided by said

$$y_k = a_1 y_{k-1} + a_2 y_{k-2} + \dots + b_0 u_k + b_1 u_{k-1} + b_2 u_{k-2} + \dots$$

y : Rotational speed of the marine diesel engine

u : Fuel injection amount

k : Time (time point) of the control to be applied

n : Number of times of the previous measurements of the rotational speed of the marine diesel engine and the fuel injection amount to be used for the calculation at the time of the control to be applied,

a_m, b_n : coefficients,

wherein coefficients a_m, b_n are determined by assigning previous measurements of the rotational speed $y_{k-1}, \dots, y_{k-n}$ of the marine diesel engine and the fuel injection amount $u_k, \dots, u_{k-n}$ to said expression.

2. A fuel injection control device for a marine diesel engine comprising:

a fuel injection valve open/close mechanism for opening and closing a fuel injection valve of the marine diesel engine,

a fuel injection amount control mechanism for controlling the operation of said fuel injection valve open/close mechanism,

a first sensor for detecting the rotational speed of said marine diesel engine, and

a second sensor for detecting the opening of said fuel injection valve, wherein said fuel injection amount control mechanism inputs said rotational speed of the marine diesel engine and said opening of the fuel injection valve from said first sensor and said second sensor respectively at prescribed time intervals,

said fuel injection amount control mechanism finds the expression satisfying the relation between the rotational speed of the marine diesel engine measured at a prescribed number of times and the opening of the fuel injection valve, **characterized in that** said expression is

$$y_k = a_1 y_{k-1} + a_2 y_{k-2} + \dots + b_0 u_k + b_1 u_{k-1} + b_2 u_{k-2} + \dots$$

y : Rotational speed of the marine diesel engine

u : Fuel injection amount

k : Time (time point) of the control to be applied

n : Number of times of the previous measurements of the rotational speed of the marine diesel engine and the fuel injection amount to be used for the calculation at the time of the control to be applied,

wherein the fuel injection amount control mechanism determines coefficients a_m, b_n by assigning previous measurements of the rotational speed $y_{k-1}, \dots, y_{k-n}$ of the marine diesel engine and the fuel injection amount $u_k, \dots, u_{k-n}$ to said expression,

calculates the fuel injection amount (u_k) that should be injected at present when the rotational speed of the marine diesel engine in said expression is set to a constant rotational speed, and

controls said fuel injection valve open/close mechanism so as to match the calculated fuel injection amount at present.

3. A fuel injection control device for a marine diesel engine according to Claim 2 **characterized in that** said fuel injection valve open/close mechanism comprises:

a liquid pressure cylinder for driving the fuel injection valve,
 a check valve mechanism for providing oil pressure switchably in separated chambers formed on both sides of
 a piston of said liquid pressure cylinder,
 a bidirectional pump with a motor for delivering a pressurized fluid to said separated chambers via said check
 valve mechanism, and
 a driver for controlling the operation of said bidirectional pump.

4. A fuel injection control device for a marine diesel engine according to Claim 2 or 3 **characterized in that** said fuel injection amount control mechanism comprises:

a first controller for inputting a set rotational speed of the marine diesel engine as a target rotational speed, the rotational speed of the marine diesel engine detected by said first sensor, and the data of the opening of the fuel injection valve detected by said second sensor, and for outputting a primary control signal for a target opening of the fuel injection valve, and
 a second controller for inputting said primary control signal from the first controller, and a signal of the opening of the fuel injection valve from said second sensor, and outputting a secondary control signal so as to match the opening of the fuel injection valve with the target opening of the fuel injection valve.

Patentansprüche

1. Verfahren zur Steuerung der Kraftstoffeinspritzung eines Schiffsdieselmotors, das umfasst:

einen Schritt zum Messen der Kraftstoffeinspritzmenge und der Drehzahl des Schiffsdieselmotors eine vorgeschriebene Anzahl von Malen in vorgeschriebenen Zeitintervallen und Einspeisen der Messungen,
 einen Schritt zum Ermitteln des Ausdrucks, den die Beziehung zwischen der Kraftstoffeinspritzmenge und der Drehzahl des Dieselschiffsmotors erfüllt, die in der vorgeschriebenen Anzahl von Malen gemessen werden;
 einen Schritt zum Berechnen der Kraftstoffeinspritzmenge (u_k), die aktuell eingespritzt werden sollte, gemäß dem Ausdruck, wenn die Drehzahl des Dieselschiffsmotors auf eine konstante Drehzahl festgelegt ist, und
 einen Schritt zum Steuern der Öffnung des Kraftstoffeinspritzventils des Dieselschiffsmotors, so dass sie der aktuell berechneten Kraftstoffeinspritzmenge entspricht, **dadurch gekennzeichnet, dass** der Ausdruck gegeben ist durch:

$$y_k = a_1 y_{k-1} + a_2 y_{k-2} + \dots + b_0 u_k + b_1 u_{k-1} + b_2 u_{k-2} + \dots$$

y: Drehzahl des Dieselschiffsmotors

u: Kraftstoffeinspritzmenge

k: Zeit (Zeitpunkt), zu der Steuerung angewendet wird

n: Anzahl der Male vorhergehender Messungen der Drehzahl des Dieselschiffsmotors und der Kraftstoffeinspritzmenge, die für die Berechnung der Zeit der Steuerung, die angewendet werden soll, verwendet werden soll,

a_m , b_n : Koeffizienten,

wobei die Koeffizienten a_m , b_n durch Zuordnen vorhergehender Messungen der Drehzahl y_{k-1} , ..., y_{k-n} des Dieselschiffsmotors und der Kraftstoffeinspritzmenge u_k , ..., u_{k-n} an diesen Ausdruck bestimmt werden.

2. Kraftstoffeinspritzsteuervorrichtung für einen Dieselschiffsmotor, die umfasst:

einen Kraftstoffeinspritzventilöffnungs-/Schließmechanismus zum Öffnen und Schließen eines Kraftstoffeinspritzventils des Dieselschiffsmotors,
 einen Kraftstoffeinspritzmengen-Steuermechanismus zum Steuern des Betriebs des Kraftstoffeinspritzventilöffnungs-/Schließmechanismus,
 einen ersten Sensor zum Erfassen der Drehzahl des Dieselschiffsmotors, und
 einen zweiten Sensor zum Erfassen der Öffnung des Kraftstoffeinspritzventils, wobei der Kraftstoffeinspritzmengen-Steuermechanismus die Drehzahl des Dieselschiffsmotors und die Öffnung des Kraftstoffeinspritzventils von dem ersten Sensor und dem zweiten Sensor jeweils in vorgeschriebenen Zeitintervallen einspeist,

wobei der Kraftstoffeinspritzmengen-Steuermechanismus den Ausdruck ermittelt, den die Beziehung zwischen der Drehzahl des Dieselschiffsmotors, die eine vorgeschriebene Anzahl von Malen gemessen wird, und der Öffnung des Kraftstoffeinspritzventils erfüllt, **dadurch gekennzeichnet, dass** der Ausdruck gegeben ist durch:

$$y_k = a_1 y_{k-1} + a_2 y_{k-2} + \dots + b_0 u_k + b_1 u_{k-1} + b_2 u_{k-2} + \dots$$

y: Drehzahl des Dieselschiffsmotors

u: Kraftstoffeinspritzmenge

k: Zeit (Zeitpunkt), zu der Steuerung angewendet wird

n: Anzahl der Male vorhergehender Messungen der Drehzahl des Dieselschiffsmotors und der Kraftstoffeinspritzmenge, die für die Berechnung der Zeit der Steuerung, die angewendet werden soll, verwendet werden soll,

wobei der Kraftstoffeinspritzmengen-Steuermechanismus Koeffizienten a_m , b_n durch Zuordnen vorhergehender Messungen der Drehzahl y_{k-1} , ..., y_{k-n} des Dieselschiffsmotors und der Kraftstoffeinspritzmenge u_k , ..., u_{k-n} an diesen Ausdruck bestimmt,

die Kraftstoffeinspritzmenge (u_k), die aktuell eingespritzt werden sollte, wenn die Drehzahl des Dieselschiffsmotors in dem Ausdruck auf eine konstante Drehzahl festgelegt ist, berechnet und

den Kraftstoffeinspritzventilöffnungs-/Schließmechanismus steuert, um der aktuell berechneten Kraftstoffeinspritzmenge zu entsprechen.

3. Kraftstoffeinspritzvorrichtung für einen Dieselschiffsmotor nach Anspruch 2, **dadurch gekennzeichnet, dass** der Kraftstoffeinspritzventilöffnungs-/Schließmechanismus umfasst:

einen Flüssigkeitsdruckzylinder zum Antreiben des Kraftstoffeinspritzventils,

einen Rückschlagventilmechanismus zum schaltbaren Bereitstellen des Öldrucks in getrennten Kammern, die auf beiden Seiten eines Kolbens des Flüssigkeitsdruckzylinders ausgebildet sind,

eine Zweirichtungspumpe mit einem Motor, um ein unter Druck stehendes Fluid über den Rückschlagventilmechanismus an die getrennten Kammern zu liefern, und

eine Ansteuerung zum Steuern des Betriebs der Zweirichtungspumpe.

4. Kraftstoffeinspritzsteuervorrichtung für einen Dieselschiffsmotor nach Anspruch 2 oder 3, **dadurch gekennzeichnet, dass** der Kraftstoffeinspritzmengen-Steuermechanismus umfasst:

eine erste Steuerung zum Einspeisen einer festgelegten Drehzahl des Dieselschiffsmotors als eine Zieldrehzahl, wobei die Drehzahl des Dieselschiffsmotors von dem ersten Sensor erfasst wird, und der Daten der Öffnung des Kraftstoffeinspritzventils, die von dem zweiten Sensor erfasst werden, und zum Ausgeben eines primären Steuersignals für eine Zielöffnung des Kraftstoffeinspritzventils, und

eine zweite Steuerung zum Einspeisen des primären Steuersignals von der ersten Steuerung und eines Signals der Öffnung des Kraftstoffeinspritzventils von dem zweiten Sensor und Ausgeben eines sekundären Steuersignals, um die Öffnung des Kraftstoffeinspritzventils auf die Zielöffnung des Kraftstoffeinspritzventils abzustimmen.

Revendications

1. Procédé de commande de l'injection de carburant d'un moteur diesel marin comprenant :

une étape consistant à mesurer la quantité d'injection de carburant et la vitesse de rotation du moteur diesel marin un nombre de fois prescrit à des intervalles de temps prescrits et entrer les mesures,

une étape consistant à trouver l'expression satisfaisant la relation entre la quantité d'injection de carburant et la vitesse de rotation du moteur diesel marin mesurées lors dudit nombre de fois prescrit ;

une étape consistant à calculer la quantité d'injection de carburant (u_k) qui devrait actuellement être injectée en fonction de ladite expression lorsque la vitesse de rotation du moteur diesel marin est réglée sur une vitesse de rotation constante, et

une étape consistant à commander l'ouverture de la soupape d'injection de carburant du moteur diesel marin de manière à coïncider avec ladite quantité d'injection de carburant calculée actuellement, **caractérisé en ce**

que ladite expression est fournie par

$$y_k = a_1 y_{k-1} + a_2 y_{k-2} + \dots + b_0 u_k + b_1 u_{k-1} + b_2 u_{k-2} + \dots$$

y : vitesse de rotation du moteur diesel marin

u : quantité d'injection de carburant

k : moment (point dans le temps) de la commande devant être appliquée n : nombre de fois des mesures précédentes de la vitesse de rotation du moteur diesel marin et de la quantité d'injection de carburant devant être utilisées pour le calcul au moment de la commande devant être appliquée, a_m , b_n : coefficients, dans lequel les coefficients a_m , b_n sont déterminés en attribuant des mesures précédentes de la vitesse de rotation y_{k-1} , ..., y_{k-n} du moteur diesel marin et de la quantité d'injection de carburant u_k , ..., u_{k-n} à ladite expression.

2. Dispositif de commande d'injection de carburant pour un moteur diesel marin comprenant :

un mécanisme d'ouverture/fermeture de soupape d'injection de carburant pour ouvrir et fermer une soupape d'injection de carburant du moteur diesel marin,

un mécanisme de commande de quantité d'injection de carburant pour commander l'opération dudit mécanisme d'ouverture/fermeture de soupape d'injection de carburant,

un premier capteur pour détecter la vitesse de rotation dudit moteur diesel marin, et

un second capteur pour détecter l'ouverture de ladite soupape d'injection de carburant, dans lequel ledit mécanisme de commande de quantité d'injection de carburant entre ladite vitesse de rotation du moteur diesel marin et ladite ouverture de la soupape d'injection de carburant depuis ledit premier capteur et ledit second capteur, respectivement, à des intervalles de temps prescrits,

ledit mécanisme de commande de quantité d'injection de carburant trouve l'expression satisfaisant la relation entre la vitesse de rotation du moteur diesel marin mesurée lors d'un nombre de fois prescrit et l'ouverture de la soupape d'injection de carburant, **caractérisé en ce que** ladite expression est $y_k = a_1 y_{k-1} + a_2 y_{k-2} + \dots + b_0 u_k + b_1 u_{k-1} + b_2 u_{k-2} + \dots$

y : vitesse de rotation du moteur diesel marin

u : quantité d'injection de carburant

k : moment (point dans le temps) de la commande devant être appliquée

n : nombre de fois des mesures précédentes de la vitesse de rotation du moteur diesel marin et de la quantité d'injection de carburant devant être utilisées pour le calcul au moment de la commande devant être appliquée, dans lequel le mécanisme de commande de quantité d'injection de carburant détermine des coefficients a_m , b_n en attribuant des mesures précédentes de la vitesse de rotation y_{k-1} , ..., y_{k-n} du moteur diesel marin et de la quantité d'injection de carburant u_k , ..., u_{k-n} à ladite expression,

calcule la quantité d'injection de carburant (u_k) qui devrait actuellement être injectée lorsque la vitesse de rotation du moteur diesel marin dans ladite expression est réglée sur une vitesse de rotation constante, et commande ledit mécanisme d'ouverture/fermeture de soupape d'injection de carburant de manière à coïncider avec la quantité d'injection de carburant calculée actuellement.

3. Dispositif de commande d'injection de carburant pour un moteur diesel marin selon la revendication 2, **caractérisé en ce que** ledit mécanisme d'ouverture/fermeture de soupape d'injection de carburant comprend :

un cylindre de pression de liquide pour entraîner la soupape d'injection de carburant,

un mécanisme de soupape antiretour pour fournir de la pression d'huile de manière commutable dans des chambres séparées formées des deux côtés d'un piston dudit cylindre de pression de liquide,

une pompe bidirectionnelle avec un moteur pour fournir un fluide pressurisé auxdites chambres séparées par le biais dudit mécanisme de soupape antiretour, et

un dispositif d'entraînement pour commander l'opération de ladite pompe bidirectionnelle.

4. Dispositif de commande d'injection de carburant pour un moteur diesel marin selon la revendication 2 ou 3, **caractérisé en ce que** ledit mécanisme de commande de quantité d'injection de carburant comprend :

un premier contrôleur pour entrer une vitesse de rotation réglée du moteur diesel marin comme vitesse de rotation cible, la vitesse de rotation du moteur diesel marin détectée par ledit premier capteur et les données

EP 1 816 332 B1

de l'ouverture de la soupape d'injection de carburant détectée par ledit second capteur, et pour émettre un signal de commande primaire pour une ouverture cible de la soupape d'injection de carburant, et
un second contrôleur pour entrer ledit signal de commande primaire provenant du premier contrôleur et un
signal de l'ouverture de la soupape d'injection de carburant provenant dudit second capteur, et émettre un
signal de commande secondaire de manière à faire coïncider l'ouverture de la soupape d'injection de carburant
avec l'ouverture cible de la soupape d'injection de carburant.

5

10

15

20

25

30

35

40

45

50

55

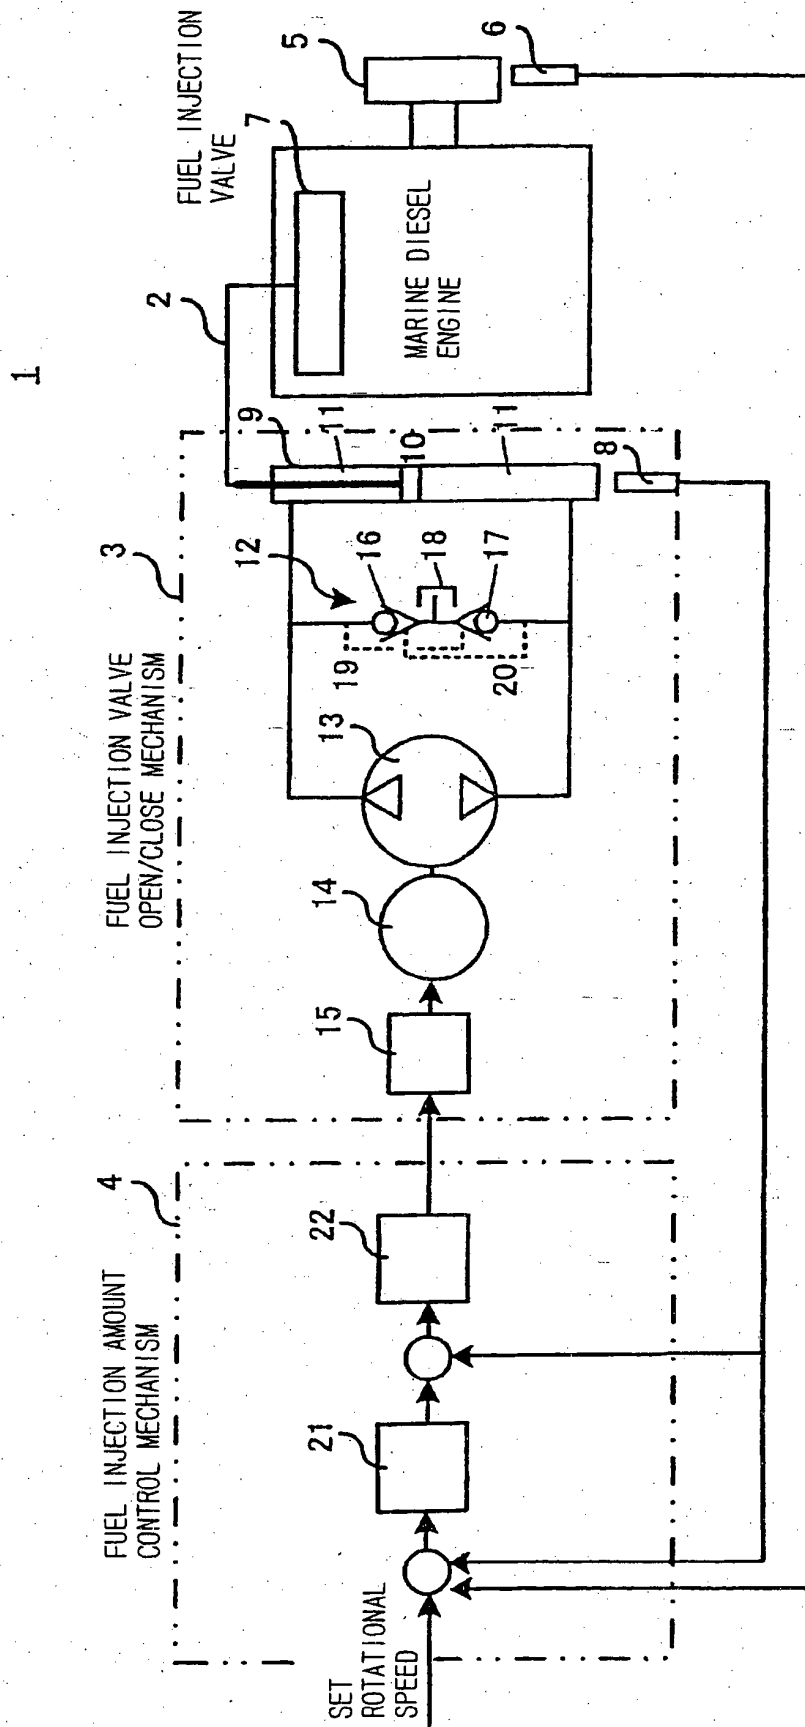


FIG. 1

FUEL INJECTION AMOUNT (OPENING OF THE FUEL INJECTION VALVE)	ROTATIONAL SPEED OF THE MARINE DIESEL ENGINE
u_1	y_1
u_2	y_2
u_3	y_3
u_4	y_4
u_5	y_5
$\vdots$	$\vdots$

FIG. 2

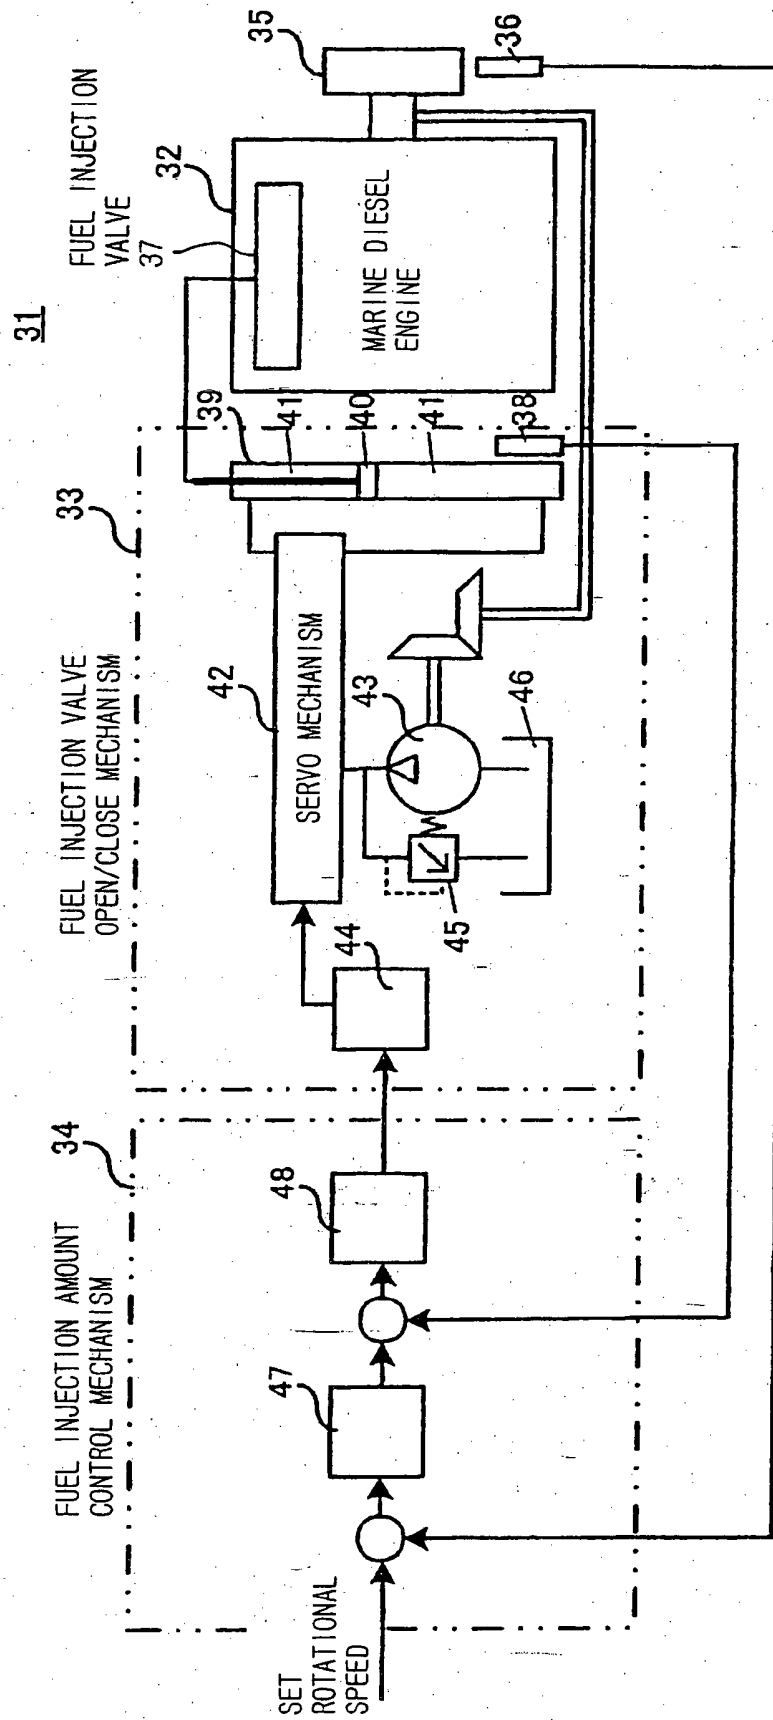


FIG. 3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 62265031987 B **[0025]**
- JP 63428361988 B **[0027]**
- JP 62017345 A **[0028]**
- EP 1286033 A **[0029]**