

(21) Application No **8530485**

(22) Date of filing **11 Dec 1985**

(71) Applicant
The Plessey Company Plc,

(Incorporated in United Kingdom),

Vicarage Lane, Ilford, Essex IG1 4AQ

(72) Inventors
Alexander Schroder Philip,
Mahir Ozdamar,
Geoffrey Chopping

(74) Agent and/or Address for Service
G. Sorenti, Vicarage Lane, Ilford, Essex IG1 4AQ

(51) INT CL⁴
H04L 9/02


(52) Domestic classification (Edition I)
H4P DCSP
B1D BEA

(56) Documents cited
None


(58) Field of search
H4P
Selected US specifications from IPC sub-class H04L

(54) Method of secured communications in a telecommunications system

(57) The telecommunications system includes at least two exchanges EXCA, B and a plurality of user equipments SUBA, B. Each equipment includes a store for holding a user variable data word particular to that user. Each exchange is provided with a store for holding all the user variable data words of the users connected to it, and each exchange is also provided with its own random variable data word. When a first user makes a secure call to a second user, the first user equipment encrypts the call using its particular user variable data word and sends the encrypted data to its own exchange. The exchange decrypts the call using the particular user variable data word and generates the random variable data word that will be used for the call. The exchange encrypts the random variable data word with the particular user variable data word and returns it to the first user. The exchange also sends the random variable data word to the second user's exchange which encrypts it with the user variable data word particular to the second user, and sends it to the second user.

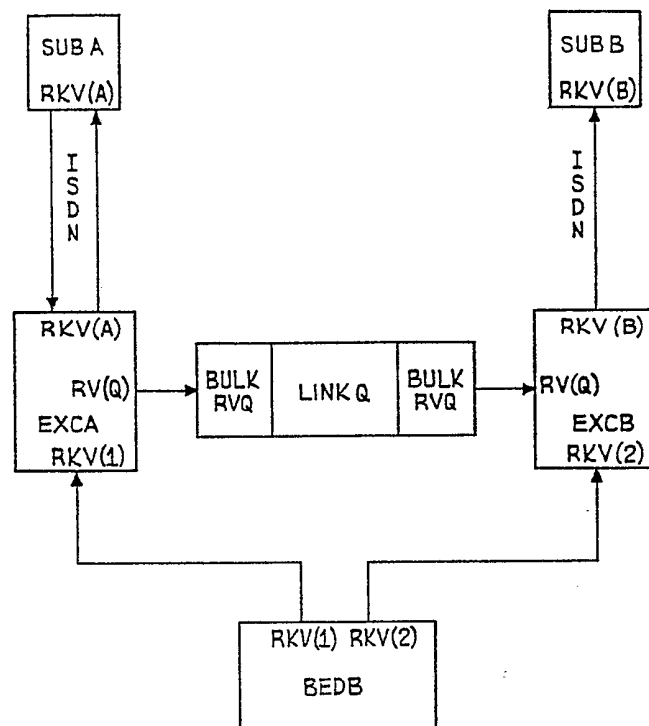

2191661

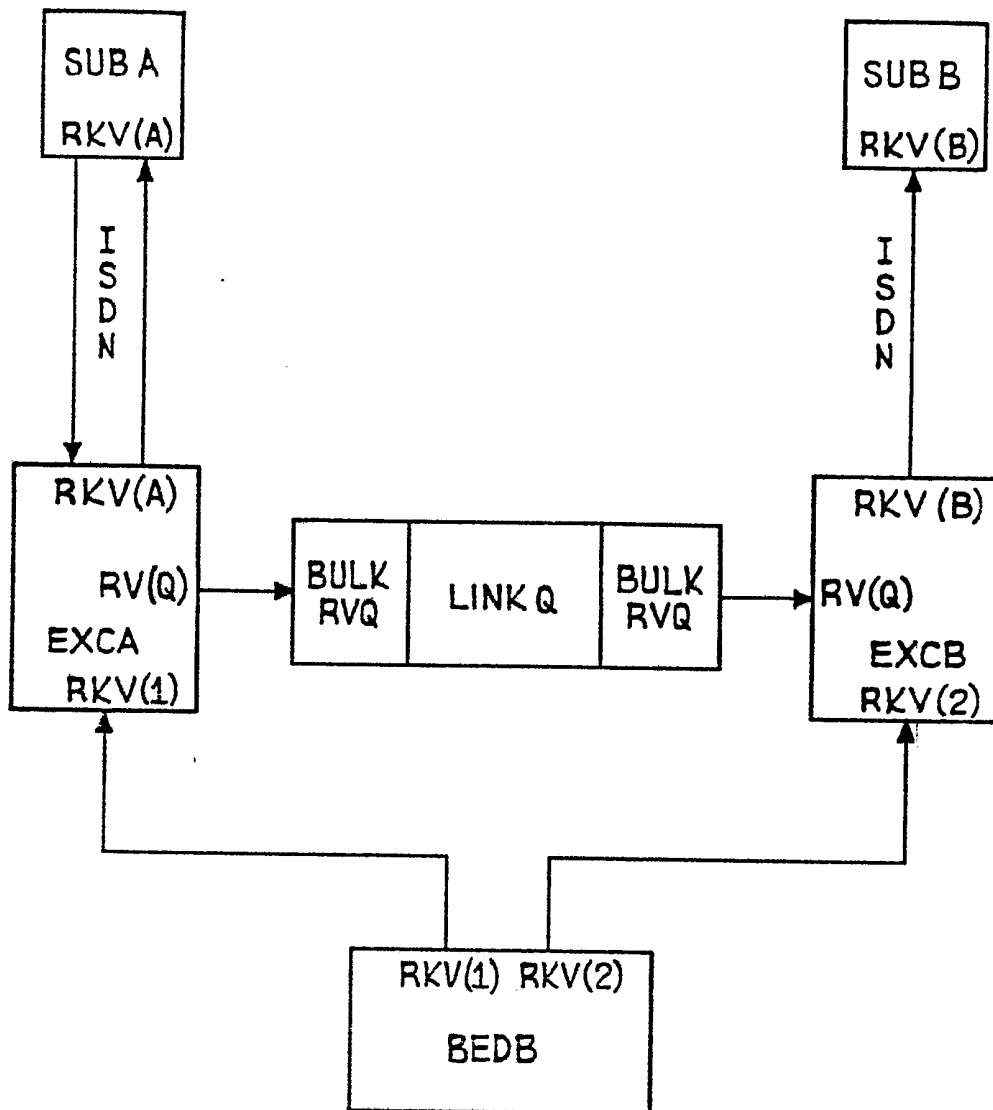

SPECIFICATION

Method of secured communications in a telecommunications system

5 The present invention relates to a method of secured communications in a telecommunications system.

The invention finds application in a public telecommunications system, including System X type

10 exchanges.
There are four main areas where security can be incorporated. The first are the customer facilities which can be used to ensure that the communications are made to the correct subscribers.

15 The second is the encryption of the integrated digital network (ISDN) 64 kbit/s D channels. The third is the encryption of certain signalling messages across the network. The fourth is the bulk encryption of 2048 kbit/s links which will be used to carry all speech

20 (data) and signalling across the modern network.
The combination of all these methods gives a very powerful security mechanism.

A System X telecommunication exchange already provides some capabilities such as Originating Line Identity (OLI), Terminating Line Identity (TLI), Closed

25 User Group (CUG) and private circuits that provide access verification and some degree of secured access to its ISDN customers. However, these capabilities are not sufficient in themselves to provide

30 really secure communications, and is a disadvantage of known telecommunication exchanges.

The present invention utilises the outband signalling capabilities of ISDN subscriber access, and the CCITT No. 7 signalling system. The subscribers do

35 not have to call one another from a different telephone or send codes through the post before making a secure call.

According to the present invention there is provided a method of secured communication in a telecommunications system including at least two tele-

40 communication exchanges and a plurality of user equipments, wherein each user equipment is provided with a store which holds a user variable data word particular to that user; and, each exchange is

45 provided with a store which holds all the user variables data words of the users connected to it, and, each exchange is provided with its own random variable data word, so that when a first user makes a secure call to a second user, the first user equipment

50 encrypts the call using its particular user variable data word and sends the encrypted data to its own exchange, the exchange is provided with equipment for decrypting the call using the particular user variable data word and generates the random variable

55 data word that will be used for the call, and encrypts it with the particular user variable data word and returns it to the first user; the exchange also sends the random variable data word to the second user's exchange which encrypts it with the user variable data

60 word particular to the second user and sends it to the second user.

An embodiment of the invention will now be described with reference to the accompanying drawing which shows a block diagram of a secure com-

65 munications system.

Referring to Figure 1, the user's equipment Sub A, Sub B contains a special chip which holds the subscriber's rekeying variable data word RKVA, RKVB respectively. The rekeying variable data word is a

70 number approximately 100 bits long. The rekeying variable data word can be changed by means of a device that exists. Each exchange also holds the rekeying variable data words of its subscribers. Therefore when the RKV is changed the change must be

75 made both at the user's end and at the exchange.

The random variable data word RV is approximately 200 bits long and is generated by the exchange when required. A random variable data word may be generated once or more than once during a

80 call. However, there are well defined events that triggers the generation of a new random variable data word.

An example is given below explaining the operation of the proposed method:

85 When Subscriber A wants to make a secure call to Subscriber B, Subscriber A encrypts his call request with his rekeying variable data word RKVA and sends it to his exchange. Subscriber A's exchange, ExcA decrypts the request using the rekeying variable data word RKVA. Exchange ExcA then gener-

90 ates the random variable data word that will be used in that call, encrypts it with the rekeying variable data word RKVA and sends it to Subscriber A. Exchange ExcA also sends the random variable data word to

95 Subscriber B's exchange ExcB by way of link Q. Exchange Excb encrypts the random variable data word with the rekeying variable data word RKVB and sends it to Subscriber B. Thus both parties end up

100 in that call. The end to end synchronisation is provided by the user's equipment.

The method enables a large degree of flexibility for the users. For instance the user can start with an un-

105 secured call and mid-way through the call may instigate a secure call by virtue of a recall request. Another example would be where the user can start with a secure telephony call and then swap to a secure data call. This is a case where two different random variable data words may be used, one for se-

110 cure telephony and one for secure data. Another important feature is that the proposed method allows any party involved in a call to request secure communications. Furthermore it is possible to have secure communications in one direction and unsecu-

115 red communications in the other direction.

Optionally, some of the functions described above may be performed by an external database. In this case the user's rekeying variables data words may be held in the data base and the random variable gener-

120 ated there. In this mode, System X exchanges provide the required signalling and coordination functions.

The method depends heavily on the availability of outband message based signalling systems such as

125 CCITT I-Series between the user and the exchange and No.7 in the network.

The proposed method can be extended to provide secure signalling across the network. In this case each exchange can have its own rekeying variable

130 and random variables can be periodically issued to

exchanges for use in encrypting and decrypting signalling messages. Furthermore it is possible to encrypt only those messages that apply to a secure call.

5 Bulk encryption

The bulk encryption database DGDB, sends routine updates of the message random variable data word RV(Q) and the bulk random variable data word RVQ encrypted by the rekeying variable data word RKV(1) to exchange ExcA. Routine updates of the message random variable data word RV(Q) and the bulk random variable data word RVQ encrypted by the rekeying variable data word RKV(2) are also sent to exchange ExcB.

- 15 For 2048 kbit/s links between exchanges it is possible to totally encrypt all the speech (data) and signalling, but not the frame synchronisation. The synchronisation patterns and the spare bits in time slot zero are not encrypted so that it is not necessary to know the encryption key to achieve 2048 kbit/s frame synchronisation or to be able to read the spare bits.

A frame consists of thirty two slots each of eight bits making a total of 256 bits, time slot zero contains a synchronisation pattern in alternate frames. A multiframe consists of sixteen frames which is 4096 bits. The multiframe is signalled by one of the international bits. This international bit and the spare bits are contained in the time slot zero which does not contain a synchronisation pattern. Four spare bits are used to assist with bulk encryption.

- There are two factors that both ends of an encryption link need to know. The first is the random variable which defines a pseudo random sequence that will be used to modify the speech (data). The second is to define the position in that sequence so that both ends are in step with one another.

It is necessary to be able to change the random variable data word routinely without any loss of speech (data) or signalling. This implies that both ends must change at exactly the same instant. One spare bit can be used to indicate when the transmitting interface changes to the new random variable data word so that the receiving end knows when to change over to the new random variable data word. The new random variable data word will have been supplied to both ends independently some time before.

- Three spare bits are used to transmit a twenty four bit number every multiframe. This is incremented every multiframe. This number will define where the following multiframe is in the sequence. The position of the first bit within a multiframe is of course defined by the synchronisation pattern. It takes over nine hours for the twenty four bit number to repeat.

When a change to a new random variable data word is initiated the spare bit will change state four multiframes before hand. For these four multiframes a new sequence of twenty four numbers can be started to define the position in the sequence of the new random variable data word. If a new random variable data word is not supplied to each end when the spare bit changes then the old random variable data word will remain in use but a jump to the new defined position in the sequence will occur.

- The random variable data word can be different for

both directions of the 2048 kbit/s links and each link in the country can have its own random variables. The encryption is done prior to the insertion of the synchronisation pattern and spare bits. The encryption circuitry knows when the time slot zero information will be inserted as well as the state of the multiframe timing and twenty four bit number. The decoding is done after the detection of the frame synchronisation, multiframe synchronisation, and the spare bits. The line coding and decoding (HDB3) is performed at the line interfaces.

- The present invention can be used in other applications such as in private fixed subscriber networks and in mobile networks. As such, for example, an integrated digital exchange can provide a similar facility for secure communications in a private local or wide area network.

CLAIMS

1. A method of secured communication in a telecommunications system including at least two communication exchanges and a plurality of user equipments, wherein each user equipment is provided with a store which holds a user variable data word particular to that user; and, each exchange is provided with a store which holds all the user variables data words of the users connected to it, and, each exchange is provided with its own random variable data word, so that when a first user makes a secure call to a second user, the first user equipment encrypts the call using its particular user variable data word and sends the encrypted data to its own exchange, the exchange is provided with equipment for decrypting the call using the particular user variable data word and generates the random variable data word that will be used for the call, and encrypts it with the particular user variable data word and returns it to the first user; the exchange also sends the random variable data word to the second user's exchange which encrypts it with the user variable data word particular to the second user and sends it to the second user.

2. A method of secured communication as claimed in claim 1, wherein different random variable data words are generated to enable a user in telephony communication to change to data communication.

3. A method of secured communication as claimed in claims 1 or 2, wherein the random variable data words are generated in an external data base.

4. A method of secured communication as claimed in claim 1, wherein to provide network signalling, each exchange is given its own variable data word, and random variable data words are periodically issued to exchanges for use in encrypting and decrypting signalling messages across the network.

5. A method of secured communication as claimed in claim 4, wherein a bulk encryption data base is provided which sends updates of a message random variable data word and of a bulk random variable data word to the exchanges.

6. A method of secured communication as claimed in claim 5, wherein particular bits are used to

transmit an n-bit number in each multiframe, the number being incremented every multiframe and being used to define where the following multiframe is in a sequence.

- 5 7. A method of secured communication as claimed in claim 6, wherein a change in a random variable data word is indicated by a further particular bit changing state, several multiframe in advance of the change, so that a new n-bit number can be gener-
10 ated to define the position in the sequence of the new random variable data word.

8. A method of secured communication substantially as hereinbefore described, and with reference to the accompanying drawing.