

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199939431 B2
(10) Patent No. 744405

(54) Title
Temperature control of incubation vessels using electrically conducting polymers

(51)⁷ International Patent Classification(s)
C12M 001/02 G05D 023/19
B01L 007/00 H05B 003/14

(21) Application No: **199939431**

(22) Application Date: **1999.05.17**

(87) WIPO No: **WO99/61578**

(30) Priority Data

(31) Number	(32) Date	(33) Country
9411060	1998.05.23	GB

(43) Publication Date : **1999.12.13**

(43) Publication Journal Date : **2000.02.24**

(44) Accepted Journal Date : **2002.02.21**

(71) Applicant(s)
The Secretary of State for Defence


(72) Inventor(s)
Martin Alan Lee; Dario Lyall Leslie; Paul Moore

(74) Agent/Attorney
DAVIES COLLISON CAVE, 1 Little Collins Street, MELBOURNE VIC 3000

(56) Related Art
WO 98/24548
US 5552321
DE 3132926




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : C12M 1/02, H05B 3/14, B01L 7/00, G05D 23/19</p>	<p>A1</p>	<p>(11) International Publication Number: WO 99/61578 (43) International Publication Date: 2 December 1999 (02.12.99)</p>
<p>(21) International Application Number: PCT/GB99/01553 (22) International Filing Date: 17 May 1999 (17.05.99) (30) Priority Data: 9411060.4 23 May 1998 (23.05.98) GB (71) Applicant (for all designated States except US): THE SECRETARY OF STATE FOR DEFENCE [GB/GB]; Defence Evaluation and Research Agency, Ively Road, Farnborough, Hampshire GU14 0LX (GB). (72) Inventors; and <i>Leslie, Dario, Lual</i> (75) Inventors/Applicants (for US only): LEE, Martin, Alan [GB/GB]; (CBD Porton Down, Salisbury, Wiltshire SP4 0JQ (GB). LESLIE, Dario [GB/GB]; CBD Porton Down, Salisbury, Wiltshire SP4 0JQ (GB). MOORE, Paul [GB/GB]; CBD Porton Down, Salisbury, Wiltshire SP4 0JQ (GB). (74) Agent: BOWDERY, A., O.; D/IPD, Formalities Section (DERA), Poplar 2, MOD Abbey Wood #19, Bristol BS34 8JH (GB).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p> 

(54) Title: TEMPERATURE CONTROL OF INCUBATION VESSELS USING ELECTRICALLY CONDUCTING POLYMERS

(57) Abstract

The use of incubation means for the controlled heating of biological materials, said means comprising an electrically conducting polymer connectable to a power supply, said polymer being either contiguous or integral with an incubation vessel, or adapted to be in thermal contact with an incubation vessel. Incubation apparatus including such means and a method for culturing biological materials using them are also described and claimed.

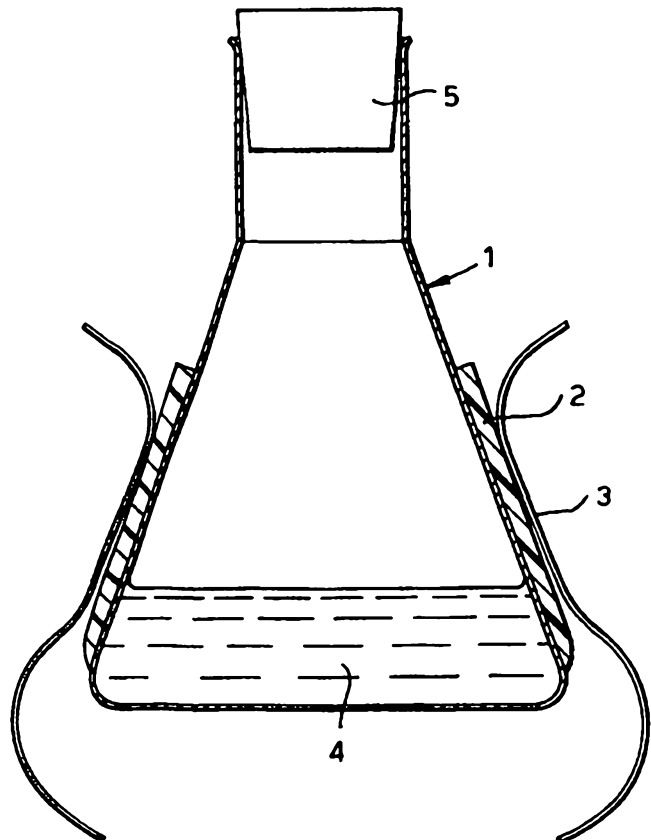

TEMPERATURE CONTROL OF INCUBATION VESSELS USING ELECTRICALLY CONDUCTING POLYMERS

The present invention relates to the use of electrically conducting polymers in the production of apparatus such as incubators for use in the culture of biological material as well as apparatus and methods for incubating biological material.

Culture of biological material, such as plant or animal cells, bacteria, viruses or hybridoma or other immortal cell lines are required in a wide variety of purposes. For example, the cell lines may be cultured for use in experimental purposes. In addition, bacteria and in particular recombinant bacteria may be cultured used in the production of materials such as antibiotics or other pharmaceuticals. Antibodies useful in diagnosis and therapy in a wide range of fields are prepared for example by the culture of hybridoma or other immortal cells lines.

For diagnostic purposes, for example in the areas of food hygiene monitoring, it may be necessary to culture any bacterial or viral strains isolated in order to obtain significant quantities for detection and/or identification.

Plant cells may be cultured to prepare calluses for use in transformation to produce recombinant plants.

The controlled heating of shake flasks or other vessels used in the culture of biological material is often carried out using large heaters or incubators. Multiple shake flasks, each containing the biological material to be tested and culture medium are held within these devices. The temperature within the incubator is held at a temperature at which the biological material may be grown. Generally, this will be of the order of 37°C which is an acceptable temperature for the culture of many types of biological material. However, this may not be the optimum culture temperature for all biological material being

cultured within the container, particularly when a wide range of different biological materials are contained within different individual shake flasks.

Furthermore, this may not provide an economical method of heating where only a small number of samples are required as it is necessary to heat and maintain the entire apparatus at the desired temperature, even when only a few samples are contained within it.

Finally, incubation of certain strains, in particular recombinant stains of bacteria etc. require specific temperature conditions and transitions in order to induce or "switch on" desired genes. Certain strains require culturing for a predetermined period at one temperature followed by adjustment of the temperature to a different level in order to obtain expression of a particular gene. At present, such a complex operation has to be carried out manually, which means that an operator has to be present at the particular moment when the temperature change is required, in order to remove the incubation vessel from the constant temperature environment, and heat or cool it as appropriate.

There is a need for a more controllable method of heating incubation vessels used in the culture of biological material. Copending International Patent Application No. PCT/GB97/03187 describes reaction vessels which utilise electrically conducting polymers as the heating means. It has been found that such vessels may be adapted for use in the incubation of biological material.

According to the present invention there is provided the use of incubation means for the controlled heating of biological materials, said means comprising an electrically conducting

polymer connectable to a power supply, said polymer being either contiguous or integral with an incubation vessel, or adapted to be in thermal contact with an incubation vessel.

Electrically conducting polymers are known in the art and may be
5 obtained from Caliente Systems Inc. of Newark, USA. Other
examples of such polymers are disclosed for instance in US
Patent No. 5106540 and US Patent No. 5106538. Many polymers,
for example, polytetrafluoroethylene (PTFE) or polyethylene (PE)
can be formed into electrically conducting polymers by inclusion
10 of graphite in the polymer material.

Suitable conducting polymers can provide temperatures up to
300°C and so are well able to be used in incubation processes
where the range of temperatures is between 0° and 100°C,
typically between 15° and 50°C.

15 Incubation vessels which may be used in the context of the
invention are well known in the art. They may comprise shake
flasks, petrie dishes, test tubes, chemostats, fermenters or
slides including microscope slides.

An advantage of the invention over a known incubators or ovens
20 is that the temperature within individual incubation vessels can
be controlled independently of one another.

The heating rate achievable depends upon the precise nature of
the polymer, the dimensions of polymer used and the amount of
current applied. Preferably the polymer has a high resistivity
25 for example in excess of 1000ohm.cm. The temperature of the
polymer can be readily controlled by controlling the amount of
electric current passing through the polymer, allowing it to be
held at a desired temperature for the desired amount of time.
Furthermore, the rate of transition between temperatures can be
30 readily controlled after calibration, by delivering an

appropriate electrical current, for example under the control of a computer programme.

Suitably however, the temperature within each vessel may be set using for example a simple thermostat device which cuts off the
5 current to the polymer if the temperature within the flask exceeds the desired temperature.

The thermal properties of an electrically conducting polymer and in particular its low thermal mass, will ensure that adjustments in the temperature will take place rapidly. If desired however,
10 the incubation vessel may be subjected to artificial cooling to further increase the speed of cooling. Suitable cooling methods include forced air cooling, for example by use of fans, immersion in ice or water baths etc.

In addition, the use of polymer as the heating element in an
15 incubation vessel will generally allow the apparatus to take a more compact form than existing incubators. This may be useful when carrying out culture processes in field conditions such as in the open air, on a river, on a factory floor or even in a small shop.

20 The incubation vessel may take the form of a reagent container such as a glass, plastic or silicon container, with electrically conducting polymer arranged in close proximity to the container. In one embodiment of the vessel, the polymer is provided as a sheath which fits around the incubation vessel, in
25 thermal contact with the vessel. The sheath can either be provided as a shaped cover which is designed to fit snugly around an incubation vessel or it can be provided as a strip of film which can be wrapped around the incubation vessel and secured.

The polymer sheath arrangement means that close thermal contact is achievable between the sheath and the incubation vessel. This ensures that the vessel quickly reaches the desired temperature without the usual lag time arising from the insulating effect of the air layer between the incubation vessel and the heater.

Furthermore, a polymer sheath can be used to adapt apparatus using pre-existing incubation vessels. In particular, a strip of flexible polymer film can be wrapped around an incubation vessel of various different sizes and shapes.

Where a sheath is employed it may be advantageous for it to be perforated or in some way reticulated. This may increase the flexibility of the polymer and can permit even readier access by a cooling medium if the polymer is not itself used to effect the cooling.

In another embodiment of the invention, the polymer is provided as an integral part of the incubation vessel. The incubation vessel may be made from the polymer by extrusion, injection moulding or similar techniques. Alternatively, the incubation vessel may be manufactured using a composite construction in which a layer of the conducting polymer is interposed between layers of the material from which the vessel is made or in which the internal or external surfaces of the incubation vessel is coated with the polymer, or again in which the vessel is basically made of the polymer coated with a thin laminate of a culture medium compatible material. Such vessels may be produced using lamination and/or deposition such as chemical or electrochemical deposition techniques as is conventional in the art.

Vessels which comprise the polymer as an integral part may provide particularly compact structures.

If several incubation vessels are required for a particular reaction, any electrical connection points can be positioned so that a single supply can be connected to all the incubation vessels or tubes. The incubation vessels may be provided in an
5 array.

Alternatively, each of or each group of incubation vessels may have its own heating profile set by adjusting the applied current to that vessel or group of vessels. This provides a further and particularly important advantage of incubation
10 vessels with polymer in accordance with the invention over conventional incubators, in that the temperature of individual vessels can be controlled independently of one another. This means that each incubation vessel may be provided with its own thermal profile which may be optimised for the culture of the
15 particular biological strain contained therein.

The polymer may suitably be provided in the form of a sheet material or film, for example of from 0.01mm to 10 mm, such as from 1 to 10 mm, and preferably 0.1 to 0.3 mm thick. By using thin films, the volume of polymer required to cover a particular
20 incubation vessel or surface is minimised. This reduces the time taken for the polymer to heat to the required temperature as the heat produced by passing the current through the polymer does not have to be distributed throughout a large volume of polymer material.

25 In use, the polymer component of the incubation vessel is arranged such that an electric current can be generated within the polymer. This can either be achieved by providing the polymer with connection points for connection to an electrical supply or by inducing an electric current within the polymer,
30 for example by exposing the polymer to suitable electrical or magnetic fields.

Close thermal contact between the polymer and the incubation vessel is economical in that it does not require the heating of all the space within the incubator.

5 A particularly suitable incubation vessel for use in the context of the invention is a conical flask. The flask may either be surrounded by a sheath of conducting polymer. The sheath may be held in place by fixing means such as resilient clips. The clips are suitably of metal or other conducting material, as these may then act as the connection to the power supply.

10 Alternatively, the polymer may be integral with the flask. For example, the flask may contain a laminated form of polymer on glass or silicon.

In a different embodiment, the vessel may comprise a flat support plate such as a two-dimensional array in particular a
15 chip such as a silicon wafer chip; or a slide, in particular a microscope slide, on which biological material and culture medium may be supported. The plate may be made from the polymer or the polymer may be provided as an integral part of the plate, either as a coating on one side of the plate or as a polymer
20 layer within a composite construction as previously described.

Other suitable incubation vessels are tubes and cuvettes, which are known in the art.

Novel forms of incubation means for use in the invention as well as incubation vessels including these means form a further
25 aspect of the invention.

The invention further provides incubation apparatus for the culture of biological material, said apparatus comprising an incubation vessel, an electrically conducting polymer which is either contiguous or integral with the incubation vessel, or

positioned in thermal contact with the incubation vessel, a means for generating an electrical current within the electrically conducting polymer and a means for controlling the temperature within the incubation vessel.

5 The control means is suitably an automatic control means such as a thermostat device as are well known in the art, or a computer controlled interface arrangement. The latter may include a temperature monitoring device such as a thermocouple, which monitors the temperature of the incubation vessel and feeds this
10 information into the control system so that the desired regime of heating and/or cooling is adhered to.

Alternatively, the temperature of the polymer may be monitored directly by measuring its resistivity, for example by arranging the polymer heating element as a resistor in a wheatstone bridge
15 circuit arrangement. This avoids the use of other temperature measurement devices such as thermocouples.

Optionally, the apparatus further comprises artificial cooling means such as one or more fans.

The apparatus may include a plurality of incubation vessels. The
20 polymer may be provided as an integral part of each container, as a sheath around each container or arranged such that a layer of polymer is interposed between adjacent containers. Any electrical connection points on the polymer may be connected to a single electrical supply, if a number of reactions requiring
25 the same temperature stages are being carried out.

However, in a preferred embodiment the apparatus is arranged such that the polymer in contact with (or forming) a vessel or a group of vessels is connected to an individual supply, several vessels or groups of vessels being connected to different,
30 independently controlled electrical supplies. With this

arrangement, a number of different cultures requiring different temperatures or temperature stages can be carried out at the same time as each container or group of containers has its own heating element. This arrangement allows users to carry out a number of small batch cultures using a single vessels economically.

Where the incubation vessel comprises a slide or chip, the apparatus may comprise the slide or chip, an electrical supply, means for connecting the electrical supply to the slide or chip or for inducing an electrical current in the polymer and a means for controlling the current passing through the polymer layer in the slide or chip.

Incubation vessels and apparatus of the invention can be used in a variety of situations where biological material is required to be cultured. Thus the invention further provides a method of culturing a biological material which method comprises placing the biological material and a culture medium in an incubation vessel which is provided with incubation means as described above, and supplying a current to the incubation means so as to cause the incubation vessel to reach a predetermined temperature.

Embodiments of the present invention will now be described, by way of example, with reference to the accompanying drawing, which is a diagram showing an embodiment of incubation apparatus of the invention.

In the drawing, a conical flask 1 is surrounded with a sheath of electrically conducting polymer 2. The polymer sheath 2 is held in place by means of a resilient metal clip 3. An electrical power supply (not shown) is connected to the clip 3.

In use, biological material in culture medium 4 is placed within the incubation vessel 1 which is stoppered by means of a bung 5. The sheath 2 is in close thermal contact with the incubation vessel 1. Electrical power is supplied to the clip 3 such that
5 current is passed through the polymer sheath 2, thereby heating it and biological material inside the incubation vessel 1.

The electrical power supply is under the control of a thermostat device (not shown) which has been set to ensure that the temperature within the incubation vessel remains optimum for the
10 particular condition or conditions under which the biological material grows.

The vessel 1 may, during the course of the reaction, be agitated or shaken, for example in a shaking apparatus as is well known in the art. Alternatively or additionally, the vessel may be
15 otherwise aerated for example by sparging. Depending upon the nature of the biological material being cultured, it may be necessary or desirable to effect the process in non-aerobic conditions, for example under a nitrogen atmosphere.

Although the vessel illustrated in the Figure comprises a
20 conical flask, it will be appreciated that other forms of vessel including tubes, slides and dishes can be employed. The formation of the polymer will be adapted accordingly.

The reference to any prior art in this specification is not, and should not be taken as, an acknowledgment or any form of suggestion that that prior art forms part of the common general knowledge in Australia.

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.



THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. The use of incubation means for the controlled heating of biological materials, said means comprising an electrically
5 conducting polymer connectable to a power supply, said polymer being either contiguous or integral with an incubation vessel, or adapted to be in thermal contact with an incubation vessel.
2. The use according to claim 1 wherein the polymer of the incubation means is contiguous with an incubation vessel.
- 10 3. The use as claimed in claim 2 wherein the polymer of the incubation means forms a sheath around an incubation vessel.
4. The use as claimed in claim 2 of claim 3 wherein the polymer is in the form of a film.
5. The use as claimed in claim 3 and wherein the sheath is
15 integral with an incubation vessel.
6. The use as claimed in any one of claims 2 or 5 and wherein the polymer of the incubation means is perforated or reticulated.
7. The use as claimed in claim 1 wherein the polymer forms a
20 container for the biological material.
8. The use as claimed in claim 1 wherein an incubation vessel for biological material is provided and wherein one of the surfaces of the vessel is coated with the said polymer.
9. The use as claimed in any one of claims 1 to 8 wherein the
25 incubation vessel comprises a flask, dish or slide.
10. The use as claimed in claim 9 wherein the incubation vessel comprises a flask.



11. Incubation apparatus for the culture of biological material, said apparatus comprising an incubation vessel, an electrically conducting polymer which is either contiguous or
5 integral with the incubation vessel, or positioned in thermal contact with the incubation vessel, a means for generating an electrical current within the electrically conducting polymer and a means for controlling the temperature within the incubation vessel.

10 12. Apparatus as claimed in claim 11 and incorporating a plurality of incubation vessels at least some of which are supplied with incubation means as claimed in any one of claims 1 to 10.

13. Apparatus as claimed in claim 13 and wherein the control
15 means is arranged for the supply of current for a different temperature profile for various of the incubation vessels.

14. A method of culturing a biological material which method comprises placing the biological material and a culture
20 medium in an incubation vessel which is provided with incubation means as claimed in claim 1, and supplying a current to the incubation means so as to cause the incubation vessel to reach a predetermined temperature.

15. A method according to claims 14 wherein biological
25 material within a plurality of incubation vessels heated simultaneously.

16. A method according to claim 15 wherein each incubation vessel is heated individually to the temperature required for the culture taking place within that vessel.



17. The use of incubation means as claimed in claim 1 and substantially as hereinbefore described with reference to the accompanying drawing.

18. Incubator apparatus for the culture of biological materials, according to claim 11 and substantially as hereinbefore described with reference to the accompanying drawing.

19. A method according to claim 14 substantially as hereinbefore described with reference to the Example.

10

DATED this 27th day of December, 2001

The Secretary of State for Defence

15

By DAVIES COLLISON CAVE

Patent Attorneys for the applicant(s)

5
15
25



