

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 511 811 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
12.03.1997 Bulletin 1997/11

(51) Int. Cl.⁶: **A43D 119/00**, A43D 21/00

(21) Application number: **92303776.6**

(22) Date of filing: **27.04.1992**

(54) Machine for use in the manufacture of shoes

Maschine zum Herstellen von Schuhen

Dispositif pour la fabrication de chaussures

(84) Designated Contracting States:
DE ES FR GB IT

(30) Priority: **30.04.1991 GB 9109271**
19.09.1991 GB 9120027

(43) Date of publication of application:
04.11.1992 Bulletin 1992/45

(73) Proprietors:
• **BRITISH UNITED SHOE MACHINERY LIMITED**
Belgrave Leicester LE4 5BX (GB)
Designated Contracting States:
DE FR GB IT
• **USM ESPANA, S.L.**
08005 Barcelona (ES)
Designated Contracting States:
ES

(72) Inventors:

- **Vale, John Raymond**
Leicester (GB)
- **Sharp, Francis Barry**
Syston, Leicestershire LE7 8NF (GB)
- **Blatherwick, Mark Quibell**
Loughborough, Leicestershire LE12 7DZ (GB)
- **Sanderson, Alan**
Sileby, Leicestershire LE12 7NT (GB)

(74) Representative: **Atkinson, Eric**
c/o British United Shoe Machinery Limited
P.O. Box 88
Ross Walk
Belgrave Leicester LE4 5BX (GB)

(56) References cited:
EP-A- 0 135 201 **DE-B- 1 182 111**
GB-A- 2 154 424 **US-A- 3 968 534**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 511 811 B1

Description

This invention is concerned with a machine for use in the manufacture of shoes, more particularly a machine for lasting side and heel seat portions of shoes comprising a shoe support for supporting, bottom up, a shoe comprising a shoe upper on a last and an insole on the last bottom, Said shoe support also having a heel seat height gauge device whereby the height of the bottom of such shoe in the heel seat region thereof can be set, two side lasting assemblies arranged one at each side of the shoe support, a heel seat wiper mechanism comprising a pair of wiper plates, and a heel band mechanism for clamping the heel end of such shoe prior to the operation of the heel seat wiper mechanism, wherein the shoe support comprises a last pin for receiving the last pin hole of a shoe last, and a toe support for supporting the toe end of a shoe supported by the last pin.

One such machine is disclosed in US-A-4006504.

In recent years there has been a move to control more accurately the operating paths of tools for operating upon shoes and to this end it has become progressively more necessary for the positioning of the shoe to be achieved accurately within the machine of which such operating tools forms part. At the same time, the shoe supports are also used to provide e.g. dimensional information concerning the shoe which is held thereby, which information in turn can then be used in the control of the operating path of the tools.

One shoe support of the aforementioned type is described in EP-A 0 379 774, being a shoe support particularly useful for a machine for roughing side wall portions of shoes. In this shoe support the shoe is centralised with its heel-to-toe longitudinal axis coincident with a longitudinal centre line of the shoe support, so that the shoes are similarly oriented regardless of whether they are rights or lefts. Such a feature is wholly acceptable in the case of a roughing machine, but may not be so in the case of other machines, especially where only part of the shoe is being operated upon and a different parameter, e.g. the longitudinal centre line of a heel portion of the shoe, is to be aligned with the longitudinal centre line of the shoe support. Moreover, while, in the case of the aforementioned roughing machine, it is necessary to ensure that the shoe bottom is held in a desired heightwise position in order to ensure that the shoe side wall portions are consistently maintained in the correct relationship with the pre-programmed path of the roughing tool, nevertheless the path is in fact determined in accordance with the shoe position - dictated by fixed heel end and toe end height datums - rather than the position being determined by the tool path. In other shoe-making machines, by contrast, the tool path may be fixed, e.g. in the case of a lasting machine having wiper plates movable in a plane, and thus, it will be appreciated, the arrangement described above in respect of the roughing machine would not be suitable for use in a machine where the

tool path is fixed.

In the operation of the aforementioned roughing machine, furthermore, it is necessary, at one stage in the progressive operation of the roughing tool, to move the shoe heel end positioning mechanism, which also serves a clamping function, to an out-of-the-way position. In order to enhance the stability of the shoe after the shoe has been positioned. During such stage, therefore, the last pin is tilted about a transverse axis, this tilting of the last pin serving to "lock" the last against the toe support. In the roughing machine, of course, the pressure applied by the tool to the shoe is directed laterally and the support arrangement described above has been found adequate to maintain the stability of the shoe against such pressure. Where, however, greater and/or differently directed forces are to be applied to the shoe, as e.g. in a lasting machine, especially during the initial engagement of the shoe bottom by the lasting tools where firm clamping of the shoe heel end is generally considered to be essential, the arrangement for the roughing machine would not be suitable, from the point of view of ensuring the stability of the shoe, and thus maintaining the desired orientation of its bottom.

Because, as already mentioned, the programmed path of the roughing tool is determined after the model shoe to be digitised has been positioned in the shoe support, effectively the various style features do not in any way affect the positioning of the shoe in the shoe support, but rather such features are readily accommodated in the programme. Such a relatively simple approach, it will be appreciated, cannot readily be followed in the case of a machine where the positioning of the shoe is dictated at least partly by fixed features of the machine. Nevertheless in terms of machine efficiency and enhanced quality of performance (in that setting the machine according to the particular shoe being operated upon becomes merely a matter of selection on the part of the operator) the ability to programme the machine setting is desirable.

It is thus the object of the present invention to provide an improved machine for use in the manufacture of shoes in which the various shortcomings set out above are mitigated.

This object is resolved, in accordance with the invention, in a machine as set out in the first paragraph above, in that the shoe support further comprises a shoe heel end positioning mechanism comprising a datum member engageable by the heel end of a shoe supported by the last pin for positioning said heel end in a direction extending lengthwise of the shoe, and in that the shoe heel end positioning mechanism and the heel band mechanism are each movable between an operative and an out-of-the-way position, the arrangement being such that in the operation of the machine the shoe heel end positioning mechanism is first brought to its operative position, thus to set the lengthwise and heightwise positions of a shoe supported by the last pin as aforesaid, whereafter said mechanism is moved to its out-of-the-way position and the heel band mechanism is

moved to its operative position, thus to clamp the heel end of said shoe in said positions.

Preferably in such machine, furthermore, the toe support is movable heightwise whereby in cooperation with the shoe heel end positioning mechanism to enable the heel seat of the bottom of a shoe supported by the last pin to be accommodated in a desired plane. Moreover, preferably n.c. motor means is provided for effecting heightwise movement of the toe support as aforesaid.

In addition, preferably the toe support is movable in a direction transversely of a shoe supported by the last pin to accommodate to both left and right shoes, adjustable abutment means are provided for limiting such transverse movement in both directions, and means, including an n.c. motor, is provided for setting the position of the abutments according to the style of shoe to be operated upon.

In one embodiment, the datum member of the shoe heel end positioning mechanism comprises a plate member engageable by the heel end of a shoe supported by the last pin and movable into and out of an operative position, means being provided for resiliently urging it out of such position, the datum member being effective, when moved into its operative position, to actuate a switch whereby a signal is generated in response to which the toe support is moved in a direction towards the datum member. In such a machine, furthermore, the toe support preferably comprises two members having inwardly directed inclined faces and being movable equidistantly towards and away from one another, thus to provide a generally V-shaped support for the toe end of a shoe supported by the last pin, and also a shoe toe-engaging member movable into and out of an operative position and being resiliently urged out of said position, said toe-engaging member, when in its operative position, actuating a switch by which a signal is generated in response to which the movement of the toe support is terminated. Preferably, furthermore, a toe height datum member is provided, formed integral with the toe-engaging member, against the under-side of which the bottom of the shoe in the toe region thereof is urged by the movement towards one another of said members, the arrangement being such that the toe end of the shoe is thus positioned heightwise and also held between said datum member and the V-shaped support provided by the two members, the signal in response to which movement of the toe support is terminated as aforesaid also being effective to initiate the inward movement of the two members providing the V-shaped support and also to cause the setting of the heightwise position of the heel seat of the shoe to be initiated.

In the machine in accordance with the invention, conveniently auxiliary clamp means is provided co-operable with the toe support and last pin to maintain the shoe in its position set by the shoe heel end positioning mechanism when the latter is moved to its out-of-the-way position and prior to the heel band mechanism being moved into clamping engagement with the heel end of the shoe.

In one embodiment of the invention, the height gauge device is constituted by a photoelectric switch ("range finder") arrangement and the heel seat of the shoe is positioned at the desired heightwise position by effecting heightwise movement of the last pin. Alternatively, in another embodiment the height gauge device comprises a holddown engageable with the heel seat of a shoe supported by the last pin, means being provided for effecting heightwise movement of the last pin towards and away from the holddown, the holddown being movable between an advanced position, in which it sets said datum position of the heel seat of such shoe, and a retracted position, and further, for effecting movement of the holddown between its advanced and retracted positions, a piston-and-cylinder arrangement is provided having a fixed stroke, said arrangement being itself mounted for bodily adjusting movement towards and away from the last pin, thus to vary said datum position. Preferably, moreover, an n.c. motor is provided for effecting bodily adjusting movement of the holddown.

In the machine in accordance with the invention, furthermore, the two side lasting assemblies preferably each comprise a rotating lasting roller having a helical rib arrangement, relative movement being effected, in a direction extending lengthwise of a shoe supported as aforesaid, between the shoe support and the side lasting assemblies thus to cause the rollers to operate progressively along opposite side portions of the shoe upper, and each roller being caused to rotate in such a direction that the helical rib arrangement thereof effects an inwiping action the lasting marginal portion of the shoe upper engaged thereby. In such a machine, furthermore, the lasting rollers are brought into operative engagement with a shoe supported by the last pin before the shoe heel end positioning mechanism is moved out of its operative position.

It will be appreciated that, using a machine as set out above, the stability of the shoe supported by the shoe support is reliably maintained throughout an operating cycle of the machine. More particularly, by moving the heel band mechanism to clamp the heel end of the shoe prior to the initiation of the operation of the wiper mechanism, the shoe is held firmly in the same manner as in conventional heel seat and side lasting machines, while at the same time nevertheless by the provision of the shoe heel end positioning mechanism the shoe is more accurately positioned in the shoe support, so that e.g. adhesive can be accurately supplied to, or tacks be inserted into, side regions of the shoe in the side lasting operation.

Moreover, using the machine in accordance with the invention the shoe can be accurately positioned in relation to any desired datum, for example the longitudinal centre line of the machine, more particularly by the facility for moving the toe support laterally so that a desired dimensional feature of the shoe can be aligned with such machine feature (in the case of a heel seat and side lasting machine by aligning the longitudinal

centre line of the heel end of the shoe with the longitudinal centre line of the machine), and moreover the orientation of the shoe bottom can be adjusted as desired, namely by the facility for effecting heightwise movement of the toe support, so that the shoe bottom can be properly oriented in relation to a further desired datum, e.g., in the case of a heel seat and side lasting machine, with the wiping plane of the wiper mechanism of such machine.

It will also be observed that, in the preferred embodiment of the machine in accordance with the invention, n.c. motors are used for controlling various of the settings which can be made. It will further be appreciated that in this way the control of the settings can readily be effected by programmed control, so that it would be possible readily to input various style data into a machine control and thereafter to recall such data according to the style of shoe being operated upon, whereupon the various settings made for such style can be recalled and the machine re-set accordingly. It is of course envisaged that "teaching" of such style settings be made in the machine in a "teach" mode using model shoes.

There now follows a detailed description, to be read with reference to the accompanying drawings, of one machine for lasting heel seat and side portions of shoe uppers, said machine having been selected for description merely by way of non-limiting exemplification of the present invention.

In the accompanying drawings:-

Figure 1 is a front perspective view, with parts broken away, of a machine for lasting heel seat and side portions of shoe uppers in accordance with the present invention;

Figure 2 is a rear perspective view of the machine shown in Figure 1, showing in particular a shoe removal device of the machine;

Figure 3 is a fragmentary side view of a shoe support forming part of the machine of Figures 1 and 2; Figure 4 is a view along the arrow IV in Figure 3, showing details of a toe support of said shoe support;

Figure 5 is a fragmentary plan view showing details of a shoe heel end positioning mechanism of the shoe support;

Figure 6 shows details of a jack post forming part of the shoe support;

Figure 7 shows details of a heel band mechanism forming part of the shoe support;

Figure 8 shows details of a wiper head of the machine in accordance with the invention;

Figure 9 is a fragmentary side view illustrating a carriage for adhesive-applying means and a side lasting assembly of the machine in accordance with the invention;

Figure 10 shows details of the adhesive-applying means of the machine;

Figure 11 shows details of a side lasting assembly

of the machine; and

Figure 12 is a view, generally similar to Figure 3 but on a smaller scale, showing an alternative form of heel seat height gauge device.

The machine now to be described is a so-called heel seat and side lasting machine in the operation of which heel seat and side portions of a shoe upper, which is carried on a last having an insole on the last bottom and which has already been lasted in the toe region thereof, are lasted; more particularly the lasting of the side portions is first initiated, from the region of the heel breast line toewardly, and thereafter the lasting of the seat portion is effected.

This machine thus comprises a shoe support generally designated 20 (Figure 3) for supporting, bottom up, a shoe, the toe end portion of which has already been lasted, for heel seat and side lasting operations to be performed thereon. To this end, the shoe support 20 comprises a jack post 22 (Figures 3 and 6) including a last pin 24 which is capable of limited sliding movement, transversely of the longitudinal centre line of the shoe, in a slide 26 which itself is mounted for arcuate sliding movement, generally in the lengthwise direction of the shoe bottom, on a further slide 28 supported by the jack post 22. In this way it is possible for the heel seat region of the shoe bottom to be correctly levelled in relation to a wiping plane, to be referred to hereinafter, of the machine.

The shoe support 20 also comprises a toe support generally designated 30 (Figures 3 and 4) which comprises two blocks 32 having inwardly facing inclined surfaces which together form a generally V-shaped support surface for the toe end of the shoe. The blocks 32 are supported on a linkage comprising two levers 34, for pivotal movement towards or away from each other, a link 33 extending between the levers 34 thus to cause them to move equidistantly. The levers 34 are mounted for pivotal movement, each on its own pivot 36, on a support block 38. Extending between lower, bifurcated, ends 34a of the levers 34 is a piston-and-cylinder arrangement 40 by which the lower ends of the levers are drawn together or moved apart, thus effecting movement of the blocks 32 away from or towards one another. A shaft 42 is also mounted between the lower ends of the levers 34, being fixedly mounted to one of said ends and slidably accommodated in a block fixed to the bifurcated lower end 34a of the other. This shaft 42 forms part of a pneumatically operated bar-lock arrangement generally designated 44, by which the blocks 32 may be locked in adjusted position.

For determining the heightwise position of the toe end of a shoe in relation to the blocks 38 an abutment plate 54 is provided, pivotally mounted on an upstanding bracket 56 on the support block 38. The plate 54 is spring-urged into an operative position in which an inclined face of a lip 54a can be engaged by the tip of the toe portion of a shoe placed on the jack post, said lip thus providing a toe height datum for such shoe. As will

be described hereinafter, there is associated with the plate 54 an inductance switch 58 which when the plate is pivoted by engagement with the shoe, provides a signal in response to which the blocks 32 are caused to move towards one another and thus to urge the shoe upwardly against said lip 54a.

The support block 38 is mounted for heightwise adjusting movement in the shoe support 20, and to this end is supported on a slide rod 46 which is mounted for vertical sliding movement in a further support block 48. The slide rod 46 threadedly receives at its lower end a ball screw 50 which in turn is connected to the output of a stepping motor 52 carried on the underside of the further support block 48. Thus, actuation of the stepping motor 52 is effective to cause heightwise movement of the support block, and thus of the blocks 32 and plate 54, to take place. In this way the heightwise position of the toe support can be determined according to the style of shoe being operated upon.

The further support block 48 is mounted for sliding movement, transversely of the shoe bottom, on a shaft 60, a rectangular bar (not shown) being provided parallel to the shaft 60 and spaced therefrom, in order to "steady" the further support block 48 as it slides along the shaft 60. The shaft 60 and bar are mounted in a carriage 64 of the toe support 30, as will be referred to hereinafter. For effecting sliding movement of the further support block 48 along the shaft 60, and thus effecting sliding movement of the toe support widthwise of the shoe to be supported thereby - this facility being provided for enabling the toe ends of left and right shoes to be supported in the machine with the longitudinal centre line of their heel seat correctly positioned in relation to a longitudinal centre line of the shoe support (and thus of an operating locality of the machine of which the shoe support may form part) - a further piston-and-cylinder arrangement 66 is provided. For limiting such transverse movement of the further support block 48, furthermore, two abutments in the form of lugs 68 (one only shown in Figure 3) are mounted for sliding movement in a channel 70, by which the lugs are restrained from any rotational movement. The lugs are themselves mounted on a threaded rod (not shown), one half of the thread being a left-hand and the other a right-hand so that upon rotation of said rod the lugs 68 are moved towards or away from one another. The rod is itself supported in the carriage 64 and is driven by a stepping motor 74 itself also mounted on the carriage 64. By appropriate signals to the stepping motor 74, therefore, it will be appreciated, the lugs 68 may be positioned in a desired relationship with one another according to the size (more particularly the width) of the toe end of the shoe to be supported by the blocks 32. Cooperating with the lugs 68, furthermore, is a pin 76 which is carried on the further support block 48. It will thus be appreciated that, by engagement of the pin 76 with one or other of the lugs 68, the position of the support block 48, and thus of the blocks 32, widthwise of the shoe, can be established.

The carriage 64 is supported at one side by a slide rod 78 and at the other by a rectangular bar 80 which extend in a direction lengthwise of a shoe supported by the last pin 24. The carriage 64 can thus slide in said lengthwise direction relative to the jack post 22 for accommodating shoes of different length. To effect such sliding movement a piston-and-cylinder arrangement 82 is provided secured at one end to a frame portion 83 of the shoe support 20 and at its other to the carriage 64. A linear potentiometer 84 is also provided, secured at one end to the frame portion 83 and at its other to the carriage 64, thus to provide a signal corresponding to the position of the toe support in relation to the jack post 22, whereby the length of a shoe to be operated upon can be "measured".

The shoe support 20 also comprises a shoe heel end positioning mechanism generally designated 86 (Figures 3 and 5) comprising a casting 87 which is carried on a frame portion 88 mounted for pivotal movement about a pivot 90 carried on the frame of the shoe support 20. The shoe heel end positioning mechanism 86 is thus mounted for pivotal movement between an operative position (as shown in Figure 3) and an out-of-the-way position. For effecting such pivotal movement, furthermore, two piston-and-cylinder arrangements 92 are provided, connected one to each side of the frame portion 88 and mounted on a stationary portion of the frame of the shoe support 20.

Supported by the casting 87 is a plate member 94 which can be engaged by the backseam region of a shoe placed on the jack post 22 to provide a lengthwise datum for such shoe in the shoe support 20. The plate 94 is spring-urged in a direction towards the jack post 22 about a pivot 96. When engaged by a shoe, the plate is urged in a direction away from the jack post (clockwise, viewing Figure 3) and thus actuates an inductance switch 98 in response to actuation of which a control signal is supplied, as will be referred to hereinafter.

Also mounted on the casting 87 are two so-called seat clamp members 100, each for pivotal movement about a pivot 102 on the casting. A rearward end of one of the members 100, furthermore, is connected to a piston-and-cylinder arrangement 104, and the clamp members 100 are interconnected by a connecting rod 106 whereby they are moved equidistantly towards or away from one another. The effect of moving the clamp members 100 equidistantly towards the heel end of the shoe is to centralize the heel seat of the shoe, that is to say to locate the longitudinal centre line of the heel seat of the shoe coincident with the longitudinal centre line of the shoe support. The clamp members 100 each support a clamp pad 108 which is shaped to conform to the region of the feather edge of the shoe in the vicinity of the heel breast line.

Also mounted on the casting 87 is a heel seat height gauge device 110 (Figure 3). This device 110 is carried on a lever 112 pivotally mounted on the casting 87, a piston-and-cylinder arrangement 114 being carried on the underside of the casting 87 for effecting such

pivotal movement. The device 110 is of the photoelectric switch ("range finder") type by which the distance of an object spaced from it can be detected. Such devices are conventional and readily commercially available.

Instead of using a photoelectric switch as the heel seat height gauge device, alternatively a holddown device 410 (Figure 12) may be used comprising a pneumatic piston-and-cylinder arrangement 412 having a fixed stroke, and a piston rod 414 of said arrangement constitutes a holddown member for determining a datum position for the heel seat of a shoe supported by the last pin 24. The piston-and-cylinder arrangement 412 is mounted on a bracket 416 carried by a slide member 418 which is in turn mounted for heightwise sliding movement in guideways 420. The guideways 420 are in turn secured to a support plate 422 and spaced therefrom to allow passage of the slide member 418. The support plate 422 is in turn secured on a cross-member 424 forming part of the main frame of the shoe support.

For effecting heightwise movement of the slide 418 a lead screw 426 is threadedly received in a threaded bore formed in the upper end of the slide, and for effecting rotation of the lead screw 426 a stepping motor 428 is provided which is mounted on an upper end of the support plate 422.

For securing the slide member 418, and thus the piston-and-cylinder arrangement 412, in adjusted heightwise position, locking means in the form of a further piston-and-cylinder arrangement 430 is also provided, mounted on a rear face of the support plate 422 and a piston rod 432 thereof extending through an aperture in the support plate and making frictional contact with a rear face of the slide member 418, urging it into frictional engagement with the guideways 420.

For setting the position of the piston-and-cylinder arrangement 412, and thus the datum position of the holddown, appropriate signals are supplied to the stepping motor 428. As in the case also of the stepping motor 74, such signals may be provided in accordance with data which is stored for particular styles of shoes, such data being recalled each time a particular style is selected.

The jack post 22 comprises a post 116 (Figures 3 and 6) on which the slide 28 is mounted for arcuate movement, as referred to above. The post 116 is slidable, in a direction heightwise of the bottom of a shoe supported by it, in a mounting thereof in the form of a casting 118 which is mounted for limited pivotal movement about an axis 120 (Figure 6) extending widthwise of such shoe, as will be referred to hereinafter. For effecting heightwise movement of the post 116 a piston-and-cylinder arrangement 122 is mounted on the bottom end of the casting 118 and a piston rod thereof is operatively connected with the post 116. Also associated with the movement of the post 116 is a linear potentiometer 124 by which the heightwise position of the post 116 in relation to the casting 118 can be monitored. A pneumatically operated bar lock arrangement

generally designated 126 is operable to lock the post 116 in its adjusted heightwise position.

For effecting limited rocking or pivotal movement of the casting 118 on the pivot 120 a piston-and-cylinder arrangement 128 is mounted on the frame of the shoe support 20 and is connected to a rod 130 which is pivotally connected at 132 to the casting 118. The piston-and-cylinder arrangement 128 is double-acting. A further pneumatic bar lock arrangement generally designated 134 acts on the rod 130 to lock it, and thus also the casting 118 and jack post 22, in position in a direction extending lengthwise of the shoe bottom.

The carriage 64 of the toe support 20 is also provided with a bar lock arrangement generally designated 138 (Figure 3). This arrangement comprises a locking plate 140 having an aperture through which the slide rod 78 passes and which is pivotally mounted in a support plate 142, pivotal movement of the locking plate 140 under the influence of a piston-and-cylinder arrangement 144 being effective to lock the plate 140 in relation to the slide rod 78. The support plate 142 is itself mounted in the carriage 64 for limited rocking movement about a pivot 143, the limit being determined by a stop rod (not shown). The effect of this arrangement is that after the bar lock arrangement 138 has been applied and the plate 140 is in locking contact with the slide rod 78, nevertheless the carriage is capable of limited movement, as determined by the stop rod 146, in a direction away from the jack post 22, for a purpose to be described hereinafter.

When a shoe is to be lasted, the operator first places the shoe, which has already been toe-lasted, on the last pin 24 and then urges the shoe towards the plate member 94, the slide 28, and the last pin therewith thus being caused to slide in the shoe-lengthwise direction; in addition the jack post 22, which is at this stage under merely a balancing pressure applied through the piston-and-cylinder arrangement 128 to facilitate this, moves also towards the plate 94. Upon contact between the backseam of the shoe and the plate 94, the inductance switch 98 is actuated and a signal is thus generated in response to which firstly the heel seat height gauge device 110 (or device 410) is moved from an out-of-the-way position into its operative position and in addition pressure fluid is supplied to the piston-and-cylinder arrangement 82 to cause the carriage 64, and thus the toe support 30, to move towards the jack post 22. The arrangement is such that initially fluid under relatively high pressure is applied to the arrangement 82 in order to initiate such movement, whereafter the pressure is reduced, but nevertheless is sufficient to maintain the movement of the carriage. At the stage, furthermore, the blocks 32 are spaced apart.

As the toe support 30 reaches the toe end of the shoe, sides of the toe end are engaged by the blocks 32 and the tip of the toe end of the shoe is engaged beneath the lip 54a of the abutment plate 54, whereupon the latter is rocked anti-clockwise (viewing Figure 3) and a signal is thus generated in response to the con-

sequent actuation of the inductance switch 58. In response to this signal firstly the bar lock arrangement 138 is applied, thus to lock the carriage 64 in position, whereafter fluid pressure is applied to the opposite side of piston-and-cylinder arrangement 82 thus to allow the carriage 64 to retract slightly from the plate member 94, within the constraints of the pivotal movement of the support plate 142. In this way the shoe is maintained in position without its being at this stage forced against the plate 94. In this condition the signal generated in response to actuation of the inductance switch 58 is then effective to cause simultaneously the blocks 32 to move towards one another and also to cause the post 116 of the jack post to rise in response to the application of pressure fluid to piston-and-cylinder arrangement 122. The upward movement of the jack post, which can thus take place without the shoe being forced against the plate 94 and thus being dislodged on its last, is monitored by the device 110 which cooperates with the linear potentiometer 124 to bring the insole on the shoe bottom to the height datum of the shoe support; using the alternative heel seat height gauge device 410, such upward movement of the jack post continues until the heel seat of the shoe insole engages with the holddown 414, now in its advanced position, so that the heel seat of the insole on the shoe bottom is brought to the height datum of the shoe support. This height datum is determined in relation to the previously mentioned wiping plane of the machine. The inward movement of the blocks 32 serves, by reason of the inclined surfaces thereof, to force the shoe toe against the under-side of the lip 54a thereby establishing the toe of the shoe at the desired toe height datum, and at the same time serves to centralise the toe end of the shoe.

In this regard, it should be noted that the machine will have been set up previously according to whether the shoe to be operated upon is a left or a right, and the support block 48 will have been positioned accordingly, as determined by the engagement of the pin 76 with one or other of the lugs 68. Moreover, the heightwise position of the lugs will have been determined according to the style of shoe being operated upon.

At this stage the seat clamp members 100 are moved inwards so that their pads 108 engage and clamp the shoe at the level of the featherline in the region of the heel breast line thereof, and thus centralise it. The device 110 is then retracted. Thereafter the application of fluid pressure to the piston-and-cylinder arrangement 82, to urge the toe support 30 away from the jack post 22, is discontinued and also the bar lock arrangement 44 is applied, locking the blocks 32 in position.

With the shoe thus positioned its length can then be "measured" by the linear potentiometer 84 in readiness for the subsequent lasting operation.

The machine in accordance with the invention also comprises a heel band mechanism generally designated 150 (Figure 7) by which a conventional heel band 152 can be brought into engagement with the heel end

of a shoe supported by the shoe support 20; it will of course be appreciated that in order for this mechanism to engage the heel end of a shoe it will first be necessary to remove the shoe heel end positioning mechanism 86 from engagement with such heel end, for which purpose of course said mechanism is mounted on the frame portion 88 for pivotal movement about the pivot 90 into and out of an operative position as aforesaid.

The heel band mechanism 150 comprises a casting 154 provided with two rearwardly extending lugs 156 by which the casting is mounted on a support rod 158 extending in a direction transversely of the shoe bottom. Mounted on the casting, one at each side thereof, are two bell crank levers 160 forward (i.e. towards the jack post 22) ends of which support wing portions of the heel band 152. Supported between the rearward ends of the levers 160 is a piston-and-cylinder arrangement 162 actuation of which is thus effective to move the forward ends of the levers 160 towards or away from one another, thus to enable the heel end of a shoe to be clamped and subsequently released by the heel band 152.

The support rod 158 is itself supported at its opposite ends by a frame 164 which is mounted for pivotal movement, about an axis 166 extending widthwise of the bottom of a shoe supported by the shoe support, whereby the heel band mechanism 150 can be moved between an operative position, in which it can engage the heel end of a shoe supported by the last pin 24, and an out-of-the-way position. A piston-and-cylinder arrangement 168 is mounted on a stationary portion of the machine frame and is connected to the frame 164 to effect such pivotal movement.

The machine also comprises a wiper mechanism generally designated 170 (Figure 10) which is of generally conventional construction and comprises a wiper head 172 which is slidable towards and away from the jack post 22 under the action of a piston-and-cylinder arrangement (not shown). The wiper head supports a pair of wiper plates 174 which, under the action of a cam plate 176, effect a forward and inward wiping movement over the heel end of a shoe. The wiper head 172 is bodily movable into an operative position, this position being determined by a block 178 engaging a back surface of the heel band 152 and urging the heel band into engagement with the backseam region of the shoe; in this way the wiper head is always positioned in a desired relationship with the heel end of the shoe prior to initiation of the forward and inward wiping movement of the wiper plates. More particularly, the block 178 is mounted on a spigot 180 which is accommodated within the wiper head and spring-urged in a direction away from the jack post, an adjustable stop pin 182 being provided in the block and engaging with a surface of the wiper head thus to determine the position of the block in relation to the wiper head. The block 178 is provided with two wings 178a, at opposite ends thereof, by which it engages and presses on the back surface of the heel band 152 at opposite sides of the backseam region

thereof. It will thus be appreciated that by varying the position of the stop pin 182, the relationship between the initial position of the wipers prior to the start of the forward and inward wiping movement thereof, and thus the amount by which the wiper plates over-wipe the shoe upper, can be pre-set.

It will be appreciated that, because the heel band is, in its final stage of movement, urged into engagement with the heel end of the shoe by the advancing wiper head 172, it moves in a direction which is parallel, or substantially so, to the plane in which the heel seat of the shoe is located, thereby minimising the risk of dislodging the upper on its last, which could of course occur if the band followed an arcuate path into clamping engagement therewith.

After the heel end of the shoe has been engaged by the heel band in the aforementioned manner, actuation of the piston-and-cylinder 162 is effective to close the wings of the heel band 152 under clamping pressure against the sides of the shoe.

The shoe support 20 is provided, in addition to the seat clamp members 100, with two further, auxiliary, side clamp members 184 (Figure 5), mounted, one at each side, on a frame portion of the shoe support and movable into engagement with a shoe supported by the shoe support under the action of piston-and-cylinder arrangements 186. The side clamp members 184, as will be explained later, cooperate with the toe support 30 to maintain the shoe firmly in the shoe support when the seat clamp members 100, which of course form part of the shoe heel end positioning mechanism 86, are retracted prior to the heel band 152 being brought into engagement with the heel end of the shoe.

The machine in accordance with the invention also comprises adhesive-applying means generally designated 190 (Figure 10). Said means 190 comprises two nozzles 192 with each of which is associated a melt chamber 194 and a feed mechanism generally designated 196 (see Figure 1) by which adhesive in rod form can be fed to the melt chambers 194. The feed mechanism 196 in each case is generally as described in GB 2 088 195 and will not be further described here.

The nozzles 192 follow independent paths along marginal portions of opposite sides of the insole, each path being under any suitable control, preferably however under programmed control. The two nozzles are similarly mounted (but on a mirror-opposite basis) and only one will now be described.

Extending along the outside of the main machine frame are two parallel slide rods 198 (Figures 9 and 10) on which a carriage 200 is movable. To this end a stepping motor 202 is effective through a gearbox 203 to drive a drive shaft 204 having drive pulleys 205 at opposite ends thereof. Around each pulley a timing belt 206 is entrained, which is connected to the carriage 200. Idler pulleys 207 are arranged at the opposite ends of the slide rods 198.

Mounted on a bracket 208 (Figure 10) upstanding from the carriage 200, for movement about a pivot 209,

is a lever 210 on which in turn a carrier block 212 is supported. The carrier block 212 supports a stepping motor 214 which drives a ball screw 216 captively supported on blocks 218 secured to the carrier block 212. Operatively connected to the ball screw 216 is a drive block 220 on which a plate 222 is carried for sliding movement along slide rods 224 supported by the carrier block 212. The melt chamber 194 is supported by a bracket 223 on an end portion of the plate 222 and thus is movable in a direction extending transversely of the shoe bottom under the action of the stepping motor 214. In this way, and by reason of the lengthwise movement of the carriage 200 for the nozzle under the action of the stepping motor 200, the nozzle 192 can be caused to track in X and Y directions along the shoe bottom.

In order to accommodate heightwise variation in the shoe bottom contour, the lever 210 is urged about the pivot 209, so as to maintain contact between the nozzle and the shoe bottom, under the action of a piston-and-cylinder arrangement 226 mounted on the carriage 200.

The machine in accordance with the invention still further comprises two side lasting assemblies generally designated 230; these two assemblies are also mirror-opposites and only one will therefore now be described with reference to Figures 9 and 11. Each side lasting roller is mounted in a bearing 234 and is driven through a system of belts and pulleys generally designated 236 by a motor 238. The parts of the assembly 230 just described are all mounted on a support plate 240, itself mounted for pivotal movement, about an axis 242, on a casting 244. For effecting such pivotal movement a gear segment 246, having a centre of curvature at the pivot 242, is mounted on the plate 240 and meshes with a drive pulley 248 which is driven, through a further system of timing belts and gears generally designated 250, from an output shaft of a stepping motor 252 mounted on the casting 244. It will thus be appreciated that the stepping motor 252 controls the angle of tilt of the lasting roller about the axis 242, whereby the roller can accommodate to the widthwise contour of the shoe bottom being operated upon.

The casting 244 is itself mounted for pivotal movement on stub shafts 254 extending inwardly of lugs 256 formed on a carrier block 258 which is itself carried on a further shaft 260 supported at opposite ends by lugs 262 formed on the carriage 200. Also mounted on the shaft 260, between the lugs 262, is a mounting 263 for a piston-and-cylinder arrangement 264 by which the casting 244 is urged in such a direction that the lasting roller is held against the shoe bottom as it is caused to operate progressively therealong.

The machine further comprises means for effecting pivotal movement of the carrier block 258 about the shaft 260, said means comprising two piston-and-cylinder arrangements 266, 268 which are mounted on the carriage 200 and are caused to act upon a plate 270 secured to an inwardly directed arm 272 integral with the carrier block 258. The piston-and-cylinder arrangement 266 is generally actuated so that its piston rod is

fully extended and in this case the lasting roller is held with its tip at or adjacent the longitudinal centre line of the shoe support 20, as shown in full line in Figure 11. In this condition the piston rod of the piston-and-cylinder arrangement 268 is at an intermediate position such that it can be either further extended or fully retracted when the piston-and-cylinder arrangement 266 is de-actuated. In this way, the piston-and-cylinder arrangement 268 is effective to cause pivotal movement of the carrier block 258 which results in the lasting roller being either urged over, i.e. beyond, the longitudinal centre line of the shoe support 20 (in the case of extension of the piston rod of the arrangement 268), as shown in chain-dot line in Figure 11, or being withdrawn from adjacent said longitudinal centre line (in the case of retraction of said piston rod). It will of course be appreciated that the two lasting rollers must be actuated together so that as one is moved beyond the longitudinal centre line the other is withdrawn and vice versa, in order to avoid collision. The purpose of this so-called "shogging" movement is to enable the lasting rolls to track along opposite marginal portions of the shoe bottom which are not symmetrical along the longitudinal centre line of the shoe support, and indeed one of which may, especially toward the end, cross such longitudinal centre line.

It will be recalled that the casting 188 of the jack post 22 is mounted for limited pivotal movement about the axis 120. The axis 120 is in the form of a pivot pin which is itself mounted on a lever 300 (Figure 6) which can rock about a pivot 302 secured to a stationary frame portion of the machine. The opposite end of the lever 300 provides an abutment surface against which a piston rod 304 of a diaphragm-type piston-and-cylinder arrangement 306 can act, the arrangement 306 also being mounted on a stationary frame portion of the machine. In this way, as will be referred to hereinafter, bedding pressure may be applied to the heel seat of a shoe supported on the last pin 24.

In using the machine described above, with a shoe supported by the shoe support 20 the machine cycle is initiated whereby firstly the side clamp members 184 are moved inwardly against the shoe upon actuation of piston-and-cylinder arrangements 186. At the same time, the nozzles 192 of the adhesive-applying means 190 move downwardly into engagement with the insole of the shoe toewardly of the backseam region thereof by the action of piston-and-cylinder arrangements 226, and thereafter they are moved heelwardly by the action of the stepping motor 202, acting on the carriages 200. At this stage the nozzles are closely adjacent one another so that they move to a position in the region of the backseam and adjacent the insole edge. If the lasting margin has previously been in-flanged, then the nozzles move beneath such in-flanged portion. In this position the feed mechanisms 196 for the adhesive are initiated so that adhesive is then applied from the nozzles to the insole and, under the influence of stepping motors 214 and stepping motor 202, the nozzles are

caused to move along a predetermined path which is preferably parallel to the insole edge thus to apply adhesive from the backseam region of the shoe bottom toewardly up to the previously lasted toe portion of the shoe.

The path may be controlled by any conventional means. For example, and indeed preferably, the path of the nozzles has previously been digitised, in terms of coordinate axis values which are directly then applicable to the stepping motors referred to; conveniently the paths are reversible for left and right shoes and in addition, according to the length of shoe as measured by the linear potentiometer 84, the paths are graded.

At this stage the rollers 232, which are still held out of engagement with the shoe bottom, are caused to begin rotation under the action of motors 238 and, when the nozzles have moved forwards from the heel breast line region of the shoe bottom by a distance more or less equal to the spacing between the nozzles and the rollers (approximately 75 mm in the machine described above), they are moved downwardly under the action of piston-and-cylinder arrangements 264 and engage the lasting marginal portions of the shoe upper. By reason of the rotation of the lasting rollers 232 as described above, furthermore, the helical rib arrangement 294 of each effects an inwiping movement on such lasted marginal portion at the point of engagement and also presses said lasting marginal portion against a corresponding marginal portion of the insole, thus causing the two marginal portions to be bonded together by the previously applied adhesive.

Although at each side of the machine the nozzle and side lasting roller are mounted on a common carriage, namely the carriage 200, nevertheless they are capable of independent widthwise movement and indeed heightwise movement, so that both can track along the shoe bottom and indeed their operating path can be terminated independently. When a programmed control is provided, the boundary of the previously toe-lasted portions of the shoe bottom can be "taught" and thus it can be ensured that both the nozzles and thereafter the rollers are lifted off when such boundary region has been traversed. Moreover, the cement feed mechanisms 196 are switched off some 20 to 30 mm from the taught position, so that there is no excess of adhesive at the termination of the nozzle path, and in addition, the feed mechanisms 196 are so arranged that following such switching off they can reverse the feed of the adhesive rod, thereby effectively causing adhesive to be sucked back from the end of the nozzle, thereby avoiding drooling or other detrimental deposition of cement when not required.

Once the rollers 232 have engaged the shoe bottom, the shoe heel end positioning mechanism 86 can be moved to its out-of-the-way position without the shoe becoming destabilised; the shoe is of course at this stage held by the side clamping members 184 and by the toe support 30, as well as benefiting from the stabilising effect of the downward pressure applied by the

rollers themselves. Once the shoe heel end positioning mechanism 86 is removed, the heel band mechanism 150 is moved about its axis 166 to a position closely adjacent the heel end of the shoe, but stopping short of engagement therewith. In this condition, the wiper head 172 of the wiper mechanism 170 is advanced, the block 178 engaging with its wings 178a the back of the heel band 152 and urging it in that region against the shoe. In this way the wiper head 172 is positioned correctly in accordance with the heel end of the shoe; moreover, the last part of the heel band movement is thus parallel with the shoe bottom, thereby avoiding any tendency (which could have arisen with a purely arcuate movement of the heel band) to dislodge the heel end of the shoe on its last. The wings of the heel band 152 are then urged into embracing engagement with the heel end of the shoe under the action of piston-and-cylinder arrangement 162, whereupon the side clamping members 184 can be retracted.

With the shoe thus clamped the bar lock arrangement 126, by which the post 116 of the jack post 22 is held in its heightwise position, is released and an upward yielding pressure is applied by the piston-and-cylinder arrangement 122, the wiper plates 174 then being moved inwardly to wipe the lasting marginal portions in the heel seat region of the shoe over and press them against corresponding marginal portions of the insole, while said upward yielding pressure remains applied. (It will of course be appreciated that at this stage the bar lock arrangement 138, by which the toe support 30 is held in its operative position remains applied).

With the wiper plates 174 in their inwiped position, the bar lock 126 is re-applied thus to lock the post 116 in relation to the casting 118, and bedding pressure is then applied through the composite unit of post and casting 116, 118 from the diaphragm piston-and-cylinder arrangement 206 acting through the lever 200; this bedding pressure thus urges the shoe upwardly against the under-side of the wiper plates 174. Bedding pressure remains applied according to the time required for ensuring a consolidated bond between the in-wiped lasting marginal portions and the corresponding marginal portions of the insole.

At the end of this dwell time the bedding pressure is relieved and the wiper head 172 is retracted, the wiper plates 174 retracting within the wiper head 172, the heel band 152 is released, and at the same time the abutment plate/datum 54 and the blocks 32 are retracted to release the toe end of the shoe. The heel band mechanism 150 is then caused to pivot about the axis 166 to its out-of-the-way position and the shoe can then be removed from the operating locality of the machine. Thereafter the shoe heel end positioning mechanism 86 can be returned to such operating locality in readiness for the next shoe to be operated upon, and at this time also the post 116 of the jackpost 22 moves back to its loading position.

It should also be noted that after the wiper head 172

has been retracted as described above, the carriage 200 for the nozzles 192 and side lasting assemblies 230 can be retracted and returned to their initial positions in readiness for a next cycle of operation of the machine.

Whereas in the machine just described the position of the heel end of the shoe is determined by the shoe heel end positioning mechanism 86, in other machines in accordance with the invention the heel band mechanism 150 may instead be used for this function, in which case the plate 94 would be dispensed with and the heel seat height gauge device 110 would be mounted in an alternative manner, e.g. on the casting 154 of the heel band mechanism.

Claims

1. Machine for lasting side and heel seat portions of shoes comprising

a shoe support (20) for supporting, bottom up, a shoe comprising a shoe upper on a last and an insole on the last bottom, said shoe support (20) also having a heel seat height gauge device (110;410') whereby the height of the bottom of such shoe in the heel seat region thereof can be set, ,
two side lasting assemblies (230) arranged one at each side of the shoe support (20),
a heel seat wiper mechanism (170) comprising a pair of wiper plates (174), and
a heel band mechanism (150) for clamping the heel end of such shoe prior to the operation of the heel seat wiper mechanism (170),

wherein the shoe support (20) comprises

a last pin (24) for receiving the last pin hole of a shoe last, and
a toe support (30) for supporting the toe end of a shoe supported by the last pin (24),

characterised in that the shoe support further comprises a shoe heel end positioning mechanism (86) comprising

a datum member (94) engageable by the heel end of a shoe supported by the last pin (24) for positioning said heel end in a direction extending lengthwise of the shoe, said shoe heel end positioning mechanism (86) and the heel band mechanism (150) are each movable between an operative and an out-of-the-way position, the arrangement being such that in the operation of the machine the shoe heel end positioning mechanism (86) is first brought to its operative position, thus to set the lengthwise and heightwise positions of a shoe supported by the last pin (24) as aforesaid, whereafter said mechanism (86) is moved to its out-of-the-

way position and the heel band mechanism (150) is moved to its operative position, thus to clamp the heel end of said shoe in said positions.

2. Machine according to Claim 1 characterised in that the toe support (30) is movable heightwise whereby in cooperation with the shoe heel end positioning mechanism (86) to enable the heel seat of the bottom of a shoe supported by the last pin (24) to be accommodated in a desired plane.

3. Machine according to Claim 2 characterised in that n.c. motor means (52) is provided for effecting heightwise movement of the toe support (30) as aforesaid.

4. Machine according to any one of the preceding Claims characterised in that the toe support (30) is movable in a direction transversely of a shoe supported by the last pin (24) to accommodate to both left and right shoes, characterised in that adjustable abutments (68) are provided for limiting such transverse movement in both directions, and in that means (74), including an n.c. motor (74), is provided for setting the position of the abutments (68) according to the style of shoe to be operated upon.

5. Machine according to any one of the preceding Claims characterised in that the datum member (94) of the shoe heel end positioning mechanism (86) comprises a plate member (94) engageable by the heel end of a shoe supported by the last pin (24) and movable into and out of an operative position, means being provided for resiliently urging it out of such position, characterised in that the datum member (94) is effective, when moved into its operative position, to actuate a switch (98) whereby a signal is generated in response to which the toe support (30) is moved in a direction towards the datum member (94), and in that the toe support (30) comprises a shoe toe-engaging member (54) also movable into and out of an operative position and being resiliently urged out of said position, said toe-engaging member (54), when in its operative position, actuating a switch (58) by which a signal is generated in response to which the movement of the toe support (30) is terminated.

6. Machine according to Claim 5 characterised in that the toe support (30) comprises two members (32) having inwardly directed inclined faces and being movable equidistantly towards and away from one another thus to provide a generally V-shaped support for the toe end of a shoe supported by the last pin (24),

and wherein a toe height datum member (54a) is provided, formed integral with the toe-engaging member (54), against the under-side of which (54a) the bottom of such shoe in the toe region thereof is urged by the movement towards one another of said members (32), the arrangement being such that the toe end of the shoe is thus positioned heightwise and also held between said datum member (54a) and the V-shaped support provided by the two members (32),

characterised in that the signal in response to which movement of the toe support (30) is terminated is also effective to initiate the inward movement of the two members (32) providing the V-shaped support and also to cause the setting of the heightwise position of the heel seat of the shoe to be initiated.

7. Machine according to any one of the preceding Claims characterised in that auxiliary clamp means (184) is provided co-operable with the toe support (30) and last pin (24) to maintain the shoe in its position set by the shoe heel end positioning mechanism (86) when the latter (86) is moved to its out-of-the-way position and prior to the heel band mechanism (150) being moved into clamping engagement with the heel end of the shoe.

8. Machine according to any one of the preceding Claims characterised in that the height gauge device (110) is constituted by a photoelectric switch ("range finder") arrangement (110) and the heel seat of the shoe is positioned at the desired heightwise position by effecting heightwise movement of the last pin (24).

9. Machine according to any one of Claims 1 to 7 characterised in that the height gauge device (410) comprises a holddown a heel seat height gauge device (110;410') whereby the height of the bottom of such shoe in the heel seat region thereof can be set, (414) engageable with the heel seat of a shoe supported by the last pin (24), means (122) being provided for effecting heightwise movement of the last pin (24) towards and away from the holddown (414),

and further wherein the holddown (414) is movable between an advanced position, in which it sets said datum position of the heel seat of such shoe heel seat, and a retracted position, characterised in that, for effecting movement of the holddown (414) between its advanced and retracted positions, a piston-and-cylinder arrangement (412) is provided having a fixed stroke, said arrangement (412) being itself mounted for bodily adjusting movement towards and away from the last pin (24), thus to vary said datum position.

10. Machine according to Claim 9 characterised in that an n.c. motor (428) is provided for effecting bodily

adjusting movement of said arrangement (412),
and thus of the holddown (414).

Patentansprüche

1. Maschine zum Zwicken der Seiten- und Fersenbodenabschnitte von Schuhen, die

eine Schuhstütze (20) umfaßt, um einen mit der Unterseite nach oben gekehrten Schuh mit einem Schuhenschaft auf einem Leisten und einer Brandsohle an der Leistenunterseite zu stützen, wobei die genannte Schuhstütze (20) auch eine Einrichtung zum Einstellen der Fersenbodenhöhe (110; 140) umfaßt, durch welche die Höhe des Bodens eines solchen Schuhs im Bereich des Fersenbodens eingestellt werden kann, zwei Seitenzwickvorrichtungen (230), von denen eine an jeder Seite der Schuhstütze (20) angebracht ist, eine Fersenboden-Schereneinrichtung (170), die ein Paar Scherenplatten (174) umfaßt und eine Fersensatteleinrichtung (150), um die Ferse eines solchen Schuhs vor der Betätigung der Fersenboden-Schereneinrichtung (170) festzuklemmen,

wobei die Schuhstütze (20)

einen Leistenstift (24) umfaßt, um die Leistenstiftbohrung eines Schuhleisters aufzunehmen und eine Spitzenauflage (30), um die Spitze eines vom Leistenstift (24) getragenen Schuhs zu stützen

dadurch gekennzeichnet, daß die Schuhstütze weiterhin eine Schuhfersen-Positioniereinrichtung (86) umfaßt, welche

ein Referenzelement (94) beinhaltet, an dem die Ferse eines durch den Leistenstift (24) gestützten Schuhs anschlagen kann, um die genannte Ferse in einer sich längs zum Schuh erstreckenden Richtung zu positionieren, wobei die genannte Schuhfersen-Positioniereinrichtung (86) und die Fersensatteleinrichtung (150) jeweils zwischen einer Arbeitsposition und einer Position, in der sie aus dem Weg sind, bewegt werden können, und die Anordnung derart ist, daß beim Betrieb der Maschine die Schuhfersen-Positioniereinrichtung (86) zunächst in ihre Arbeitsposition gebracht wird, um so die Längsposition und die höhenmäßige Position eines wie zuvor erwähnt durch den Leistenstift (24) gestützten Schuhs einzustellen, und danach die genannte Einrichtung (86) in ihre Position, in der sie aus dem

Weg ist, und die Fersensatteleinrichtung (150) in ihre Arbeitsposition bewegt werden, um so die Ferse des genannten Schuhs in den genannten Positionen festzuklemmen.

2. Maschine gemäß Anspruch 1, dadurch gekennzeichnet, daß die Schuhstütze (30) höhenmäßig bewegt werden kann, um dadurch in Zusammenwirkung mit der Schuhfersen-Positioniereinrichtung (86) zu ermöglichen, daß der Fersenboden eines durch den Leistenstift (24) gestützten Schuhs in einer gewünschten Ebene untergebracht werden kann.
3. Maschine gemäß Anspruch 2, dadurch gekennzeichnet, daß eine NC-Motor-Einrichtung (52) zur Verfügung steht, um eine höhenmäßige Bewegung der Spitzenauflage (30) wie zuvor erwähnt zu bewirken.
4. Maschine gemäß einem der vorstehenden Ansprüche, dadurch gekennzeichnet, daß die Spitzenauflage (30) in eine Richtung quer zu einem durch den Leistenstift (24) gestützten Schuh bewegt werden kann, um sowohl linke, als auch rechte Schuhe aufnehmen zu können, dadurch gekennzeichnet, daß einstellbare Widerlager (68) zur Verfügung stehen, um eine solche Querbewegung in beide Richtungen zu begrenzen, und dadurch, daß eine Einrichtung (74) einschließlich eines NC-Motors (74) zur Verfügung steht, um die Position der Widerlager (68) entsprechend der zu bearbeitenden Leistenform einzustellen.
5. Maschine gemäß einem der vorstehenden Ansprüche, dadurch gekennzeichnet, daß das Referenzelement (94) der Schuhfersen-Positioniereinrichtung (86) ein Plattenelement (94) umfaßt, an dem die Ferse eines durch den Leistenstift (24) gestützten Schuhs anschlagen, und das in eine Arbeitsposition hinein und aus einer Arbeitsposition heraus bewegt werden kann, wobei eine Einrichtung zur Verfügung steht, um es federnd aus einer solchen Position heraus zu drücken, dadurch gekennzeichnet, daß das Referenzelement (94), wenn es in seine Arbeitsposition hinein bewegt wird, einen Schalter (98) betätigt, durch welchen ein Signal erzeugt wird, aufgrunddessen die Spitzenauflage (30) in eine Richtung zum Referenzelement (94) hin bewegt wird, und dadurch, daß die Spitzenauflage (30) ein an der Schuhspitze angreifendes Element (54) umfaßt, das auch in eine Arbeitsposition hinein und aus einer Arbeitsposition heraus bewegt werden und federnd aus der genannten Position heraus

gedrückt werden kann, wobei das genannte an der Spitze angreifende Element (54), wenn es in seiner Arbeitsposition ist, einen Schalter (58) betätigt, durch den ein Signal erzeugt wird, auf Grund dessen die Bewegung der Spitzenauflage (30) beendet wird. 5

6. Maschine gemäß Anspruch 5,

dadurch gekennzeichnet, daß die Spitzenauflage (30) zwei Elemente (32) umfaßt, die nach innen zeigend geneigte Oberflächen haben und um die gleiche Strecke zueinander hin und voneinander weg bewegt werden können, um so eine allgemein V-förmige Auflage für die Spitze eines durch den Leistenstift (24) gestützten Schuhs zu bilden, 10 15

und bei der weiterhin ein Spitzenhöhen-Referenzelement (54a) zur Verfügung steht, welches in dem an der Spitze anschlagenden Element (54) integriert ist, gegen dessen Unterseite, durch die Bewegung der genannten Elemente (32) zueinander hin, der Boden eines solchen Schuhs im Bereich der Spitze gedrückt wird, wobei die Anordnung derart ist, daß die Spitze des Schuhs somit höhenmäßig positioniert und auch zwischen dem genannten Referenzelement (54a) und der durch die zwei Elemente (32) gebildeten V-förmigen Auflage gehalten wird, 20 25

dadurch gekennzeichnet, daß das Signal, auf Grund dessen die Bewegung der Spitzenauflage (30) beendet wird, auch bewirkt, daß die Bewegung nach innen der zwei Elemente (32), welche die V-förmige Auflage bilden, und auch die Einstellung der höhenmäßigen Position des Fersenbodens des Schuhs ausgelöst wird. 30 35

7. Maschine gemäß einem der vorstehenden Ansprüche,

dadurch gekennzeichnet, eine Hilfs-Klemmeinrichtung (184) zur Verfügung steht, die mit der Spitzenauflage (30) und dem Leistenstift (24) zusammenwirkt, um den Schuh in seiner durch die Schuhfersen-Positioniereinrichtung (86) eingestellten Position zu halten, wenn letztere (86) in ihre Position, in der sie aus dem Weg ist, bewegt wird und bevor die Fersenatteleinrichtung (150) in Kontakt mit der Ferse des Schuhs gebracht wird, um diesen festzuklemmen. 40 45

8. Maschine gemäß einem der vorstehenden Ansprüche,

dadurch gekennzeichnet, daß die Meßvorrichtung für die Höhe des Fersenbodens (110) durch eine photoelektrische Schalter-Vorrichtung ("Entfernungsmesser") gebildet wird und der Fersenboden des Schuhs durch Bewirken einer höhenmäßigen Bewegung des Leistenstifts (24) in der gewünschten höhenmäßigen Position positioniert wird. 50 55

9. Maschine gemäß einem der Ansprüche 1 bis 7,

dadurch gekennzeichnet, daß die Höheneinstelleinrichtung (410) einen Niederhalter (414) umfaßt, eine Meßvorrichtung für die Höhe des Fersenbodens (110; 410'), durch welche die Höhe des Bodens eines solchen Schuhs im Bereich des Fersenbodens eingestellt werden kann, welcher (414) am Fersenboden eines durch den Leistenstift (24) gestützten Schuhs anschlagen kann, wobei eine Einrichtung (122) zur Verfügung steht, um eine höhenmäßige Bewegung des Leistenstifts (24) zum Niederhalter (414) hin und vom Niederhalter (414) weg zu bewirken, 5

und bei welcher weiterhin der Niederhalter (414) zwischen einer vorgeschobenen Position, in welcher er die genannte Referenzposition des Fersenbodens eines solchen Schuhs einstellt, und einer zurückgezogenen Position bewegt werden kann, dadurch gekennzeichnet, daß zum Bewirken der Bewegung des 10

Niederhalters (414) zwischen seiner vorgeschobenen und seiner zurückgezogenen Position eine Kolben- und Zylinder-Vorrichtung (412) mit einem feststehenden Hub zur Verfügung steht, wobei die genannte Vorrichtung (412) selbst so angebracht ist, daß eine körperliche Einstellbewegung zum Leistenstift (24) hin und vom Leistenstift (24) weg stattfinden kann um so die genannte Referenzposition zu verändern. 15 20 25 30

10. Maschine gemäß Anspruch 9,

dadurch gekennzeichnet, daß ein NC-Motor (428) zur Verfügung steht, um die körperliche Einstellbewegung der genannten Vorrichtung (412) und somit des Niederhalters (414) zu bewirken. 35

Revendications

1. Machine à monter les portions de flanc et d'emboîtement de chaussures, comprenant

un support (20) de chaussure pour supporter, sa partie inférieure tournée vers le haut, une chaussure comprenant une tige de chaussure sur une forme et une première sur la partie inférieure de la forme, ledit support (20) de chaussure possédant également un dispositif d'évaluation de la hauteur de l'emboîtement (110 ; 410') grâce auquel on peut régler la hauteur de la partie inférieure d'une telle chaussure dans la région d'emboîtement de celle-ci, deux assemblages (230) de montage des flancs disposés de part et d'autre du support (20) de chaussure, un mécanisme (170) de galbage d'emboîtement comprenant une paire de porte-plaques (174), et un mécanisme (150) de plaque de rabattage destiné à serrer l'extrémité de talon d'une telle

chaussure avant la mise en service du mécanisme (170) de galbage d'emboîtement,

dans laquelle le support (20) de chaussure comprend

une broche de forme (24) destinée à recevoir le trou de broche de forme d'une forme de chaussure, et

un support (30) de bout destiné à supporter l'extrémité de bout d'une chaussure supportée par la broche de forme (24),

caractérisée en ce que le support de chaussure comprend en outre un mécanisme (86) de positionnement de l'extrémité de talon d'une chaussure comprenant

un membre de repère (94) avec lequel peut se mettre en prise l'extrémité de talon d'une chaussure supportée par la broche de forme (24) pour positionner ladite extrémité de talon dans une direction s'étendant dans le sens de la longueur de la chaussure, ledit mécanisme (86) de positionnement d'extrémité de talon de chaussure et le mécanisme (150) de plaque de rabattage peuvent chacun se déplacer entre une position de travail et une position à l'écart, l'agencement étant tel que lors de la mise en service de la machine, le mécanisme (86) de positionnement d'extrémité de talon de chaussure est tout d'abord amené à sa position de travail, pour ainsi régler les positions en longueur et en hauteur d'une chaussure supportée par la broche de forme (24) comme susmentionné, après quoi on déplace ledit mécanisme (86) jusqu'à sa position à l'écart et on déplace le mécanisme (150) de plaque de rabattage jusqu'à sa position de travail, pour ainsi serrer l'extrémité de talon de ladite chaussure dans lesdites positions.

2. Machine selon la revendication 1, caractérisée en ce qu'on peut déplacer en hauteur le support (30) de bout, grâce à quoi on peut accueillir dans un plan souhaité, en coopération avec le mécanisme (86) de positionnement d'extrémité de talon de chaussure, l'emboîtement de la partie inférieure d'une chaussure supportée par la broche de forme (24).

3. Machine selon la revendication 2, caractérisée en ce qu'on prévoit un moyen de moteur à commande numérique (52) servant à opérer le déplacement en hauteur du support (30) de bout comme susmentionné.

4. Machine selon une revendication précédente, caractérisée en ce qu'on peut déplacer le support

(30) de bout dans une direction transversale par rapport à une chaussure supportée par la broche de forme (24) afin d'accueillir à la fois des pieds droits et gauches,

caractérisée en ce qu'on prévoit des butées réglables (68) destinées à limiter un tel déplacement transversal dans les deux sens,

et en ce qu'on prévoit un moyen (74), comportant un moteur à commande numérique (74), destiné à régler la position des butées (68) selon le style de la chaussure sur laquelle on va travailler.

5. Machine selon l'une quelconque des revendications précédentes, caractérisée en ce que le membre de repère (94) du mécanisme (86) de positionnement d'extrémité de talon de chaussure est constitué d'un membre de plateau (94) avec lequel peut se mettre en prise l'extrémité de talon d'une chaussure supportée par la broche de forme (24) et qui peut se déplacer dans et hors d'une position de travail, un moyen étant prévu pour le pousser à la manière d'un ressort hors d'une telle position, caractérisée en ce que le membre de repère (94) opère, lorsqu'il est déplacé dans sa position de travail, pour actionner un interrupteur (98) grâce auquel on produit un signal en réponse auquel on déplace le support (30) de bout dans un sens en direction du membre de repère (94), et en ce que le support (30) de bout comprend un membre (54) de mise en prise du bout de chaussure que l'on peut également déplacer dans et hors d'une position de travail et que l'on pousse à la manière d'un ressort hors de ladite position, ledit membre (54) de mise en prise du bout, lorsqu'il est dans sa position de travail, actionnant un interrupteur (58) grâce auquel on produit un signal en réponse auquel le déplacement du support (30) de bout se termine.

6. Machine selon la revendication 5, caractérisée en ce que le support (30) de bout est constitué de deux membres (32) présentant des faces inclinées dirigées vers l'intérieur et pouvant se déplacer de manière équidistante l'un vers l'autre et inversement pour ainsi produire un support généralement en forme de V pour l'extrémité de bout d'une chaussure supportée par la broche de forme (24), et dans laquelle on prévoit un membre (54a) de repère de hauteur de bout, formé de manière intégrale avec le membre (54) de mise en prise de bout, et contre le dessous duquel (54a) on pousse par le déplacement l'un vers l'autre desdits membres (32) la partie inférieure de cette chaussure dans la région de bout de celle-ci, l'agencement étant tel qu'on positionne ainsi en hauteur l'extrémité de bout de la chaussure et qu'on la maintient en outre entre ledit membre de repère (54a) et le support en forme de V formé par les deux membres (32),

caractérisée en ce que le signal en réponse auquel se termine le déplacement du support (30) de bout opère également pour amorcer le mouvement vers l'intérieur des deux membres (32) formant le support en forme de V et également pour provoquer l'amorce du réglage dans la position en hauteur de l'emboîtement de la chaussure.

(412) un mouvement d'ajustement en bloc, et ainsi au dispositif de maintien (414).

7. Machine selon l'une quelconque des revendications précédentes, caractérisée en ce qu'on prévoit un moyen (184) de pince auxiliaire pouvant coopérer avec le support (30) de bout et la broche de forme (24) afin de maintenir la chaussure dans sa position réglée par le mécanisme (86) de positionnement d'extrémité de talon de chaussure lorsqu'on déplace celui-ci (86) dans sa position à l'écart et avant de déplacer le mécanisme (150) de plaque de rabattage en prise serrante avec l'extrémité de talon de la chaussure.
8. Machine selon l'une quelconque des revendications précédentes, caractérisée en ce que le dispositif d'évaluation de hauteur (110) est constitué par un agencement (110) à interrupteur photoélectrique ("télémètre") et l'emboîtement de la chaussure est positionné à la position souhaitée en hauteur en faisant effectuer à la broche de forme (24) un mouvement en hauteur.
9. Machine selon l'une quelconque des revendications 1 à 7, caractérisée en ce que le dispositif (410) d'évaluation de hauteur comprend un dispositif de maintien, un dispositif d'évaluation de hauteur d'emboîtement (110 ; 410') grâce auquel on peut régler la hauteur de la partie inférieure de cette chaussure dans la région d'emboîtement de celle-ci (414), pouvant se mettre en prise avec l'emboîtement d'une chaussure supportée par la broche de forme (24), un moyen (122) étant prévu pour faire effectuer à la broche de forme (24) un mouvement en hauteur en direction et à l'écart du dispositif de maintien (414), et en outre dans laquelle on peut déplacer le dispositif de maintien (414) entre une position avancée, dans laquelle il règle ladite position de repère de l'emboîtement d'une telle chaussure, et une position rétractée, caractérisée en ce que, pour faire effectuer au dispositif de maintien (414) un déplacement entre ses positions avancée et rétractée, on prévoit un agencement (412) à piston-cylindre à course fixe, ledit agencement (412) étant lui-même monté pour effectuer un mouvement d'ajustement en bloc en direction et à l'écart de la broche de forme (24), pour ainsi faire varier ladite position de repère.
10. Machine selon la revendication 9, caractérisée en ce qu'on prévoit un moteur à commande numérique (428) servant à faire effectuer audit agencement

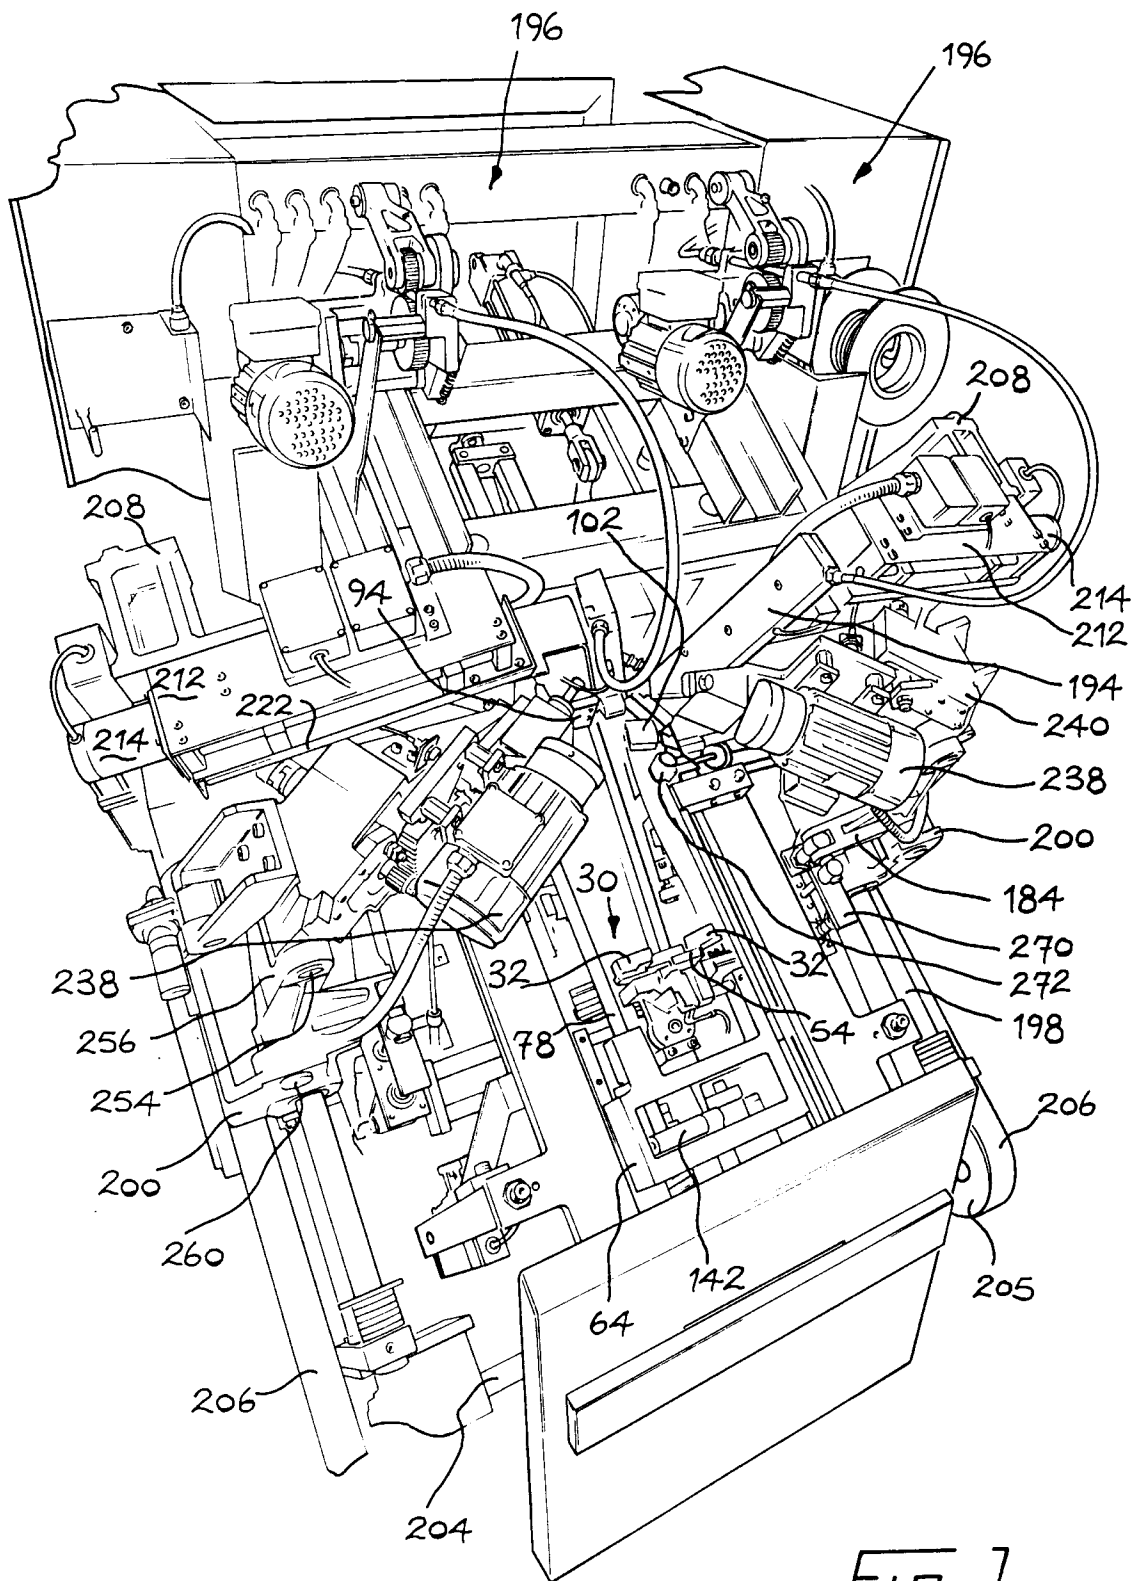


Fig. 1

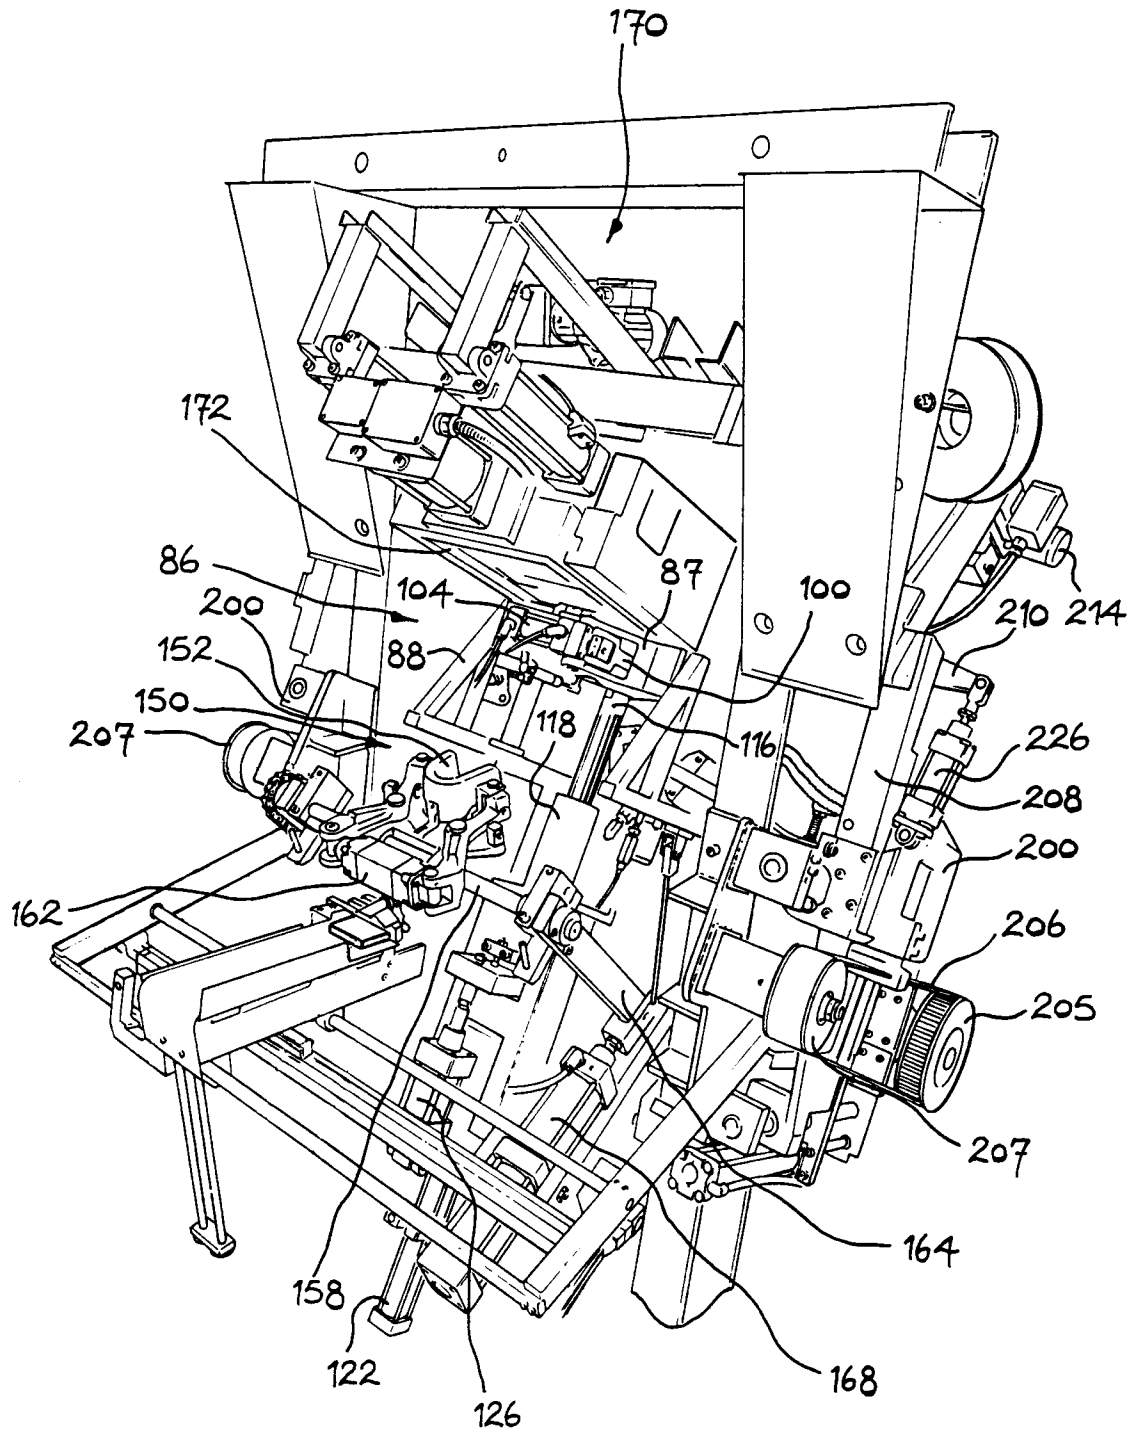
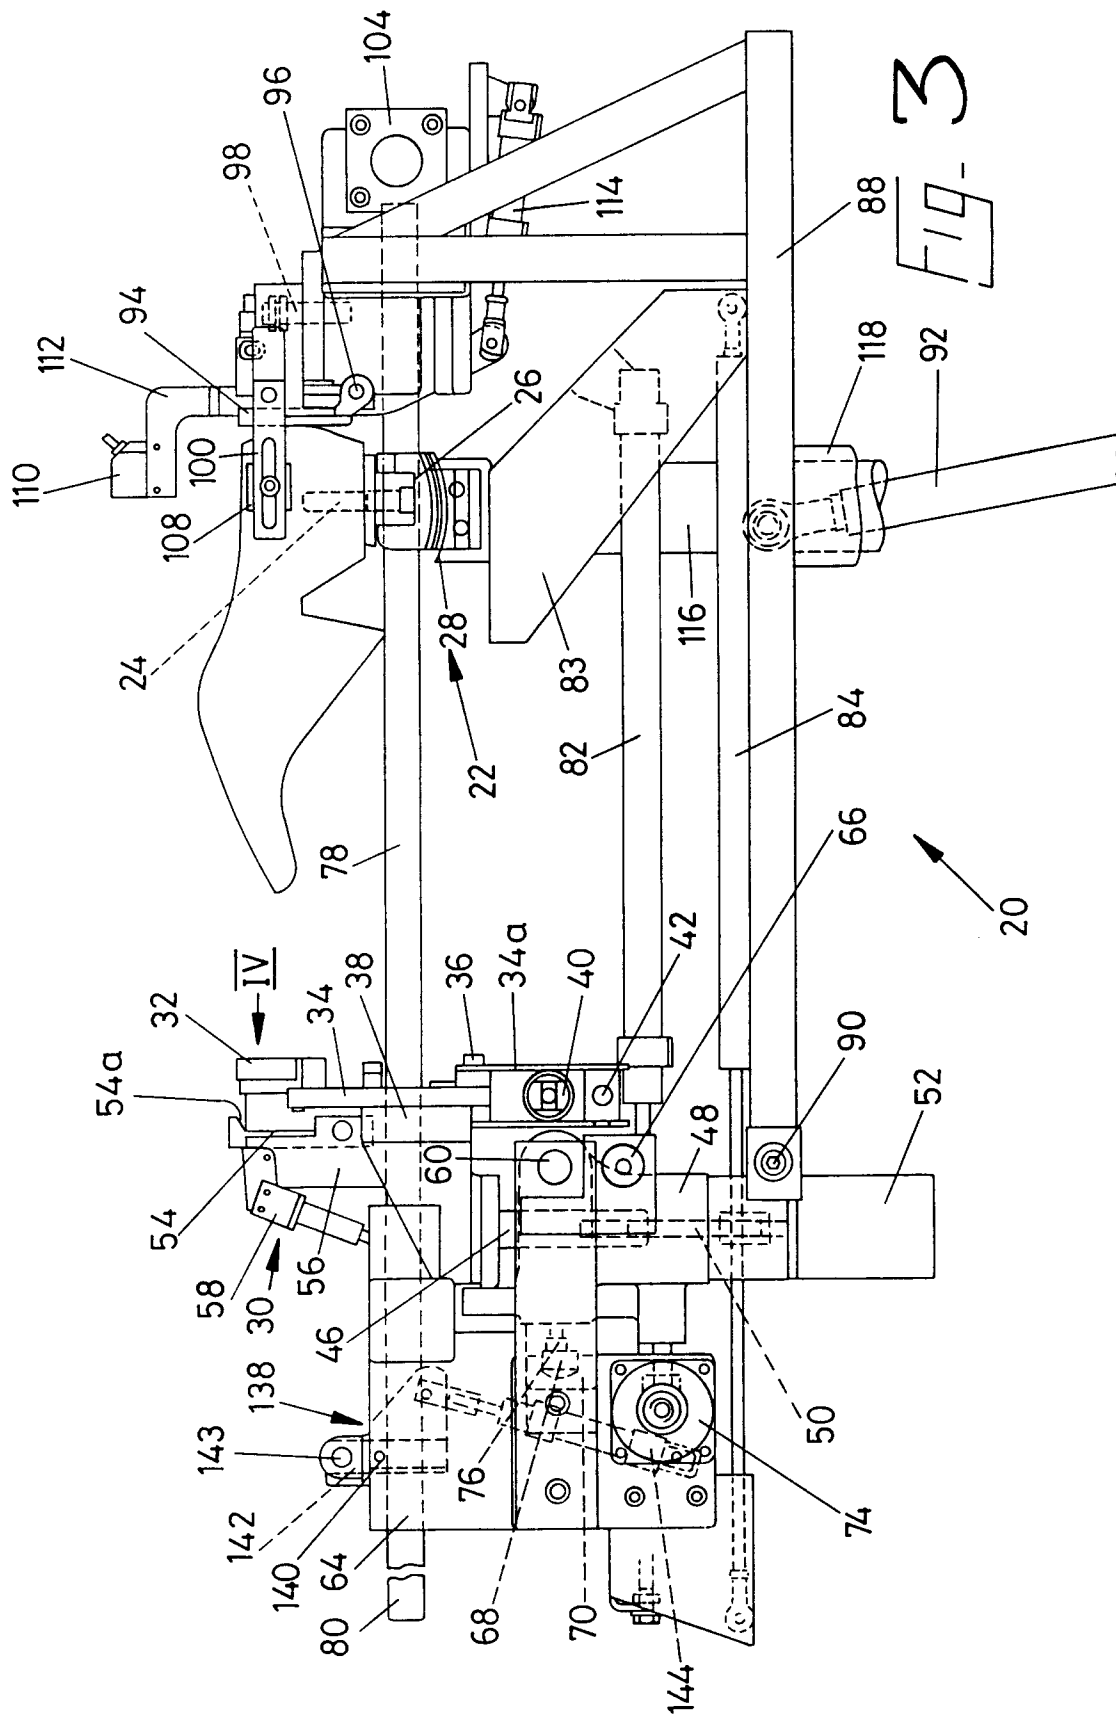
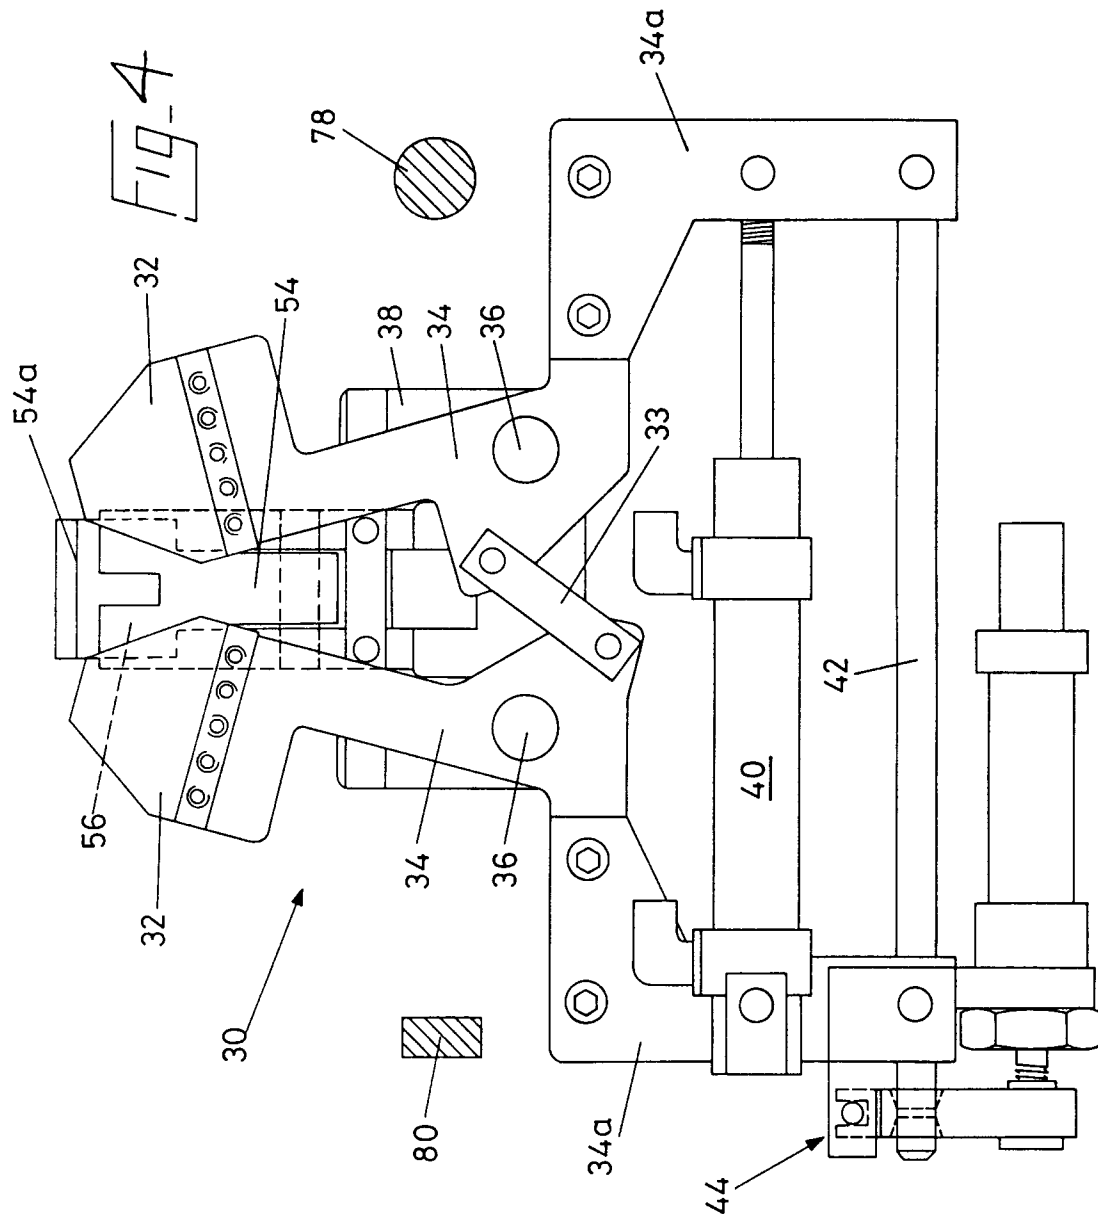


Fig-2





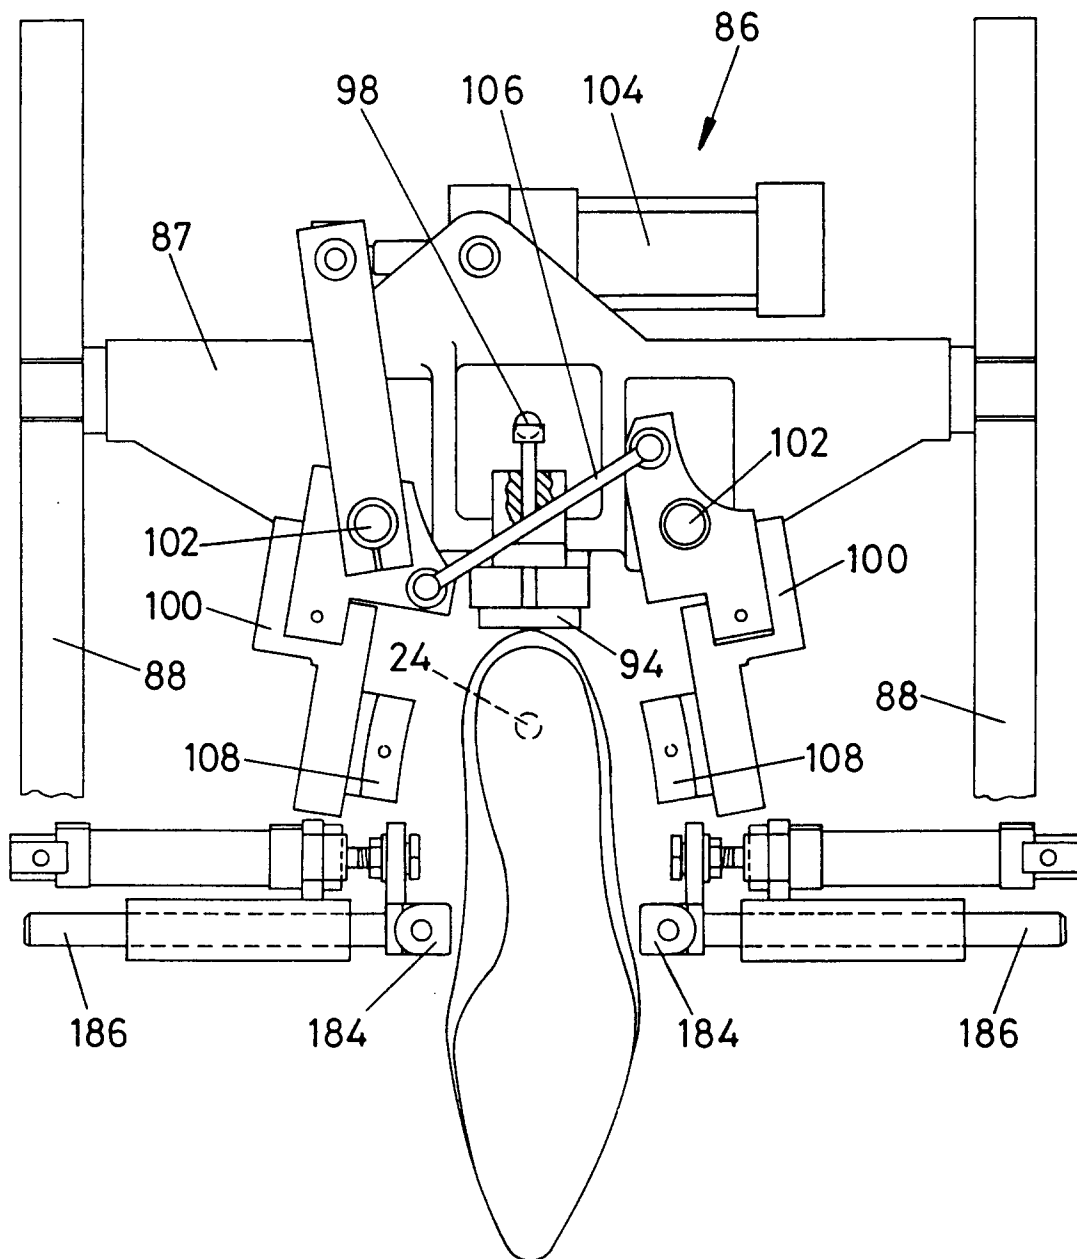


Fig. 5

