

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 2013276280 B2

(54) Title
Railway rail fastening clip and pad for recessed railseats

(51) International Patent Classification(s)
E01B 9/30 (2006.01) **E01B 9/68** (2006.01)

(21) Application No: **2013276280** (22) Date of Filing: **2013.04.23**

(87) WIPO No: **WO13/186520**

(30) Priority Data

(31) Number **1210365.1** (32) Date **2012.06.12** (33) Country **GB**

(43) Publication Date: **2013.12.19**

(44) Accepted Journal Date: **2016.10.13**

(71) Applicant(s)
Pandrol Limited

(72) Inventor(s)
Gardner, Christopher;Cox, Stephen John

(74) Agent / Attorney
Cullens Pty Ltd, Level 32 239 George Street, Brisbane, QLD, 4000

(56) Related Art
WO 1993/012296
GB 2235003
DE 102004033724
GB 2211231

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2013/186520 A3

(43) International Publication Date
19 December 2013 (19.12.2013)

WIPO | PCT

(51) International Patent Classification:
E01B 9/30 (2006.01) *E01B 9/68* (2006.01)

(21) International Application Number:
PCT/GB2013/051024

(22) International Filing Date:
23 April 2013 (23.04.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1210365.1 12 June 2012 (12.06.2012) GB

(71) Applicant: PANDROL LIMITED [GB/GB]; 63 Station Road, Addlestone Surrey KT15 2AR (GB).

(72) Inventors: GARDNER, Christopher; 1 Scofton Close, Gateford, Worksop Nottinghamshire S81 7SG (GB). COX, Stephen John; 5 Selwyn Avenue, Richmond Surrey TW9 2HB (GB).

(74) Agent: FENLON, Christine Lesley; 5th Floor, Lincoln House, 300 High Holborn, London Greater London WC1V 7JH (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(88) Date of publication of the international search report:

13 March 2014

(54) Title: RAILWAY RAIL FASTENING CLIP AND PAD FOR RECESSED RAILSEATS

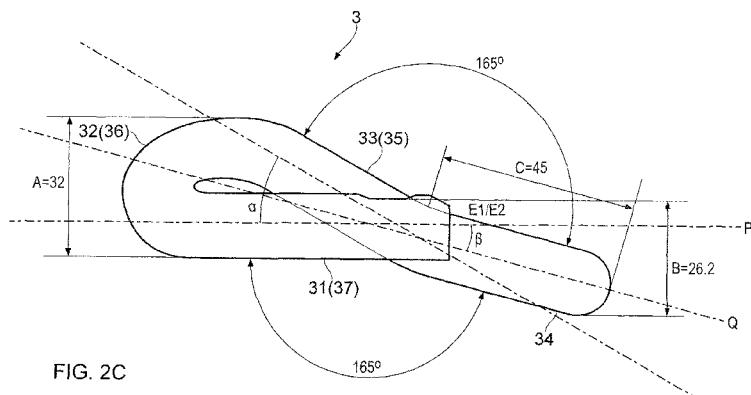


FIG. 2C

(57) Abstract: A resilient railway rail fastening clip (3) has successive first to seventh portions (31 to 37) where, when the clip (3) is in a non-operative configuration, the first and seventh portions (31, 37) of the clip (3) form leg portions which lie in a first plane (P), the second and sixth portions extend substantially away from and above the first plane (P), at least parts of the third and fifth portions (33, 35) extend towards and above the first plane (P) such that the longitudinal axes of the third and fifth portions (33, 35) lie substantially in a second plane (R), different from the said first plane (P), which second plane (R) intersects the first plane (P) at a first acute angle α , and the fourth portion (34) extends substantially in or below the said first plane (P) such that the longitudinal axis of the fourth portion (34) lies substantially in a third plane (Q) which is different to the said second plane (R) and intersects the said first plane (P) at a second acute angle β , where $0^\circ < \beta < \alpha$.

WO 2013/186520 A3

RAILWAY RAIL FASTENING CLIP AND PAD FOR RECESSED RAILSEATS

The present invention relates to a railway rail fastening clip and railway rail pad for recessed railseats.

5

A recessed railseat is a transverse recess (channel) in the top surface of a concrete railway sleeper for receiving the foot of a railway rail. Respective railway rail clip anchoring devices (shoulders) are provided on either side 10 of the recess for retaining resilient railway rail fastening clips which bear on the rail foot. An example of such a rail fastening clip is known from GB1510224, which is a clip of the type which is driven onto the rail foot in a direction parallel to the longitudinal axis of the rail.

15

Railway rail fastening clips are known, for example from EP0619852A as shown in Figure 1A and EP1987201A as shown in Figure 1B, which are designed to be driven onto a rail foot laterally with respect to the longitudinal axis of the 20 rail. One advantage of such clips is that they can be driven more readily by automatic machinery. One type of automatic clip driving machinery has paddles which are set at a certain height such that as they sweep they come into contact with the rear arches (heel) of the clip but do not 25 touch the sleeper surface or any part of the anchoring device.

It is desirable to provide a railway rail fastening clip of a type which can be driven laterally by the afore-mentioned 30 type of automatic clip driving machinery onto a railway rail seated in a recessed railseat.

According to an embodiment of a first aspect of the present invention there is provided a resilient railway rail fastening clip for fastening a railway rail to an underlying foundation, the clip being such that it can be

5 deflected from a non-operative configuration to at least one operative configuration in which a toe portion of the clip bears on a railway rail, the clip being made from a rod of resilient material shaped so as to have, proceeding from one end of the rod to the other end of the rod,

10 firstly a substantially straight first portion, then a substantially bent second portion, then a third portion, then a fourth portion which is substantially U-shaped and forms the toe portion of the clip, then a fifth portion, then a substantially bent sixth portion, and finally a

15 substantially straight seventh portion, the first and seventh portions of the clip forming leg portions, the longitudinal axes of which lie substantially in a first plane when the clip is in its non-operative configuration and, when the clip is viewed in a direction perpendicular

20 to the said first plane, the third and fifth portions appear to lie between the first and seventh portions, wherein, when the clip is in its non-operative configuration, the second and sixth portions extend substantially away from and above the first plane and at

25 least parts of the third and fifth portions extend towards and above the first plane such that the longitudinal axes of the third and fifth portions lie substantially in a second plane, different from the said first plane, which second plane intersects the first plane at a first acute angle α , and the fourth portion extends substantially in or

30 below the said first plane such that the longitudinal axis of the fourth portion lies substantially in a third plane which is different to the said second plane and intersects

the said first plane at a second acute angle β , where $0^\circ \leq \beta < \alpha$.

5 In one embodiment of the clip, substantially all parts of the third and fifth portions extend towards and above the first plane.

In a preferred embodiment of the clip, $15^\circ \leq \alpha \leq 45^\circ$ and $0^\circ < \beta \leq 20^\circ$, such that $0^\circ \leq \beta < \alpha$.

10

By virtue of its shape, a clip embodying the first aspect of the present invention can be used to fasten a rail located in a recessed rail seat and is capable of being driven laterally onto the rail foot by the aforementioned 15 automatic machinery.

When a rail is seated in a recessed railseat the edges of the rail foot bear against respective electrically-insulating wear pieces (sidepost insulators) that typically 20 extend along the entire length of the channel, that is across the whole width of the sleeper surface. The sidepost insulators usually comprise members of L-shaped section, one part of the L sitting on the top surface of the sleeper and the other part of the L extending down a 25 side wall of the railseat recess towards the floor of the railseat recess. A railway rail pad, comprising a plate of resilient material for providing cushioning between the rail foot and the underlying sleeper, is provided on the floor of the railseat recess, usually such that ends of the 30 sidepost insulators are located beneath the pad.

Some recessed railseats are provided with pads which have a trough-like structure in which upstanding portions of

electrically insulating material, which serve as sidepost insulators for insulating the anchoring device from the rail, are attached to a railseat portion along its entire length so as to form a channel. However, such pads can be 5 subject to the problem of longitudinal migration, i.e. the pad moves along the sleeper surface as the rail above moves under the passage of rail traffic.

A different form of rail cushioning pad is known from 10 EP1987201A in which the railseat portion of the pad is integrally formed, along central parts of its opposite edges, with sidepost insulators. The pad has parts connected to corners of the railseat portion which extend laterally therefrom to provide ears between which a recess 15 for receiving the front part of an anchoring device is defined. The ears are provided in order to overcome the problem of longitudinal migration of the pad. However, owing to the ears, such a pad cannot be used in a recessed railseat.

20

It is desirable to provide a rail pad with integral sidepost insulators which can be used in a recessed railseat.

25 According to an embodiment of a second aspect of the present invention there is provided a rail pad for use, as cushioning and/or electrical insulation, beneath a foot of a railway rail in a recess formed in an upper surface of a rail foundation, the pad having a major face forming a 30 railseat portion on which the foot of the railway rail sits when the rail pad is in use, the railseat portion having opposite side edges to at least part of each of which an upstanding portion of the pad is connected, each upstanding

portion being connected to the railseat portion along the entire length of the upstanding portion and extending upwardly therefrom, wherein the pad does not have any part which extends laterally from the railseat portion in the 5 same plane as the railseat portion, and wherein each upstanding portion is connected to at least one projection of the pad which extends laterally from the upstanding portion such that it is vertically spaced from, and does not overhang, the rail seat portion, the said projection 10 extending along only part of the length of the upstanding portion at a location along the length of the upstanding portion which is spaced from ends thereof.

The projection on each upstanding portion serves to prevent 15 longitudinal movement of the pad in the recess by interlocking with a corresponding opening in the front part of the railway rail anchoring device located adjacent to the recess.

20 There may be two or more such projections, spaced apart along the length of the upstanding portion.

Concrete erosion, caused by water carrying grit, is a problem at the pad/sleeper interface. As the upper surface 25 of the rail foot is inclined, water falling on the rail foot rolls down the upper surfaces of the rail foot into the small gaps between the rail edge and the front face of the sidepost insulator; water will also flow off of the top surface of the sleeper into the gaps between the rail edges 30 and sidepost insulators (especially if the rail track is also canted). If, as is typically the case, there is no seal between the sidepost insulators and the rail pad, such water, and any grit it is carrying, can penetrate down the

side of the pad to the concrete sleeper surface and be drawn in under the pad. Rail pads need to be replaced regularly as part of the normal track maintenance program, but significant erosion of the concrete sleeper surface can 5 usually be addressed only by expensive repair or replacement of the sleeper.

The afore-mentioned trough-shaped rail pads, by virtue of the fact that the sidepost insulators are sealed to the 10 railseat portion of the pad, prevent water which has rolled down between the rail foot edge and the front face of the side post from reaching the sleeper/pad interface beneath the rail. However, water falling on the top of the sleeper and flowing back down towards the rail is able to drop down 15 between the edge of the recess and the back face of the sidepost insulator, and make its way down onto the concrete surface beneath the pad, potentially causing erosion.

With a view to overcoming this problem, a rail pad embodying the second aspect of the present invention 20 preferably further comprises cover portions connected to, and extending laterally from, each upstanding portion at locations along its length. In such a rail pad the cover portions serve to cover the gaps between the side edges of the pad and the side walls of the sleeper recess, thereby 25 diverting water away.

In one embodiment the upstanding portion may be connected along its entire length to either a projection or a cover portion. In this case, at least one cover portion which is 30 located immediately adjacent to a projection is provided with a notch for receiving part of a railway rail anchoring device.

Alternatively, a rail pad embodying the invention has a gap between at least one cover portion and one of the projections located immediately adjacent thereto for receiving part of a railway rail anchoring device.

5

Upper surfaces of the said projections may be higher with respect to the rail seat portion than upper surfaces of the said cover portions.

10 According to an embodiment of a third aspect of the present invention there is provided apparatus comprising a rail pad embodying the second aspect of the present invention and a railway rail foundation having an upper surface formed with a recess providing a seat for a railway rail, respective
15 railway rail clip anchoring devices being attached to the rail foundation on opposite sides of the recess, the front part of each anchoring device having an opening, wherein, when the railseat portion of the pad is located in the recess, the projections of the rail pad project into the
20 openings.

In one embodiment of the apparatus, front parts of the anchoring devices are spaced from edges of the recess.

25 Reference will now be made to the accompanying drawings in which:

Figures 1A and 1B show respective prior art railway rail fastening clips;

30

Figures 2A, 2B and 2C show respective plan, front elevational and side elevational views of a railway rail

fastening clip embodying the first aspect of the present invention;

Figures 3A, 3B and 3C show perspective, plan and front 5 elevational views of a rail pad embodying the second aspect of the present invention;

Figure 4 shows apparatus embodying the third aspect of the present invention, in which a rail pad embodying the second 10 aspect of the present invention is located in a recessed railseat; and

Figure 5 shows an assembly comprising railway rail fastening clips embodying the first aspect of the present 15 invention together with apparatus embodying the third aspect of the present invention.

Figures 2A to 2C show a resilient railway rail fastening clip 3 for fastening a railway rail to an underlying 20 foundation, the clip being such that, through driving the clip into a suitable railway rail clip anchoring device, it can be deflected from a non-operative (unstressed) configuration to at least one operative (stressed) configuration in which a toe portion 34 of the clip 3 bears 25 on a railway rail.

The clip 3 has successive first to seventh portions 31 to 37 where, when the clip 3 is in a non-operative configuration, the first and seventh portions 31, 37 of the 30 clip 3 form leg portions which lie in a first plane P, the second and sixth portions extend substantially away from and above the first plane P, at least parts of the third and fifth portions 33, 35 extend towards and above the

first plane P such that the longitudinal axes of the third and fifth portions 33, 35 lie substantially in a second plane R, different from the said first plane P, which second plane R intersects the first plane P at a first acute angle α , and the fourth portion 34 extends substantially in or below the said first plane P such that the longitudinal axis of the fourth portion 34 lies substantially in a third plane Q which is different to the said second plane R and intersects the said first plane P at a second acute angle β , where $0^\circ \leq \beta < \alpha$.

In particular, the clip 3 is made from a rod of resilient material shaped so as to have, proceeding from one end E1 of the rod to the other end E2 of the rod, firstly a substantially straight first portion 31, then a substantially bent second portion 32, then a third portion 33, then a fourth portion 34 which is substantially U-shaped and forms the toe portion of the clip, then a fifth portion 35, then a substantially bent sixth portion 36, and finally a substantially straight seventh portion 37, the first and seventh portions 31, 37 of the clip 3 forming leg portions for engaging a railway rail clip anchoring device 5 (see Figures 4 and 5) and the second and sixth portions 32, 36 forming rear arches which provide the heel portions of the clip. The longitudinal axes of the first and seventh portions lie substantially in a first plane P when the clip 3 is in its non-operative configuration and, when the clip 3 is viewed in a direction perpendicular to the said first plane P, the third and fifth portions 33, 35 (centre body) appear to lie between the first and seventh portions 31, 37 and the fourth portion extends beyond the ends E1 and E2 of the rod. When the clip 3 is in its non-operative configuration, as shown in Figures 2A to 2C, the

second and sixth portions extend substantially away from and above the first plane P and the third and fifth portions 33, 35 extend substantially towards and above the first plane P such that the longitudinal axes of the third 5 and fifth portions 33, 35 lie substantially in a second plane R, different from the said first plane P, which second plane R intersects the first plane P at a first acute angle α , and the fourth portion 34 extends substantially below the said first plane P such that the 10 longitudinal axis of the fourth portion 34 lies substantially in a third plane Q which is different to the said second plane R. In this embodiment the third plane Q is also different from the first plane P. The third plane Q intersects the said first plane P at a second acute angle 15 β which is smaller than the said first acute angle α .

Taking the first plane P of the leg portions 31, 37 as a datum, the rear arches (heel portion) 32, 36 of the clip 3 first rise up to provide sufficient height at the back of 20 the clip 3 to allow for driving of the clip 3 onto the rail 2 (see Figure 5). The centre body 33, 35 of the clip 3 then descends steeply, but then bends back up, such that the toe portion that is driven onto the rail 2 is much more nearly horizontal when in the operating position. The shape of the 25 clip permits the clip to be used with a rail located in a recessed railseat, whilst reducing the risk of the clip stalling (becoming stuck) or a toe insulator 6 carried by the toe of the clip (shown in Figure 5) being damaged as the clip is driven onto the rail.

30

In the embodiment described above substantially all of the third and fifth portions 33, 35 extend above the first plane P, but in other embodiments of the clip 3 the third

and fifth portions 33, 35 may extend partially through the first plane P.

For a clip made of a rod of 15mm diameter, typical
5 dimensions A and B for the new clip are 32 mm and 26 mm respectively, whereas for the clip of Figure 1A these dimensions are typically 30 mm and 10 mm respectively and for the clip of Figure 1B these dimensions are typically 14 mm and 14.5 mm respectively.

10

Dimension C in the new clip is 45mm.

In the embodiment shown the second and sixth portions 32, 36 (rear arches) of the clip typically have a diameter of
15 about 18.5mm. In other embodiments of the clip this diameter may be between about 12mm to 24mm.

In an embodiment of the clip 3 the obtuse angle between the first plane P and the third plane Q is approximately 165°
20 and the obtuse angle between the second plane R and the third plane Q is approximately 165°. Thus in this embodiment the second acute angle β is approximately 15° and the first acute angle α is approximately 30°.

25 In other embodiments of the clip, the first acute angle α may be within the range 15° to 45° and the second acute angle β may be within the range 0° to 20°, providing $\alpha > \beta$. An increase in angle α is desirably accompanied by a proportionate decrease in the angle β . For example, when α
30 is around 45°, β may be around 0°. In the case that β is 0°, the third plane Q lies in the first plane P, such that the first and third planes, P and Q, are the same, or, if the third and fifth portions 33, 35 extend partially

through the first plane P, the third plane Q is a plane lying parallel to but below the first plane P.

Detents are provided in upper surfaces of the clip legs 31,
5 37, adjacent to the ends E1, E2, for engaging with corresponding projections on an anchoring device, whereby the clip can be held in a pre-assembly position in which it is retained by the anchoring device but does not bear on the rail. At the ends E1, E2, a chamfer is provided for
10 assisting the driving of the clip into an anchoring device.

Figures 3A to 3C show a rail pad 4 with integral sideposts for use in a recessed railseat, in which projections from the sideposts can overlap the surface of the sleeper
15 adjacent to the recess to resist ingress of water and debris. The pad is suitable for use with a resilient rail fastening clip, such as that of Figure 2, which is configured to be driven onto and off the rail foot in a lateral direction with respect to the longitudinal axis of
20 the rail. Rail pad 4 has a major face 41 providing a rail seat portion 42 on which the foot of the railway rail sits when the rail pad 4 is in use. The rail seat portion has opposite side edges 43 to at least part of each of which an upstanding portion 44 of the pad is connected. Each
25 upstanding portion 44 is connected to the railseat portion 42 along the entire length of the upstanding portion 44 and extends upwardly therefrom. That is, all parts of the pad 4 connected to the railseat portion 42 extend substantially perpendicular thereto. Unlike the prior art pads, no part
30 of the pad 4 is connected to the railseat portion 42 so as to extend laterally therefrom. Instead, each upstanding portion 44 is connected to at two projections 45A; 45B of the pad 4 each of which extends laterally from the

upstanding portion 44 such that it is vertically spaced from, and does not overhang (i.e. extends away from), the rail seat portion 42. The projections 45A, 45B extend from upper edges of the upstanding portions 44. The projections 5 45A, 45B are spaced apart along the length of the upstanding portion 44 and extend along only part of the length of the upstanding portion 44 at a location along the length of the upstanding portion 44 which is spaced from ends 44a thereof. In this embodiment the projections 45A, 10 45B are centrally located with respect to the ends 44a of the upstanding portions 44.

The rail pad further comprises cover portions 46A, 46B, 46C connected to, and extending laterally from, each upstanding 15 portion 44 at locations along its length such that the upstanding portion 44 is connected along its entire length to either a projection 45A, 45B or a cover portion 46A, 46B, 46C. The projections 45A and 45B and the cover portion 46B which adjoins them could be regarded as forming a 20 single projection. Cover portions 46A, 46C are provided with a notch 46A', 46C' for receiving part of a railway rail anchoring device 5.

In an alternative embodiment (not shown), instead of the 25 notches 46A', 46C', gaps are provided between the cover portions 46A, 46C and the projections 45A, 45B located immediately adjacent thereto for receiving part of a railway rail anchoring device, in order to accommodate an anchoring device having parts which extend up to the edge 30 of the recess.

In the embodiment shown, upper surfaces 451A, 451B of the projections 45A, 45B are higher with respect to the rail

seat portion 42 than upper surfaces 461A, 461B, 461C of the cover portions 46A, 46B, 46C, such that there is more material, and hence strength, in the projections 45A, 45B.

5 Figure 4 shows apparatus comprising a rail pad 4 as shown in Figures 3A to 3C and a railway rail foundation 1 having an upper surface 1A formed with a recess 10 providing a seat for a railway rail 2 (see Figure 5). The rail pad 4 is located within the recess 10 such that the upstanding portions 44 of the pad 4 abut respective walls of the recess 10 and extend to the height of the walls of the recess 10. The projections 45A, 45B of the upstanding portions 44 extend over part of the upper surface 1A of the rail foundation 1. Lower surfaces of the cover portions 10 46A to 46C contact the upper surface 1A of the sleeper 1 so as to provide a seal against the ingress of water and/or debris. In this embodiment, respective railway rail clip anchoring devices 5 are attached to the rail foundation 1 on opposite sides of the recess 4 such that front parts 50 15 of the anchoring devices 5 are spaced from edges of the recess 10 (although as mentioned above in an alternative embodiment the front parts 50 may extend up to the edge of the recess 10). The front part 50 of each anchoring device 5 has an opening 51, and the projections 45A, 45B of the rail pad 4 project into the openings 51, such that contact 20 between the projections 45A, 45B and internal surfaces of the opening resists longitudinal movement of the pad.

25 It is to be clearly understood that mere reference herein to any previous or existing devices, apparatus, products, systems, methods, practices, publications or to any other information, or to any problems or issues, does not constitute an acknowledgement or admission that any of

those things, whether individually or in any combination, formed part of the common general knowledge of those skilled in the field, or that they are admissible prior art.

5

In the present specification and claims (if any), the word 'comprising' and its derivatives including 'comprises' and 'comprise' include each of the stated integers but does not exclude the inclusion of one or more further integers.

10

Reference throughout this specification to 'one embodiment' or 'an embodiment' means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the present invention. Thus, the appearance of the phrases 'in one embodiment' or 'in an embodiment' in various places throughout this specification are not necessarily all referring to the same embodiment. Furthermore, the particular features, structures, or characteristics may be combined in any suitable manner in one or more combinations.

20

In compliance with the statute, the invention has been described in language more or less specific to structural or methodical features. It is to be understood that the invention is not limited to specific features shown or described since the means herein described comprises preferred forms of putting the invention into effect. The invention is, therefore, claimed in any of its forms or modifications within the proper scope of the appended claims (if any) appropriately interpreted by those skilled in the art.

CLAIMS

1. A resilient railway rail fastening clip for fastening a railway rail to an underlying foundation, the clip being
5 such that it can be deflected from a non-operative configuration to at least one operative configuration in which a toe portion of the clip can bear on a railway rail, the clip being made from a rod of resilient material shaped so as to have, proceeding from one end of the rod to the
10 other end of the rod, firstly a substantially straight first portion, then a substantially bent second portion, then a third portion, then a fourth portion which is substantially U-shaped and forms the toe portion of the clip, then a fifth portion, then a substantially bent sixth
15 portion, and finally a substantially straight seventh portion, the first and seventh portions of the clip forming leg portions, the longitudinal axes of which lie substantially in a first plane when the clip is in its non-operative configuration, the third and fifth portions lying
20 between the first and seventh portions, wherein, when the clip is in its non-operative configuration, the second and sixth portions extend substantially away from and above the first plane and at least parts of the third and fifth portions extend towards and above the first plane such that
25 the longitudinal axes of the third and fifth portions lie substantially in a second plane, different from the said first plane, which second plane intersects the first plane at a first acute angle α , and the fourth portion extends substantially in or below the said first plane such that
30 the longitudinal axis of the fourth portion lies substantially in a third plane which is different to the said second plane and intersects the said first plane at a second acute angle β , where $0^\circ \leq \beta < \alpha$.

2. A clip as claimed in claim 1, wherein substantially all parts of the third and fifth portions extend towards and above the first plane.

5

3. A clip as claimed in claim 1 or 2, wherein $0^\circ < \beta \leq 20^\circ$.

4. A clip as claimed in claim 1, 2 or 3, wherein $15^\circ \leq \alpha \leq 45^\circ$.

10 5. A rail pad for use, as cushioning and/or electrical insulation, beneath a foot of a railway rail in a recess formed in an upper surface of a rail foundation between railway rail clip anchoring devices, the pad having a major face forming a railseat portion on which the foot of the
15 railway rail sits when the rail pad is in use, the railseat portion having opposite side edges to at least part of each of which an upstanding portion of the pad is connected, each upstanding portion being connected to the railseat portion along the entire length of the upstanding portion
20 and extending upwardly therefrom, wherein the pad does not have any part which extends laterally from the railseat portion in the same plane as the railseat portion, and wherein each upstanding portion is connected to at least one projection of the pad which extends laterally from the
25 upstanding portion such that it is vertically spaced from, and does not overhang, the rail seat portion, the said projection extending along only part of the length of the upstanding portion at a location along the length of the upstanding portion which is spaced from ends thereof, such
30 that the projection is configured to interlock with a corresponding opening in a front part of one of the railway rail clip anchoring devices.

6. A rail pad as claimed in claim 5, wherein there are two such projections, spaced apart along the length of the upstanding portion.
- 5 7. A rail pad as claimed in claim 5 or 6, further comprising cover portions connected to, and extending laterally from, each upstanding portion at locations along its length.
- 10 8. A rail pad as claimed in claim 7, wherein the upstanding portion is connected along its entire length to either a projection or a cover portion.
- 15 9. A rail pad as claimed in claim 7 or 8, wherein at least one cover portion which is located immediately adjacent to one of the projections is provided with a notch for receiving part of a railway rail anchoring device.
- 20 10. A rail pad as claimed in claim 7, wherein there is a gap between at least one cover portion and one of the projections located immediately adjacent thereto for receiving part of a railway rail anchoring device.
- 25 11. A rail pad as claimed in any one of claims 7 to 10, wherein upper surfaces of the said projections are higher with respect to the rail seat portion than upper surfaces of the said cover portions.
- 30 12. Apparatus comprising a rail pad as claimed in any one of claims 5 to 11 and a railway rail foundation having an upper surface formed with a recess providing a seat for a railway rail, respective railway rail clip anchoring devices being attached to the rail foundation on opposite

sides of the recess, the front part of each anchoring device having an opening, wherein, when the railseat portion of the pad is located in the recess, the projections of the rail pad project into the openings.

5

13. Apparatus as claimed in claim 12, wherein the rail pad is a pad as claimed in any one of claims 5 to 9, or claim 11 when read as appended to any one of claims 5 to 9, and front parts of the anchoring devices are spaced from edges 10 of the recess.

1/6

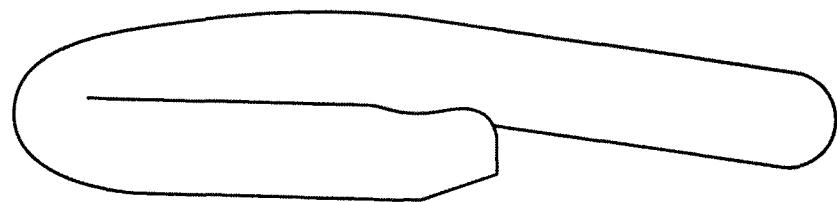


FIG. 1A

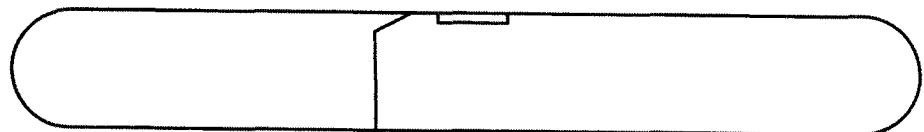


FIG. 1B

2/6

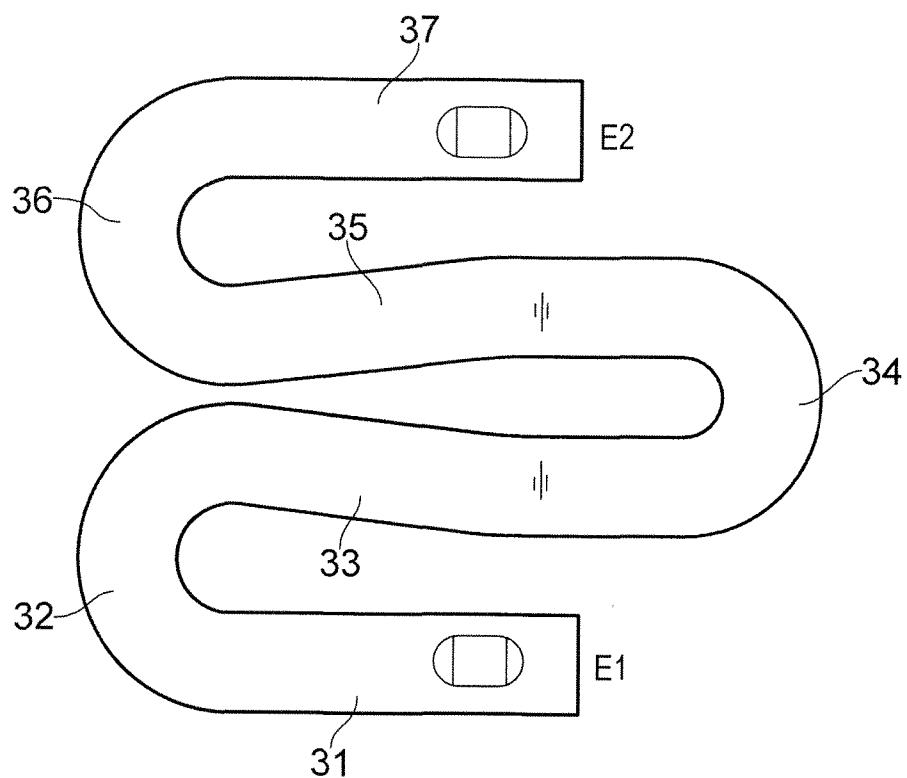


FIG. 2A

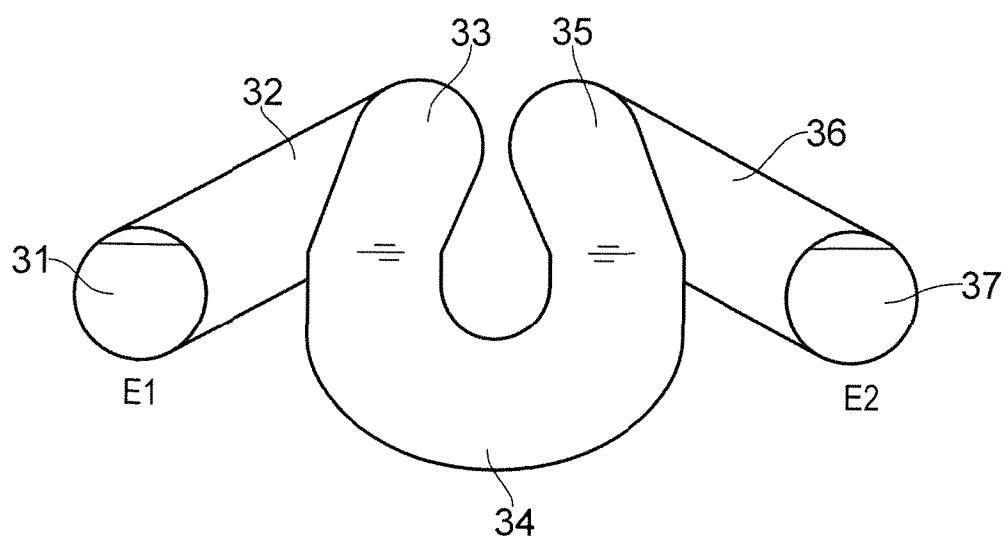


FIG. 2B

3/6

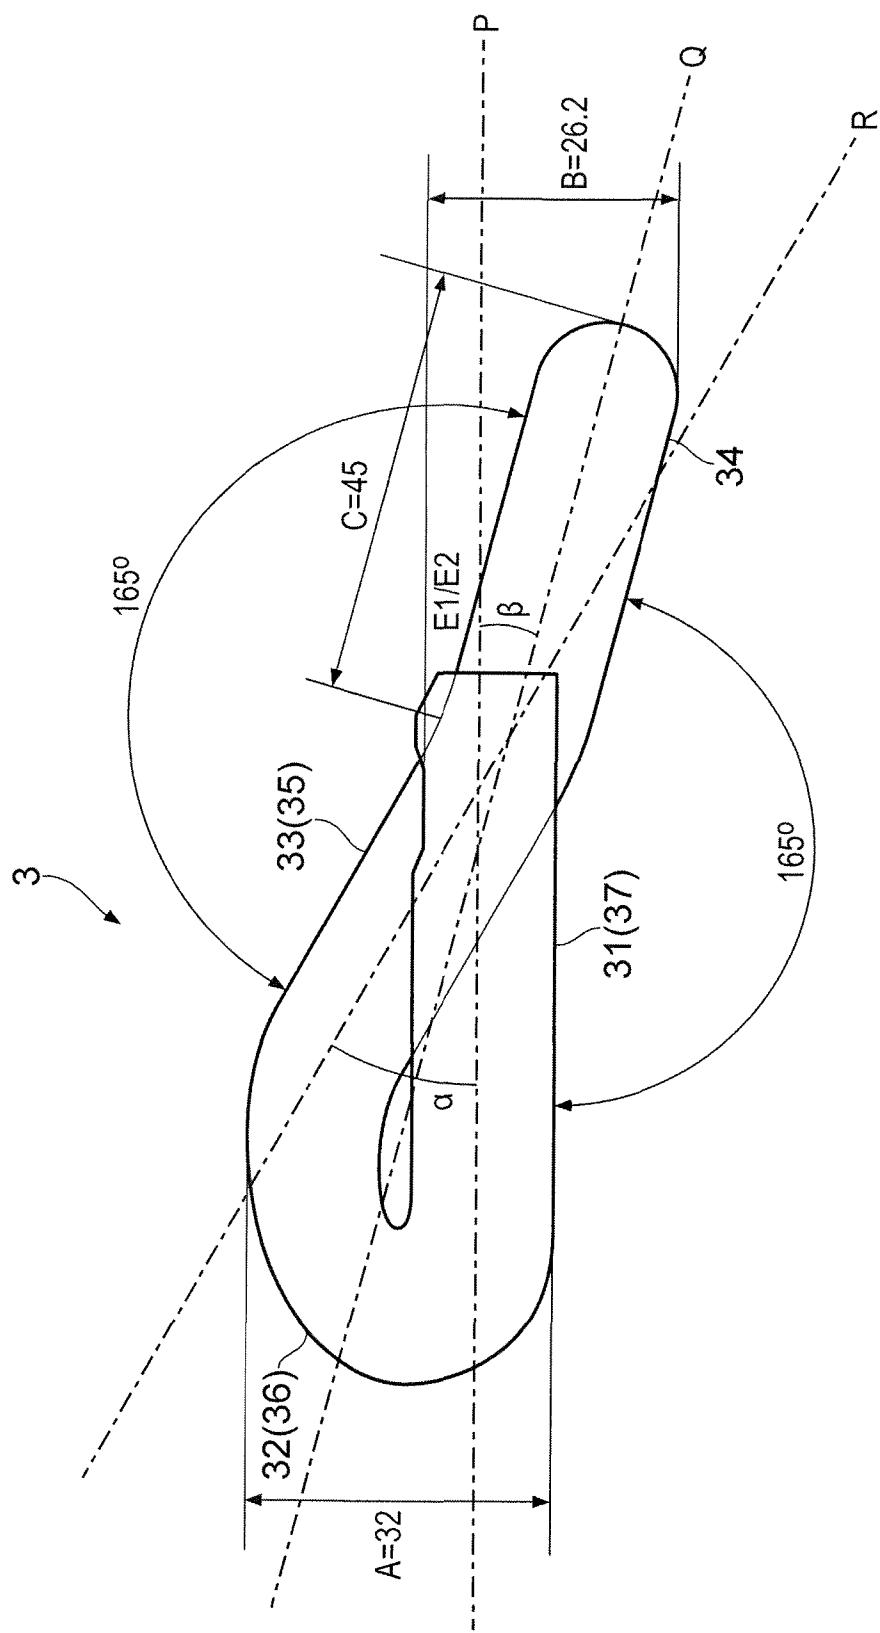


FIG. 2C

4/6

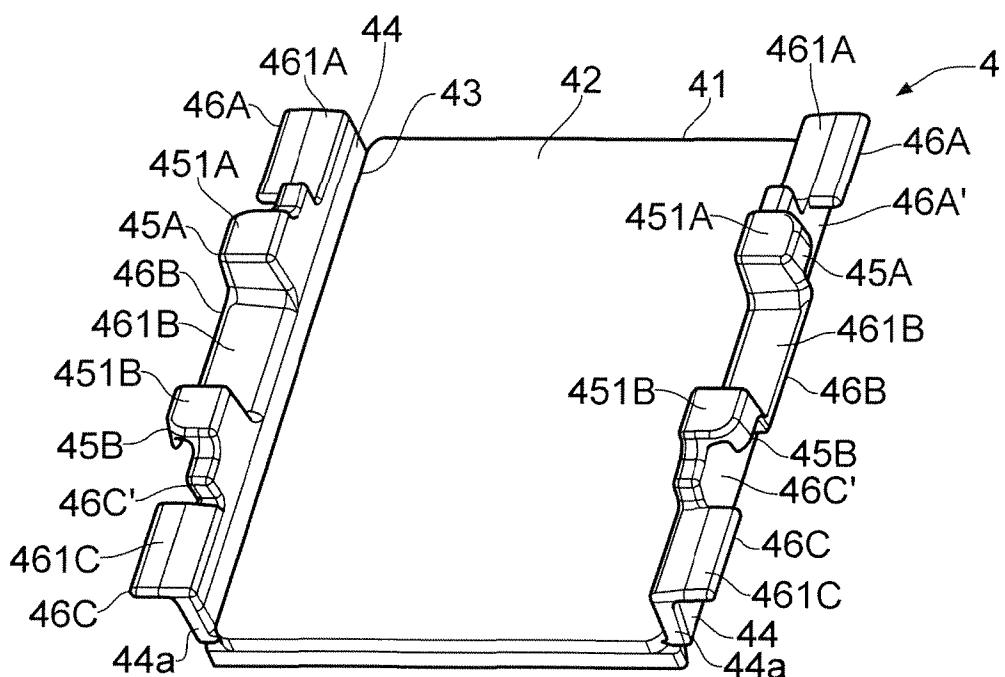


FIG. 3A

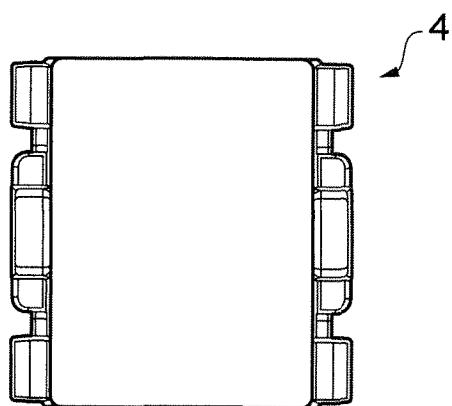


FIG. 3B



FIG. 3C

5/6

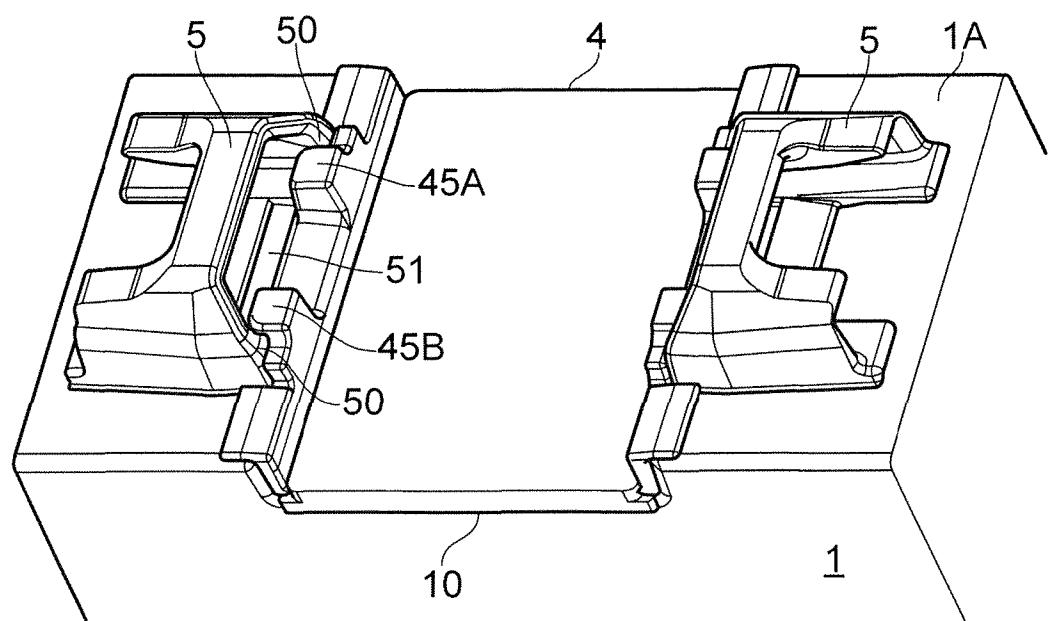


FIG. 4

6/6

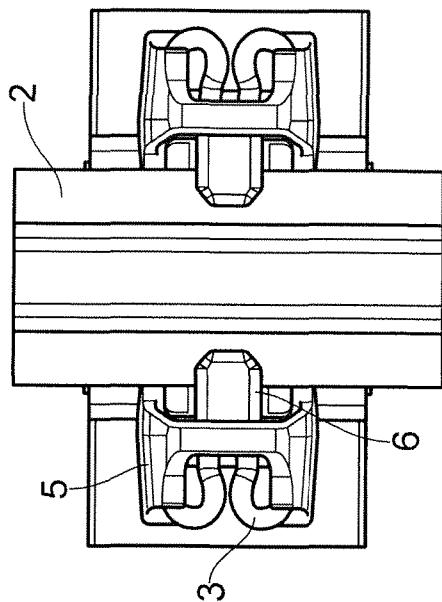


FIG. 5B

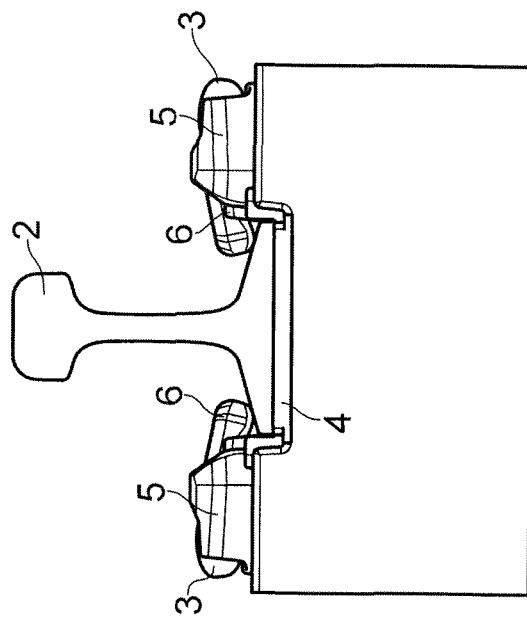


FIG. 5C

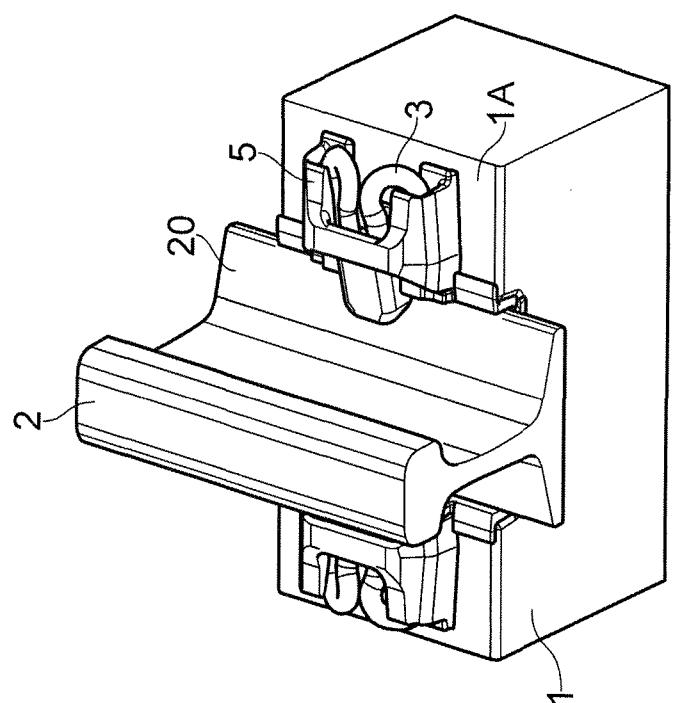


FIG. 5A