




(86) Date de dépôt PCT/PCT Filing Date: 2003/04/19
(87) Date publication PCT/PCT Publication Date: 2004/04/22
(45) Date de délivrance/Issue Date: 2009/06/02
(85) Entrée phase nationale/National Entry: 2004/06/07
(86) N° demande PCT/PCT Application No.: EP 2003/004110
(87) N° publication PCT/PCT Publication No.: 2004/033777
(30) Priorité/Priority: 2002/09/27 (DE102 45 503.1)

(51) Cl.Int./Int.Cl. *D03D 9/00* (2006.01),
D03D 13/00 (2006.01)
(72) Inventeur/Inventor:
PINTZ, HEIKO, DE
(73) Propriétaire/Owner:
HUESKER SYNTHETIC GMBH, DE
(74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : TISSU DE GRILLE
(54) Title: GRID FABRIC

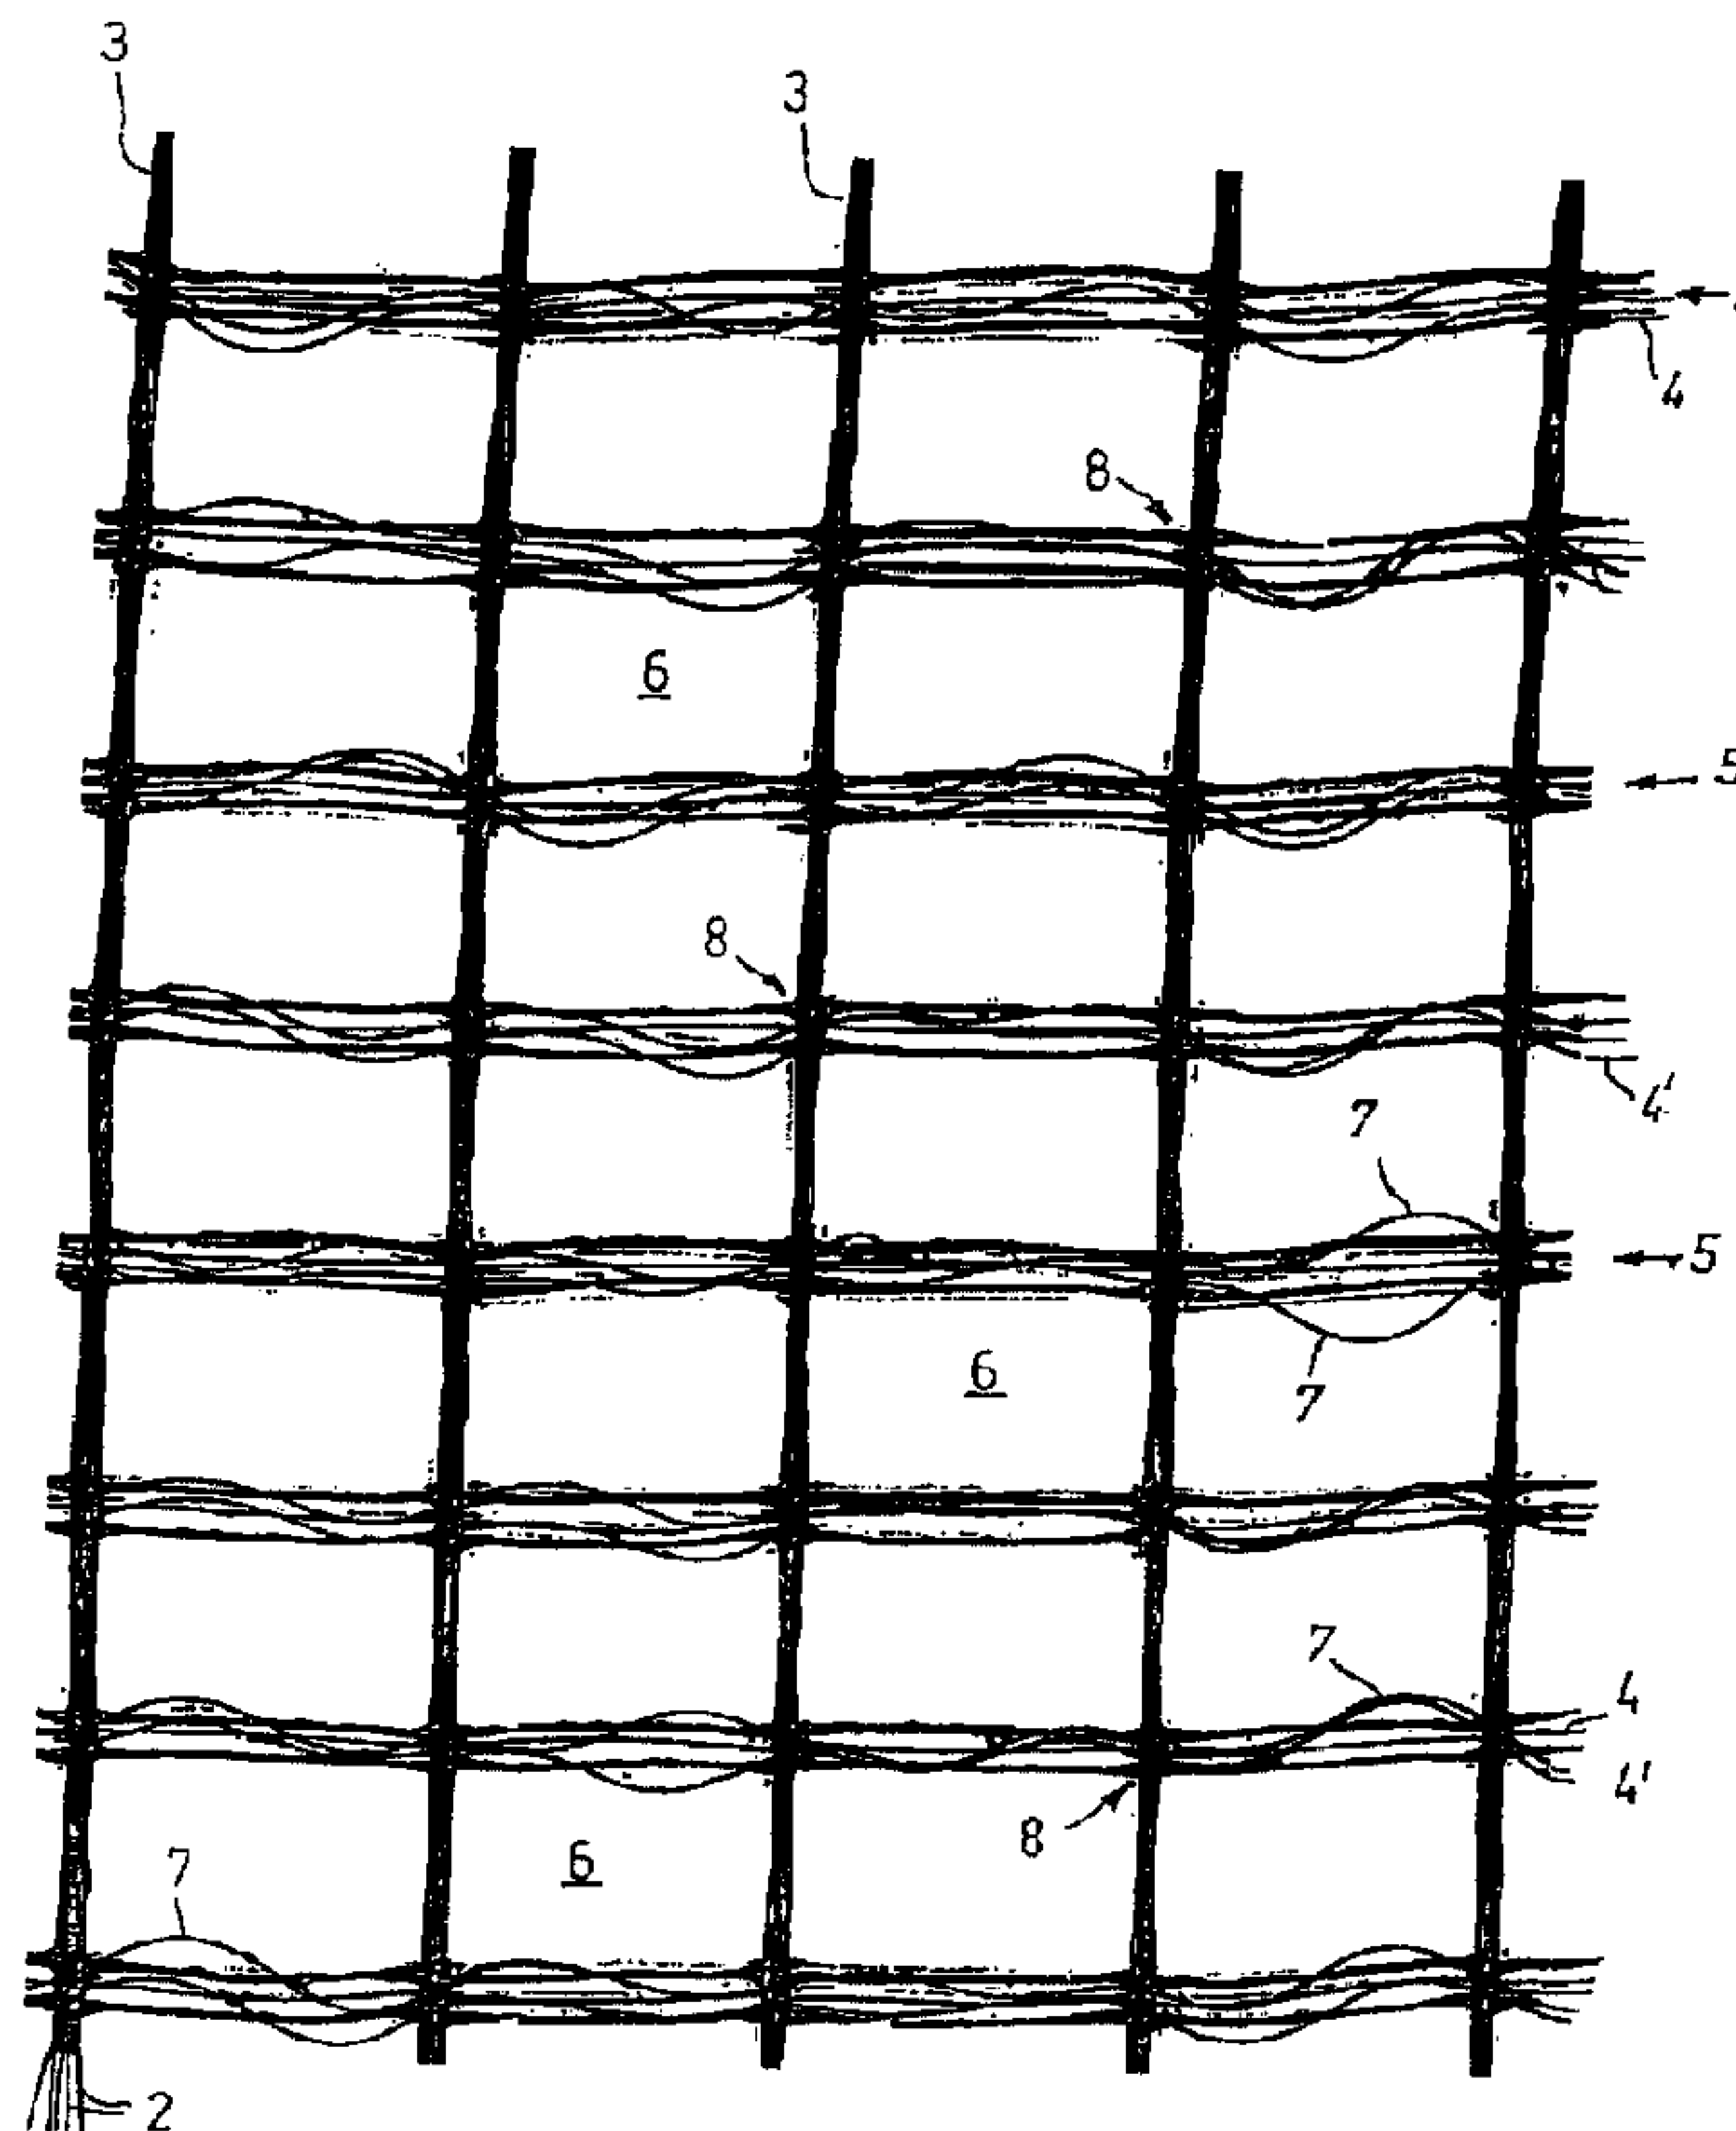

(57) Abrégé/Abstract:

A wide-meshed grid fabric is described, in particular a geogrid, in which warp thread bundles (3) composed of multiple warp threads (2) and weft thread bundles (5) composed of multiple weft threads (4) intersect and surround meshes or lattice openings (6). To give the grid fabric, which may also be a scrim, a greater volume, whereby, among other things, improved reinforcement of the soil may be achieved, individual threads (2 or 4) of a thread bundle (3 or 5) in a mesh (6) are longer than other threads of the same thread bundle (3 or 5), the longer threads (4') running in a wave pattern and forming at least one open loop or bulge (7) per mesh (6); the open loop or bulge may protrude upward and/or downward from the plane of the grid fabric (1). A plastic coating may stiffen the grid fabric (1).



Abstract of the Disclosure

A wide-meshed grid fabric is described, in particular a geogrid, in which warp thread bundles (3) composed of multiple warp threads (2) and weft thread bundles (5) composed of multiple weft threads (4) intersect and surround meshes or lattice openings (6).

To give the grid fabric, which may also be a scrim, a greater volume, whereby, among other things, improved reinforcement of the soil may be achieved, individual threads (2 or 4) of a thread bundle (3 or 5) in a mesh (6) are longer than other threads of the same thread bundle (3 or 5), the longer threads (4') running in a wave pattern and forming at least one open loop or bulge (7) per mesh (6); the open loop or bulge may protrude upward and/or downward from the plane of the grid fabric (1). A plastic coating may stiffen the grid fabric (1).

GRID FABRIC

5

Description

The present invention relates to a wide-meshed grid fabric in which the clearance of the meshes is delimited by warp thread bundles composed of multiple warp threads and by weft
10 thread bundles composed of multiple weft threads, the warp threads and the weft threads being interwoven at the points of intersection of the warp thread bundles and the weft thread bundles running at right angles to one another.

The rectangular or square lattice openings formed by the warp thread bundle and the weft
15 thread bundle are referred to in this description as "mesh."

Grid fabrics of this type which, if they are impregnated or coated with a synthetic polymer, are used in particular for reinforcing bitumen-bonded road surfaces or for reinforcing cement- or gypsum-bonded mortar layers, or as geogrids for reinforcing soils, are known from DE 20
20 00 937; 31 20 661; 31 36 026; 41 23 055, and 199 62 441.

The warp threads and the weft threads are preferably made of high tensile-strength multifilament synthetic yarns, in particular of aramid fiber, polyester, or the like. Glass filament yarns may also be used.

25

The warp thread bundles and the weft thread bundles are composed of at least four threads.

The compound which encloses the warp thread bundles, the weft thread bundles, and their points of intersection, thus fixing the grid fabric and protecting it against chemical and
30 mechanical stress, may be, depending on the application, a PVC paste, a latex dispersion, or dispersions of bitumen, acrylics, or similar soft plastics, as well as mixtures thereof.

The term "grid fabric" also relates to scrims in which the warp threads and the weft threads are not interwoven at the points of intersection, but are bonded to one another using other
35 techniques, Raschel technology in particular, or also by gluing or welding.

The object of the present invention is to create a grid fabric in which the grid fabric is provided with a larger volume using weaving technology and, if used as a geogrid, to achieve improved interlocking with the soil to be reinforced.

5

This object is achieved according to the present invention in that individual threads of a bundle of threads are longer per mesh than the mesh clearance and are longer than other threads of the same bundle of threads, the longer threads running in a wave pattern and forming at least one open loop or bulge per mesh.

10

Due to the fact that one portion of the weft or warp threads within the mesh clearance is longer than a second portion of the weft or warp threads of the same bundle of threads, the longer threads form bulges or open loops per mesh which protrude mostly upward or downward from the plane of the grid fabric.

15

To prevent the bulges or open loops protruding from the plane of the grid fabric from falling back onto the plane of the grid fabric, the grid fabric is stiffened by impregnation or by coating using a synthetic polymer material.

20 The different lengths of the warp threads and weft threads per mesh may be obtained by using warp threads and weft threads which shrink or expand differently for example under heat treatment.

In scrims, individual warp threads of a warp thread bundle and/or individual weft threads of a weft thread bundle per mesh may be lifted from the grid plane before the scrim passes the point at which the warp threads and weft threads are bonded by gluing, welding, or by using Raschel technology.

Grid fabrics according to DE 199 62 441 A1 are particularly advantageous for use in geotextiles. In this grid fabric, the warp thread bundles are divided into a first warp thread group and a second warp thread group, the first warp thread group intersecting with the second warp thread group of the same warp thread bundle once per mesh in a half-twist. The first warp thread group is always positioned on top and the second warp thread group always

beneath it. At the points of intersection of warp threads and weft threads, the threads are interwoven with one another either individually or in groups.

5 A higher tensile stress in the warp direction results in the threads of the two warp thread groups of a bundle, which run in a zigzag pattern and intersect with each other once per mesh, moving closer together in the area of the points of intersection which in turn results in the grid fabric being less elastic in the warp direction and being able to absorb greater forces without further expansion, and also in a portion of the weft threads looping around the warp thread groups, which are displaced closer to each other, in an S pattern, while the portion of
10 the weft threads interwoven in the opposite phase passes the point of intersection essentially straight, so that this portion of the weft threads is longer per mesh than the portion of the shorter threads which determines the clearance of the meshes.

The grid fabric according to the present invention having loops protruding from the plane of
15 the lattice is particularly advantageous for numerous applications. Not only is improved interlocking with the soil to be reinforced achieved, but the grid fabric according to the present invention is also advantageous for reinforcing hardening compounds and products, e.g., floor pavements, as well as gypsum and concrete products, or as a supporting web in the manufacture of setting or hardening products made of plastic, gypsum or concrete mortar,
20 which are sprayed or formed onto the supporting web so that the loops protrude into the hardened products which remain connected via the supporting web. Furthermore, the grid mat provided with protruding loops is well suited to form the supporting part of a drainage mat. Parts such as, for example, fascines may be attached to or parts such as, for example, steel reinforcements, or drainage tubes, may be inserted through the loops protruding from the
25 plane of the fabric upward, downward or upward and downward.

Finally, the grid fabric according to the present invention is well suited for erosion protection, as an anti-slip mat, or as a snow brake.

30 The grid fabric having protruding loops and being surrounded with an elastic plastic layer has very high static friction. As an intermediate layer between stacked stone blocks of a retaining wall, this lattice anchored in the embankment may connect the wall to the embankment.

Exemplary embodiments of the present invention are explained in greater detail in the following description on the basis of the drawing.

Figure 1 shows a top view of the grid fabric according to the present invention;

5

Figure 2 shows a front view of the grid fabric;

Figure 3 shows a top view of another exemplary embodiment according to the present invention;

10

Figure 4 shows an enlarged sectional view of a point of intersection of a grid fabric;

Figure 5 shows an enlarged sectional view of a point of intersection of the grid fabric according to Figure 3.

15

The wide-meshed grid fabric 1 according to Figures 1 and 2 is formed of warp thread bundles 3 composed of multiple warp threads 2 and weft thread bundles 5 composed of multiple weft threads 4. Warp thread bundles 3 and weft thread bundles 5 surround rectangular or square lattice openings or meshes 6. A portion 4' of weft threads 4 is longer per mesh 6 than another portion of weft threads 4, so that the longer weft threads form bulges or open loops 7 most of which protrude upward and downward from the plane of grid fabric 1.

20

Weft threads 4, 4' are, individually or in groups, interwoven at points of intersection 8 with warp threads 2 of the warp thread bundles. Furthermore, grid fabric 1 and its open loops 7 are stiffened by impregnation or by coating using a synthetic polymer material.

25

Figure 3 shows a large-surface grid fabric 1 in which, for example, the warp thread bundles 3 have eight warp threads 2 and the weft thread bundles have eight weft threads 4, 4'.

Warp thread bundles 3 are divided into a first warp thread group 3' and a second warp thread group 3''. These two warp thread groups 3' and 3'' are interwoven at points of intersection 8 with weft threads 4 of weft thread bundles 5. Between two weft thread bundles 5, i.e., per mesh 6, one warp thread group 3' crosses the other warp thread group 3'' of a warp thread bundle 3 in a half-twist.

30

- Weft threads and warp threads are interwoven at points of intersection 8 in a way that a first portion of weft threads 4 of a weft thread bundle 5 runs over warp threads 2 of first warp thread group 3' and a second portion 4' of weft threads of a weft thread bundle 5 runs beneath warp threads 2 of first warp thread group 3' and over warp threads 2 of second warp thread group 3". Each odd-numbered weft thread runs over first warp thread group 3' and beneath second warp thread group 3", while each even-numbered weft thread runs beneath first warp thread group 3' and then over second warp thread group 3" of warp thread bundle 3.
- 10 Due to high tensile force applied to warp thread bundles 3, the warp thread groups 3' and 3", which run in a zigzag pattern, stretch, so that a portion of the weft threads, as shown in Figure 5, loops around the warp thread groups in an S pattern at points of intersection 8, while another portion of the weft threads passes points of intersection 8 with less loss in length.
- 15 As shown in Figure 5, warp thread groups 3' and 3", which run in a zigzag pattern, move closer together at points of intersection 8 when tensile force is applied to warp thread bundles 3. The inner edges of warp thread groups 3' and 3" overlap slightly, so that a portion of the weft threads must cover a longer distance at points of intersection 8 than the other portion of weft thread bundle 5.

List of Reference Numbers:

	1	grid fabric
	2	warp threads
5	3	warp thread bundle
	3'	first warp thread group
	3"	second warp thread group
	4	weft thread
	4'	longer weft thread
10	5	weft thread bundle
	6	mesh, lattice opening
	7	open loop
	8	point of intersection

CLAIMS:

1. A wide-meshed grid fabric for reinforcement of soil, comprising warp thread bundles composed of multiple warp threads and weft thread bundles composed of multiple weft threads the warp and weft thread bundles intersecting and surrounding meshes or lattice openings,

wherein individual threads of a thread bundle in a mesh are longer than other threads of the same thread bundle, the longer threads running in a wave pattern and forming at least one open loop or bulge per mesh, the loop or bulge being stiffened and protruding upward or downward from the plane of the grid fabric.

2. The grid fabric as recited in claim 1, wherein the grid fabric and the loops protruding from the lattice surface are stiffened by encasing in a synthetic polymer material.

3. The grid fabric as recited in claim 1 or 2, wherein the threads of the weft thread bundle form the longer threads per mesh.

4. The grid fabric as recited in any one of claims 1 to 3, wherein the longer threads per mesh are longer by 15% to 25% than the other threads of the same thread bundle.

5. The grid fabric as recited in any one of claims 1 to 4, wherein the threads of the weft thread bundles are interwoven with the threads of the warp thread bundles at the points of intersection.

6. The grid fabric as recited in claim 5, wherein the warp thread bundles are divided into a first warp thread group and a second warp thread group, the first warp thread group intersecting the second warp thread group of the same warp thread bundle per mesh on top in a half-twist, and the warp threads of both warp thread groups are interwoven with the weft threads at the points of intersection.

7. The grid fabric as recited in claim 6, wherein the warp thread group is interwoven with the weft threads in such a way that at all points of intersection a first portion of the weft threads of a weft thread bundle runs over the warp threads of the first warp thread group and beneath the warp threads of the second warp thread group of a warp thread bundle and a second portion of the weft threads of weft thread bundle runs beneath the warp threads of the first warp thread group and over the warp threads of the second warp thread group of the warp thread bundle.
8. The grid fabric as recited in claim 7, wherein each odd-numbered weft thread of a weft thread bundle belongs to the first portion and each even-numbered weft thread belongs to the second portion of weft threads of a weft thread bundle.
9. A method for manufacturing a grid fabric as recited in one of the claims 7 or 8, wherein the fabric is subjected to tension in the warp direction, whereby the warp thread groups running in a zigzag pattern are stretched and pressed closer together at the points of intersection, a first portion of the weft threads looping around the two warp thread groups in an S pattern at the points of intersection, while the second portion of the weft threads passes both groups of a warp thread bundle essentially stretched or in a straight line, whereby the first portion of the weft threads is shortened with respect to the second portion of the weft threads in the mesh, the second portion of the weft threads in the mesh being longer and forming open loops or bulges, and the grid fabric being fixed with the warp thread under tension.
10. The method as recited in claim 9, wherein the grid fabric is fixed by impregnation or coating using a synthetic polymer material.
11. The method according to claim 10, wherein the synthetic polymer material is a PVC paste or a latex dispersion.

WO 2004/033777

PCT/EP2003/004110

1/2

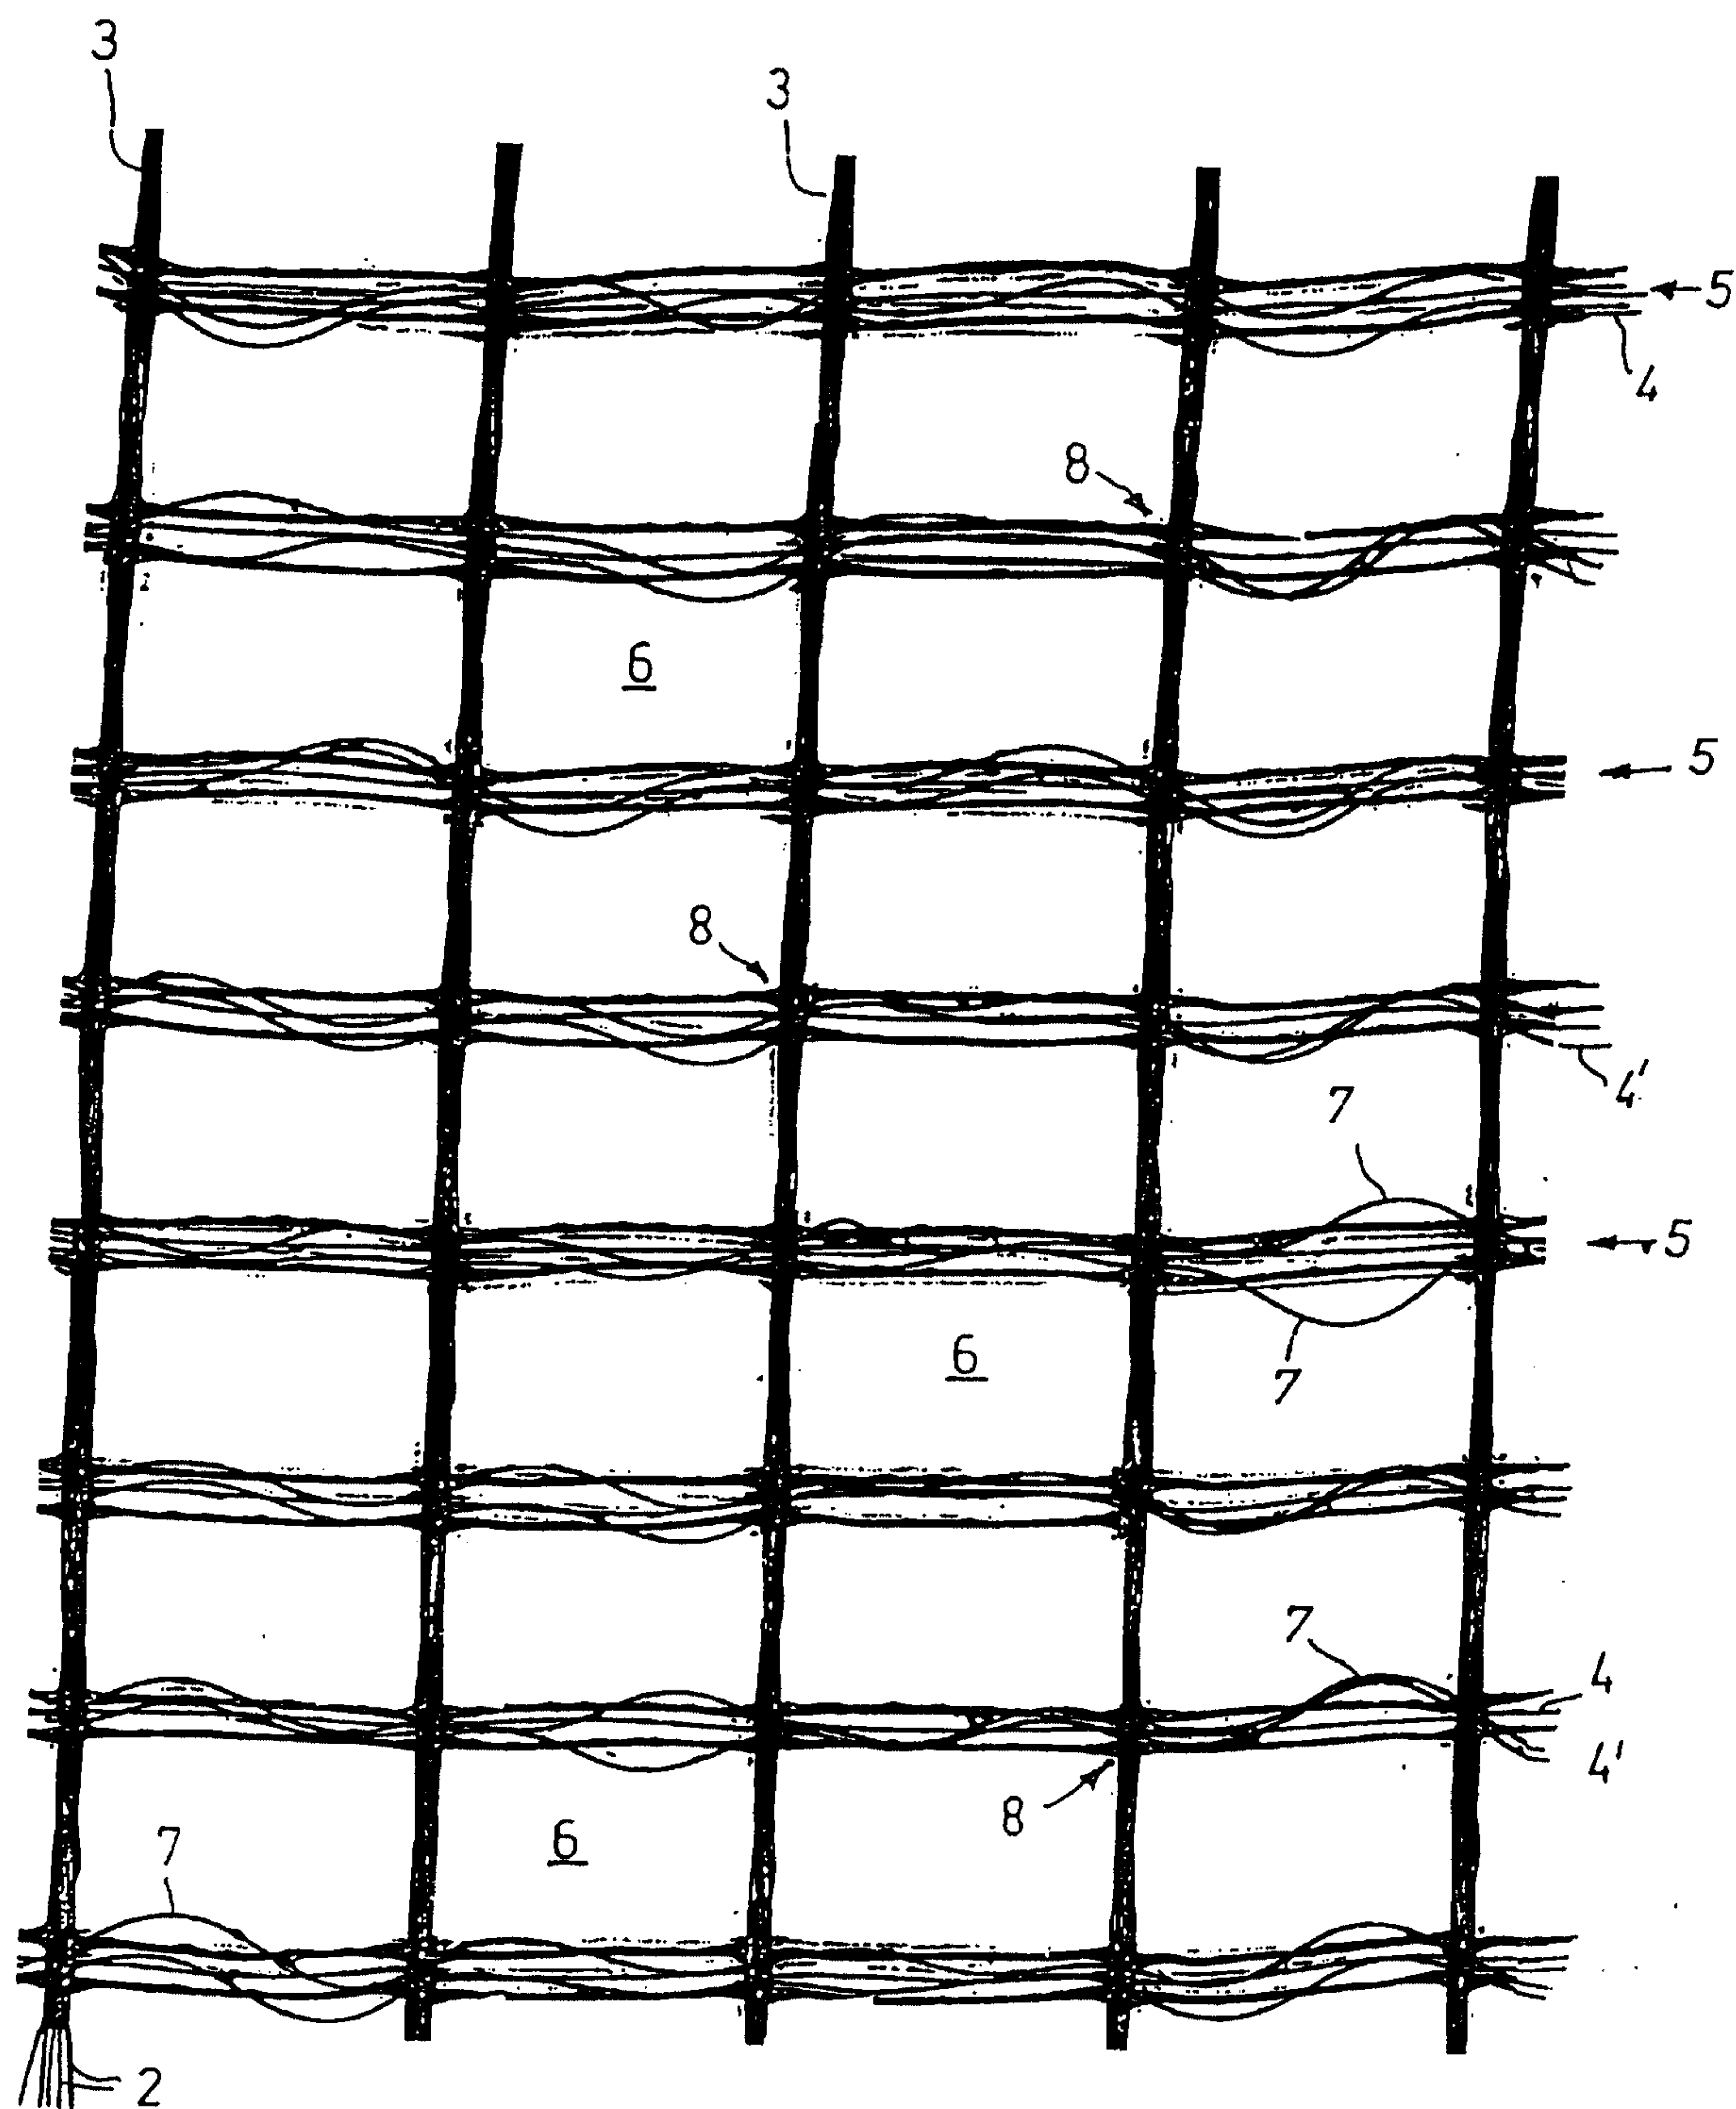


FIG. 1

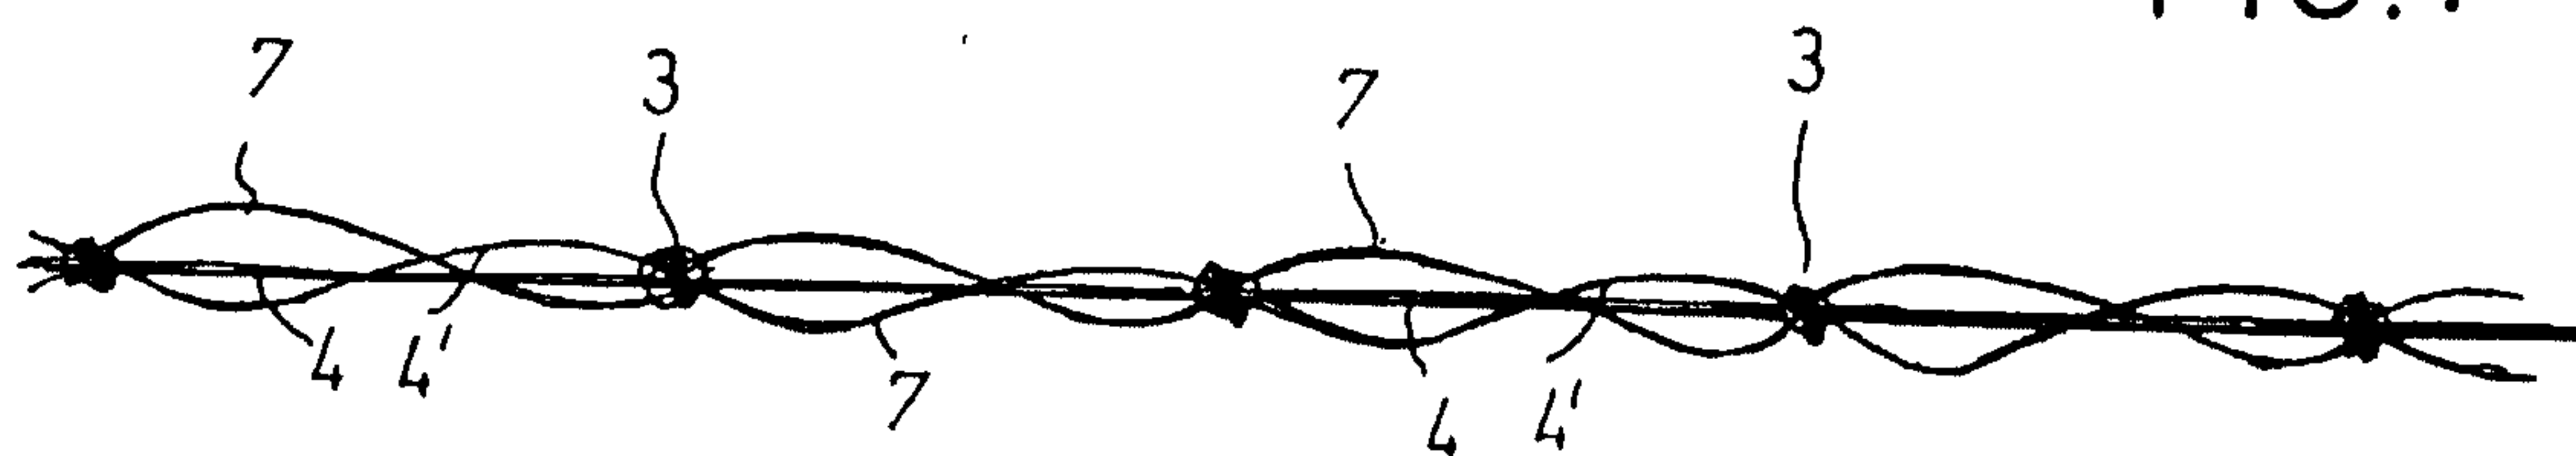


FIG. 2

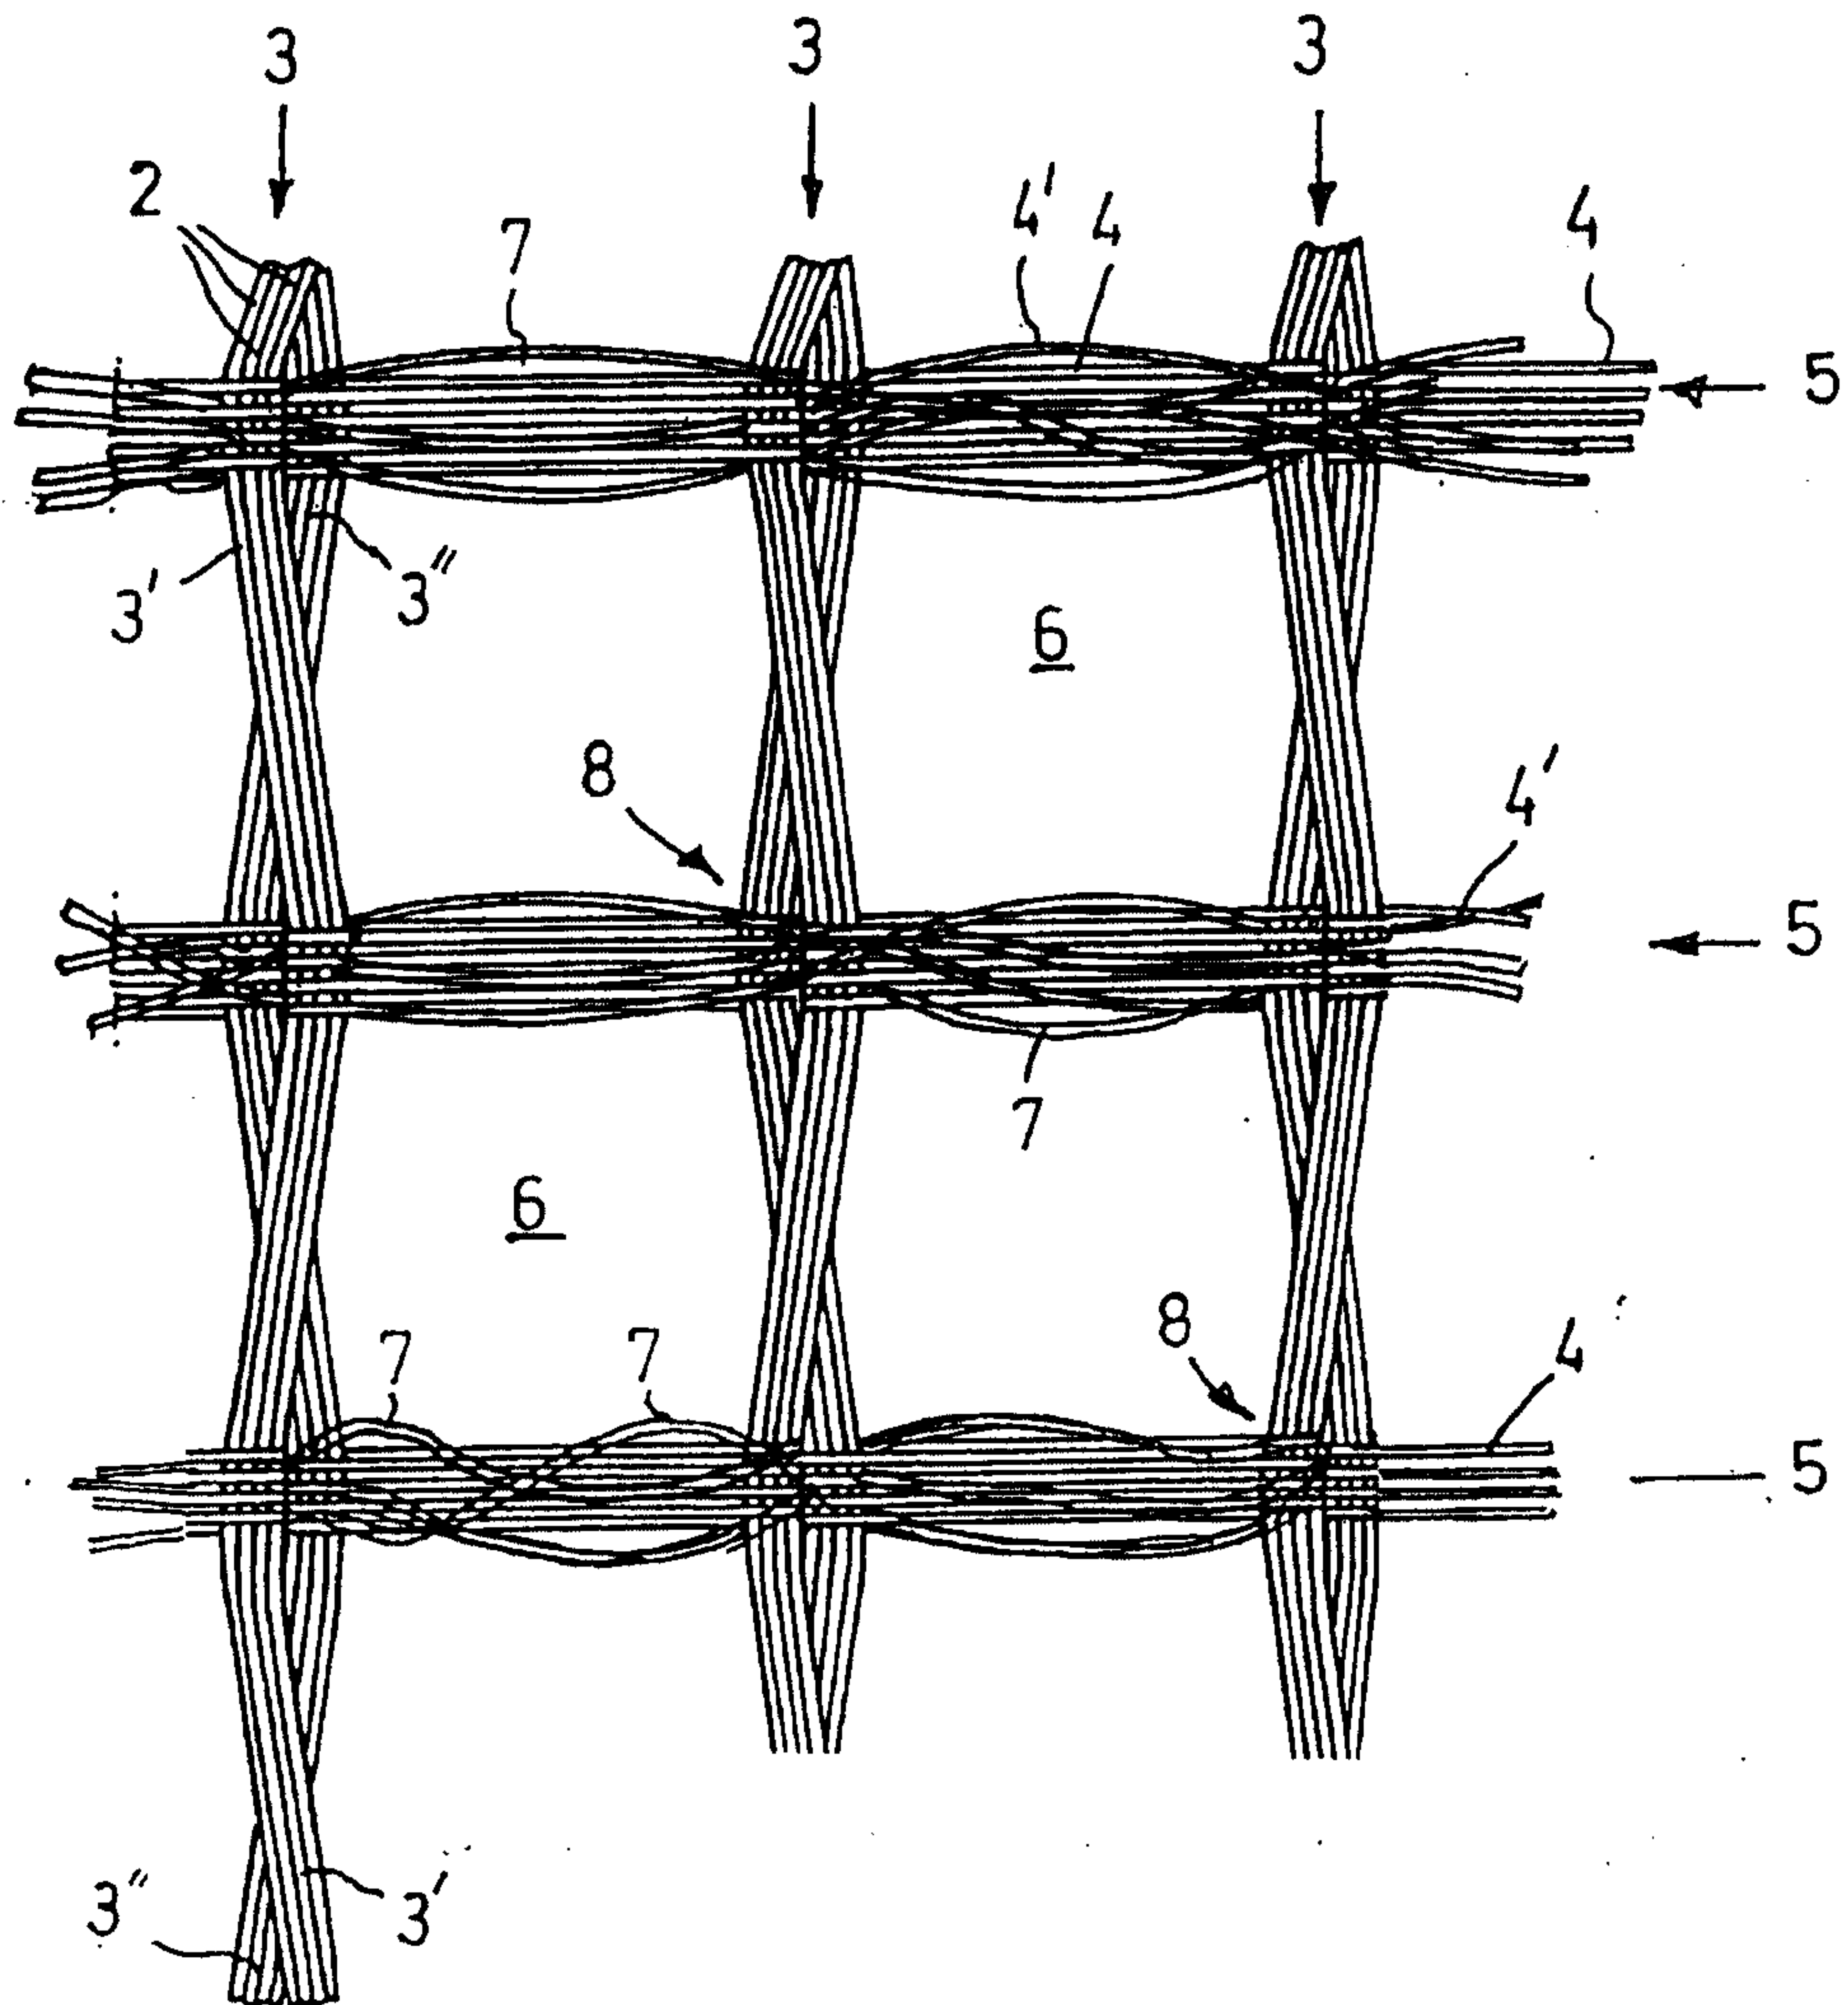


FIG. 3

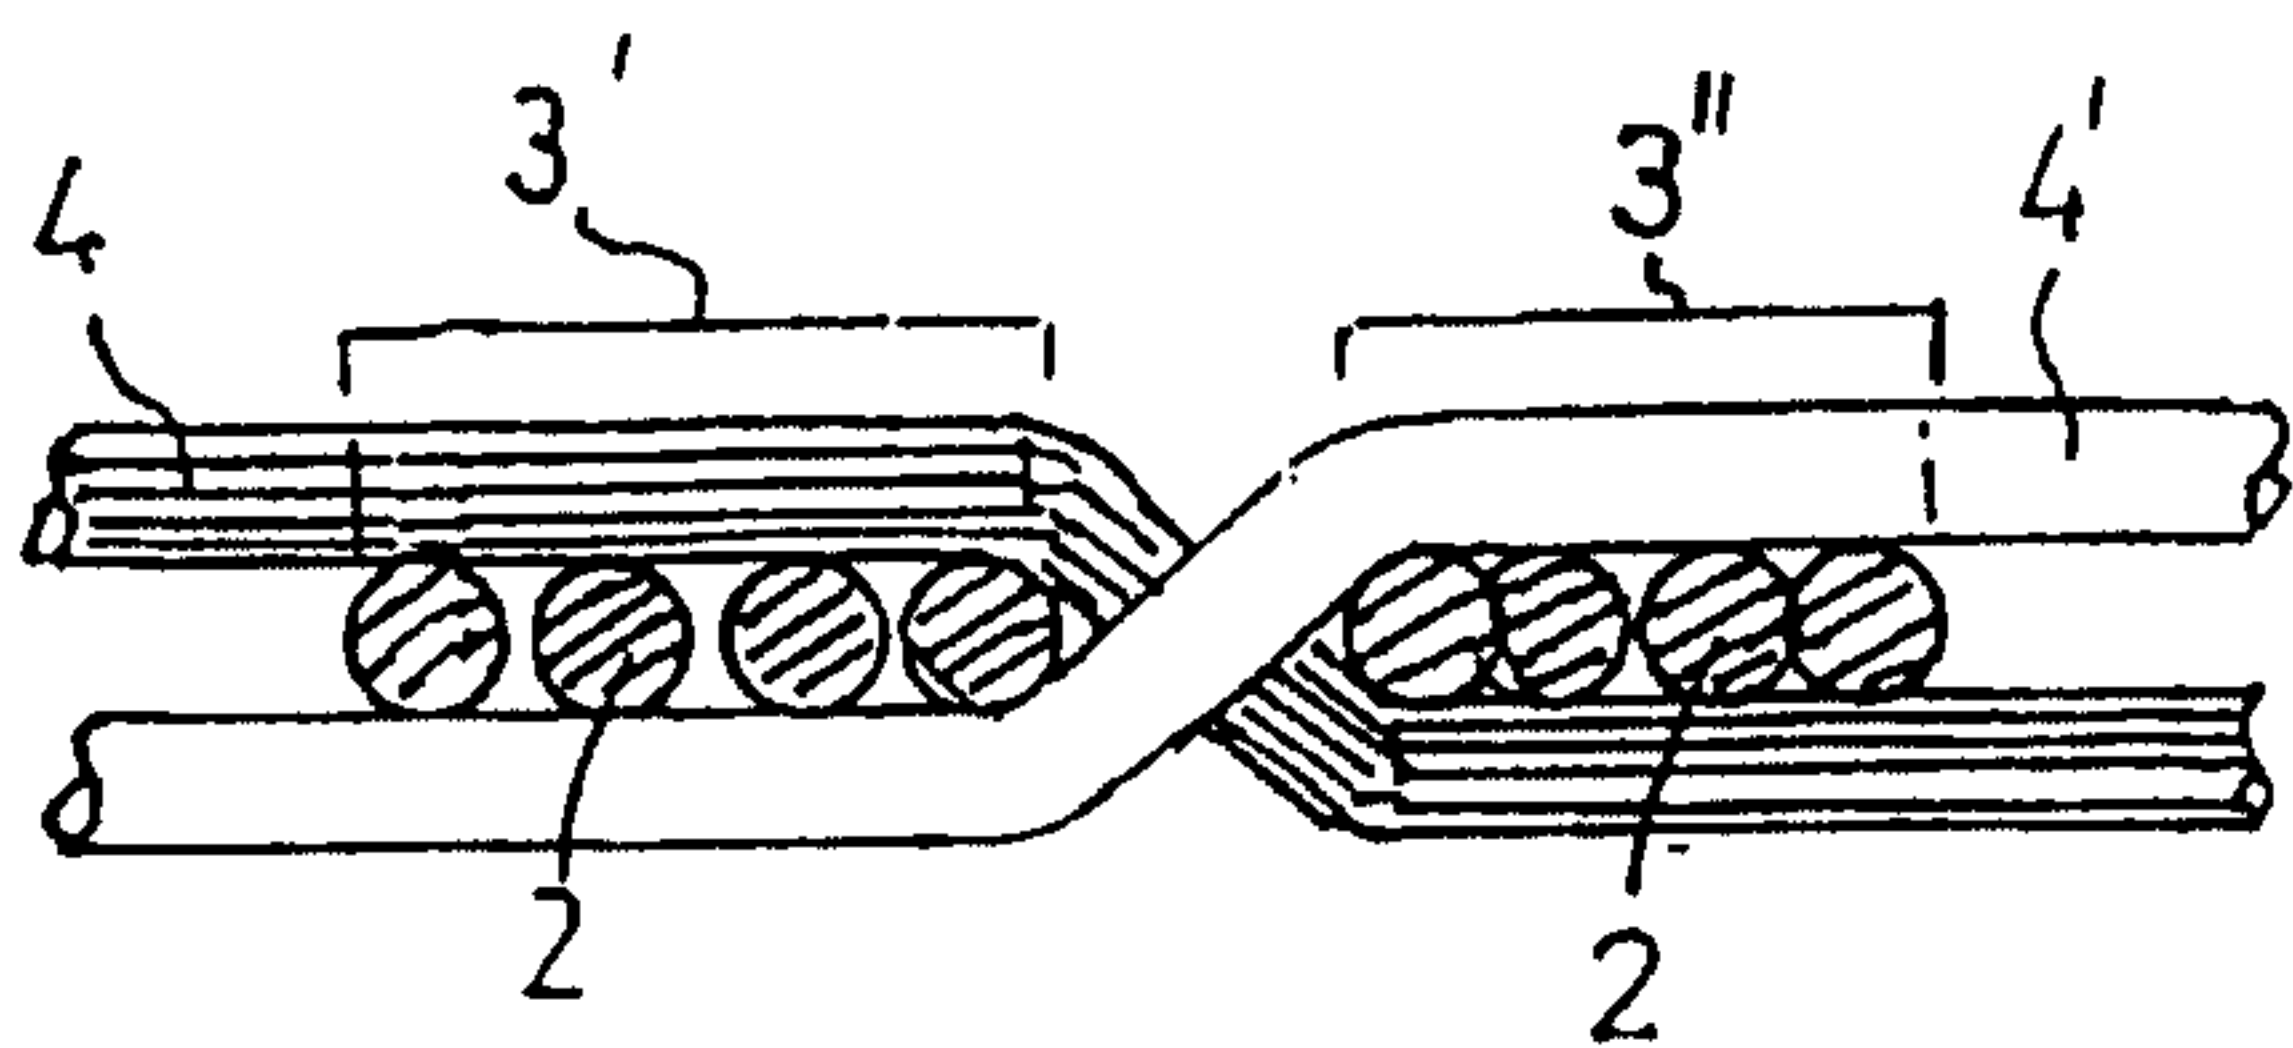


FIG. 4

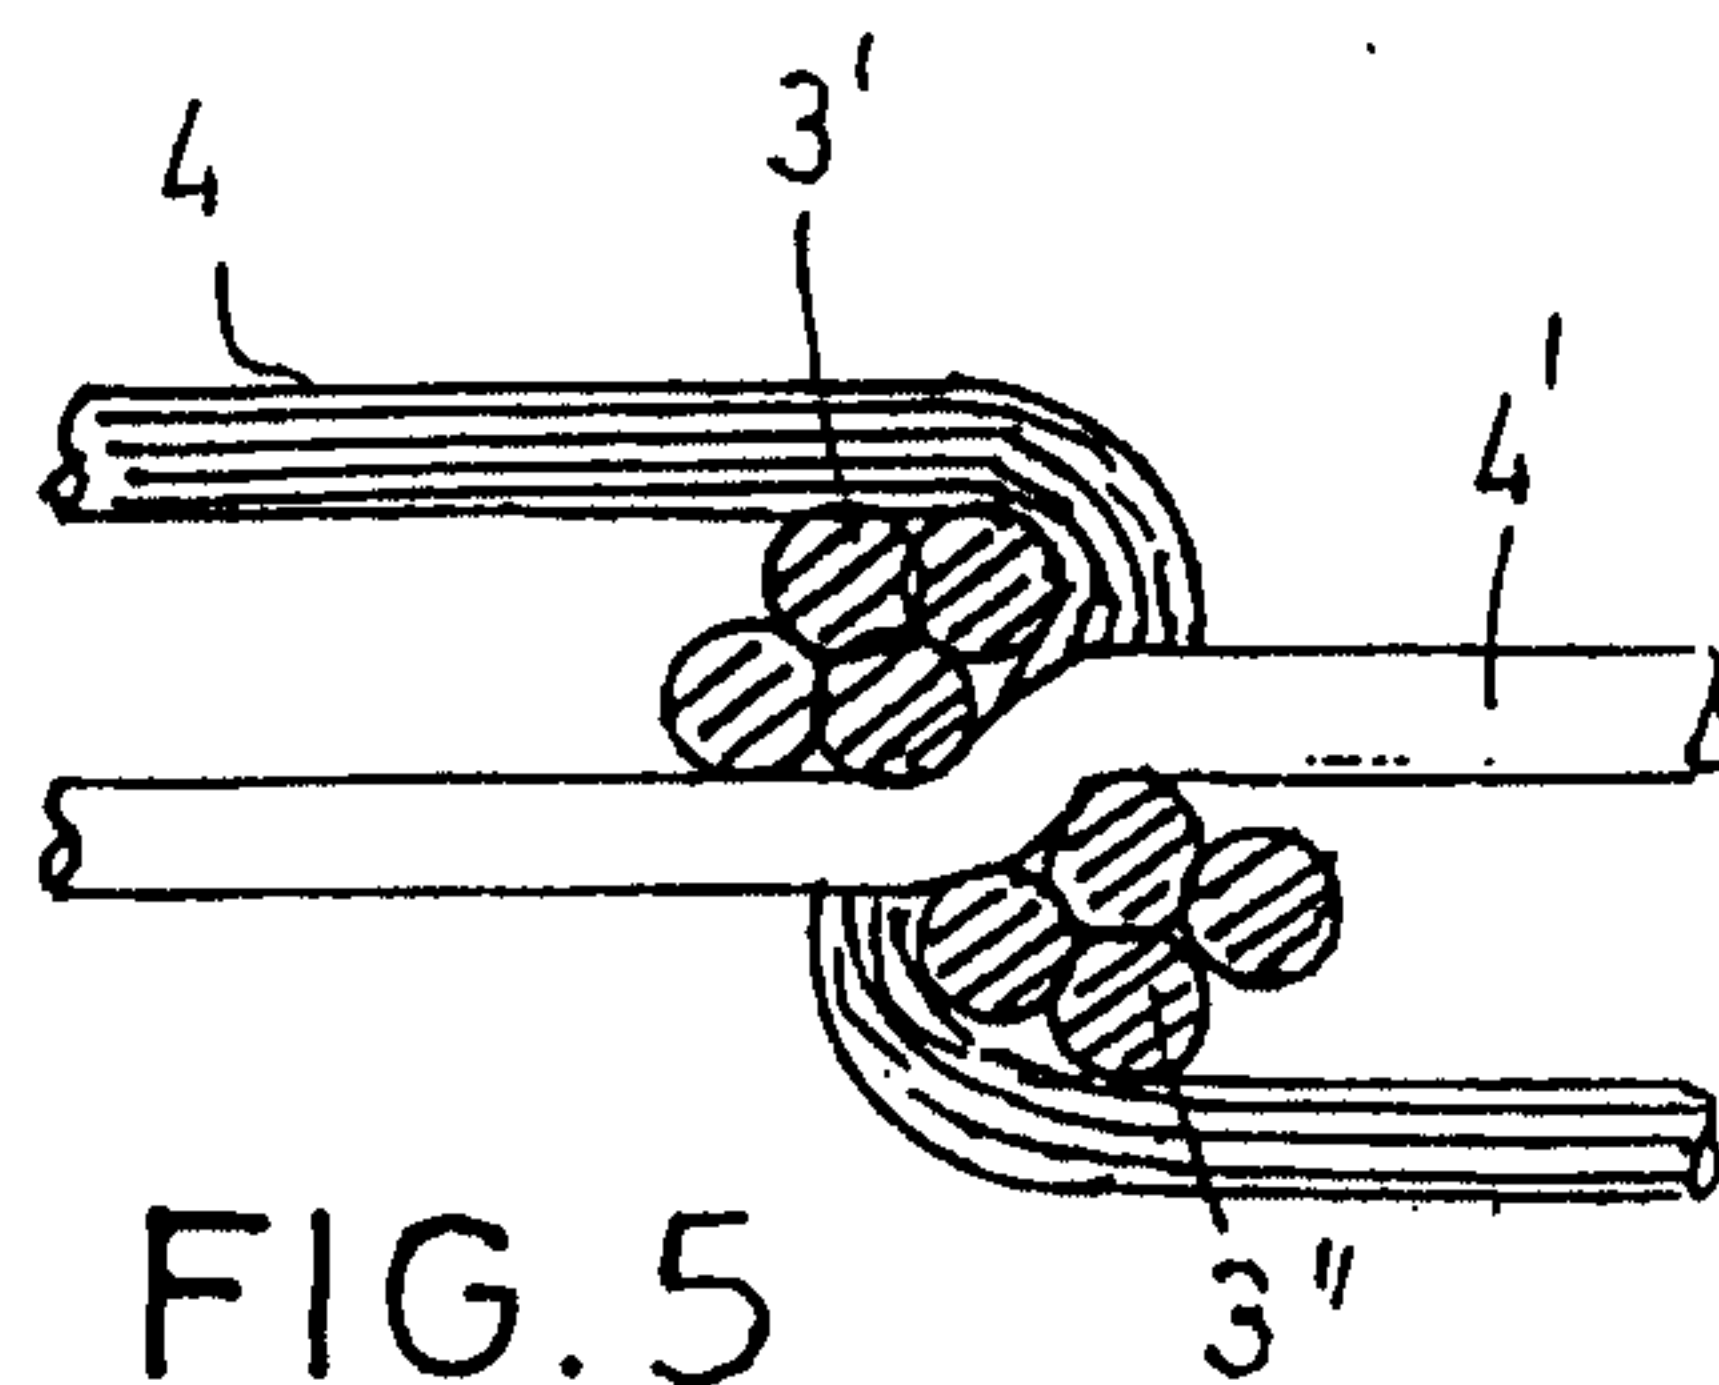


FIG. 5

