



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2553926 C 2012/06/05

(11)(21) **2 553 926**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 2005/02/04
(87) Date publication PCT/PCT Publication Date: 2005/09/01
(45) Date de délivrance/Issue Date: 2012/06/05
(85) Entrée phase nationale/National Entry: 2006/07/13
(86) N° demande PCT/PCT Application No.: EP 2005/001127
(87) N° publication PCT/PCT Publication No.: 2005/080640
(30) Priorité/Priority: 2004/02/20 (DE10 2004 008 813.6)

(51) Cl.Int./Int.Cl. *C25C 1/12* (2006.01),
C25C 7/02 (2006.01)
(72) Inventeurs/Inventors:
ANASTASIJEVIC, NIKOLA, DE;
NEPPER, JEAN-PAUL, DE;
KOENEKE, MARTIN, DE;
LOHRBERG, DIRK, DE;
MARTTILA, TOM, FI;
VIRTANEN, HENRI, FI
(73) Propriétaire/Owner:
OUTOKUMPU TECHNOLOGY OY, FI
(74) Agent: ROBIC

(54) Titre : PROCÉDE ET INSTALLATION D'ELECTRODEPOSITION DE CUIVRE
(54) Title: PROCESS AND PLANT FOR ELECTRODEPOSITING COPPER

(57) **Abrégé/Abstract:**

The present invention relates to a process for electrochemically winning or refining copper by electrodepositing copper from an electrolyte solution containing the metal in ionogenic form, in which the electrolyte is passed through an electrolysis plant comprising at least one electrolytic cell, which in an electrolyte tank for receiving the electrolyte has at least two electrodes serving as anode and cathode, which are alternately arranged at a distance from each other, and to a corresponding plant. To increase the economic efficiency of such processes and plants, it is proposed in accordance with the invention to immerse the at least one cathode during operation of the electrolysis into the electrolyte over a length of at least 1.2 meters.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 September 2005 (01.09.2005)

PCT

(10) International Publication Number
WO 2005/080640 A3

(51) International Patent Classification:

C25C 1/12 (2006.01) C25C 7/02 (2006.01)

(21) International Application Number:

PCT/EP2005/001127

(22) International Filing Date: 4 February 2005 (04.02.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

10 2004 008 813.6

20 February 2004 (20.02.2004) DE

(71) Applicant (for all designated States except US): **OUT-OKUMPU TECHNOLOGY OY** [FI/FI]; Riihitontuntie 7, FIN-02200 Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ANASTASIJEVIC, Nikola** [DE/DE]; Zum Niddersteg 11, 63674 Altenstadt (DE). **NEPPER, Jean-Paul** [DE/DE]; Obere Römerhofstrasse 51, D-61381 Friedrichsdorf (DE). **KOENEKE, Martin** [DE/DE]; Grünerweg 28a, 51375 Leverkusen (DE). **LOHRBERG, Dirk** [DE/DE]; Wilhelm-Leuschner-Strasse 114, 63263 Neu-Isenburg (DE). **MARTTILA, Tom** [DE/DE]; Verkkokuja 7 B, FIN-02230 Espoo (FI). **VIRTANEN, Henri** [FI/FI]; Likkastentie 99, FIN-28610 Pori (FI).

(74) Agent: **KEIL & SCHAAFHAUSEN**; Cronstettenstrasse 66, 60322 Frankfurt am Main (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:

22 June 2006

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PROCESS AND PLANT FOR ELECTRODEPOSITING COPPER

(57) Abstract: The present invention relates to a process for electrochemically winning or refining copper by electrodepositing copper from an electrolyte solution containing the metal in ionogenic form, in which the electrolyte is passed through an electrolysis plant comprising at least one electrolytic cell, which in an electrolyte tank for receiving the electrolyte has at least two electrodes serving as anode and cathode, which are alternately arranged at a distance from each other, and to a corresponding plant. To increase the economic efficiency of such processes and plants, it is proposed in accordance with the invention to immerse the at least one cathode during operation of the electrolysis into the electrolyte over a length of at least 1.2 meters.



WO 2005/080640 A3

- 1 -

PROCESS AND PLANT FOR ELECTRODEPOSITING COPPER

Technical Field

5 The present invention relates to a process for the electrochemical winning or refining of copper by electrodepositing copper from an electrolyte solution containing the metal in ionogenic form, in which the electrolyte is passed through an electrolysis plant comprising at least one electrolytic cell, which in an electrolyte tank for receiving the electrolyte has at least two electrodes serving as anode and cathode, which are alternately arranged at a distance from each other, and to a corresponding plant.

For producing copper, a multitude of processes are known, in particular pyrometallurgical and hydrometallurgical processes. In pyrometallurgical processes, enriched chalcopyrite is molten in a suspension furnace or bath-type melting furnace by adding oxygen to obtain a copper matrix, in converters is then converted to crude copper in two blowing steps, and is purified further in a final electrolytic refining step. This electrolysis is also referred to as refining electrolysis. In hydrometallurgical processes, on the other hand, in particular low-copper oxidic ores with a copper content of about 0.5 to 1 wt-% are used as starting materials. The starting ore poor in copper, which due to its mineralogical composition cannot always be processed economically with other processes such as flotation, is leached e.g. with dilute sulfuric acid, and in an extraction plant the resulting solution rich in copper is treated with an organic extractant which selectively extracts copper ions from the solution. Subsequently, the copper-containing extractant is stripped with foul electrolyte with a copper content of about 30 to 40 g/l, which originates from the succeeding electrolysis plant, the copper from the extractant phase passing over into the electrolyte, which upon further purification for removing extractant residues and solids typically is recirculated to the electrolysis plant with a copper content of 40 to 50 g/l. Such electrolysis is also referred to as extraction electrolysis.

30

During operation of the electrolyses, the copper ions are reduced at the cathodes and deposited as elementary copper. Conventional electrolysis plants for the electrometallurgical winning of copper, as they are described for instance in J.A. Wells and W.R.

- 2 -

Snelgrove, The Design and Engineering of Copper Electrowinning Tankhouses, Proceedings of the International Symposium on Electrometallurgical Plant Practise, Pergamon Press, 1990, pp. 57 to 72, comprise up to 188 electrolytic cells, each of which has between 20 and 60 cathodes, chiefly made of stainless steel, as well as a corresponding number of anodes. At predetermined distances, depending on the size of the plant, the copper-coated cathodes are withdrawn from the electrolytic cell manually or by means of cranes and transferred to a stripping plant, in which the copper coatings are peeled (stripped) off the cathodes, before the cathode starting sheets are returned to the electrolytic cells after a corresponding aftertreatment. The copper peeled off is finally processed in melting furnaces.

For an efficient aftertreatment of the copper-loaded cathodes, in particular for peeling off the deposited copper in the stripping machine, a rather uniform deposition of the copper on the cathodes, based on the surface area of the cathodes, is desirable. This is only ensured with a uniform streamline distribution along the length of the cathodes. As is described for instance in A. Schmidt, Angewandte Elektrochemie, Verlag Chemie 1976, pp. 49 to 51, the uniformity of the streamline distribution with a given conductivity of the electrolyte is, however, increasing with decreasing width and in particular length of the electrode surface immersed into the electrolyte. In addition, the streamline distribution depends on the conductivity of the electrode material and on the current density applied during electrolysis. Due to these relations, both the refining electrolysis and the extraction electrolysis typically employ electrodes with a surface area maximally immersed into the electrolyte of about 1x1 meter. The melting furnaces for the further processing of copper are also adjusted to this size.

Due to the high investment and operating costs of the electrolysis plants and cathode processing plants comprising crane and stripping machines, which are combined in the so-called tankhouse, attempts have been made for quite some time at increasing the economic efficiency of both the refining electrolysis and the extraction electrolysis. This largely depends on the efficiency of the electrolysis as well as on the number of the cathode movements and therefore on the amount of copper deposited per cathode.

To increase the efficiency of the electrolysis, it is desirable to increase the current density during the electrolysis, in order to achieve a higher deposition of copper on the cathodes per unit time. However, the current density on the cathode side is limited by the quality of the copper deposited, as due to the increased overvoltage on the cathodes more impurities are deposited with increasing current density. On the anode side, the lead alloy used as electrode material for the extraction electrolysis becomes more unstable, and the copper anode used for the refining electrolysis becomes passivated with increasing current density. As a result of these two effects, present-day electrolyses operate with a maximum current density of about 370 A/m² electrode surface. In the extraction electrolysis, a higher current density can only be achieved by using expensive anode materials with a lower quality of the electrodeposited copper.

Therefore, a further reduction of the production costs with a consistent quality of the electrodeposited copper can only be achieved by reducing the specific investment and operating costs of the cathode processing plants comprising the crane and stripping machines, i.e. by decreasing the necessary number of cathode movements based on the amount of copper electrodeposited per cathode.

Description of the Invention

It is the object of the present invention to increase the copper loading per cathode based on the number of cathode movements with a consistent quality of the electrodeposited copper.

In accordance with the invention, this object is solved by a process for electrodepositing copper from an electrolyte solution containing the copper in ionogenic form, said process comprising a step of passing an electric current across the electrolyte solution in at least one electrolytic cell provided in a tank for receiving the electrolyte solution and provided with electrodes including at least one anode and at least one cathode, said at least one anode and at least one cathode being alternately arranged at a distance from each other, wherein the electrodes have a horizontal hanger bar with a first end and a second end and wherein at an edge of

3a

the electrolyte tank two contact bars are provided, which are each connected to a power source of electric current, the first end of the hanger bar of said at least one cathode resting on one of the two contact bars via a two-line contact and the first end of the hanger bar of said at least one anode resting on the other one of the two contact bars via a two-line contact,

characterized in that the second end of the hanger bar of said at least one cathode rests on a cathode equalizer bar which is arranged on one of the two contact bars, in that the second end of the hanger bar of said at least one anode rests on an anode equalizer bar, which is arranged on one of the two contact bars, and


10 in that during operation of the electrolysis the at least one cathode is immersed into the electrolyte solution over a length of at least 1.2 meters.

The object of the invention is also solved by an electrolysis plant for electrodepositing copper from an electrolyte solution containing the copper in ionogenic form, by passing an electric current across the electrolyte solution, said electrolysis plant comprising at least one electrolytic cell which includes an electrolyte tank for receiving the electrolyte solution, at least two electrodes including at least one anode and at least one cathode, said at least one anode and at least one cathode being alternately arranged at a distance from each other and each having a substantially horizontal hanger bar, as well as two contact bars
20 arranged at an edge of the electrolyte tank, each contact bar being connectable to a power source of electric current, where the at least one cathode has a first end of its hanger bar resting on one of the two contact bars and the at least one anode has a first end of its hanger bar resting on the other one of the two-contact bars, characterized in that during operation of the electrolysis the at least one cathode is immersed into the electrolyte solution over a length of at least 1.2 meters, in that the first ends of the hanger bars each rest on the contact bars via a two-line contact, and in that on at least one of the two contact bars at least one equalizer bar is provided, on which rests a second end of each of the hanger bars of the at least one cathode and/or at least one anode.

3b

According to a preferred embodiment, the electrolysis plant defined above is used for performing the process of the invention.

Surprisingly, it could be found in accordance with the present invention that – contrary to the prejudice existing among experts that electrodes with an electrolyte immersion surface of more than 1x1 m, and in particular electrodes with an electrolyte immersion depth of more than 1 m, are not suitable for winning copper due to the non-uniform streamline distribution necessarily obtained at the electrodes – an electrolyte immer-

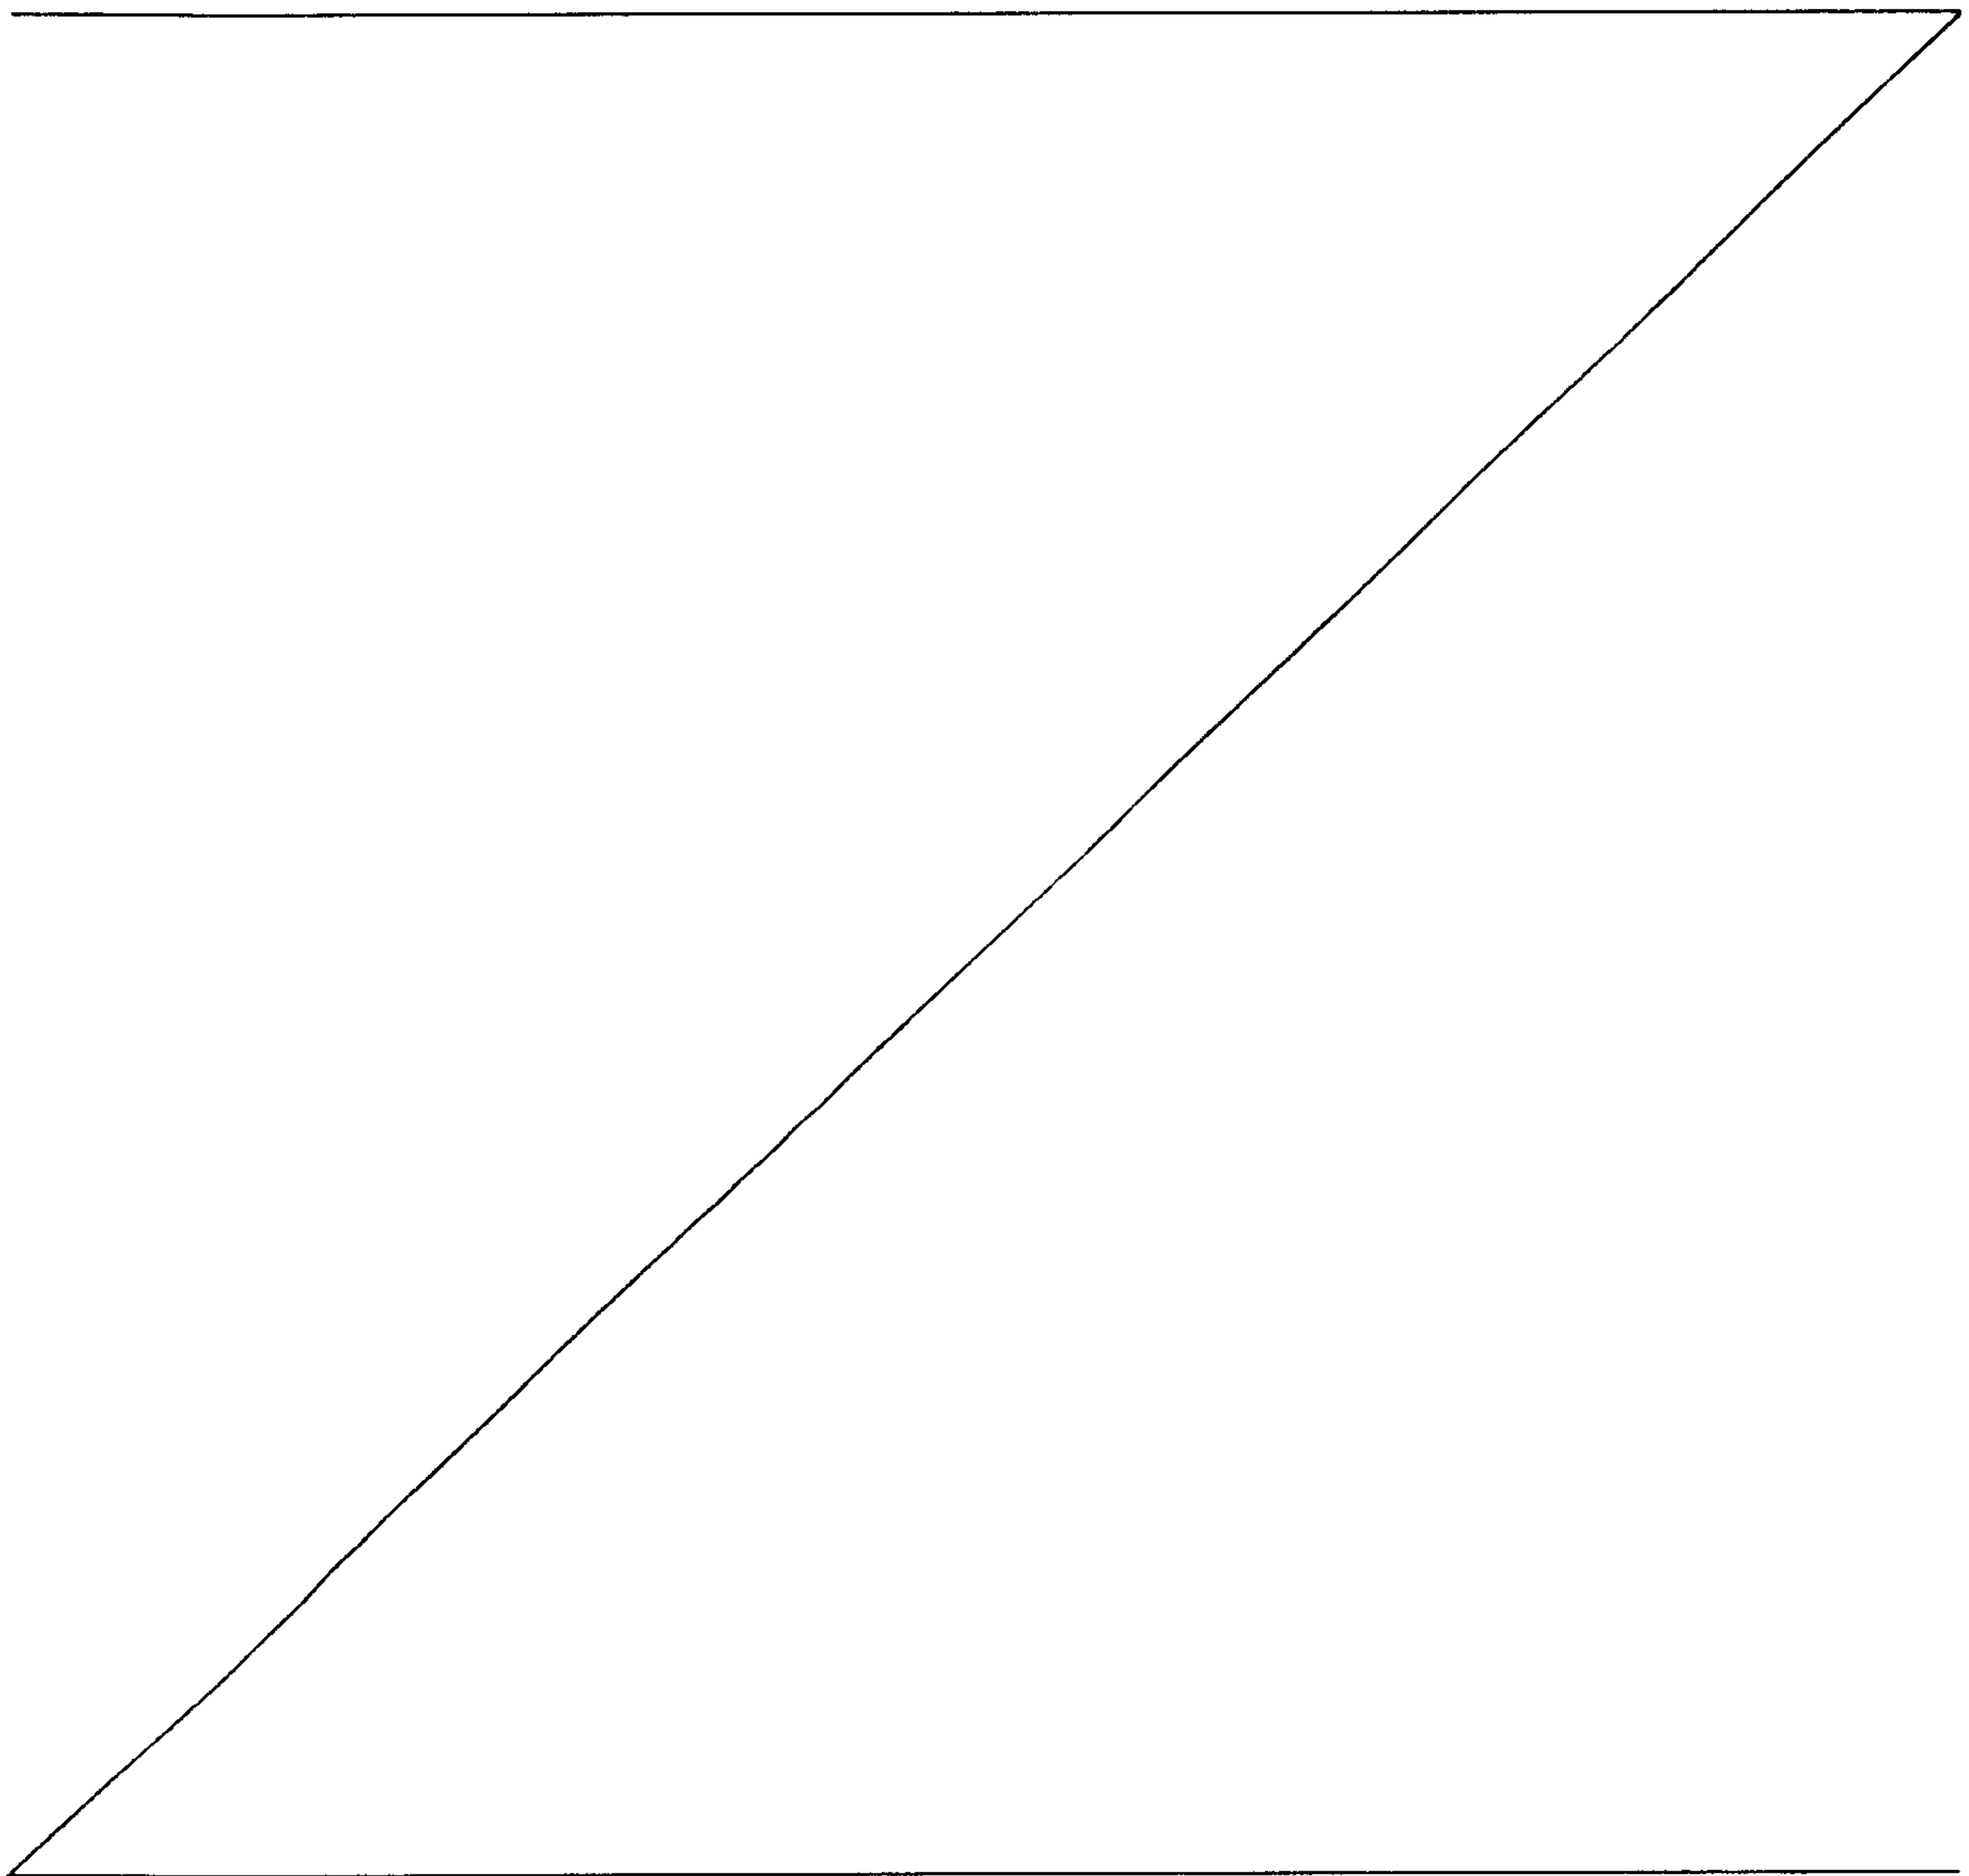

- 4 -

5 sion depth of the electrodes of more than 1.2 m leads to a sufficiently uniform deposition of copper on the cathodes in processes for electrodepositing copper from an electrolyte solution containing the metal in ionogenic form also with the cathode materials commonly employed in the refining and extraction electrolyses and with the usually
10 adjusted current densities. Here as well, an efficient processing of the loaded cathodes, in particular a stripping of the copper deposited, is possible with the known processing techniques. In the process of the invention, more copper is produced per cathode movement than in known processes with a consistent quality of the electrodeposited copper due to the greater electrolyte immersion depth, so that the costs per ton of
15 extracted copper can be decreased drastically.

15 During operation of the electrolysis, the immersion depth of the electrodes into the electrolyte preferably is an integral multiple of the commonly used immersion depth of about 1 m and particularly preferably about 2 m with a cathode width of about 1 m each. The advantage is that the melting furnaces, which because of the active cathode surface, i.e. the cathode surface immersed into the electrolyte, normally were designed
20 for a size of 1x1 m in the known processes, can be used unchanged, in that the stripped copper sheets to be obtained with the process in accordance with the invention are reduced to the corresponding size of 1x1 m subsequent to the stripping operation and before being supplied to the melting furnace. With an active electrode length of 2 m, this can easily be achieved in that for instance the copper sheets are bent in the middle and are folded at the bending surface. It is likewise possible to obtain two separate cathode sheets each of 1x1 m during the stripping operation, e.g. by an insulated
25 horizontally circumferential region provided at about the level of half the cathode height, so that another folding or reduction in size is made superfluous. Finally, a mechanical separation is also possible.

30 In accordance with a development of the invention it is proposed that the at least one electrolytic cell has more than 60 cathodes, particularly preferably more than 100 cathodes, and quite particularly preferably 114 cathodes. As a result, the efficiency of the process of the invention is further increased, as the size of the electrolytic cells caused by this measure provides for an inexpensive transport while at the same time reducing the number of cells per production capacity. This leads to a smaller tank-

- 5 -

house, shorter cathode delivery paths and less stray currents. In principle, the cathodes can be made of all materials known to the skilled person for this purpose, stainless steel cathodes being preferred.

5 It turned out to be advantageous to perform the electrolysis with a current density as used in the known processes, preferably with a current density of more than 200 A/m^2 , and particularly preferably with a current density between 250 and 370 A/m^2 . In this way, the deposition of major amounts of impurities on the cathodes is avoided and copper is produced with the required quality. Due to the greater active electrode length
10 and surface area, higher specific current intensities, i.e. higher current intensities per electrode, are obtained in the process of the invention as compared to the processes of the prior art. Whereas in the last-mentioned processes with cathodes and anodes of an active electrode surface of $1 \times 1 \text{ m}$ each, the specific current intensity is 740 A per electrode with a current density of 370 A/m^2 , the specific current intensity is doubled in
15 accordance with the invention to $1,480 \text{ A}$ per electrode when using electrodes with an active surface of $1 \times 2 \text{ m}$.

In the process of the invention, the electrodes can in principle be positioned in the electrolytic cells, be fixed and supplied with current in any way known to those skilled in
20 the art. However, electrodes with a horizontal hanger bar known per se, which has a first end and a second end and preferably is made of the same material as the cathode surface, in particular steel, turned out to be advantageous. For power supply, one end of the hanger bar of the cathodes each rests on a first contact bar connected to a power source, whereas one end each of the hanger bar of the anodes each is in con-
25 tact with a second contact bar connected to the power source. Preferably, the two contact bars are arranged on one contact bar each, which are provided at the edge of the electrolyte tank. The respectively second ends of the hanger bars of the electrodes can rest on a supporting surface of insulating material, which for instance is likewise arranged on the contact bars.

30

In accordance with a particular embodiment of the present invention, the electrodes have the first end of their hanger bar each resting on one of the two contact bars via a two-line contact. This is advantageous in particular because due to the larger specific

- 6 -

current densities in the process of the invention higher currents must be transmitted from the contact bars to the electrodes, which can be realized more effectively with two-line contacts due to the greater contact surface. For this purpose, a contact bar with an at least substantially trapezoidal indentation is used particularly preferably, onto
5 which the first end of the hanger bar is applied with a contact surface having an at least substantially rectangular cross-section. The two-line contact can of course also be effected in any other way known to the skilled person for this purpose.

To ensure a transmission of current rather free of losses between the contact bars and
10 the cathodes, which are for instance made of stainless steel, also with high specific current intensities, the process of the invention preferably employs cathodes whose e.g. steel-sheathed hanger bar has a copper core. Due to the high electric conductivity of copper, the current thus transmitted from the contact bar to the hanger bar is transmitted to the active electrode surface with only minimal losses, whereas the steel
15 sheath surface of the hanger bar provides the hanger bar in particular with a high mechanical strength and high corrosion resistance. Based on its cross-section, the copper core preferably has the same geometry as the hanger bar. In this case, a hanger bar made of steel, which for instance is substantially square in cross-section, likewise includes a substantially square copper core.

20 In accordance with a development of the invention it is proposed to have the respectively second end of the hanger bar of the cathodes rest on an equalizer bar preferably arranged on one of the two contact bars, irrespective of whether the contact of the other hanger bar ends with the contact bars is effected via a one-line or two-line contact or any other contact whatsoever. The advantage of this embodiment consists in
25 that the cathodes in this way have two electric contacts, namely on the one hand with a contact bar and on the other hand with an equalizer bar, whereby the distribution of current between the electrodes is rendered more uniform. This is expedient in particular with high specific current intensities, in order to minimize the transfer resistances and
30 electric losses.

- 7 -

For the same reasons, it is preferred in the process of the invention to also have the second end of the hanger bar of the anodes rest on an anode equalizer bar separate from the cathode equalizer bar.

- 5 In accordance with a particular embodiment of the present invention, the contact bars and/or possibly the equalizer bar or, particularly preferably, the intermediate contact bars, on which the contact bars and possibly the equalizer bars are arranged, are cooled during the electrolysis, in order to avoid a power loss, which results from the higher specific current intensity and the related higher current load, and a heating of the
- 10 corresponding conductor bars. For this purpose, a water cooling of the conductor bars turned out to be particularly expedient, which is realized for instance by passing cooling water through a cooling water channel provided in the bus bars. Good results are achieved in particular with cooling water channels having a diameter of about 15 to 20 mm. Extruded bus bars with embedded cooling channel are preferably used for this
- 15 purpose, although good results are also achieved with bus bars with milled slots, which are subsequently covered and welded, or with soldered copper tubes. For supplying water to the corresponding bus bars, tubes of PVC or hoses of vinyl material turned out to be particularly useful.
- 20 To achieve an efficient heat exchange between the bus bars and the cooling water, it is proposed in accordance with the invention to pass the cooling water through the cooling water channels with a velocity sufficient to maintain a turbulent water flow, where a velocity of about 1.5 m/s should, however, not be exceeded.
- 25 In accordance with the invention, the cooling water supply can also be effected by two coolant circuits divided into a primary circuit, which at least partly extends through the intermediate bus bars to be cooled, and a secondary circuit, which preferably extends completely outside the bus bars to be cooled. The connection of the two circuits can be effected in any way known to the skilled person. In particular, shell-and-tube heat
- 30 exchangers as well as plate-type heat exchangers turned out to be useful. Particularly preferably, the primary circuit exclusively extends through the bus bars to be cooled and is operated with high-purity cooling water, for instance water purified by a reverse

- 8 -

osmosis plant, whereas the secondary circuit is fed with crude water and is recooled for instance by an atmospheric cooling tower.

5 To ensure that the primary circuit is always filled with cooling water, the same preferably includes a water expansion tank.

10 In accordance with a development of the invention it is proposed to provide a fluid distributor in the at least one electrolytic cell, through which during operation of the extraction electrolysis a liquid, a gas, a gas mixture or a mixture of gas and liquid is introduced, particularly preferably from below, into the electrolytic cell. Due to the convection flow generated by such introduction of fluid a better intermixing of the electrolyte is achieved, which is why the copper is deposited on the cathodes more uniformly. Furthermore, the convection flow effects a reduction in thickness of the boundary layers at the electrodes, which results in a better and faster mass transfer of the copper ions to the electrode surface. An introduction of fluid from below into the electrolytic cell is particularly preferred, because in the upper region of the cell a certain convection flow is obtained automatically due to the gas bubbles released at the anode during the extraction electrolysis, and therefore in particular in the lower region of the electrolytic cell an additional convection flow is important.

20 Preferably, electrolyte solution or a mixture of electrolyte solution and gas bubbles is introduced into the electrolytic cell through the fluid distributor. Since electrolyte continuously refreshed with copper sulfate from the leaching plant must in any case be supplied to the electrolytic cell during operation of the electrolysis, the fluid supply system requires no increase in the investment and operating costs in the first case and only an insignificant increase thereof in the second case. To increase the convection, other liquids, gases or gas mixtures can also be supplied to the electrolytic cell instead of electrolyte solution or a mixture of electrolyte solution and gas bubbles, or other systems such as mechanical mixing devices or the application of ultrasound can be used.

25

30

In accordance with a particular embodiment of the present invention, the fluid distributor, as it is of simple construction and efficient in terms of operating costs, consists of

- 9 -

two tubes arranged substantially parallel to the longitudinal sides of the electrolytic cells, which at their surfaces each have one or more fluid outlet holes. The tubes are disposed at a small distance from the side wall. The distance is defined by the fastening mechanism of the tube at the cell wall and provides for the deposition of electrolyte sludge at the cell bottom. Typically, the distance is 10-50 mm. The distance of the two tubes from the cell bottom should be chosen such that electrolyte sludge can be collected below the fluid distributor at the cell bottom. Typically, the distance from the cell bottom is 100-200 mm. As fluid supply conduit to the fluid distributor, there can for instance be used a tube arranged in the middle of the end face of the electrolytic cell, which with respect to the electrolytic cell extends vertically from the top to the bottom and at its lower end branches into two tubes extending horizontally and parallel to the end face of the electrolytic cell, one of which tubes is each connected with one end of the tubes of the fluid distributor, which extend substantially parallel to the longitudinal sides of the electrolytic cells.

To achieve an effective convection flow, the fluid distributor should have a high enough number of fluid outlet holes. In accordance with the present invention it was found that for this purpose the relative number of the fluid outlet holes with respect to the total number of electrode pairs per electrolytic cell is decisive. Preferably, the fluid distributor has 1-5, particularly preferably about 1-2 fluid outlet holes per electrode pair and cell side provided in the electrolytic cell.

The shape of the fluid outlet holes is less decisive in terms of the convection flow. However, it turned out to be advantageous to provide substantially circular fluid outlet holes.

However, what influences the quality of the convection flow achieved much more is the cross-sectional area of the fluid outlet holes. In the case of circular fluid outlet holes, the diameter thereof preferably is 1 to 10 mm, particularly preferably 5 to 7 mm, and in particular about 6 mm.

- 10 -

In accordance with a development of the invention it is proposed to provide at least two electrolyte outlets per electrolytic cell, in order to achieve a trouble-free overflow and promote a uniform distribution of the electrolyte in the electrolytic cell.

- 5 In accordance with a particular embodiment of the present invention, the cathodes used have an indentation of V-shaped cross-section at their lower longitudinal edge. Thereby, a densification of streamlines necessarily occurring at straight edges, which leads to an – undesired – increased deposition of copper at the edges, can be reduced and optimally even be prevented completely. During stripping, the indentation further-
10 more effects a separation of the front and rear sides deposited on the cathode into two cathode sheets.

- The invention will subsequently be explained in detail with reference to embodiments and the drawing. All features, per se or in any combination, constitute the subject-
15 matter of the invention, independent of their inclusion in the claims or their back-reference.

Brief Description of the Drawings

- 20 Fig. 1 shows the basic structure of an electrolysis plant for winning or refining copper;
- Fig. 2 shows a section along line A-A in Fig. 1;
- 25 Fig. 3 schematically shows a section through an electrolytic cell with a cathode held by a hanger bar;
- Fig. 4 schematically shows a section through an electrolytic cell with an anode held by a hanger bar;
- 30 Fig. 5 schematically shows two-line contacts between the hanger bar and a contact bar;

- 11 -

Fig. 6 schematically shows one-line contacts between the hanger bar and a contact bar with equalizer bar; and

5 Fig. 7 schematically shows the structure of a pilot plant for performing the process of the invention.

Description of the Preferred Embodiments

10 In the electrolysis plant for winning or refining of copper, which is schematically illustrated in Figs. 1 and 2, electrolytic cells 1 (dimensions L x W x H e.g. about 12.5 x 2 x 2.7 m) each with a plurality of e.g. 115 anodes 2 and 114 cathodes 3, which are each arranged alternately and are held at the edges of the electrolytic cells 1 via hanger bars 4, are provided in numerous cell rows.

15 Via a crane 5, the hanger bar 4 with the electrodes suspended thereon can be transported between a maintenance area 6 for the anodes 2, the cells 1 as well as a stripping machine 7, in which the copper deposited at the cathodes 3 is stripped in a manner known per se.

20 Fig. 3 schematically shows a cathode 3 resting on the edges of the electrolytic cell via the hanger bar 4. Correspondingly, Fig. 4 shows an anode 2 which is likewise held by a hanger bar 4. The anode 2 additionally has holes 8 for spacers, which ensure the required uniform distance between anodes and cathodes of e.g. 50 mm each.

25 Via a two-line contact 9, the one end of the hanger bars 4 rests on a contact bar 10 arranged at the edge of the electrolyte cell(cf. Fig. 5), which is connected with a non-illustrated power source via a bus bar. The other end of the hanger bar 4 rests on an equalizer bar 11. In general, this is effected via a one-line contact (cf. Fig. 6).

30 With the process in accordance with the invention, which is characterized by a high specific current intensity – based on the electrodes – more copper is produced than in the known processes due to the greater electrolyte immersion depth of the cathodes per cathode movement with a consistent copper quality. A cathode with an active

– 12 –

immersion surface increased to 2x1 m needs only to be withdrawn from the electrolyte tank for processing after a copper loading of 200 kg, whereas a conventional prior art cathode of 1x1 m must already be processed after a deposition of 100 kg copper. Thus, the effort involved in the cathode movements is halved by a factor of 2, so that, based on the same amount of copper produced, correspondingly smaller or less crane systems are required, for instance one instead of two cranes for handling the electrodes, a smaller number of stripping machines and thus less production area and personnel. The ground area required for mounting the electrolytic cells in the tankhouse is also drastically reduced. In the process in accordance with the invention, on the other hand, different contact bars and possibly equalizer bars are required due to the higher specific current intensity, and for the subsequent processing of the loaded cathodes crane systems with a higher load-bearing capacity are required due to the higher weight of these cathodes. The height of the tankhouse between upper cell edge and crane path must be adjusted for processing the extended cathodes, and the same is true for mounting the electrolytic cells with increased overall height. Due to the greater cathode surface, differently sized stripping machines as well as folding or comminution machines for folding the larger copper sheets before supplying the same to a melting furnace designed for conventional plants are required. As both investment and operating costs for the last-mentioned measures are smaller than the corresponding savings achieved due to the smaller number of cathode movements, a significant decrease of the production costs is achieved on the whole.

Based on an annual production of 120,000 tons, a comparison of the process of the invention, which is performed with an active electrode surface of 2x1 m, with the prior art process performed with an active electrode surface of 1x1 m, but twice the number of electrodes with the same current density, yields the following characteristics:

	Prior art process	Inventive process
Amount of copper per m ² cell area (in t)	40	65
Amount of copper per m ² tankhouse (in t)	20	30
Amount of copper per m ³ tankhouse (in t)	1.9	2.3
Cathode movements per day	3120	1560

– 13 –

When using the process of the invention, the investment costs for corresponding plants for the electrochemical extraction of copper thus can be decreased by up to 20%, and the production costs can be decreased by up to 10%.

5 Example

10 In the test stand for performing verification tests on a pilot scale as shown in Fig. 7, two electrolytic cells 1a, 1b connected in parallel with respect to the electrolyte supply and a common electrolyte preparation and circulation system are provided. Both electrolytic cells are electrically connected in series (not shown). The electrolytic cell 1a is equipped with two lead anodes (A, width of 0.5 m and height of 2 m, immersed surface) and a centrally arranged cathode K. The electrolytic cell 1b has 3 anodes (A, width of 0.5 m and height of 1 m, immersed surface) and two cathodes K of equal size. The used number and size of the electrodes leads to the fact that in the case of a series connection equal current densities are achieved in both electrolytic cells.

Both electrolytic cells are charged with the same amount of fresh electrolyte (20a and 20b). The inflow of electrolyte is adjusted such that during a stationary operation of both electrolytic cells a copper depletion of about 1.5 g/l is obtained. The depleted solution 21a and 21b, respectively, is supplied to the electrolyte circuit. It comprises a stirred leaching tank 22, in which the depleted amount of copper is compensated by adding copper oxide 23. The overflow of the leaching tank 22 (enriched electrolyte 25) is introduced into a pump recipient tank 24. The pump recipient tank 24 is electrically heated by the heater 26 and stirred by partial recirculation of the enriched electrolyte 25'. The pump 27 is used for circulating the electrolyte.

30 In pilot tests, a synthetically produced sulfuric-acid copper sulfate solution was used as electrolyte. To improve the cathode morphology, a small amount of guar solution (not shown) was added to the pump recipient tank 24. The current density used was 300 A/m². Several tests were performed, which took 5 to 7 days. In all tests, cathodes of very good quality were produced in both cells. The copper quality achieved was independent of the cathode size. In all tests, a current efficiency > 90% was achieved (Table 1, all concentrations at the cell inlet, e.g. cell 1a):

- 14 -

Test	Cu Content (g/l)	H ₂ SO ₄ (g/l)	Current density (A/m ²)	Test period (h)	Voltage (V)	Current efficiency (%)
1	45	120	300	161	2.1	95
2	47	140	300	167	2.05	91
3	55	135	300	189	2.1	94

– 15 –

List of Reference Numerals

	1	electrolytic cell
	2	anode
5	3	cathode
	4	hanger bar
	5	crane
	6	maintenance area
	7	stripping machine
10	8	holes
	9	two-line contact
	10	contact rail
	11	equalizer bar
	20a,b	fresh electrolyte
15	21a,b	depleted solution
	22	leaching tank
	23	copper oxide
	24	pump recipient tank
	25,25'	enriched electrolyte
20	26	heater
	27	pump
	A	anode
	K	cathode

WHAT IS CLAIMED IS:

1. A process for electrodepositing copper from an electrolyte solution containing the copper in ionogenic form, said process comprising a step of passing an electric current across the electrolyte solution in at least one electrolytic cell provided in a tank for receiving the electrolyte solution and provided with electrodes including at least one anode and at least one cathode, said at least one anode and at least one cathode being alternately arranged at a distance from each other, wherein the electrodes have a horizontal hanger bar with a first end and a second end and wherein at an edge of the electrolyte tank two contact bars are provided, which are
10 each connected to a power source of electric current, the first end of the hanger bar of said at least one cathode resting on one of the two contact bars via a two-line contact and the first end of the hanger bar of said at least one anode resting on the other one of the two contact bars via a two-line contact, characterized in that the second end of the hanger bar of said at least one cathode rests on a cathode equalizer bar which is arranged on one of the two contact bars, in that the second end of the hanger bar of said at least one anode rests on an anode equalizer bar, which is arranged on one of the two contact bars, and in that during operation of the electrolysis the at least one cathode is immersed into the electrolyte solution over a length of at least 1.2 meters.

20

2. The process as claimed in claim 1, characterized in that during operation of the electrolysis the at least one cathode is immersed into the electrolyte solution over a length of about 2 meters or another integral multiple of one meter.

3. The process as claimed in claim 1 or 2, characterized in that during operation of the electrolysis the at least one cathode is immersed into the electrolyte solution with a cross-sectional area of 2x1 meter.

4. The process as claimed in any one of claims 1 to 3, characterized in that the at least one electrolytic cell has more than 60 cathodes.

5. The process as claimed in claim 4, characterized in that the at least one electrolytic cell has more more than 100 cathodes.

6. The process as claimed claim 5, characterized in that the at least one electrolytic cell has more than 114 cathodes.

10 7. The process as claimed in any one of claims 1 to 6, characterized in that the electric current has a current density of more than 200 A/m².

8. The process as claimed in claim 7, characterized in that the electric current has a current density between 250 and 370 A/m².

9. The process as claimed in claim 1, characterized in that the contact bars each have an at least substantially trapezoidal indentation on which rest the respectively first ends of the hanger bars with a contact surface having an at least substantially rectangular cross-section.

20

10. The process as claimed in claim 1 or 9, characterized in that the hanger bar has a sheath surface made of steel and a core made of copper.

11. The process as claimed in any one of claims 1 to 10, characterized in that the contact bars and/or the equalizer bars are water-cooled.

12. The process as claimed in claim 11, characterized in that the contact bars and/or the equalizer bars to be cooled are cooled by passing cooling water through a cooling water channel provided in the contact bars.

13. The process as claimed in claim 11, characterized in that the contact bars and/or the equalizer bars are further arranged on intermediate contact bars which are water-cooled.

14. The process as claimed in claim 13, characterized in that the intermediate contact bars to be cooled are cooled by passing cooling water through a cooling water channel provided in the contact bars.

10 15. The process as claimed in claim 12 or 14, characterized in that the cooling water is passed through the cooling water channel in a turbulent flow.

16. The process as claimed in any one of claims 11 to 15, characterized in that the contact bars are water cooled by two separate cooling circuits, including a primary circuit and a secondary circuit, the primary circuit being at least partly provided in the contact bars to be cooled, and both circuits being connected with each other by a heat exchanger.

17. The process as claimed in claim 16, characterized in that the primary circuit
20 is fed with purified water and the secondary circuit is fed with crude water.

18 The process as claimed in any one of claims 1 to 17, characterized in that in the at least one electrolytic cell a fluid distributor is further provided, through which during operation of the electrolysis, a fluid comprising the electrolyte solution, gas bubbles or a mixture of the electrolyte solution and gas bubbles is introduced into the electrolytic cell.

19. The process as claimed in claim 18, characterized in that the fluid distributor is disposed at a lower end of the electrolytic cell and that the fluid is introduced into

the electrolytic cell through the fluid distributor below or at about the level of a lower end of the electrodes.

20. The process as claimed in claim 17 or 18, characterized in that the electrolytic cell is provided with longitudinal sides, and characterized in that the fluid distributor consists of two tubes arranged substantially parallel to the longitudinal sides of the electrolytic cell, said tubes being each further provided with a first end and provided at their surface with one or more fluid outlet holes, each of said first end being connected with a fluid supply conduit.

10

21. The process as claimed in claim 20, characterized in that said at least one anode and said at least one cathode are defining at least one electrode pair, and characterized in that the fluid distributor has 1 to 5 fluid outlet holes per electrode pair and longitudinal side provided in the electrolytic cell, whose arrangement is substantially adjusted to the spaces between the electrodes.

22. The process as claimed in claim 21, characterized in that the fluid distributor has 1 to 2 fluid outlet holes.

20 23. The process as claimed in any one of claims 20 to 22, characterized in that the fluid outlet holes of the fluid distributor are of substantially circular shape and have a diameter of 1 to 10 mm.

24. The process as claimed in claim 23, characterized in that the diameter of the fluid outlet holes is of 5 to 7 mm.

25. The process as claimed in claim 24, characterized in that the diameter of the fluid outlet holes is 6 mm.

26. The process as claimed in any one of claims 1 to 25, characterized in that each electrolytic cell is further provided with two electrolyte outlets.

27. The process as claimed in any one of claims 1 to 26, characterized in that the at least one cathode has an indentation of V-shaped cross-section at a lower longitudinal edge thereof.

10 28. An electrolysis plant for electrodepositing copper from an electrolyte solution containing the copper in ionogenic form, by passing an electric current across the electrolyte solution, said electrolysis plant comprising at least one electrolytic cell (1) which includes an electrolyte tank for receiving the electrolyte solution, at least two electrodes including at least one anode (2) and at least one cathode (3), said at least one anode (2) and at least one cathode (3) being alternately arranged at a distance from each other and each having a substantially horizontal hanger bar (4), as well as two contact bars (10) arranged at an edge of the electrolyte tank, each contact bar being connectable to a power source of electric current, where the at least one cathode (3) has a first end of its hanger bar (4) resting on one of the two contact bars and the at least one anode (2) has a first end of its hanger bar (4) resting on the other one of the two-contact bars, characterized in that during
20 operation of the electrolysis the at least one cathode is immersed into the electrolyte solution over a length of at least 1.2 meters, in that the first ends of the hanger bars (4) each rest on the contact bars via a two-line contact (9), and in that on at least one of the two contact bars (10) at least one equalizer bar (11) is provided, on which rests a second end of each of the hanger bars (4) of the at least one cathode (3) and/or at least one anode (2).

29. The electrolysis plant as claimed in claim 28, characterized in that on each of the two contact bars (10) at least one equalizer bar (11) is provided, the respective second end of the hanger bars (4) of the at least one cathode (3) resting on one of

the two equalizer bars (11) and the respective second end of the hanger bars (4) of the at least one anode (2) resting on the other equalizer bar (11).

30. The electrolysis plant as claimed in claim 28 or 29, characterized in that the contact bars each have a substantially trapezoidal indentation, on which rest the respective first ends of the hanger bars (4) of the electrodes with a contact surface having a substantially rectangular cross-section.

10 31. The electrolysis plant as claimed in any one of claims 28 to 30, characterized in that a cooling water channel is provided in at least in one of the contact bars, or the equalizer bars..

32. The electrolysis plant as claimed in claim 31, characterized in that it further comprises intermediate bars in which a cooling water channel is provided.

33. The electrolysis plant as claimed in claim 31 or 32, characterized in that the cooling water channel has a diameter of 15 to 20 mm.

20 34. The electrolysis plant as claimed in any one of claims 31 to 33, characterized in that the cooling water channel is connected to a supply of water with a tube made of PVC or a hose made of vinyl material.

35. The electrolysis plant as claimed in any one of claims 31 to 34, characterized in that two separate cooling circuits are provided, one of which being a primary circuit that is at least partly provided in said cooling water channel, and both cooling circuits being connected with each other by a heat exchanger.

36. The electrolysis plant as claimed in claim 35, characterized in that the primary circuit further comprises a water expansion tank.

37. The electrolysis plant as claimed in any one of claims 28 to 36, characterized in that inside the electrolytic cell, a fluid distributor is further provided.

38. The electrolysis plant as claimed in claim 37, characterized in that the fluid distributor is provided at a bottom inside the electrolytic cell.

39. The electrolysis plant as claimed in claim 37 or 38, characterized in that the electrolytic cell is further provided with longitudinal sides, in that the fluid distributor
10 consists of two tubes arranged substantially parallel to the longitudinal sides of the electrolytic cell, and in that said tubes are provided with a first end and provided at their surfaces with one or more fluid outlet holes, each of said first ends being connected with a fluid supply conduit.

40. The electrolysis plant as claimed in any one of claims 37 to 39, characterized in that said at least one anode and said at least one cathode are defining at least one electrode pair, and characterized in that the fluid distributor has 1 to 5, particularly preferably 1-2 fluid outlet holes per electrode pair provided in the electrolytic cell, whose arrangement is substantially adjusted to the spaces between
20 the electrodes, which particularly preferably have a circular shape and a diameter of 1 to 10 mm, particularly preferably 5 to 7 mm, and in particular 6 mm.

41. The electrolysis plant as claimed in claim 40, characterized in that the fluid distributor has 1 to 2 fluid outlet holes.

42. The electrolysis plant as claimed in claim 40 or 41, characterized in that the fluid outlet holes have a circular shape and a diameter of 1 to 10 mm.

43. The electrolysis plant as claimed in claim 42, characterized in that the diameter of the fluid outlet holes is 5 to 7 mm.

44. The electrolysis plant as claimed in claim 43, characterized in that the diameter of the fluid outlet holes is 6 mm.

45. The electrolysis plant as claimed in claim 28, characterized in that it is used for performing a process as claimed in any one of claims 1 to 27.

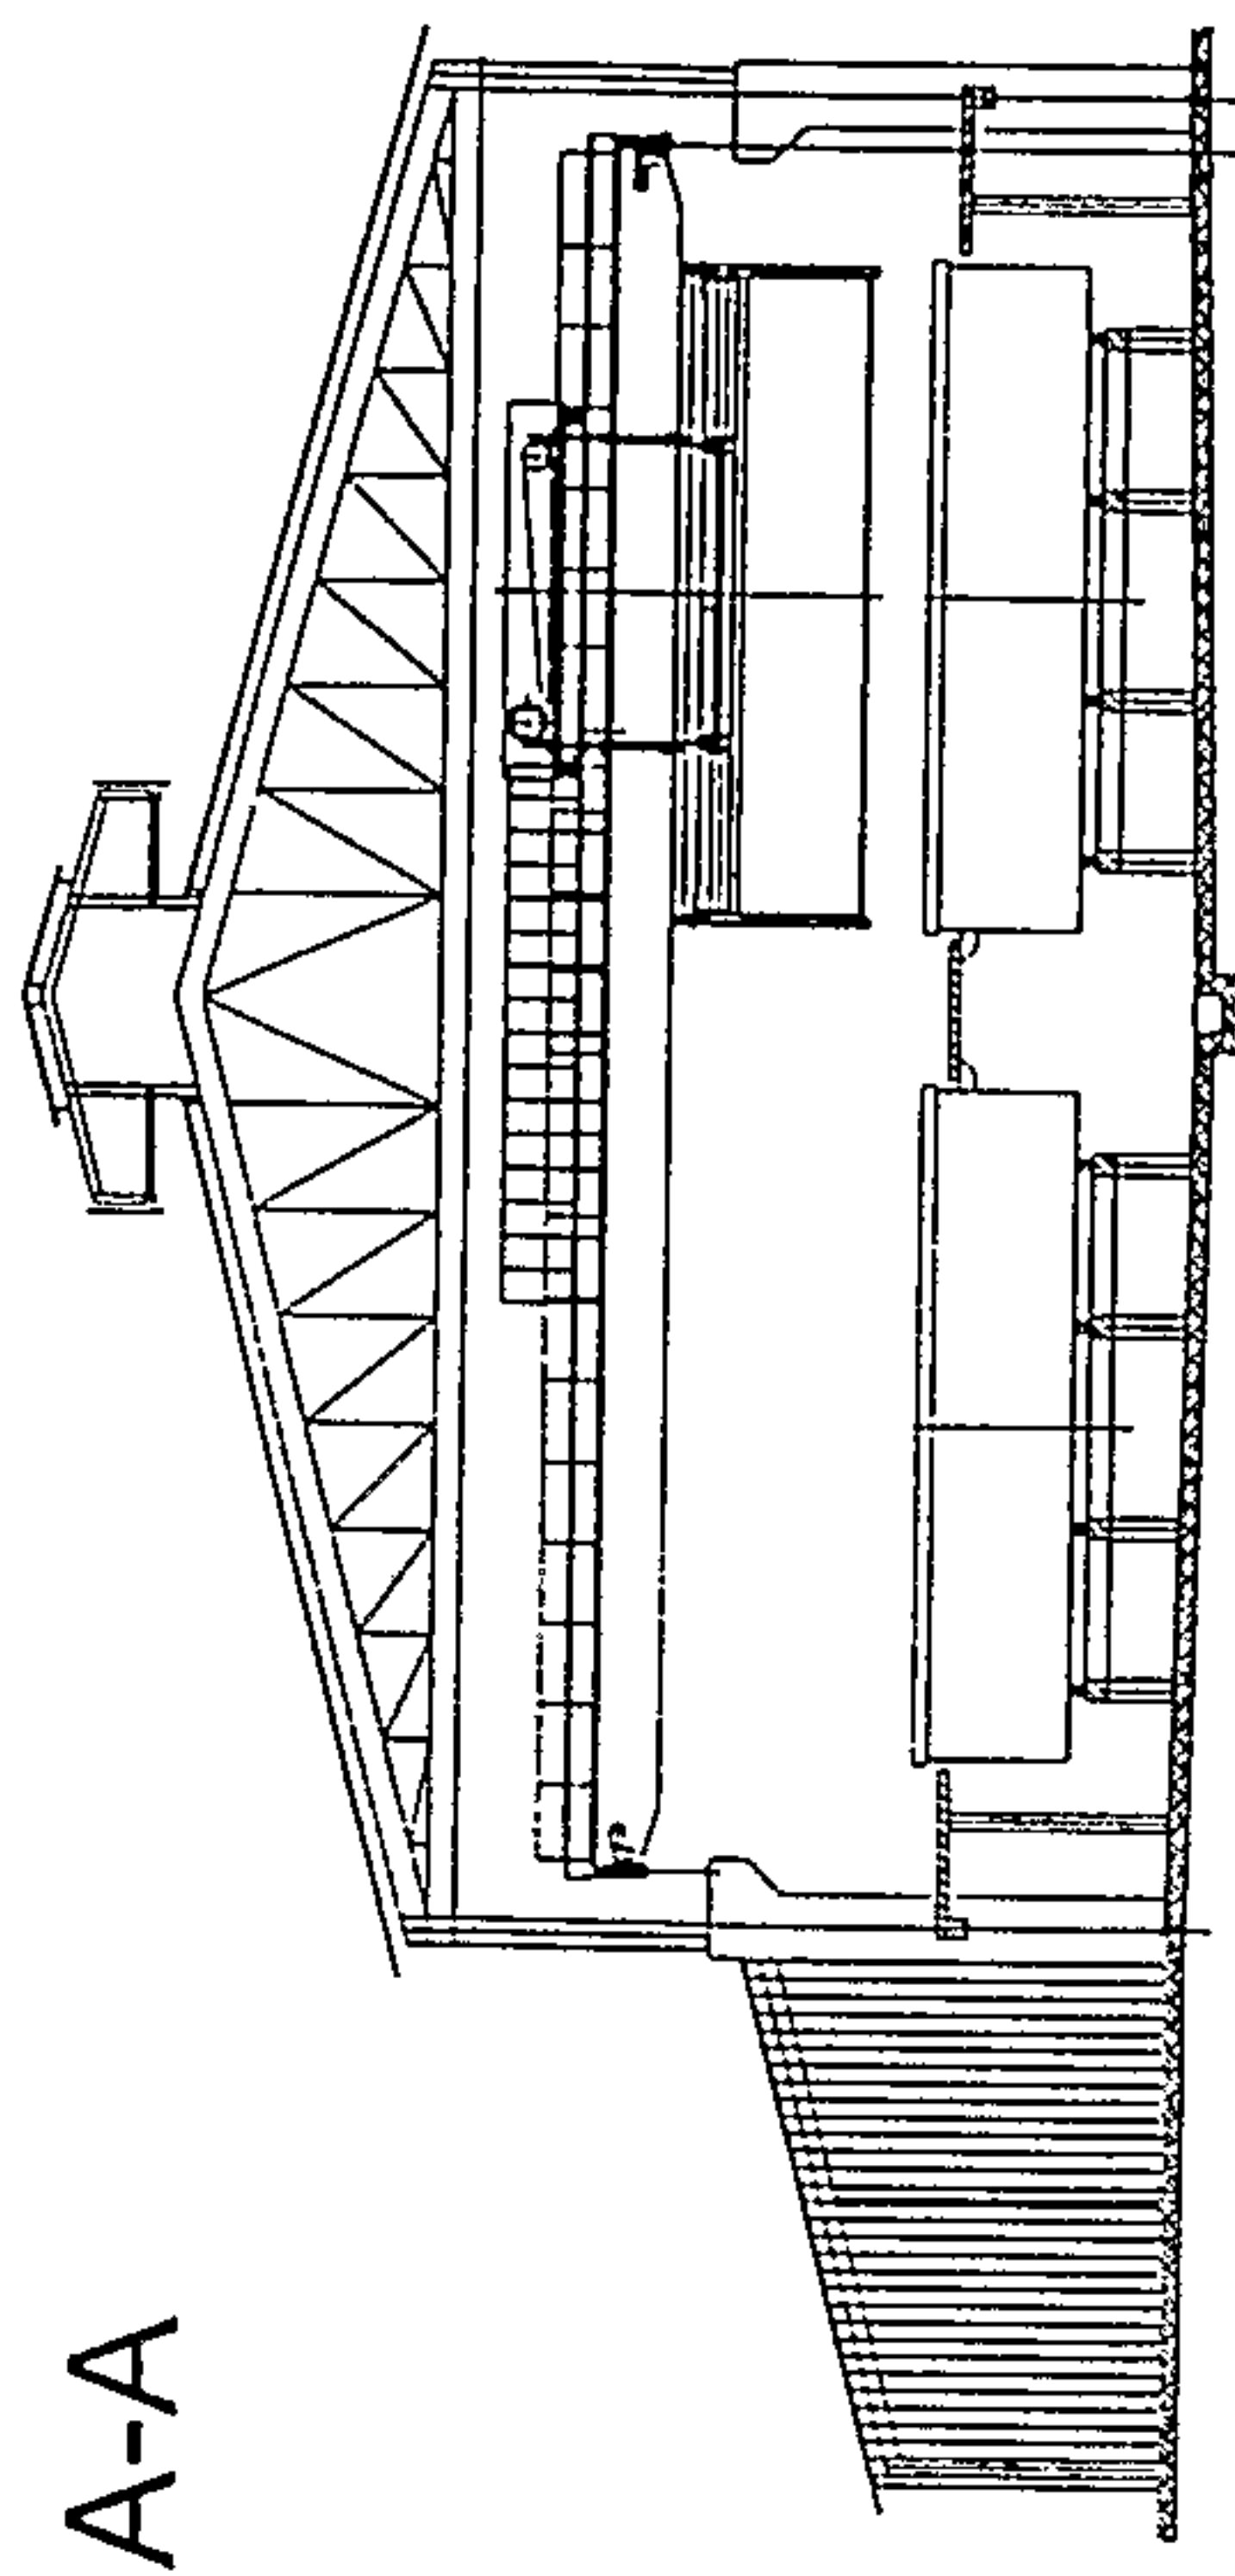


Fig. 2

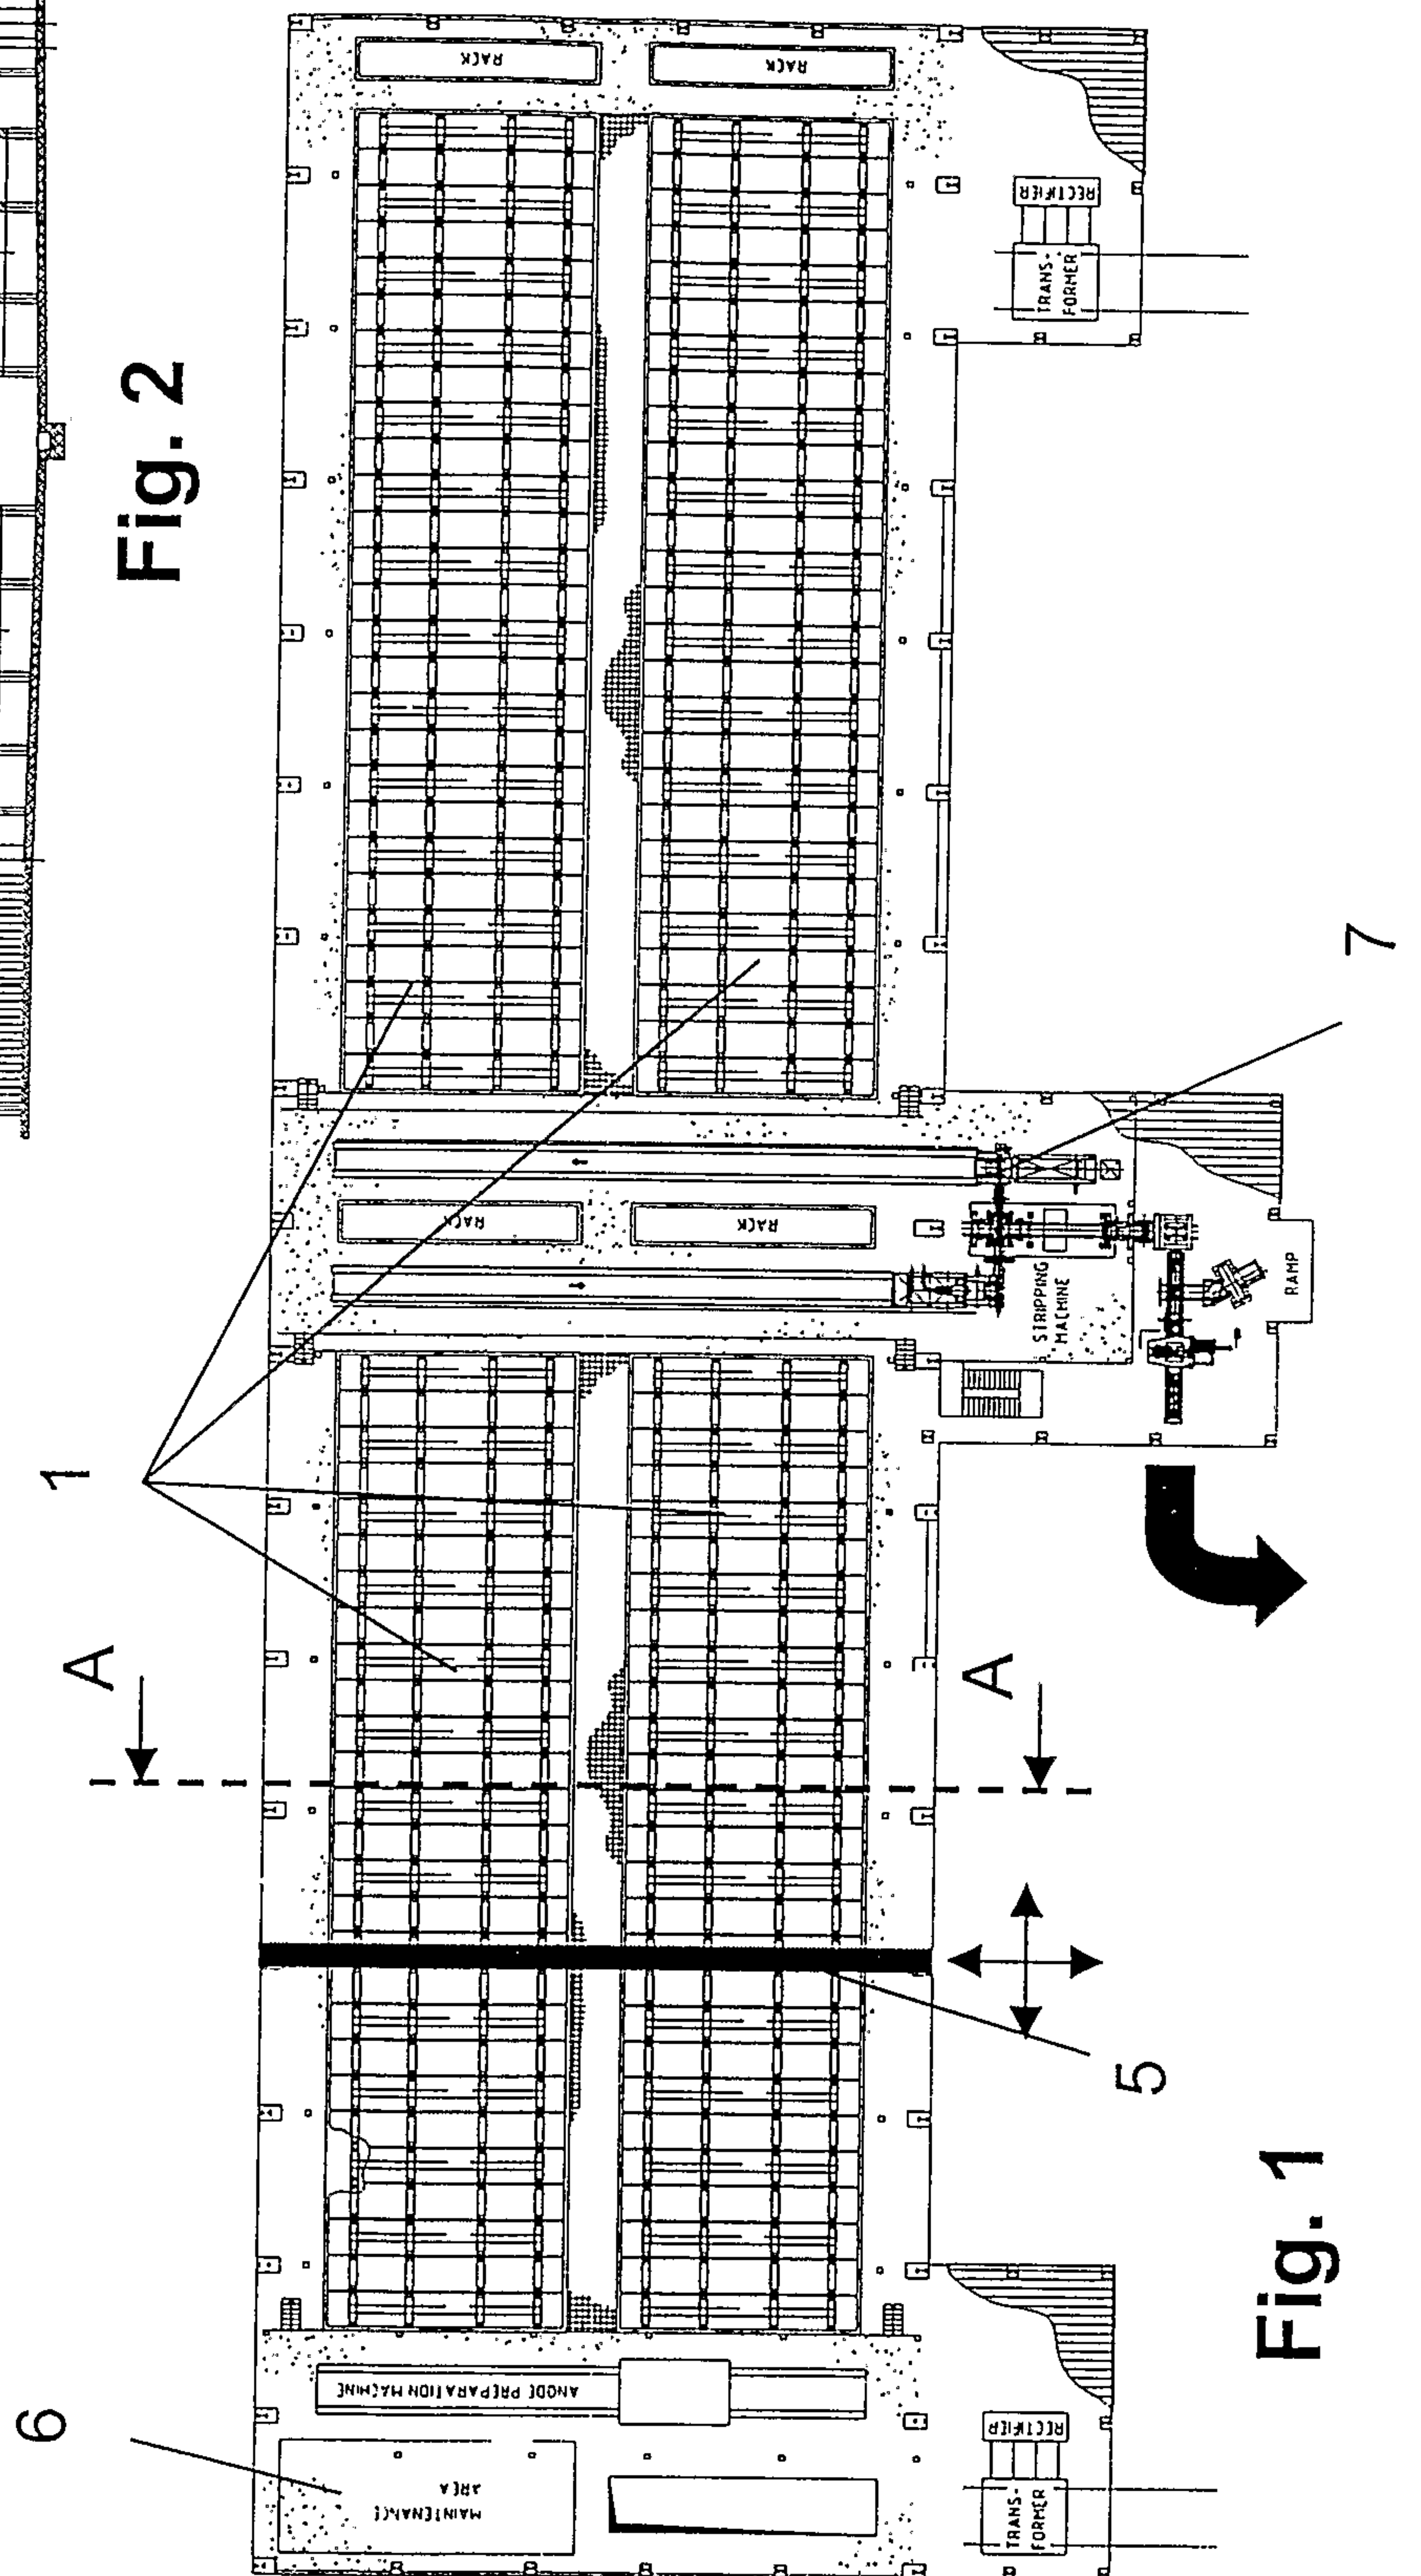


Fig. 1

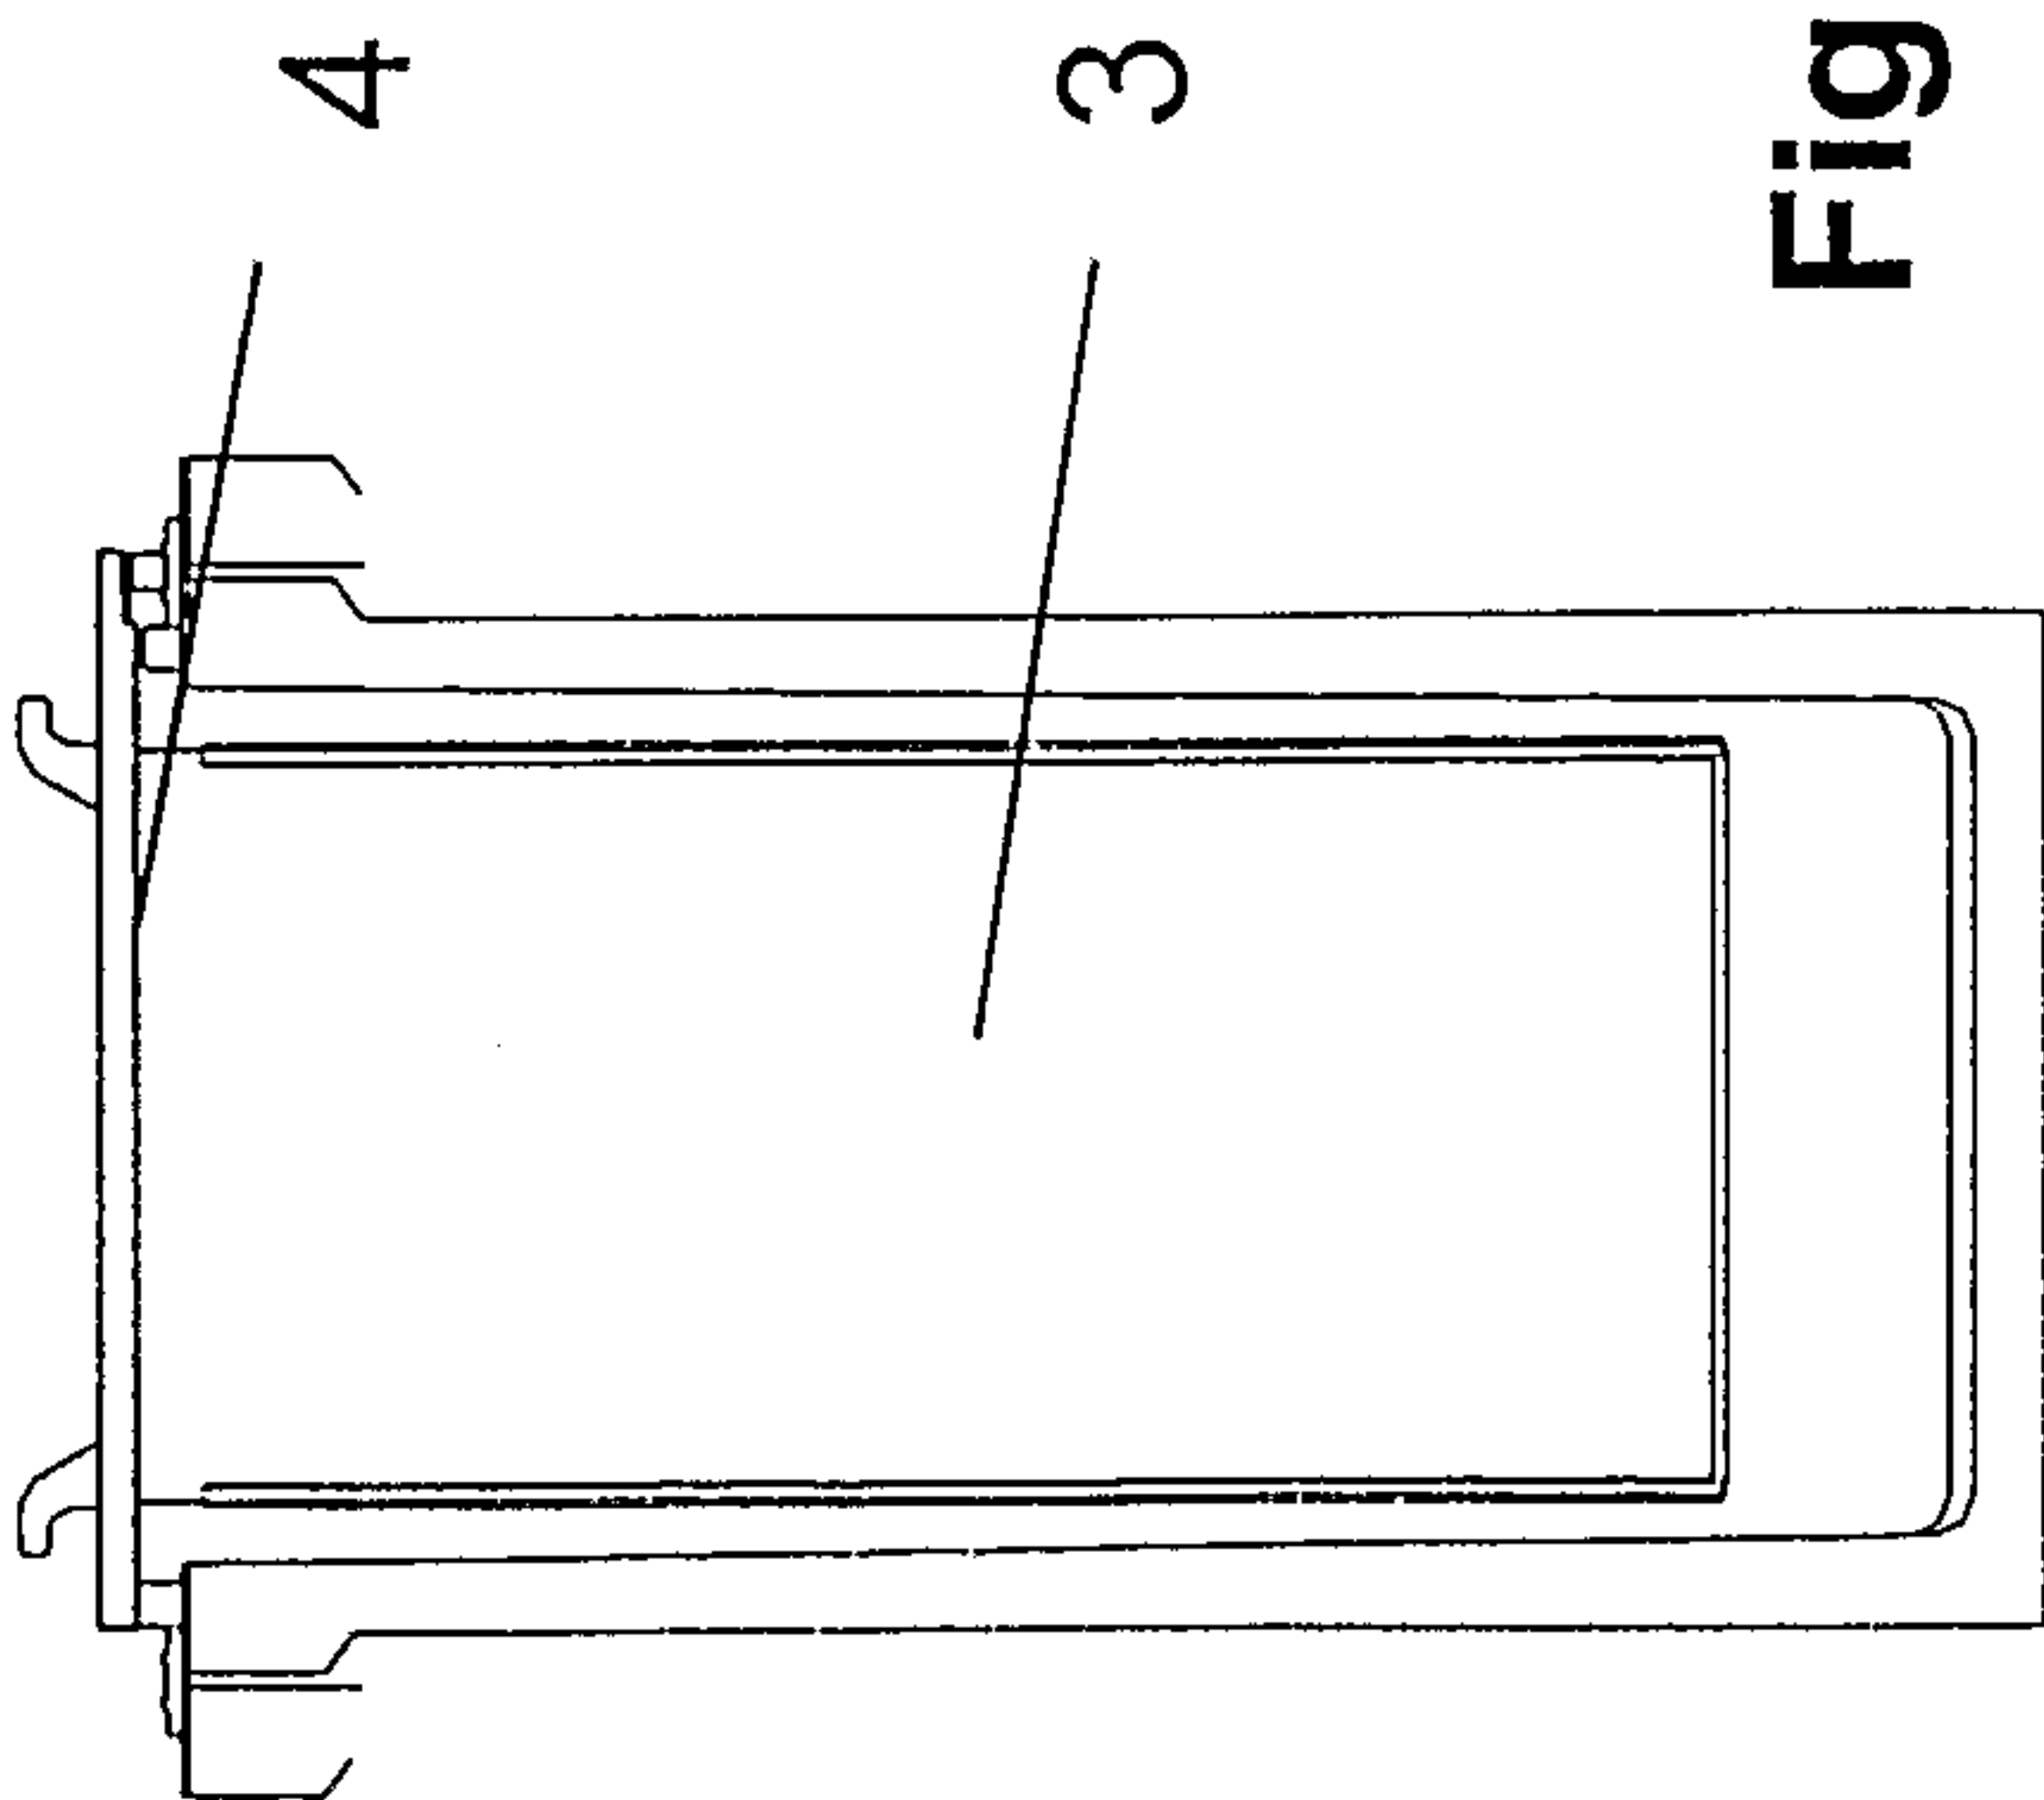


Fig. 3

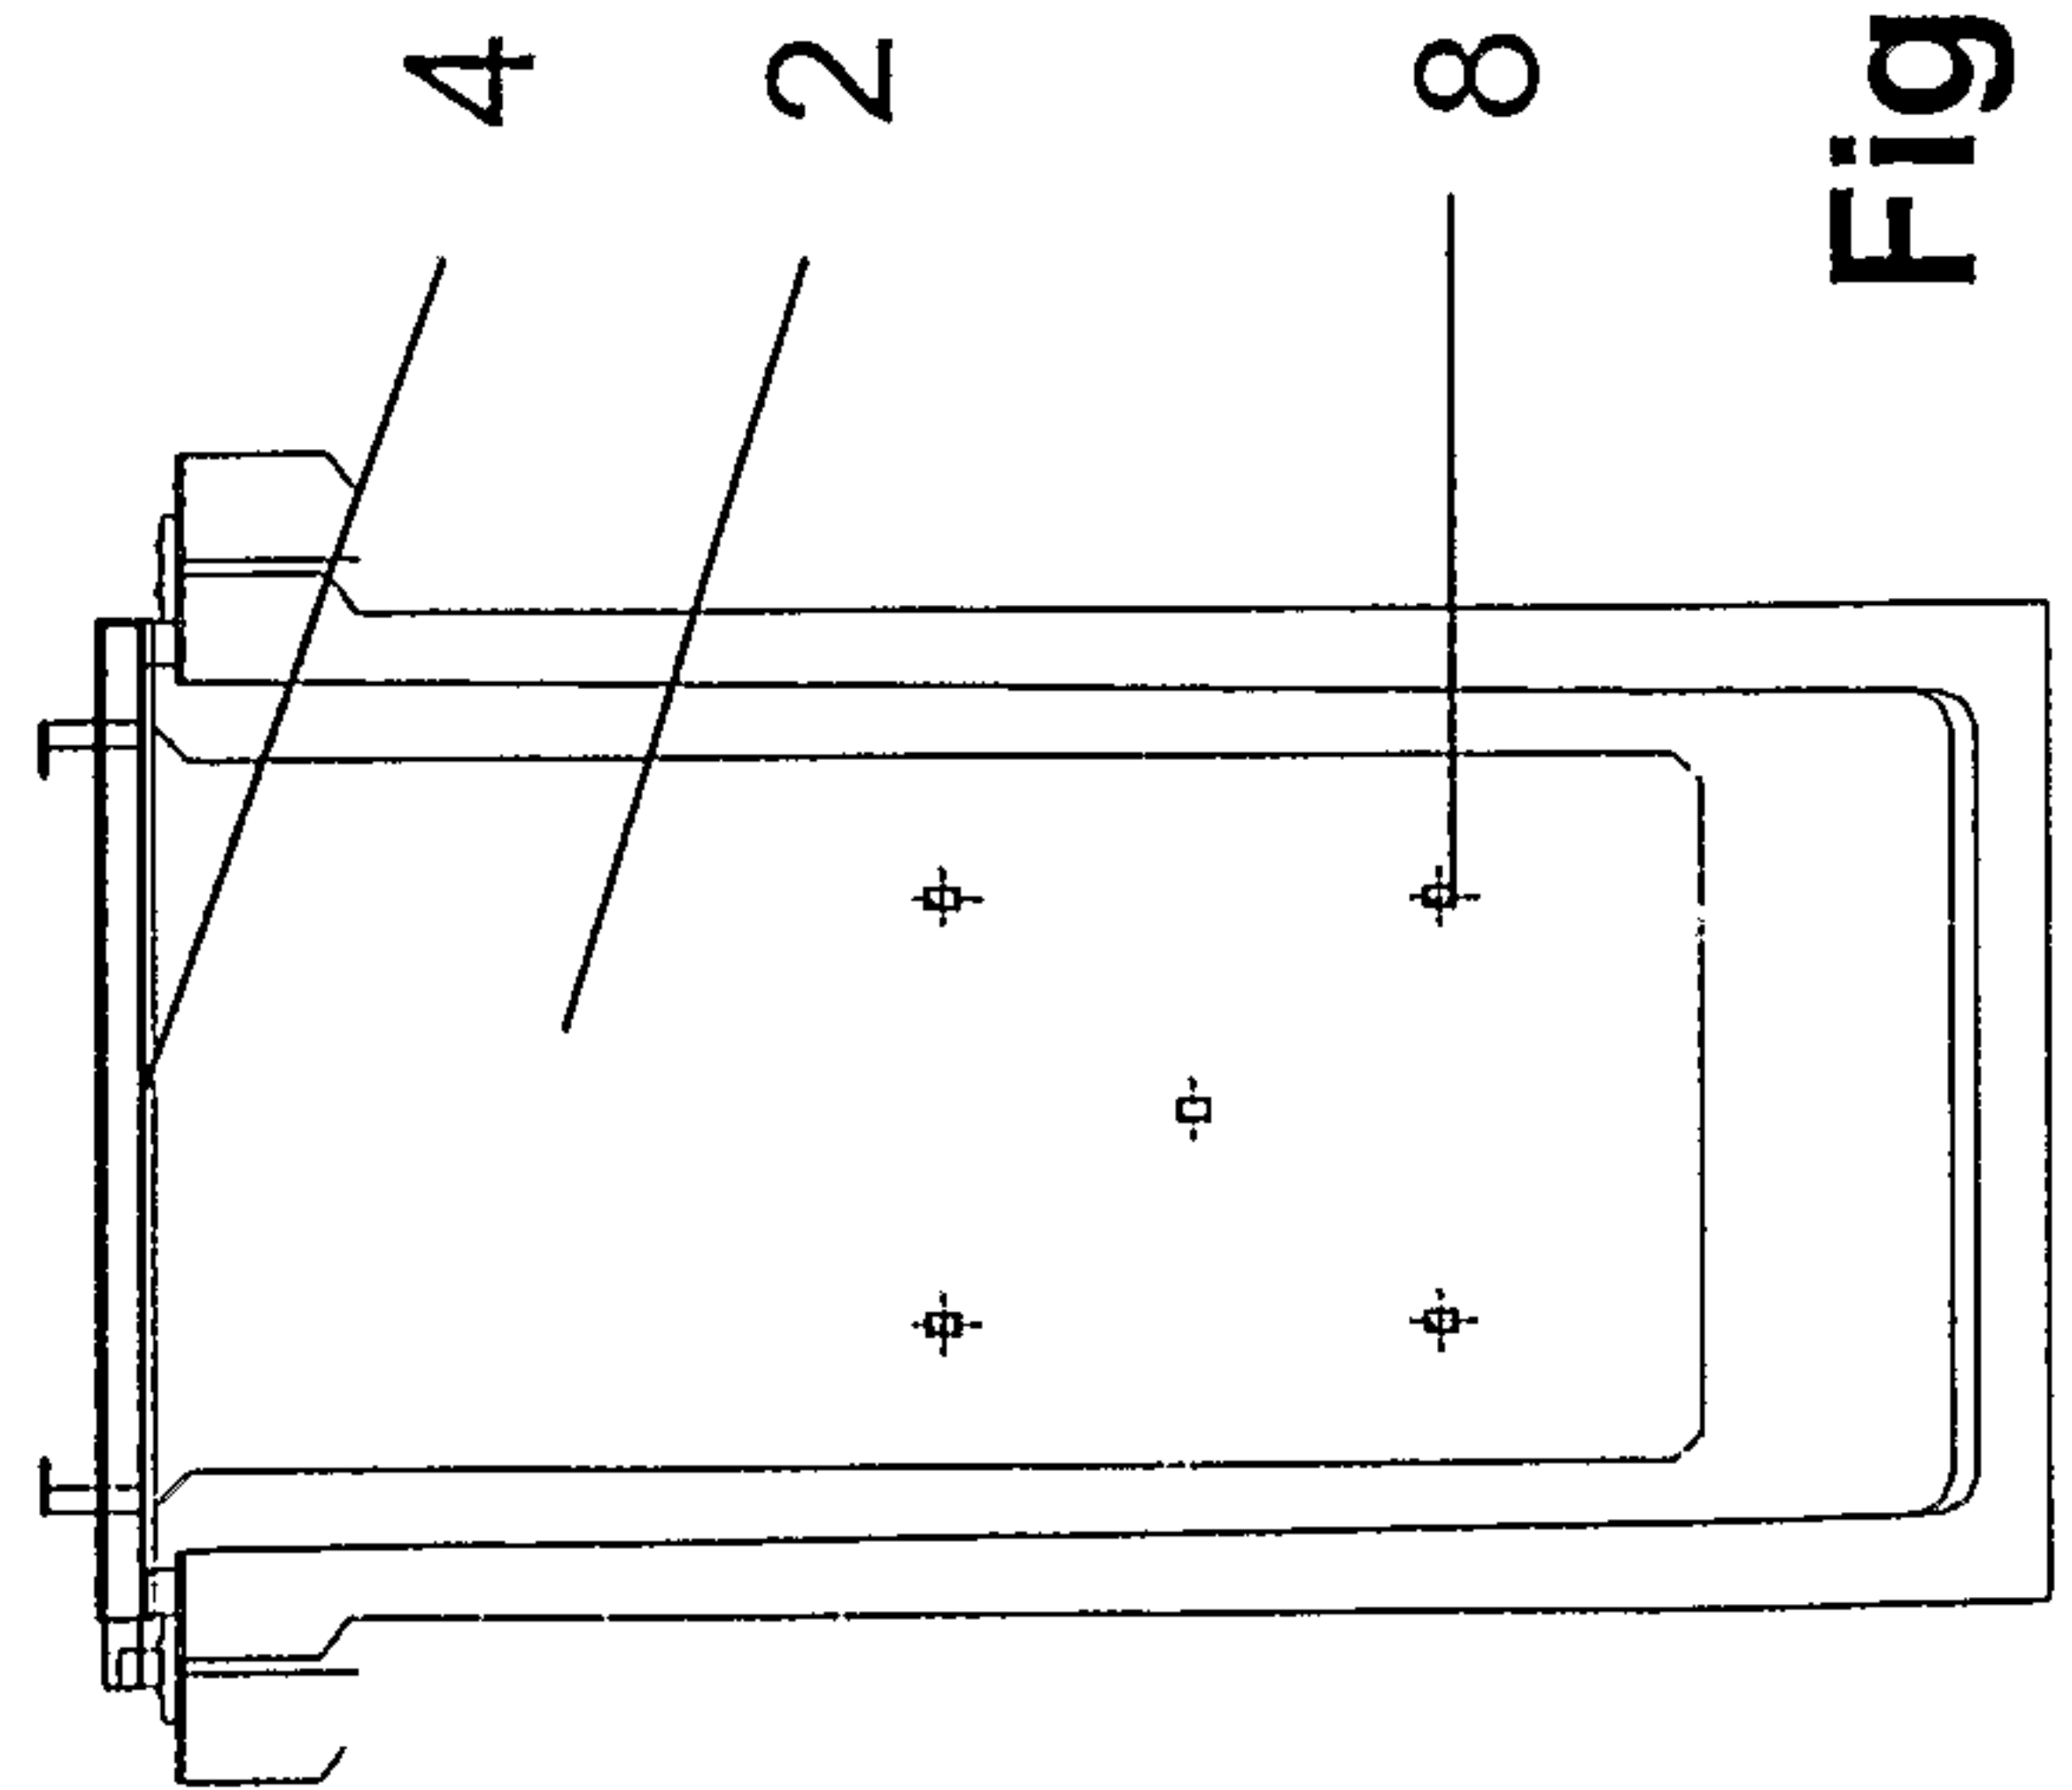


Fig. 4

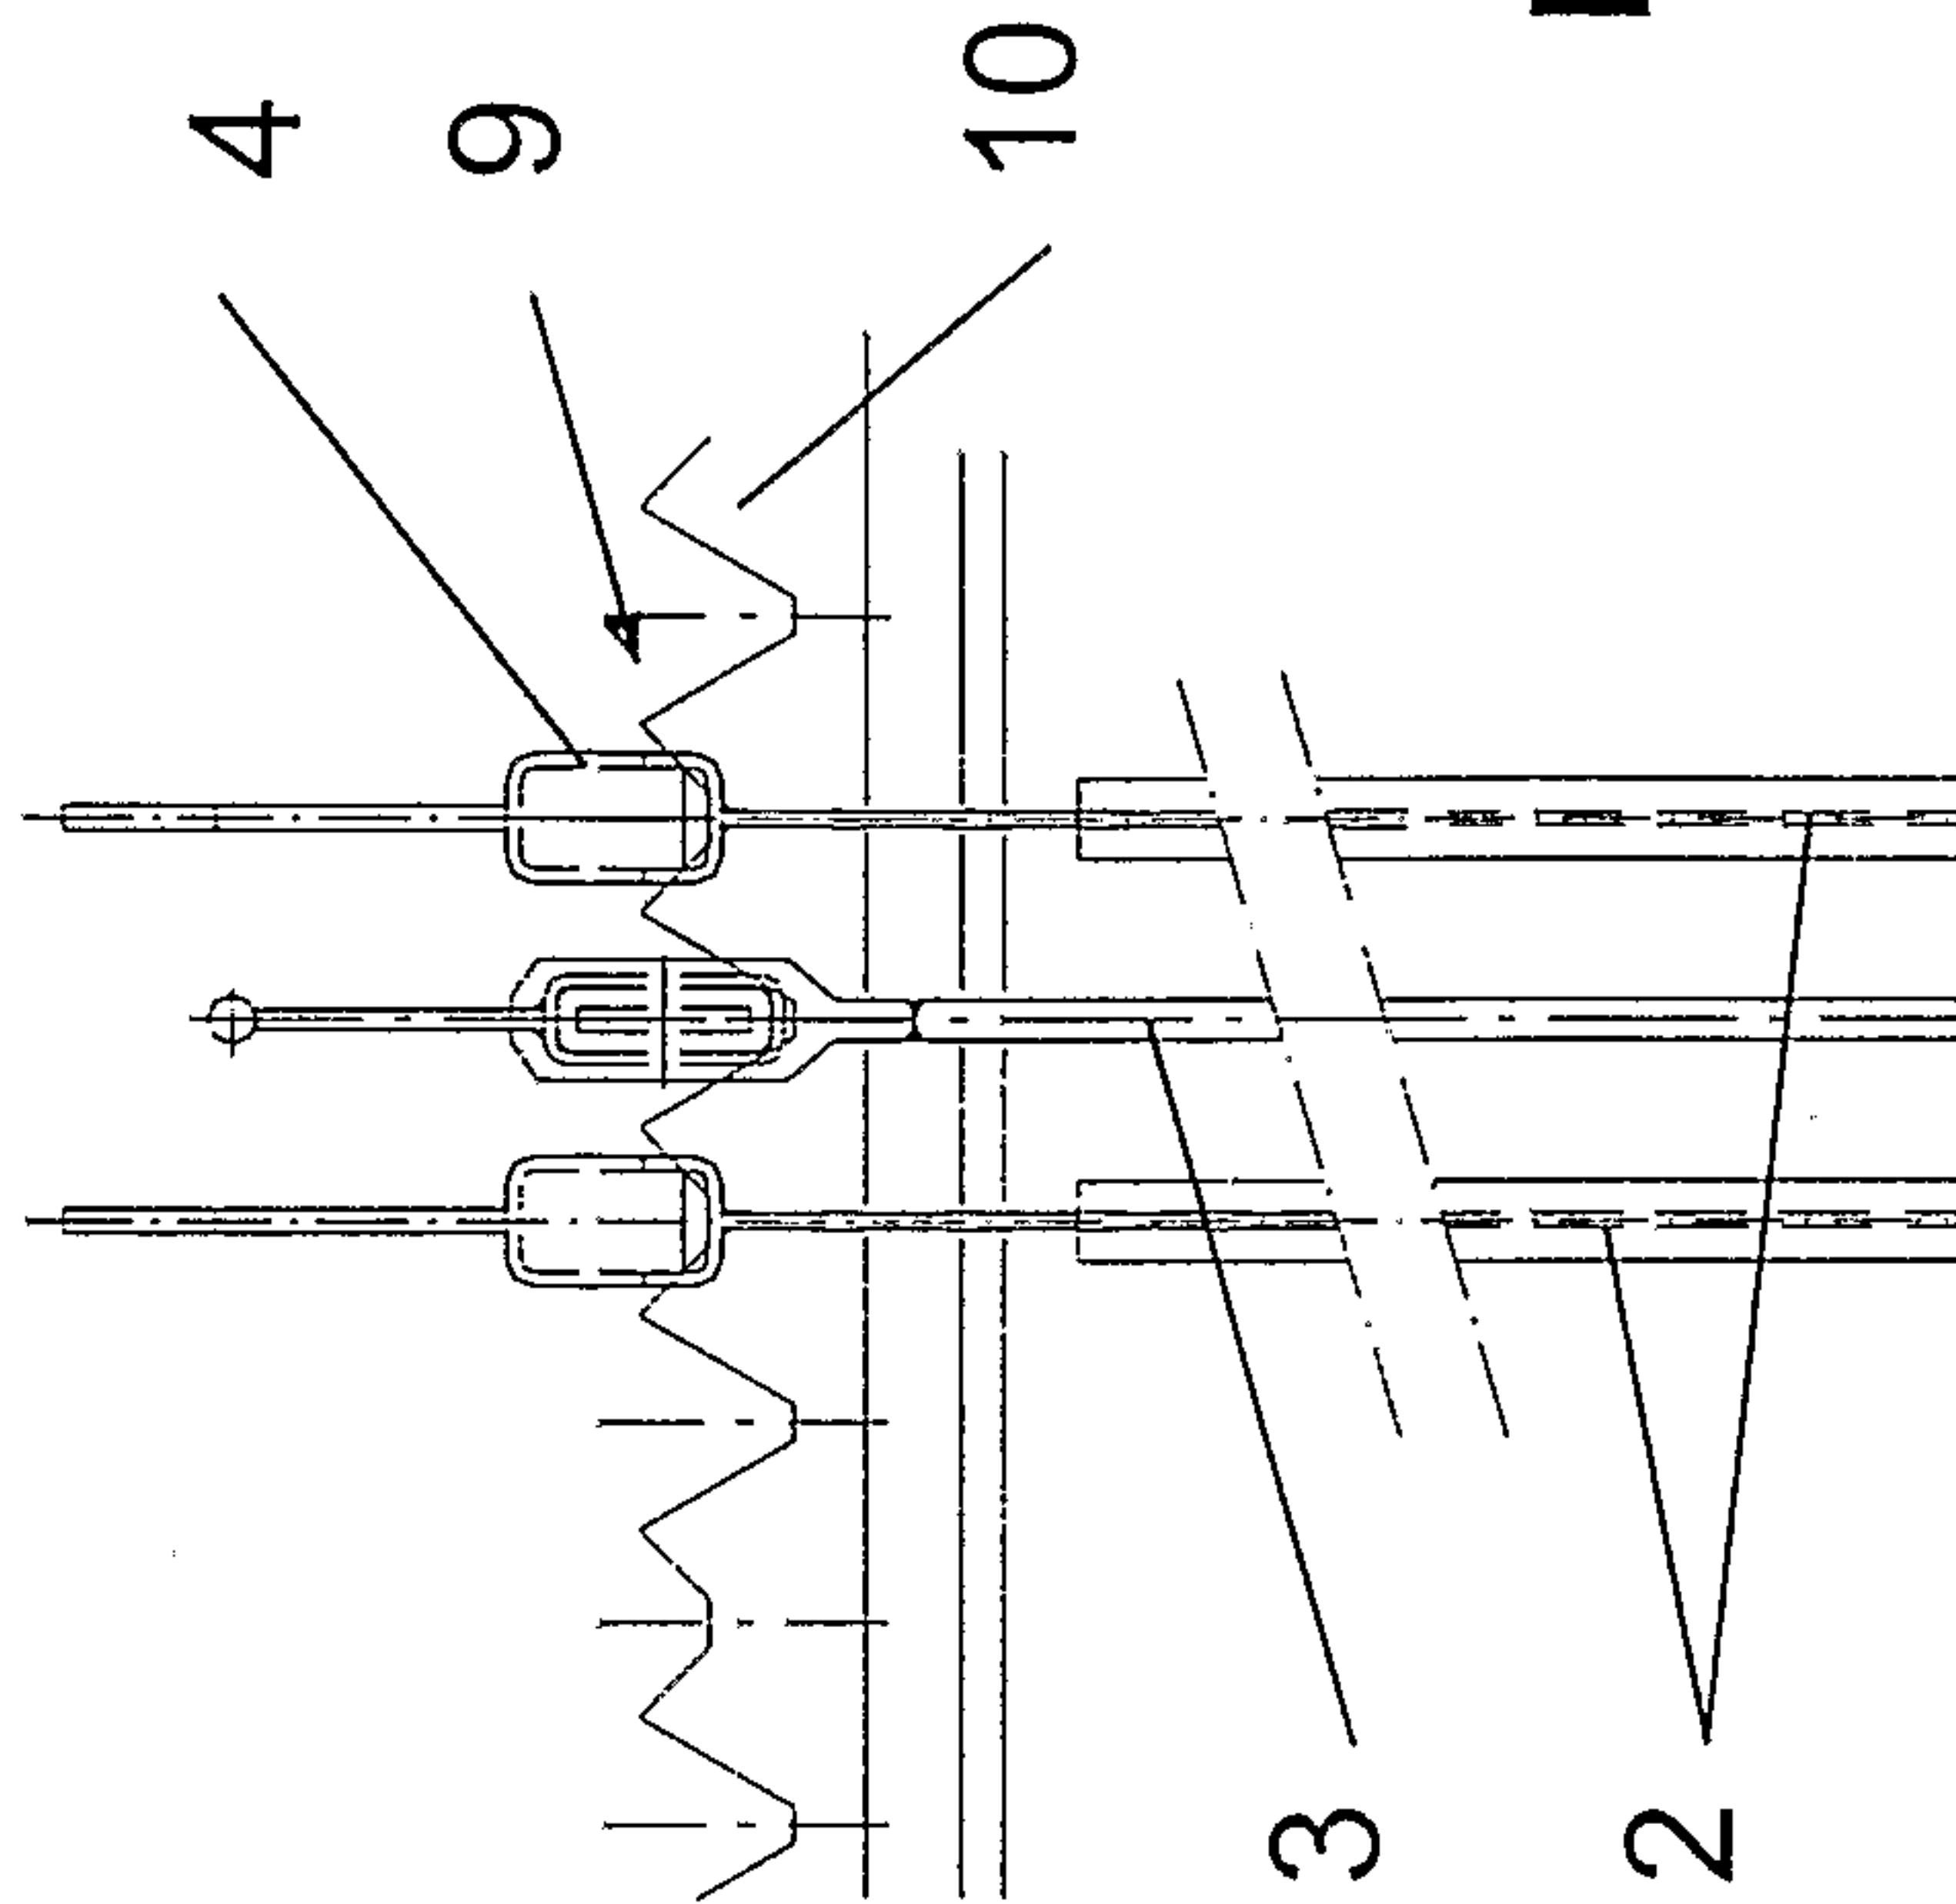


Fig. 5

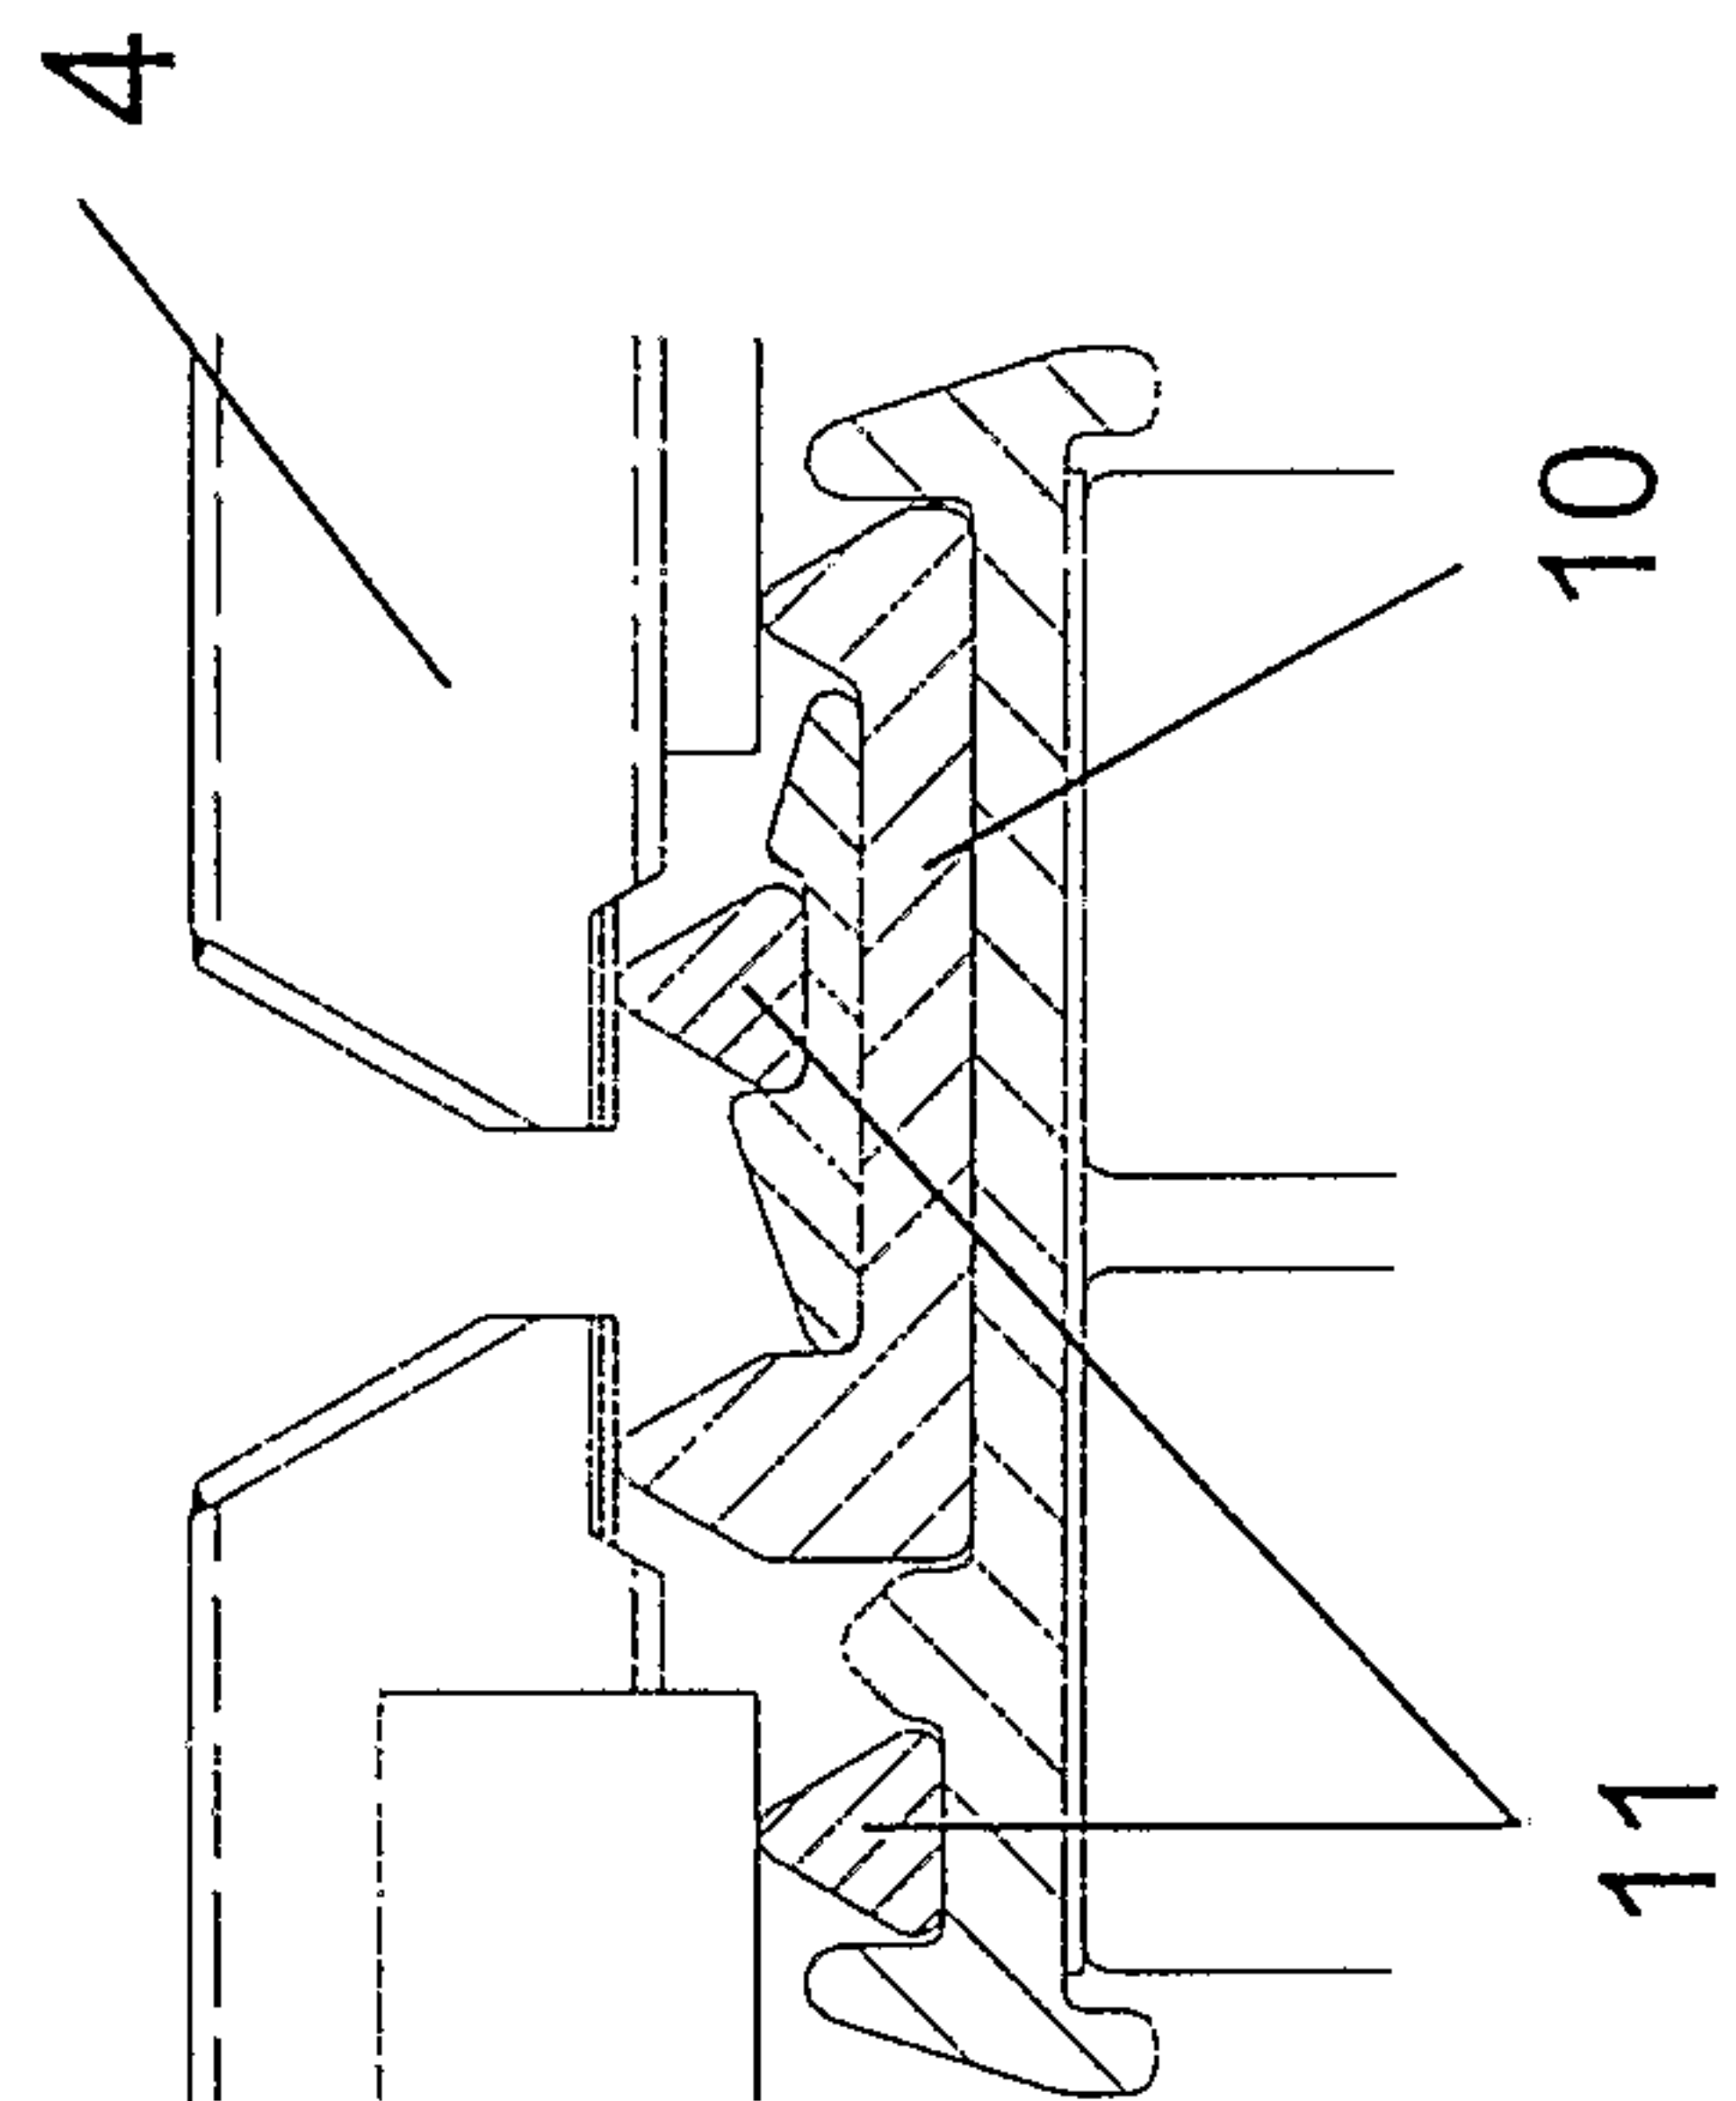


Fig. 6

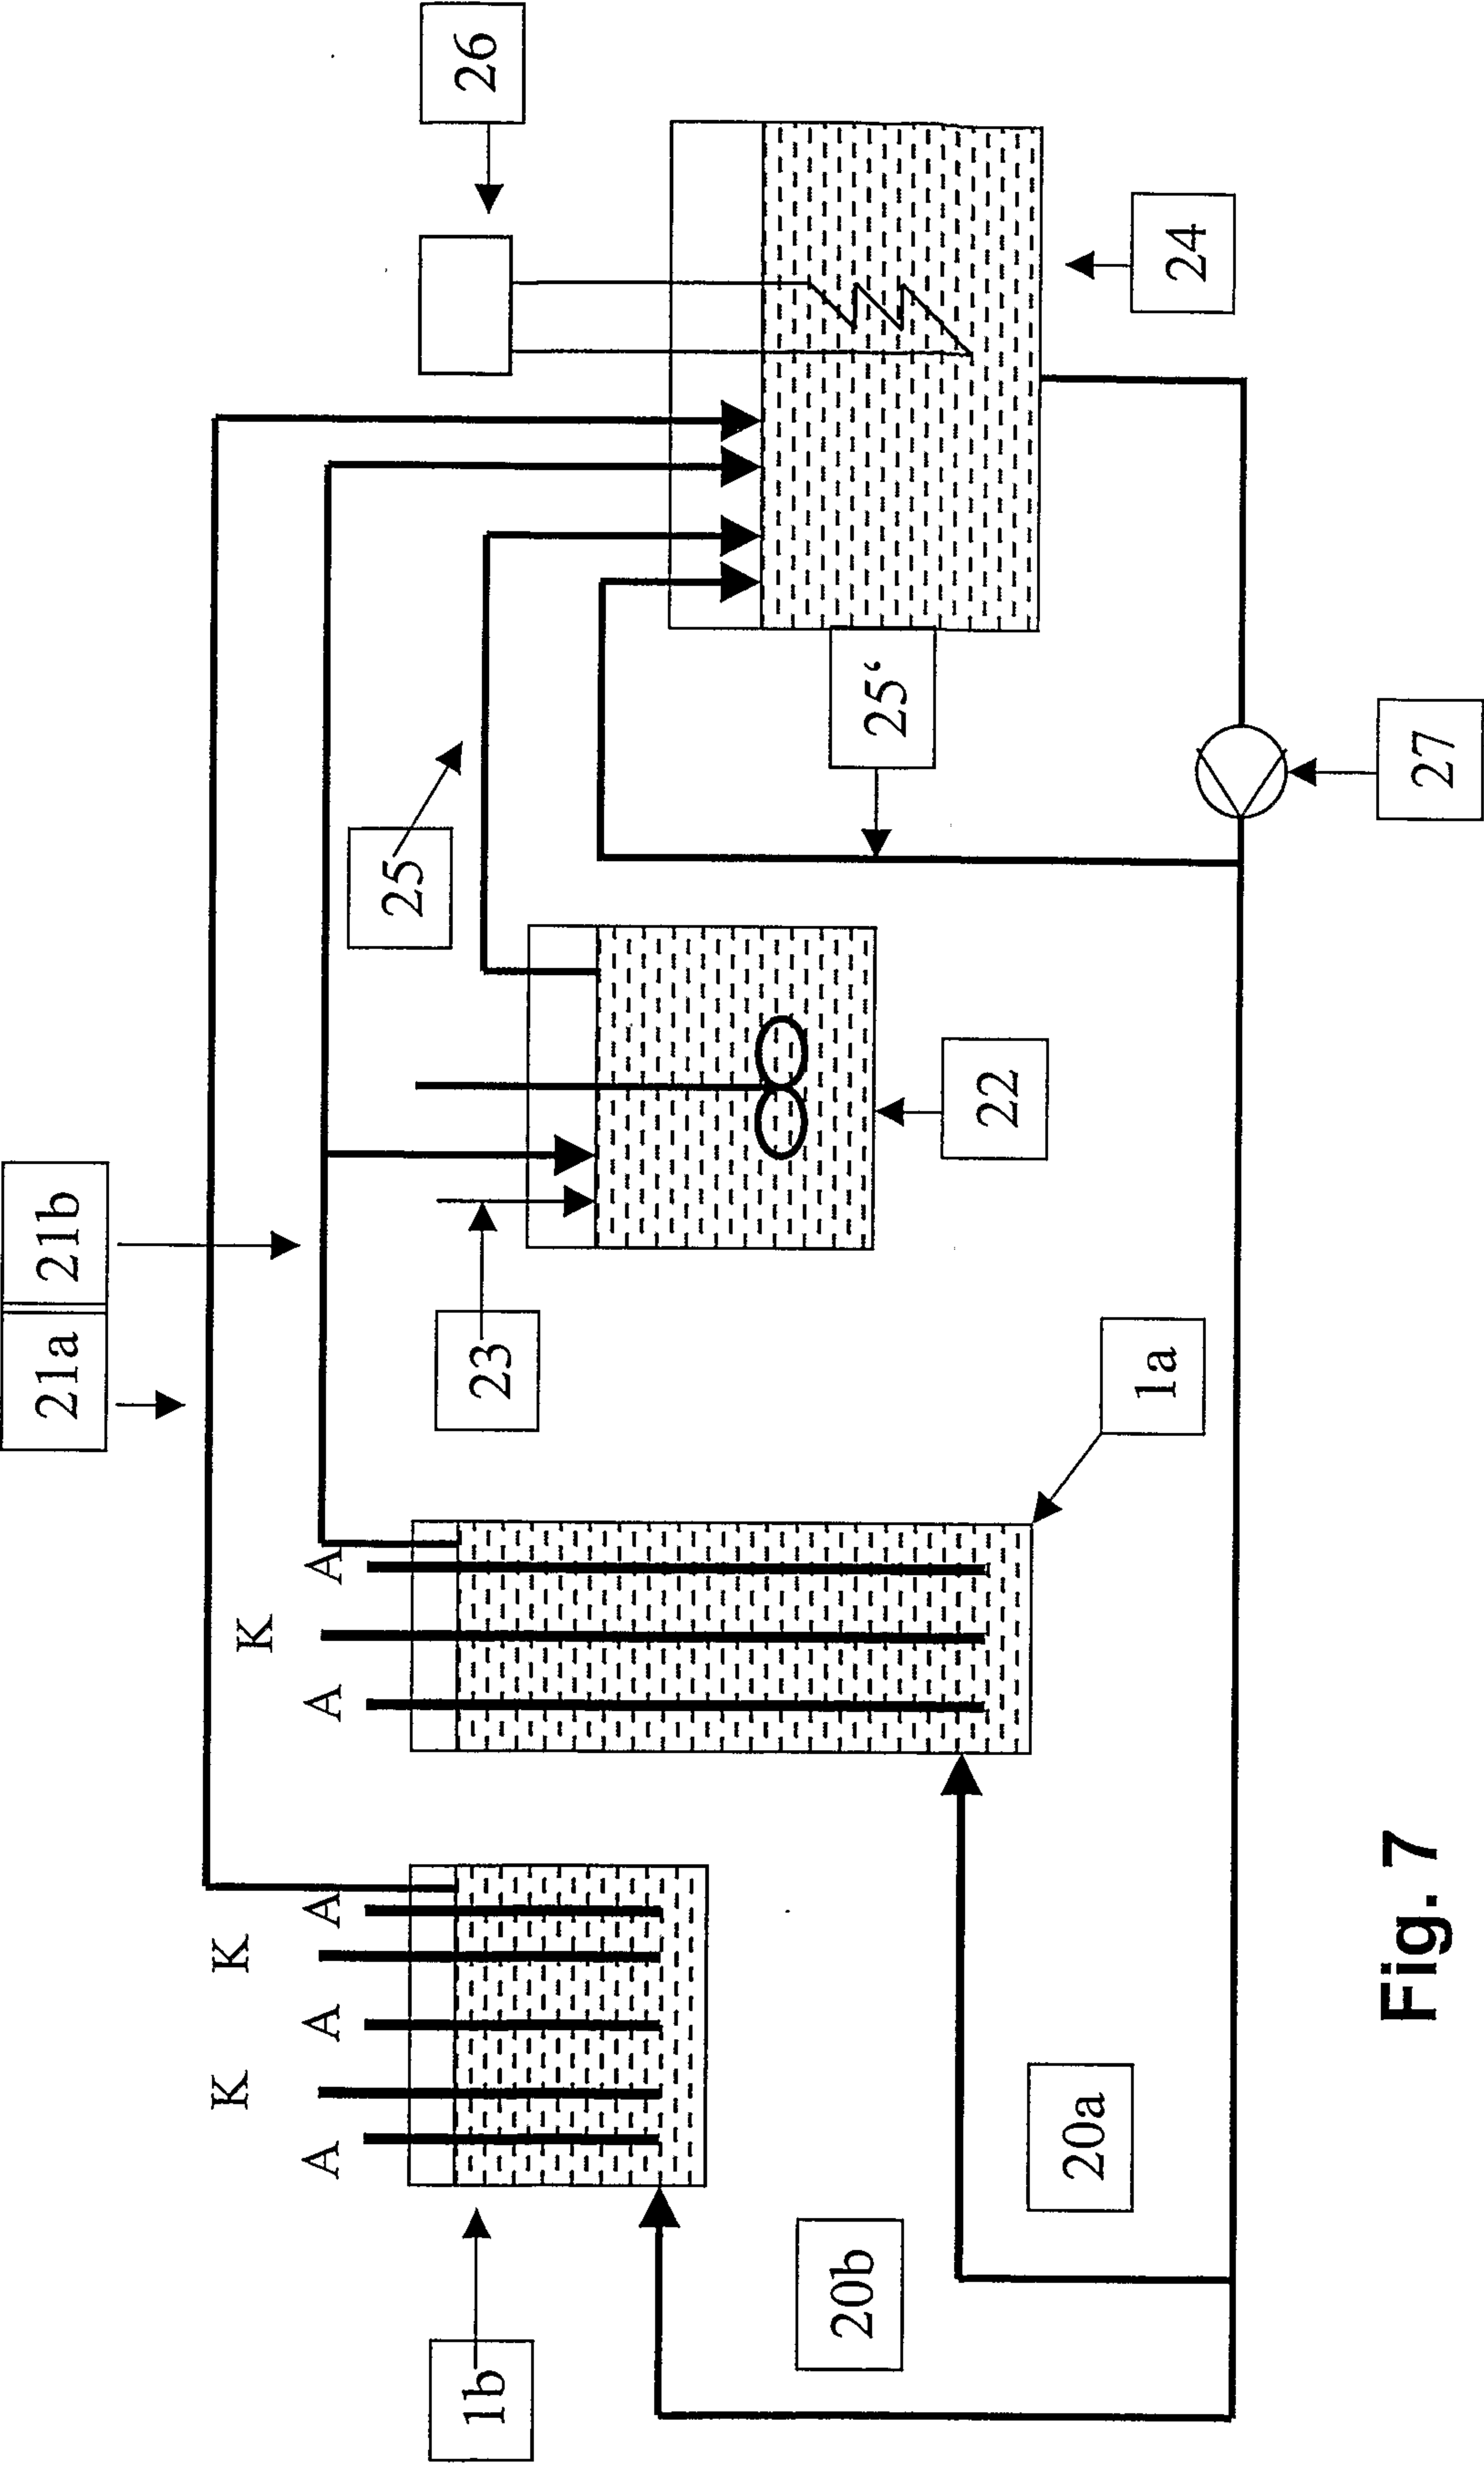


Fig. 7