




(86) Date de dépôt PCT/PCT Filing Date: 2006/06/06
(87) Date publication PCT/PCT Publication Date: 2006/12/28
(45) Date de délivrance/Issue Date: 2014/03/25
(85) Entrée phase nationale/National Entry: 2007/12/06
(86) N° demande PCT/PCT Application No.: US 2006/022056
(87) N° publication PCT/PCT Publication No.: 2006/138122
(30) Priorités/Priorities: 2005/06/14 (US60/690,244);
2006/05/31 (US11/445,390)

(51) Cl.Int./Int.Cl. *H04W 48/20* (2009.01)
(72) Inventeur/Inventor:
ROY, VINCENT, CA
(73) Propriétaire/Owner:
INTERDIGITAL TECHNOLOGY CORPORATION, US
(74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : PROCEDE ET SYSTEME DE TRANSPORT D'INFORMATION DE LIAISON TERRESTRE POUR UNE
SELECTION INTELLIGENTE D'UN POINT D'ACCES AU RESEAU MAILLE
(54) Title: METHOD AND SYSTEM FOR CONVEYING BACKHAUL LINK INFORMATION FOR INTELLIGENT
SELECTION OF A MESH ACCESS POINT

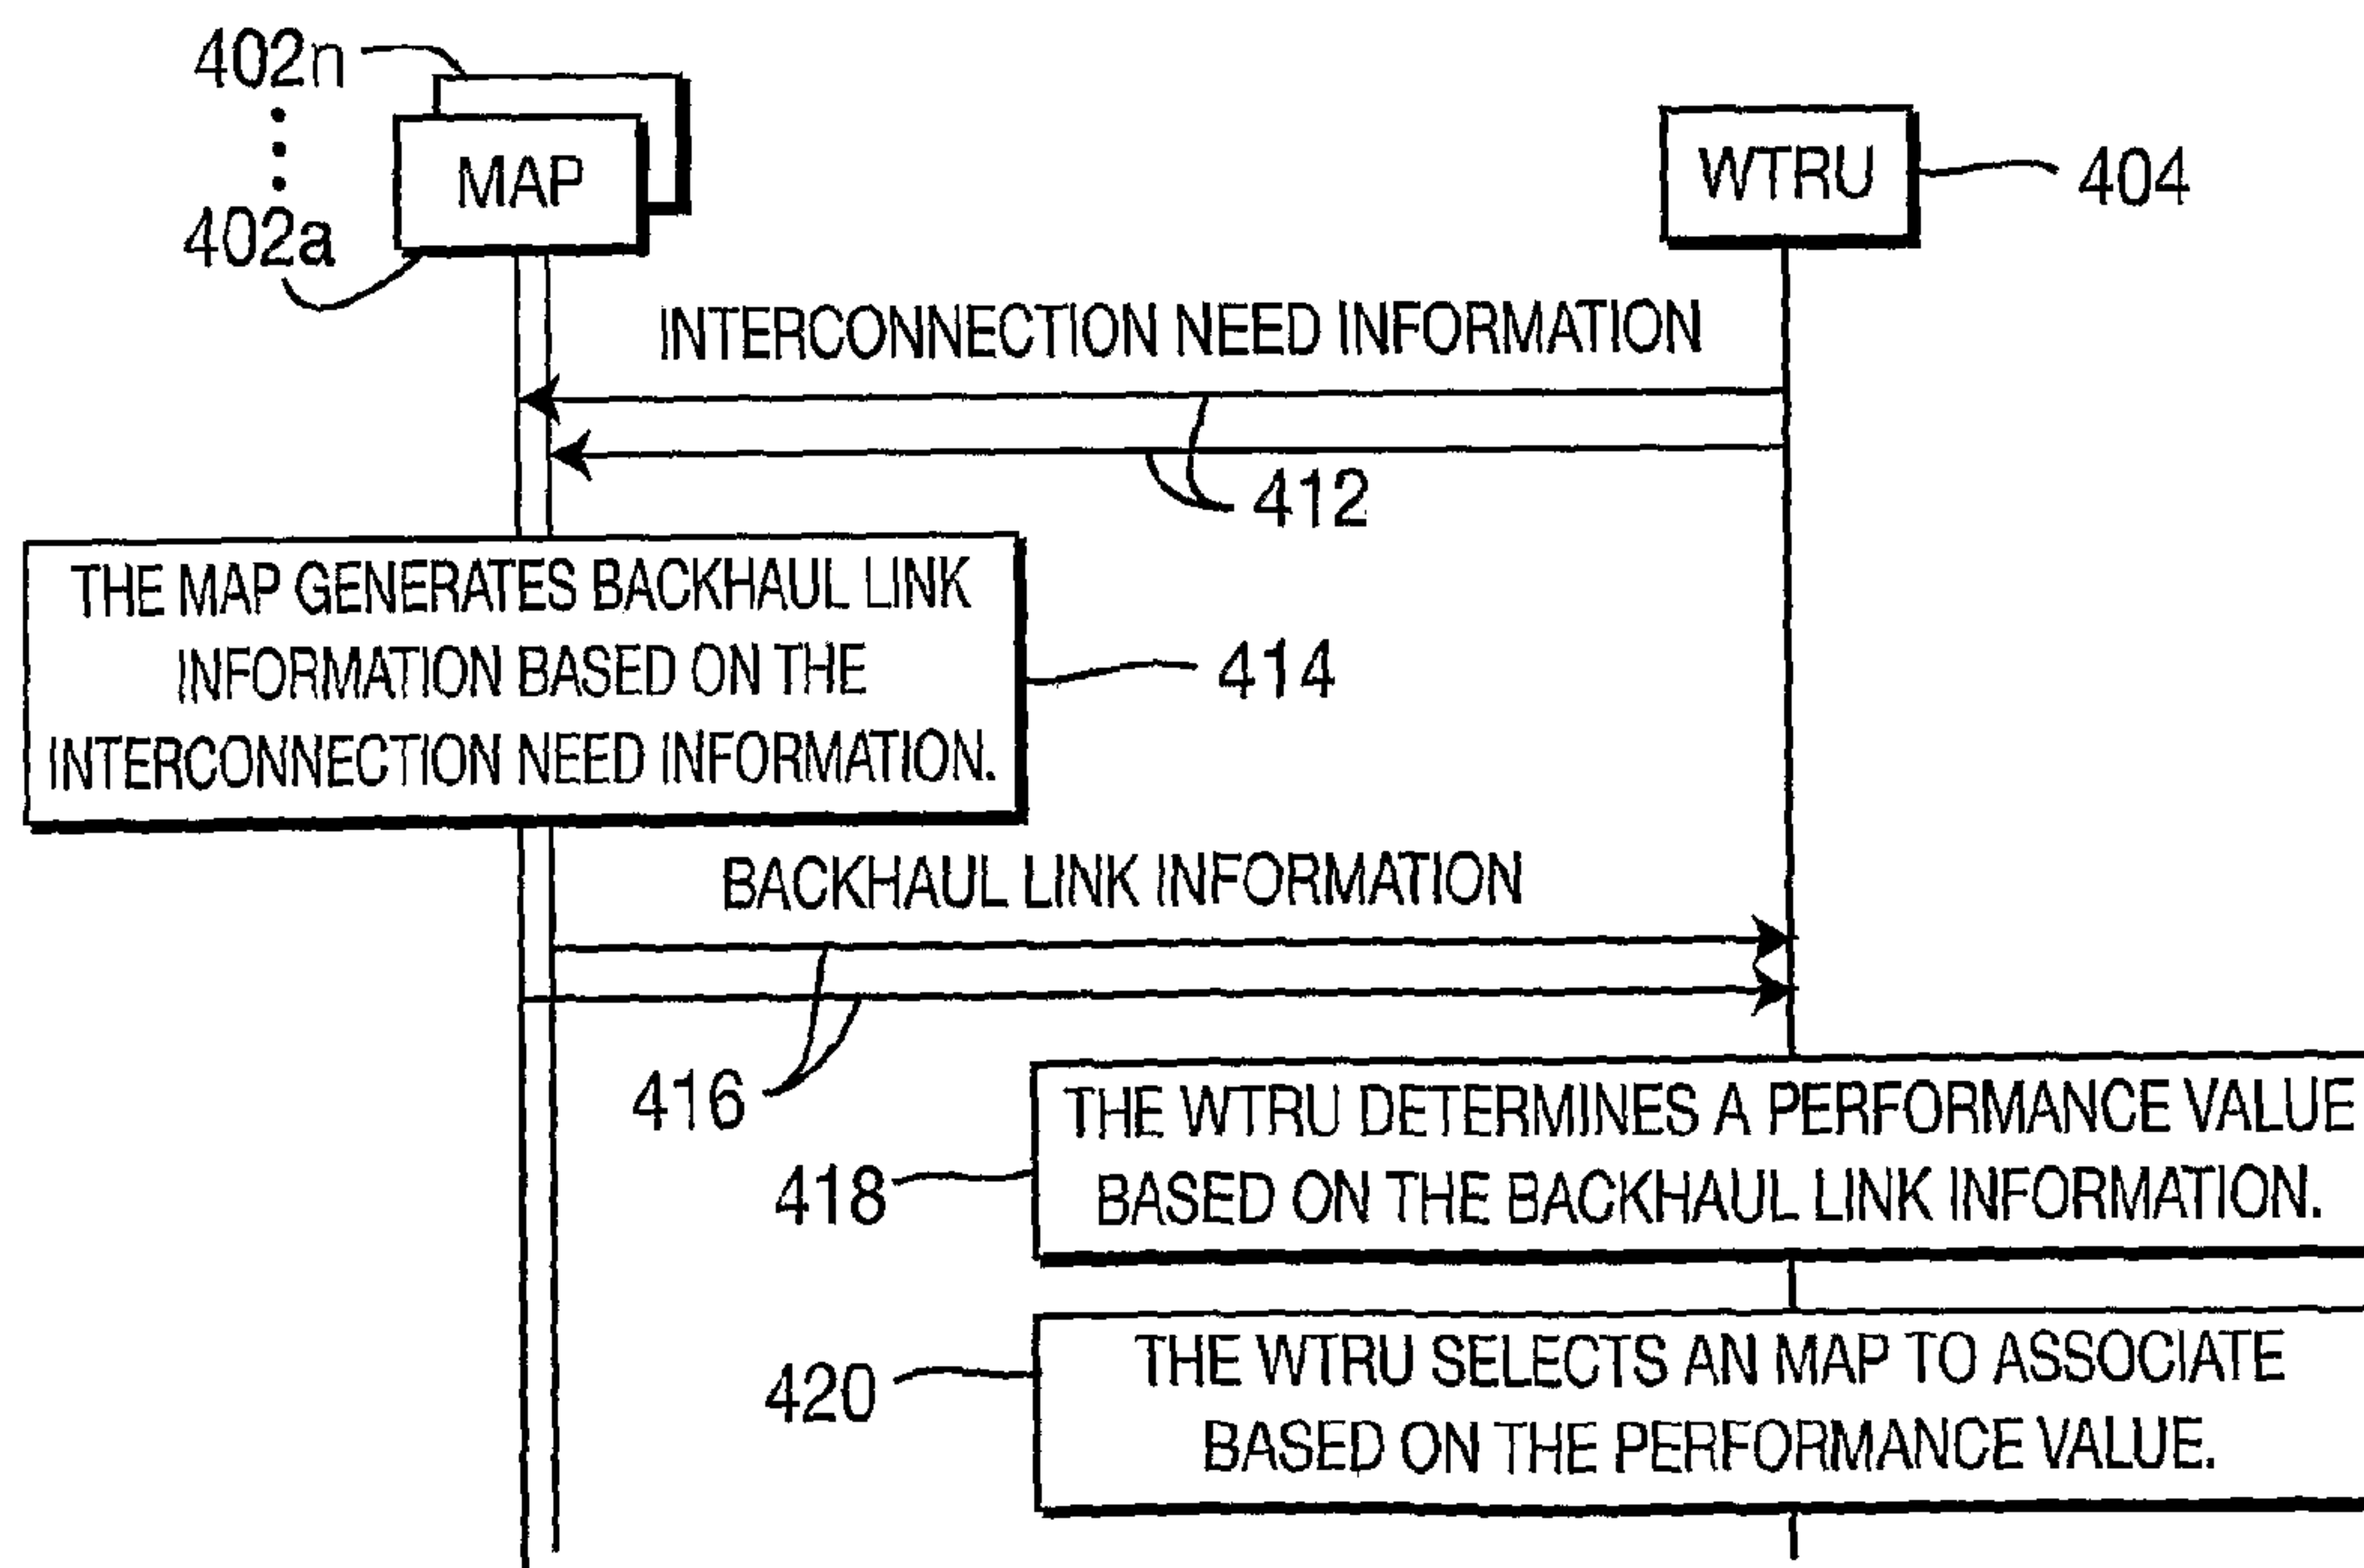

(57) Abrégé/Abstract:

A method and system for conveying backhaul link information (416) for intelligent selection of a mesh access point (MAP) (402a) in a mesh network are disclosed. The mesh network includes a plurality of MAPs (402a,...402n). The MAPs (402a,...402n) send backhaul link information (416) regarding backhaul connections between each MAP (402a) and any interconnections in a mesh network to a wireless transmit/receive unit (WTRU) (404). The WTRU then determines a performance value with respect to the MAPs based on the backhaul link information (418) and selects one of the MAPs to associate with based on the performance value (420). The WTRU may send information about interconnection needs of the WTRU to the MAPs (412), and the MAPs may generate the backhaul link information based on the interconnection needs of the WTRU (414).



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 December 2006 (28.12.2006)

PCT

(10) International Publication Number
WO 2006/138122 A3

(51) International Patent Classification:

H04B 7/00 (2006.01) **H04Q 7/20** (2006.01)

(21) International Application Number:

PCT/US2006/022056

(22) International Filing Date: 6 June 2006 (06.06.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/690,244 14 June 2005 (14.06.2005) US
11/445,390 31 May 2006 (31.05.2006) US

(71) Applicant (for all designated States except US): **INTER-DIGITAL TECHNOLOGY CORPORATION** [US/US];
3411 Silverside Road, Concord Plaza, Suite 105, Hagley Building, Wilmington, DE 19810 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ROY, Vincent** [CA/CA]; 6254 De La Roche, Montreal, Québec H2S 2E1 (CA).

(74) Agent: **DONCH, John, C., Jr.**; Volpe and Koenig, P.C., United Plaza, Suite 1600, 30 South 17th Street, Philadelphia, PA 19103 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: METHOD AND SYSTEM FOR CONVEYING BACKHAUL LINK INFORMATION FOR INTELLIGENT SELECTION OF A MESH ACCESS POINT

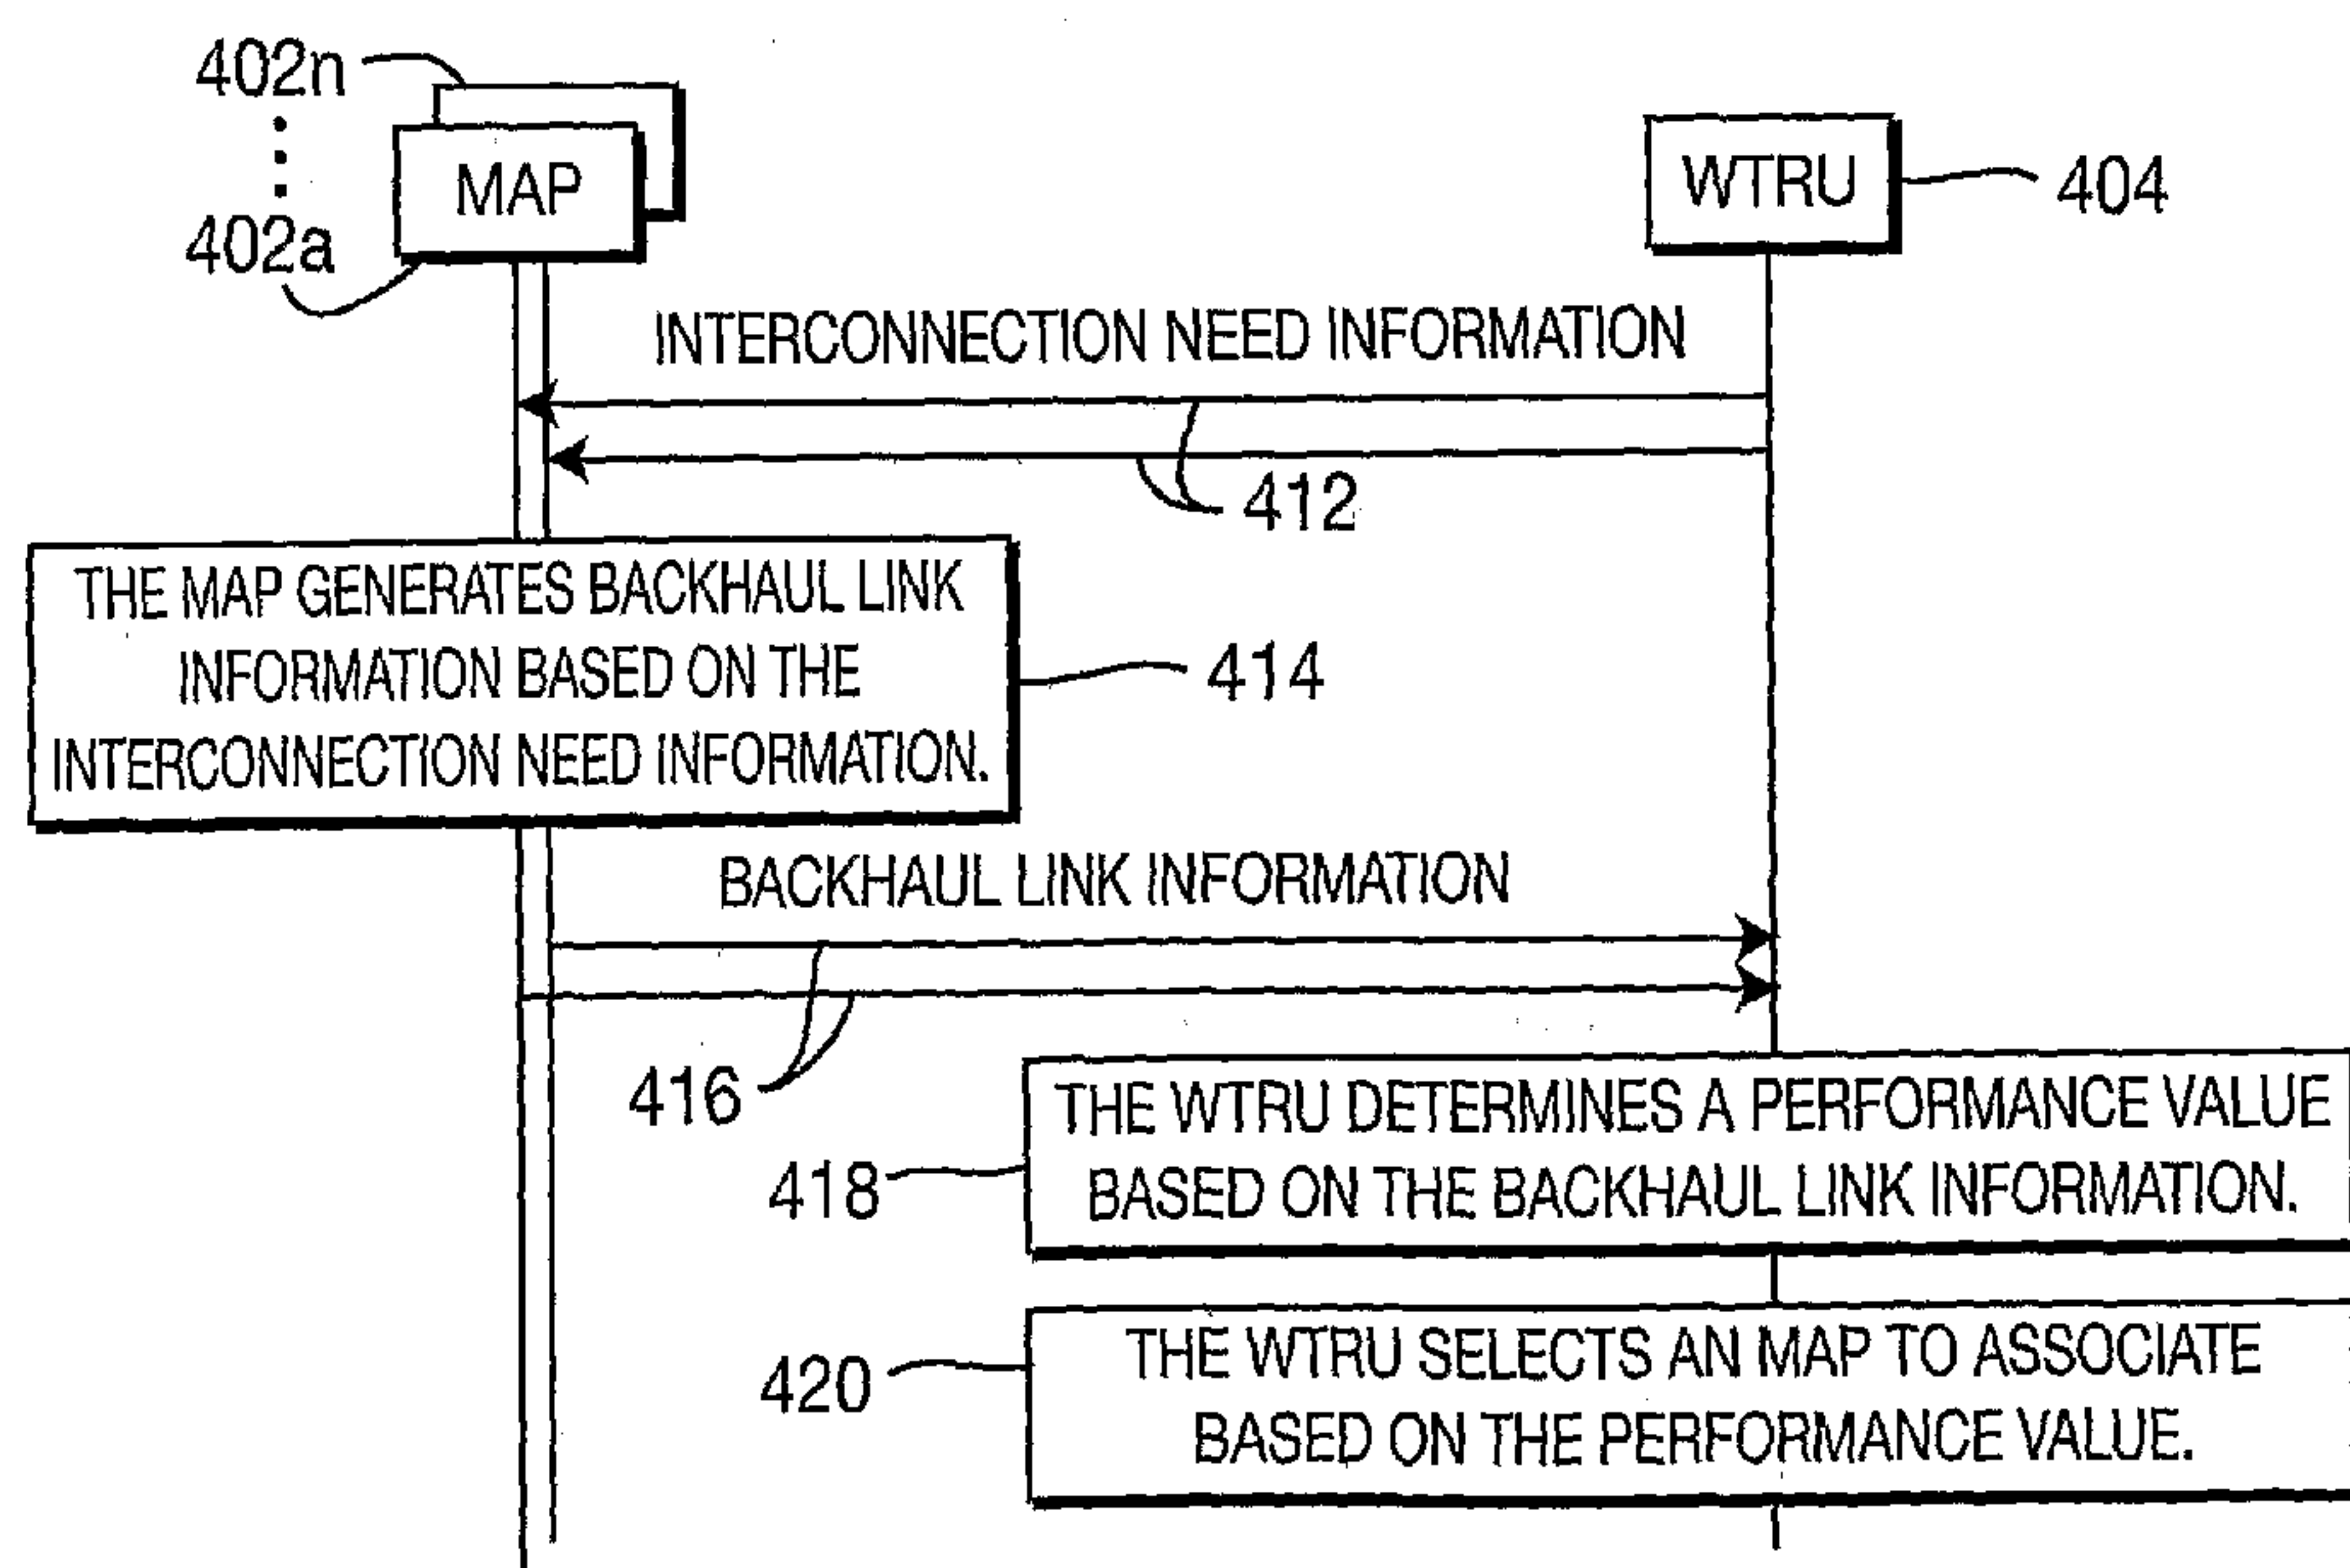

(57) Abstract: A method and system for conveying backhaul link information (416) for intelligent selection of a mesh access point (MAP) (402a) in a mesh network are disclosed. The mesh network includes a plurality of MAPs (402a,...402n). The MAPs (402a,...402n) send backhaul link information (416) regarding backhaul connections between each MAP (402a) and any interconnections in a mesh network to a wireless transmit/receive unit (WTRU) (404). The WTRU then determines a performance value with respect to the MAPs based on the backhaul link information (418) and selects one of the MAPs to associate with based on the performance value (420). The WTRU may send information about interconnection needs of the WTRU to the MAPs (412), and the MAPs may generate the backhaul link information based on the interconnection needs of the WTRU (414).

WO 2006/138122 A3

WO 2006/138122 A3



(88) Date of publication of the international search report:
27 September 2007

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

[0001] METHOD AND SYSTEM FOR
 CONVEYING BACKHAUL LINK INFORMATION
 FOR INTELLIGENT SELECTION OF A MESH ACCESS POINT

[0002] FIELD OF INVENTION

[0003] The present invention is related to a wireless communication system. More particularly, the present invention is related to a method and system for conveying backhaul link information for intelligent selection of a mesh access point (MAP) in a mesh network.

[0004] BACKGROUND

[0005] A conventional wireless network includes a set of access points (APs), (also known as base stations), each of which is connected to a backhaul network. In certain deployments, the cost of directly connecting a given AP to the backhaul network is too high. Thus, indirectly connecting the AP to the backhaul network may be more attractive. This indirect connection is typically accomplished by relaying information to and from neighboring APs in a mesh network. This is referred to as a mesh architecture.

[0006] A mesh network is a local area network (LAN) including a plurality of mesh points (MPs). The connections between the MPs may be wired or wireless. The points of interconnection between a mesh system and a non-mesh system are referred to as portals. A mesh system with multiple portals is referred to as a multi-portal mesh system. A node capable of both AP and MP functionalities is referred to as a mesh access point (MAP). Figure 1 shows an exemplary mesh network 100. The mesh network 100 includes a plurality of MPs 102, a plurality of MAPs 104 and a mesh portal 106. The MPs 102 serve as forwarding and relaying nodes in the mesh network 100. The MPs 102 receive traffic on incoming links and forward the traffic on outgoing links. The MAPs 104 are also MPs with an interface to provide radio access to a plurality of wireless transmit/receive units (WTRUs) 108 to provide wireless services in a certain geographic area. The mesh portal 106 provides connectivity to a backbone network 110, (such as the Internet), in the mesh network 100. Thus,

the mesh portal 106 acts as an MP with a special interface to the backbone network 110. Each of the WTRUs 108 communicates with another WTRU in the mesh network 100, or to the backbone network 110, via the MAPs 104 and the mesh portal 106. The MAPs 104 forward the traffic generated by the WTRUs 108 to another MAP 104 or the mesh portal 106 by relaying the traffic via intermittent MPs 102 and/or MAPs 104.

[0007] A mesh network is reliable and offers redundancy. Even if one or more of the MPs can no longer operate, the rest of the MPs can still communicate with each other, directly or through one or more intermediate MPs such that the network may function properly. Other considerations, such as ease and speed of deployment, are advantages of the mesh network since a mesh network may be deployed without having to provide direct backhaul links and interconnection modules for each MP in the mesh network.

[0008] In conventional non-mesh wireless communication systems, a WTRU needs to estimate which AP will provide the best communication link to the WTRU. WTRUs typically use the following information and methods for determining which AP to associate with:

- 1) the identity of the network of which a candidate AP is a part of, (e.g., in IEEE 802.11 systems, this identity corresponds to the service set identifier (SSID) provided to the WTRUs in a beacon frame or a probe response frame);

- 2) the capabilities of the candidate AP including information regarding which services the AP supports, (e.g., in IEEE 802.11 systems, this capability information is included in a capability information field in a beacon frame or a probe response frame); or

- 3) the expected achievable data throughput, (e.g., the WTRU may estimate the expected throughput by measuring a received power it perceives from an AP on beacon frames, probe response frames or any other frames). The received power, a signal-to-interference-plus-noise-ratio (SINR) or similar measurements typically sets the maximum rate the WTRU may achieve on a given communication link. The WTRU can also use channel occupancy or channel load

measurements, whether measured by the WTRU or collected from the AP, to refine the expected throughput estimate.

[0009] The above-described information and methods utilized to select an AP that a WTRU should associate with are no longer adequate in a mesh network. For example, in a conventional infrastructure mode WLAN, the throughput achieved on a given WTRU-AP link depends only on the characteristics of that particular radio link between the AP and the WTRU, (i.e., channel occupancy, received power, a signal-to-interference and noise ratio (SINR), or the like). However, in a mesh network, the throughput not only depends on the characteristics of the radio link between a given WTRU and its serving MAP, but it also depends on the characteristics of the radio link(s) between the serving MAP and other intermediate MPs that forward the traffic from the serving MAP to the mesh portal.

[0010] Figure 2 illustrates an example of an intelligent association problem in a conventional mesh network 200. In this example, the mesh network 200 comprises three MAPs 201, 202 and 203. The MAPs 201 and 203 are mesh portals which have connectivity to the Internet 230 via a router 220. The interconnection resources of the MAPs 201, 203 may be Ethernet-based. In this example, the MAP 202 and the MAP 203 are candidate MAPs for a WTRU 210. If the WTRU 210 is associated with the MAP 102, traffic to/from the Internet 230 is routed via radio links L2 and L1 via the MAP 201. If the WTRU 210 is associated with the MAP 203, the traffic to/from the Internet 230 is routed via radio link L3. An exemplary set of radio link characteristics for the radio links L1, L2 and L3 is illustrated in Table 1 below.

Radio link	Nodes		SNR	Transmission rate	Single-link throughput
L1	MAP1	MAP2	10 dB	12 Mbps	5 Mbps
L2	STA	MAP2	35 dB	54 Mbps	20 Mbps
L3	STA	MAP3	20 dB	36 Mbps	15 Mbps

Table 1

[0011] According to Table 1, if the WTRU 210 associates with the MAP 203, the throughput would be 15 Mbps. However, if the WTRU 210 associates with the MAP 202, the throughput would be determined by the combination of data throughput of two links L1, L2, which is typically estimated as follows:

$$1/(1/\text{throughput_L1} + 1/\text{throughput_L2}). \quad \text{Equation (1)}$$

[0012] Applying Equation (1) to radio links L1 and L2, the combined throughput would be $1/(1/5+1/20)$ or 4Mbps. From this calculation it becomes evident that the WTRU 210 will experience a better throughput by associating with the MAP 203 than by associating with the MAP 202. From the perspective of the overall mesh network 200, the preferred association of the WTRU 210 is to the MAP 203. The radio connection of L1 and L2 between the WTRU 210 and the MAP 201 offers 3.75 times (i.e., 15Mbps/4Mbps) less throughput than the multi-hop radio connection between the WTRU 210 and the MAP 203.

[0013] According to the prior art, in the foregoing example, the radio link L2 between the WTRU 210 and the MAP 202 seems more attractive, (in terms of signal-to-noise ratio (SNR), estimated achievable transmission rate, estimate single-link throughput, channel occupancy, or the like), than the radio link L3 between the WTRU 210 and the MAP 203. In the prior art, since the WTRU 210 has no means of knowing that associating with the MAP 203 will result in a better throughput than associating with the MAP 202, the WTRU 210 may end up with a less favorable MAP.

[0014] Accordingly, it is desirable to have a method and apparatus for enabling a WTRU to intelligently associate with a MAP in a mesh network.

[0015] SUMMARY

[0016] The present invention is related to a method and system for conveying backhaul link information for intelligent selection of a mesh access point (MAP) in a mesh network. The mesh network includes a plurality of MAPs. The MAPs send backhaul link information regarding backhaul connections

between each MAP and any interconnections in the mesh network to a WTRU. The WTRU then determines a performance value with respect to the MAPs based on the backhaul link information and selects one of the MAPs to associate with based on the performance value. The WTRU may send information about interconnection needs of the WTRU to the MAPs, and the MAPs may generate the backhaul link information based on the interconnection needs of the WTRU.

[0017] In prior art systems, a WTRU may associate to a MAP that will result in worse performance than other MAPs because the WTRU has no means of knowing about the performance of the different radio links that are used to convey its traffic to/from a desired mesh portal. In accordance with the present invention, a WTRU may estimate the expected throughput for the end-to-end connection, which allows the WTRU to associate to a MAP that provides the best performance from the point of view of both the WTRU and the overall system.

[0017a] According to an embodiment of the present disclosure there is provided a method for use in a wireless transmit/receive unit (WTRU) for associating with a mesh access point (MAP). The method comprises receiving backhaul link information including an estimated throughput related to the MAP and a number of hops separating the MAP and a mesh portal, wherein the number of hops is a number of intervening MAPs between the MAP and the mesh portal; determining an end-to-end performance value based on the backhaul link information received; associating with the MAP based on the end-to-end performance value; and transmitting information about interconnection requirements via at least one of a probe request frame, a special control frame, a data frame, or a broadcast frame.

[0017b] According to another embodiment there is provided a wireless transmit/receive unit (WTRU) comprising: a receiver configured to receive backhaul link information including an estimated throughput related to a mesh access point (MAP) and a number of hops separating the MAP and a mesh portal, wherein the number of hops is a number of intervening MAPs between the MAP and the mesh portal; a processor configured to determine an end-to-end performance value based on the backhaul link information received and to

associate the WTRU with the MAP based on the end-to-end performance value; and a transmitter configured to send information about interconnection requirements via at least one of a probe request frame, a special control frame, a data frame, or a broadcast frame.

[0017c] According to another embodiment there is provided a mesh access point (MAP) comprising: a receiver configured to receive information about interconnection requirements including an Internet Protocol (IP) address via at least one of a probe request frame, a special control frame, a data frame, or a broadcast frame; a processor configured to generate a backhaul link information including a number of hops, wherein the number of hops is a number of intervening MAPs between a first MAP and a mesh portal, based on the interconnection requirement information; and a transmitter configured to transmit the backhaul link information. The backhaul link information includes at least one of a number of mesh portals with which MAP communicates, the number of routes separating the MAP to a mesh portal, and mesh points (MPs) per route separating the MAP to the mesh portal, an average transmission rate on each link between the MAP and the mesh portal, an estimated throughput between the MAP and the mesh portal, channel occupancy perceived on each link between the MAP and the mesh portal, radio resources allocated on each link between the MAP and the mesh portal, and perceive quality of each link between the MAP and the mesh portal.

[0017d] According to another embodiment there is provided a method for use in a wireless transmit/receive unit (WTRU) for selectively associating with a base station associated with a mesh network. The method comprises: transmitting an address of a node with which the WTRU desires to connect; receiving backhaul link information including an estimated throughput related to the base station and to the transmitted address; determining an end-to-end performance value based on the received backhaul link information; and associating with the base station based on the end-to-end performance value.

[0017e] According to another embodiment there is provided a method for use in a wireless transmit/receive unit (WTRU) for selectively associating with one of

a plurality of base stations associated with a mesh network. The method comprises: transmitting an address of a node with which the WTRU desires to connect; receiving, from the plurality of base stations, a respective plurality of backhaul link information including estimated throughputs related to the plurality base stations and to the transmitted address; determining end-to-end performance values based on the received plurality of backhaul link information; and associating with one of the base stations based on the end-to-end performance values.

[0017f] According to another embodiment there is provided a method for use in a wireless transmit/receive unit (WTRU) for selectively associating with a base station associated with a mesh network. The method comprises: transmitting an address of a node with which the WTRU desires to connect; receiving backhaul link information for a plurality of backhaul communication paths to the node having the transmitted address, the backhaul information including estimated throughputs related to the base station and the plurality of backhaul communication paths; determining end-to-end performance values for the plurality of backhaul communication paths based on the received backhaul link information; selecting a backhaul communication path from the plurality of backhaul communication paths based on the end-to-end performance values; and requesting use of the selected backhaul communication path.

[0017g] According to another embodiment there is provided a wireless transmit/receive unit (WTRU) comprising: a transmitter configured to transmit an address of a node with which the WTRU desires to connect; a receiver configured to receive backhaul link information including an estimated throughput related to the base station and to the transmitted address; and a processor configured to determine an end-to-end performance value based on the received backhaul link information, and to associate the WTRU with the base station based on the end-to-end performance value.

[0017h] According to another embodiment there is provided a wireless transmit/receive unit (WTRU) comprising: a transmitter configured to transmit an address of a node with which the WTRU desires to connect; a receiver

configured to receive, from a plurality of base stations, a respective plurality of backhaul link information including estimated throughputs related to the plurality base stations and to the transmitted address; and a processor configured to determine end-to-end performance values based on the received plurality of backhaul link information, and to associate with one of the base stations based on the end-to-end performance values.

[0017i] According to another embodiment there is provided a wireless transmit/receive unit (WTRU) comprising: a transmitter configured to transmit an address of a node with which the WTRU desires to connect; a receiver configured to receive backhaul link information for a plurality of backhaul communication paths to the node having the transmitted address, the backhaul information including estimated throughputs related to the base station and the plurality of backhaul communication paths; and a processor configured to determine end-to-end performance values for the plurality of backhaul communication paths based on the received backhaul link information, to select a backhaul communication path from the plurality of backhaul communication paths based on the end-to-end performance values, and to request use of the selected backhaul communication path.

[0017j] According to another embodiment there is a base station associated with a mesh network, the base station comprising: a receiver configured to receive an address of a node with which a WTRU desires to connect; a transmitter configured to send backhaul link information including an estimated throughput related to the base station and to the transmitted address; and a processor configured to generate the backhaul link including the information an estimated throughput based on the transmitted address and at least one of (i) a number of hops separating the base station and the node having the transmitted address, (ii) a number of nodes, base stations or gateways associated with the mesh network intervening between the base station and the node having the transmitted address; (iii) a number of nodes, base stations and gateways associated with the mesh network intervening between the base station and the node having the transmitted address; (iv) a number of routes separating the base

station and the node having the transmitted address; (v) an average transmission rate of each link between the base station and the node having the transmitted address; (vi) an estimated throughput of each link between the base station and the node having the transmitted address; (vii) channel occupancy perceived on each link between the base station and the node having the transmitted address; (viii) radio resources allocated on each link between the base station and the node having the transmitted address; and (ix) quality experienced on each link between the base station and the node having the transmitted address.

[0018] BRIEF DESCRIPTION OF THE DRAWINGS

[0019] Figure 1 is an exemplary block diagram of a conventional mesh network.

[0020] Figure 2 illustrates an example of an intelligent association problem in a conventional mesh network.

[0021] Figure 3 is a signaling diagram between a MAP and a WTRU for selecting a MAP in a mesh network in accordance with an embodiment of the present invention.

[0022] Figure 4 is a signaling diagram between a MAP and a WTRU for selecting a MAP in a mesh network in accordance with another embodiment of the present invention.

[0023] DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0024] When referred to hereafter, the terminology "WTRU" includes but is not limited to a user equipment, a mobile station, a fixed or mobile subscriber unit, a pager, or any other type of device capable of operating in a wireless environment. When referred to hereafter, the terminology "MAP" includes but is

not limited to a base station, a Node-B, a site controller, an access point or any other type of interfacing device that has a mesh functionality in a wireless environment.

[0025] The features of the present invention may be incorporated into an integrated circuit (IC) or be configured in a circuit comprising a multitude of interconnecting components.

[0026] Figure 3 is a signaling diagram between MAPs 302a-302n and a WTRU 304 for selecting one of the MAPs 302a-302n to associate with in accordance with an embodiment of the present invention. At least one of the MAPs 302a-302n in the mesh network sends backhaul link information regarding backhaul connections between each of the MAPs 302a-302n and any interconnections in the mesh network to the WTRU 304 (step 312). The backhaul link information may be broadcast, (e.g., via a beacon frame), in a region covered by each of the MAPs 302a-302n or may be sent via unicast, (e.g., via a probe response frame), to a particular WTRU. Of course, other methods known to those skilled in the art may also be used to provide backhaul link information to WTRUs, in accordance with the present invention.

[0027] The backhaul link information that each of the MAPs 302a-302n sends to the WTRU 304 includes, but is not limited to: 1) the number of portals each MAP 302a-302n can communicate with; 2) the number of routes separated from each MAP 302a-302n to a mesh portal; 3) the number of hops and/or the number of MPs per route separated from each MAP 302a-302n to a mesh portal; 4) an average transmission rate used on each radio link, or by each of the different MPs, involved in the forwarding of packets between each MAP 302a-302n and a mesh portal; 5) an estimated throughput per radio link, or per MP, involved in the forwarding of packets between each MAP 302a-302n and a mesh portal; 6) channel occupancy perceived on each radio link, or by each MP, involved in the forwarding of packets between each MAP 302a-302n and a mesh portal; 7) radio resources allocated on each radio link, or by each MP, involved in the forwarding of packets between each of the MAPs 302a-302n and a mesh portal; 8) quality experienced on each radio link, or by each MP, involved in the

forwarding of packets between each of the MAPs 302a-302n and a mesh portal, (e.g., queued time, medium access delay, time jitter, time latency, a packet error rate); and 9) any performance metric comprising a weighted sum or any other combination of the above-mentioned metrics.

[0028] The WTRU 304 then determines an end-to-end performance value with respect to each of the MAPs 302a-302n based on the received backhaul link information (step 314). The backhaul link information enables the WTRU 304 to intelligently estimate the end-to-end performance value after associating with a particular MAP 302a-302n. For example, the WTRU 304 may estimate a data throughput that the WTRU 304 can expect along an end-to-end radio connection by associating with a particular MAP 302a-302n.

[0029] The WTRU 304 then selects one of the MAPs 302a-302n to associate with based on the performance value (step 316). Unlike conventional methods of making an association decision, the decision is not solely based on the expected performance, (e.g., expected throughput), of the direct radio link between the WTRU 304 and a particular MAP 302a-302n, but on the end-to-end performance value, such as end-to-end throughput.

[0030] Figure 4 is a signaling diagram between at least one MAP 402a-402n and a WTRU 404 for selecting one of the MAPs 402a-402n in accordance with another embodiment of the present invention. In this embodiment, the MAPs 402a-402n generate the backhaul link information based on interconnection needs of the WTRU 404 in terms of a particular mesh portal or a particular MAP 402a-402n. As the interconnection needs may vary from one WTRU 404 to another, it may be desirable for a MAP 402a-402n to know the interconnection needs, (e.g., a desired mesh portal), of a given WTRU 404 in order for the MAP 402a-402n to communicate backhaul link information that is relevant to the WTRU 404.

[0031] The WTRU 404 sends a message for interconnection needs of the WTRU 404 to at least one MAP 402a-402n (step 412). Information included in the message includes, but is not limited to: 1) an IP address that the WTRU 404 desires to connect with; 2) a medium access control (MAC) address of the nodes

that the WTRU 404 wants to connect with; 3) an address allowing a MAP 402a-402n to identify a given mesh portal from other mesh portals; 4) a subnet address that the WTRU 404 wants to connect with; and 5) a predetermined code or flag which allows a MAP 402a-402n to determine the connectivity needs of the WTRU 404. The message may be sent via a probe request frame, a special control frame, as part of the body of a data frame, a broadcast frame, or any other type of frames.

[0032] Each of the MAPs 402a-402n generates backhaul link information based on the interconnection needs of the WTRU 404 (step 414). For example, a WTRU that needs to connect to the Internet may be interested in choosing a MAP that offers the best route to a mesh portal interconnecting the mesh network to the Internet. On the other hand, a WTRU located in a given basic service set (BSS) that is interested in communicating with another WTRU located in a neighboring BSS would choose a MAP offering the best route to the a base station, (or a MAP), serving that neighbor BSS.

[0033] Each of the MAPs 402a-402n then sends the backhaul link information to the WTRU 404 (step 416). The backhaul link information may be broadcast, (e.g., via a beacon frame), or may be unicast directly to the WTRU 404, (e.g., via a probe response frame).

[0034] The WTRU 404 then determines an end-to-end performance value with respect to each of the MAPs 402a-402n based on the received backhaul link information (step 418). The backhaul link information enables the WTRU 404 to intelligently estimate an end-to-end performance value after associating with a particular MAP 402a-402n. For example, the WTRU 404 may estimate a data throughput the WTRU 404 can expect along an end-to-end radio connection by associating with a particular MAP 402a-402n. The WTRU 404 then selects one of the MAPs 402a-402n to associate with based on the performance value (step 420).

[0035] It is also possible for the MAP to communicate to the WTRU all backhaul link information without any regard to the interconnection needs of the WTRU.

[0036] Embodiments.

[0037] 1. A method for a WTRU to select a MAP for associating with in a mesh network including a plurality of MAPs.

[0038] 2. The method of embodiment 1 comprising at least one MAP sending backhaul link information to the WTRU.

[0039] 3. The method as in any embodiments 1 and 2, further comprising the WTRU determining a performance value with respect to the MAP based on the backhaul link information.

[0040] 4. The method of embodiment 3, further comprising the WTRU selecting a MAP with which to associate with based on the performance value.

[0041] 5. The method as in any embodiments 2-4, wherein the backhaul link information includes the number of mesh portals with which the MAP can communicate.

[0042] 6. The method as in any embodiments 2-5, wherein the backhaul link information includes the number of routes separating the MAP to a mesh portal.

[0043] 7. The method as in any embodiments 2-6, wherein the backhaul link information includes the number of hops and MPs per route separating the MAP to a mesh portal.

[0044] 8. The method as in any embodiments 2-7, wherein the backhaul link information includes an average transmission rate on each link between the MAP and a mesh portal.

[0045] 9. The method as in any embodiments 2-8, wherein the backhaul link information includes an estimated throughput between the MAP and a mesh portal.

[0046] 10. The method as in any embodiments 2-9, wherein the backhaul link information includes channel occupancy perceived on each link between the MAP and a mesh portal.

[0047] 11. The method as in any embodiments 2-10, wherein the backhaul link information includes radio resources allocated on each link between the MAP and a mesh portal.

[0048] 12. The method as in any embodiments 2-11, wherein the backhaul link information includes quality experienced on each link between the MAP and a mesh portal.

[0049] 13. The method as in any embodiments 2-12, wherein the MAP broadcasts the backhaul link information via a beacon frame.

[0050] 14. The method as in any embodiments 2-12, wherein the MAP sends the backhaul link information directly to the WTRU via a probe response frame.

[0051] 15. The method as in any embodiments 3-14, wherein the WTRU determines a throughput as the performance value.

[0052] 16. The method as in any embodiments 1-14, further comprising the WTRU sending information about interconnection needs of the WTRU to the MAP, whereby the MAP generates the backhaul link information based on the interconnection needs of the WTRU.

[0053] 17. The method of embodiment 16 wherein the information about interconnection needs of the WTRU includes an Internet protocol (IP) address of a node with which the WTRU desires to connect.

[0054] 18. The method as in any embodiments 16-17, wherein the information about interconnection needs of the WTRU includes a MAC address of a node with which the WTRU desires to connect.

[0055] 19. The method as in any embodiments 16-18, wherein the information about interconnection needs of the WTRU includes an address allowing the MAP to identify a mesh portal from other mesh portals.

[0056] 20. The method as in any embodiments 16-19, wherein the information about interconnection needs of the WTRU includes a subnet address with which the WTRU desires to connect.

[0057] 21. The method as in any embodiments 16-20, wherein the information about interconnection needs of the WTRU includes a predetermined code or flag which allows the MAP to determine the connectivity needs of the WTRU.

[0058] 22. The method as in any embodiments 16-21, wherein the WTRU sends the information about interconnection needs of the WTRU via at least one of a probe request frame, a special control frame, a data frame, and a broadcast frame.

[0059] 23. A mesh network comprising a WTRU and a plurality of MAPs.

[0060] 24. The mesh network of embodiment 23, wherein at least one of the MAPs is configured to send backhaul link information to the WTRU.

[0061] 25. The mesh network of embodiment 24, wherein the WTRU is configured to determine a performance value with respect to the MAP based on the backhaul link information.

[0062] 26. The mesh network of embodiment 25, wherein the WTRU is configured to select a particular MAP to associate with based on the performance value.

[0063] 27. The mesh network as in any embodiments 24-26, wherein the backhaul link information includes the number of mesh portals with which MAP can communicate.

[0064] 28. The mesh network as in any embodiments 24-27, wherein the backhaul link information includes the number of routes separating the MAP to a mesh portal.

[0065] 29. The mesh network as in any embodiments 24-28, wherein the backhaul link information includes the number of hops and MPs per route separating the MAP to a mesh portal.

[0066] 30. The mesh network as in any embodiments 24-29, wherein the backhaul link information includes an average transmission rate on each link between the MAP and a mesh portal.

[0067] 31. The mesh network as in any embodiments 24-30, wherein the backhaul link information includes an estimated throughput between the MAP and a mesh portal.

[0068] 32. The mesh network as in any embodiments 24-31, wherein the backhaul link information includes channel occupancy perceived on each link between the MAP and a mesh portal.

[0069] 33. The mesh network as in any embodiments 24-32, wherein the backhaul link information includes radio resources allocated on each link between the MAP and a mesh portal.

[0070] 34. The mesh network as in any embodiments 24-33, wherein the backhaul link information includes quality experienced on each link between the MAP and a mesh portal.

[0071] 35. The mesh network as in any embodiments 24-34, wherein the MAP is configured to broadcast the backhaul link information via a beacon frame.

[0072] 36. The mesh network as in any embodiments 24-34, wherein the MAP is configured to send the backhaul link information directly to the WTRU via a probe response frame.

[0073] 37. The mesh network as in any embodiments 25-36, wherein the WTRU is configured to determine a throughput as the performance value.

[0074] 38. The mesh network as in any embodiments 23-37, wherein the WTRU is configured to send information about interconnection needs of the WTRU to the MAP.

[0075] 39. The mesh network of embodiment 38, wherein the MAP is configured to generate the backhaul link information based on the interconnection needs of the WTRU.

[0076] 40. The mesh network as in any embodiments 38-39, wherein the information about interconnection needs of the WTRU includes at least one of an IP address of a node with which the WTRU desires to connect.

[0077] 41. The mesh network as in any embodiments 38-40, wherein the information about interconnection needs of the WTRU includes a MAC address of a node with which the WTRU desires to connect.

[0078] 42. The mesh network as in any embodiments 38-41, wherein the information about interconnection needs of the WTRU includes an address allowing the MAP to identify a mesh portal from other mesh portals.

[0079] 43. The mesh network as in any embodiments 38-42, wherein the information about interconnection needs of the WTRU includes a subnet address with which the WTRU desires to connect.

[0080] 44. The mesh network as in any embodiments 38-43, wherein the information about interconnection needs of the WTRU includes a predetermined code or flag which allows the MAP to determine the connectivity needs of the WTRU.

[0081] 45. The mesh network as in any embodiments 38-44, wherein the WTRU is configured to send the information about interconnection needs of the WTRU via at least one of a probe request frame, a special control frame, a data frame, and a broadcast frame.

[0082] Although the features and elements of the present invention are described in the preferred embodiments in particular combinations, each feature or element can be used alone without the other features and elements of the preferred embodiments or in various combinations with or without other features and elements of the present invention.

* * *

CLAIMS

What is claimed is:

1. A method for use in a wireless transmit/receive unit (WTRU) for associating with a mesh access point (MAP), the method comprising:

receiving backhaul link information including an estimated throughput related to the MAP and a number of hops separating the MAP and a mesh portal, wherein the number of hops is a number of intervening MAPs between the MAP and the mesh portal;

determining an end-to-end performance value based on the backhaul link information received;

associating with the MAP based on the end-to-end performance value; and

transmitting information about interconnection requirements via at least one of a probe request frame, a special control frame, a data frame, or a broadcast frame.

2. The method of claim 1, further comprising: determining a throughput as the end-to-end performance value.

3. The method of claim 1 wherein the information about interconnection requirements includes at least one of an Internet Protocol (IP) address of a node with which the WTRU desires to connect, a medium access control (MAC) address of a node with which the WTRU desires to connect, or a subnet address with which the WTRU desires to connect.

4. A wireless transmit/receive unit (WTRU) comprising:

a receiver configured to receive backhaul link information including an estimated throughput related to a mesh access point (MAP) and a number of hops separating the MAP and a mesh portal, wherein the number of hops is a number of intervening MAPs between the MAP and the mesh portal;

a processor configured to determine an end-to-end performance value based on the backhaul link information received and to associate the WTRU with the MAP based on the end-to-end performance value; and

a transmitter configured to send information about interconnection requirements via at least one of a probe request frame, a special control frame, a data frame, or a broadcast frame.

5. The WTRU of claim 4 wherein the processor is further configured to determine a throughput as the end-to-end performance value.

6. The WTRU of claim 4 wherein the information about interconnection requirements includes at least one of an Internet Protocol (IP) address of a node with which the WTRU desires to connect, a medium access control (MAC) address of a node with which the WTRU desires to connect, or a subnet address with which the WTRU desires to connect.

7. A mesh access point (MAP) comprising:

a receiver configured to receive information about interconnection requirements including an Internet Protocol (IP) address via at least one of a probe request frame, a special control frame, a data frame, or a broadcast frame;

a processor configured to generate a backhaul link information including a number of hops, wherein the number of hops is a number of intervening MAPs between a first MAP and a mesh portal, based on the interconnection requirement information; and

a transmitter configured to transmit the backhaul link information,

wherein the backhaul link information included at least one of a number of mesh portals with which MAP communicates, the number of routes separating the MAP to a mesh portal, and mesh points (MPs) per route separating the MAP to the mesh portal, an average transmission rate on each link between the MAP and the mesh portal, an estimated throughput between the MAP and the mesh portal, channel occupancy perceived on each link between the MAP and the mesh portal, radio resources allocated on each link between the MAP and the mesh portal, and perceive quality of each link between the MAP and the mesh portal.

8. The MAP of claim 7 wherein the transmitter is further configured to broadcast the backhaul link information via a beacon frame.

9. The MAP of claim 7 wherein the transmitter is further configured to transmit the backhaul link information via a probe response frame.

10. A method for use in a wireless transmit/receive unit (WTRU) for selectively associating with a base station of a mesh network, the method comprising:

transmitting, from the WTRU, an address of a node with which the WTRU desires to connect;

receiving, at the WTRU from the base station, backhaul link information including an estimated throughput related to a communication path between the base station and the transmitted address;

determining, based on the received backhaul link information and radio link characteristics of a radio link between the WTRU and the base station, an end-to-end performance value associated with the WTRU and the communication path; and

associating with the base station based on the end-to-end performance value.

11. The method of claim 10, wherein the transmitted address comprises any of an Internet Protocol (IP) address of the node with which the WTRU desires to connect, a medium access control (MAC) address of the node with which the WTRU desires to connect, a subnet address of the node with which the WTRU desires to connect, and an address for identifying a gateway from other gateways associated with the mesh network.

12. The method of claim 10, wherein the transmitted address is an address of any of (i) another WTRU and (ii) a node accessible via the internet.

13. The method of claim 10, wherein the base station comprises a node-B.

14. The method of claim 10, further comprising: determining as the end-to-end performance value, a throughput associated with the WTRU and the communication path.

15. The method of claim 10, wherein transmitting an address comprises: transmitting the address via at least one of a probe request frame, a special control frame, a data frame, or a broadcast frame.

16. The method of claim 10, wherein the backhaul link information further comprises any or any combination of (i) a number of hops separating the base station and a gateway associated with the mesh network; (ii) a number of nodes or base stations intervening between the base station and a gateway associated with the mesh network; (iii) a number of nodes and base stations intervening between the base station and a gateway associated with the mesh network; (iv) a number of routes separating the base station and a gateway associated with the mesh network; (v) an average transmission rate of each link between the base station and a gateway associated with the mesh network; (vi) an estimated throughput of each link between the base station and a gateway associated with the mesh network; (vii) channel occupancy perceived on each link between the base station and a gateway associated with the mesh network; (viii) radio resources allocated on each link between the base station and a gateway associated with the mesh network; and (ix) quality experienced on each link between the base station and a gateway associated with the mesh network.

17. The method of claim 10, wherein the backhaul link information further comprises any or any combination of (i) a number of hops separating the base station and the node having the transmitted address; (ii) a number of nodes, base stations or gateways associated with the mesh network intervening between the base station and the node having the transmitted address; (iii) a number of nodes, base stations and gateways associated with the mesh network intervening between the base station and the node having the transmitted address; (iv) a number of routes separating the base station and the node having the transmitted address; (v) an average transmission rate of each link between the base station and the node having the transmitted address; (vi) an estimated throughput of each link between the base station and the node having the transmitted address; (vii) channel occupancy perceived on each link between the

base station and the node having the transmitted address; (viii) radio resources allocated on each link between the base station and the node having the transmitted address; and (ix) quality experienced on each link between the base station and the node having the transmitted address.

18. The method of claim 10, further comprising:

determining the radio link characteristics of the radio link between the WTRU and the base station.

19. A method for use in a wireless transmit/receive unit (WTRU) for selectively associating with one of a plurality of base stations of a mesh network, the method comprising:

transmitting, from the WTRU, an address of a node with which the WTRU desires to connect;

receiving, at the WTRU from the plurality of base stations, a respective plurality of backhaul link information including estimated throughputs related to respective communication paths between the plurality base stations and the transmitted address;

determining based on the received plurality of backhaul link information and radio link characteristics of respective radio links between the WTRU and the base stations, end-to-end performance values associated with the WTRU and the communication paths; and

associating with one of the base stations based on the end-to-end performance values.

20. The method of claim 19, wherein:

the plurality of base stations comprises first and second base stations,
the backhaul link information comprises first and second backhaul link information,

the first backhaul link information is related to the first base station and to the transmitted address,

the second backhaul link information is related to the second base station and to the transmitted address,

the first backhaul link information comprises any or any combination of a first number of nodes, base stations and gateways associated with the mesh network intervening between the first base station and the transmitted address, and

the second backhaul link information comprises any or any combination of a second number of nodes, base stations and gateways associated with the mesh network intervening between the second base station and the transmitted address.

21. The method of claim 19, wherein transmitting an address comprises: transmitting the address via at least one of a probe request frame, a special control frame, a data frame, or a broadcast frame.

22. A method for use in a wireless transmit/receive unit (WTRU) for selectively associating with a base station of a mesh network, the method comprising:

transmitting, from the WTRU, an address of a node with which the WTRU desires to connect;

receiving, at the WTRU from the base station, backhaul link information including estimated throughputs for the base station and for a plurality of backhaul communication paths between the base station to the transmitted address;

determining, based on the received backhaul link information and radio link characteristics of a radio link between the WTRU and the base station, a plurality of end-to-end performance values, wherein each of the plurality of end-to-end performance values is associated with the WTRU and one or more of the plurality of backhaul communication paths;

selecting a backhaul communication path from the plurality of backhaul communication paths based on the end-to-end performance values; and

requesting use of the selected backhaul communication path.

23. A wireless transmit/receive unit (WTRU) comprising:

a transmitter configured to transmit, to a base station of a mesh network, an address of a node with which the WTRU desires to connect;

a receiver configured to receive, from the base station, backhaul link information including an estimated throughput related to a communication path between the base station and the transmitted address;

a processor configured to:

determine, based on the received backhaul link information, and radio link characteristics of a radio link between the WTRU and the base station, an end-to-end performance value associated with the WTRU and the communication path; and

associate the WTRU with the base station based on the end-to-end performance value.

24. The WTRU of claim 23, wherein the transmitted address comprises any of an Internet Protocol (IP) address of the node with which the WTRU desires to connect, a medium access control (MAC) address of the node with which the WTRU desires to connect, a subnet address of the node with which the WTRU desires to connect, and an address for identifying a gateway from other gateways associated with the mesh network.

25. The WTRU of claim 23, wherein the transmitted address is an address of any of another WTRU and an address of a node accessible via the internet.

26. The WTRU of claim 23, wherein the base station comprises a node-B.

27. The WTRU of claim 23, wherein the processor is further configured to: determine, as the end-to-end performance value, a throughput associated with the WTRU and the communication path.

28. The WTRU of claim 23, wherein the transmitter is further configured to transmit the address via at least one of a probe request frame, a special control frame, a data frame or a broadcast frame.

29. The WTRU of claim 23, wherein the backhaul link information further comprises any or any combination of (i) a number of hops separating the base station and the node having the transmitted address; (ii) a number of nodes, base

stations or gateways associated with the mesh network intervening between the base station and the node having the transmitted address; (iii) a number of nodes, base stations and gateways associated with the mesh network intervening between the base station and the node having the transmitted address; (iv) a number of routes separating the base station and the node having the transmitted address; (v) an average transmission rate of each link between the base station and the node having the transmitted address; (vi) an estimated throughput of each link between the base station and the node having the transmitted address; (vii) channel occupancy perceived on each link between the base station and the node having the transmitted address; (viii) radio resources allocated on each link between the base station and the node having the transmitted address; and (ix) quality experienced on each link between the base station and the node having the transmitted address.

30. The WTRU of claim 23, wherein the receiver is further configured to: determine radio link characteristics of a radio link between the WTRU and the base station.

31. A wireless transmit/receive unit (WTRU) comprising:

a transmitter configured to transmit, to a plurality of base stations of a mesh network, an address of a node with which the WTRU desires to connect;

a receiver configured to receive, from the plurality of base stations, a respective plurality of backhaul link information including estimated throughputs related to respective communications paths between the plurality base stations and the transmitted address;

a processor configured to:

determine, based on the received plurality of backhaul link information and radio link characteristics of respective radio links between the WTRU and the base stations, end-to-end performance values associated with the WTRU and the communication paths; and

associate with one of the base stations based on the end-to-end performance values.

32. The WTRU of claim 31, wherein:

the plurality of base stations comprises first and second base stations,
the backhaul link information comprises first and second backhaul link information,

the first backhaul link information is related to the first base station and to the transmitted address,

the second backhaul link information is related to the second base station and to the transmitted address,

the first backhaul link information comprises any or any combination of a first number of nodes, base stations and gateways associated with the mesh network intervening between the first base station and the transmitted address, and

the second backhaul link information comprises any or any combination of a second number of nodes, base stations and gateways associated with a mesh network intervening between the second base station and the transmitted address.

33. The WTRU of claim 31, wherein the transmitter is further configured to transmit the address via at least one of a probe request frame, a special control frame, a data frame, or a broadcast frame.

34. A wireless transmit/receive unit (WTRU) comprising:

a transmitter configured to transmit, to a base station of a mesh network, an address of a node with which the WTRU desires to connect;

a receiver configured to receive, from the base station, backhaul link information including estimated throughputs related to the base station and for a plurality of backhaul communication paths between the base station and the transmitted address;

a processor configured to:

determine, based on the received backhaul link information and radio link characteristics of a radio link between the WTRU and the base station, a plurality of end-to-end performance values, wherein each of the plurality of

* * *

end-to-end performance values is associated with the WTRU and one or more of the plurality of backhaul communication paths;

select a backhaul communication path from the plurality of backhaul communication paths based on the end-to-end performance values; and

request use of the selected backhaul communication path.

35. A base station of a mesh network, the base station comprising:

a receiver configured to receive, from a wireless transmit/receive unit (WTRU), an address of a node with which the WTRU desires to connect;

a transmitter configured to send, to the WTRU, backhaul link information including an estimated throughput related to a communication path between the base station and the transmitted address; and

a processor configured to generate the backhaul link information based on the transmitted address and at least one of (i) a number of hops separating the base station and the transmitted address; (ii) a number of nodes, base stations or gateways, associated with the mesh network, intervening between the base station and the transmitted address; (iii) a number of nodes, base stations and gateways, associated with the mesh network, intervening between the base station and the transmitted address; (iv) a number of routes separating the base station and the transmitted address; (v) an average transmission rate of each link between the base station and the transmitted address; (vi) an estimated throughput of each link between the base station and the transmitted address; (vii) channel occupancy perceived on each link between the base station and the transmitted address; (viii) radio resources allocated on each link between the base station and the transmitted address; and (ix) quality experienced on each link between the base station and the transmitted address.

36. The base station of claim 35, wherein the base station comprises a node-B.

37. The base station of claim 35, wherein the transmitted address is an address of any of another WTRU and a node accessible via the internet.

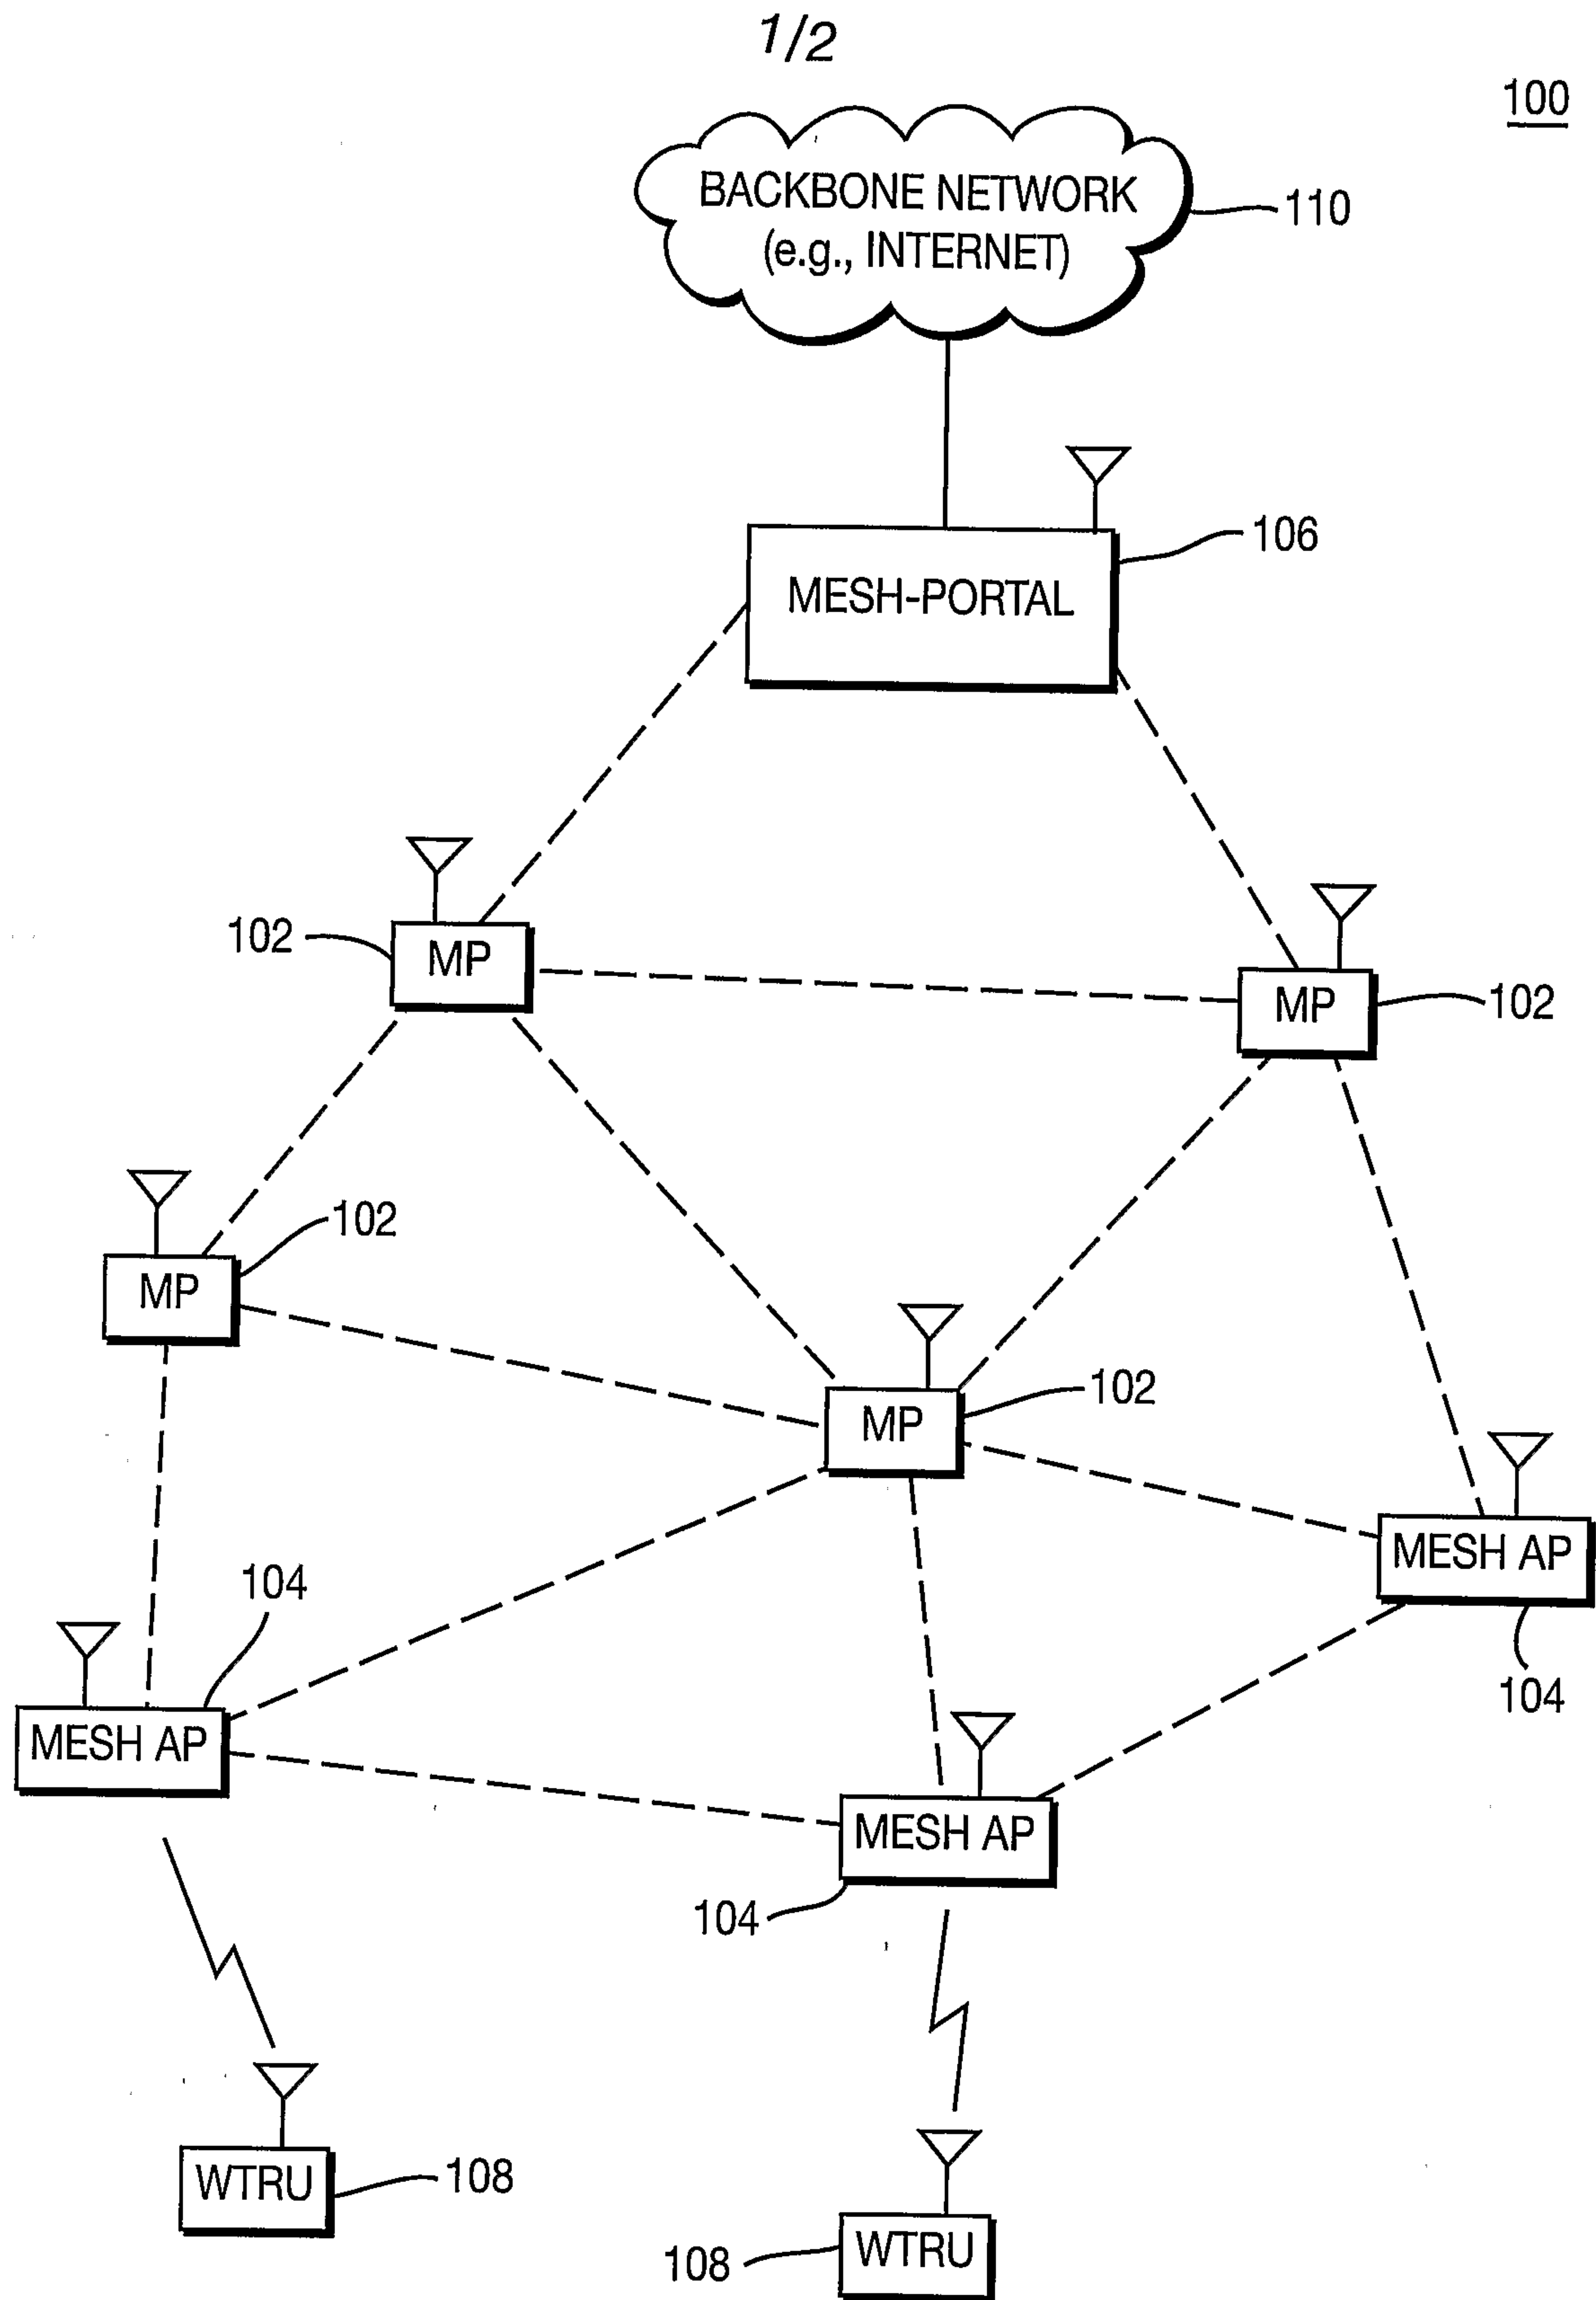


FIG. 1
PRIOR ART

MP = MESH POINT
AP = ACCESS POINT

