
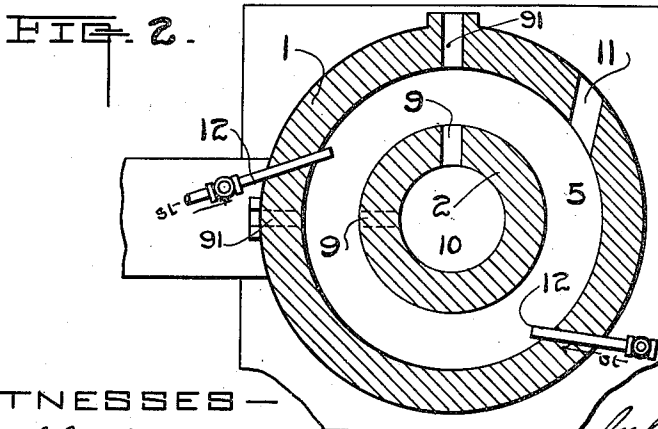


J. H. HIRT.
GAS PRODUCER.
APPLICATION FILED FEB. 14, 1910.

1,064,906.

Patented June 17, 1913.

2 SHEETS—SHEET 1.

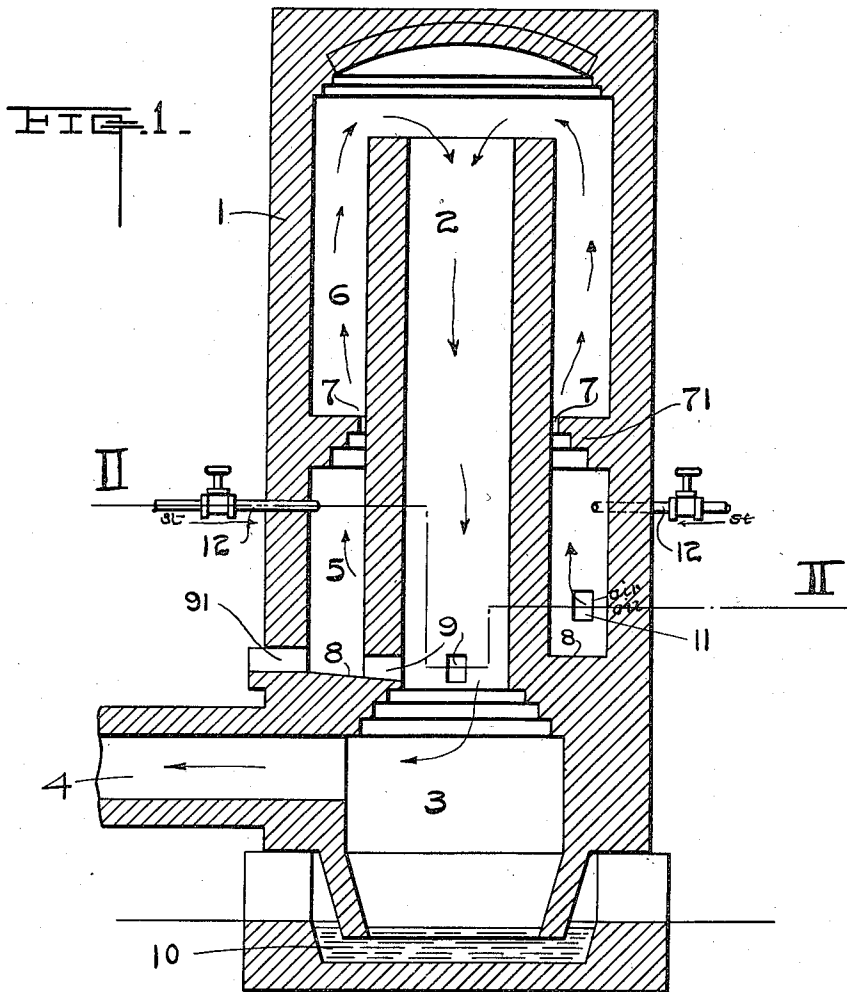

WITNESSES—

W. H. Lieber
Ella Brickell

BY

INVENTOR—

Jules H. Hirt



G. P. D. W. M. ATTORNEY.

J. H. HIRT.
GAS PRODUCER.
APPLICATION FILED FEB. 14, 1910.

1,064,906.

Patented June 17, 1913.

2 SHEETS—SHEET 2.

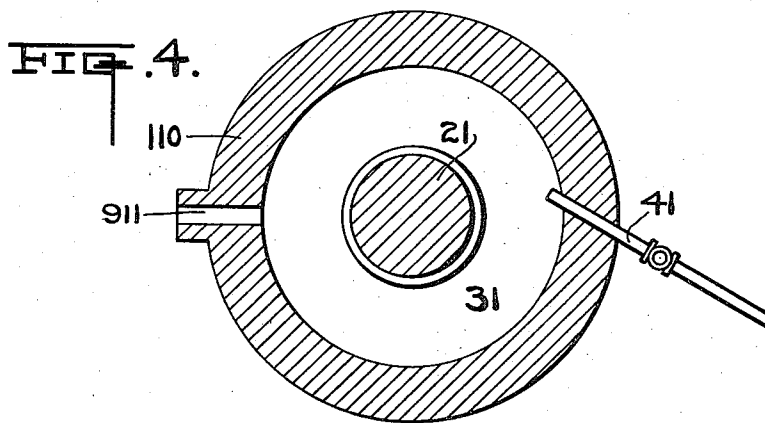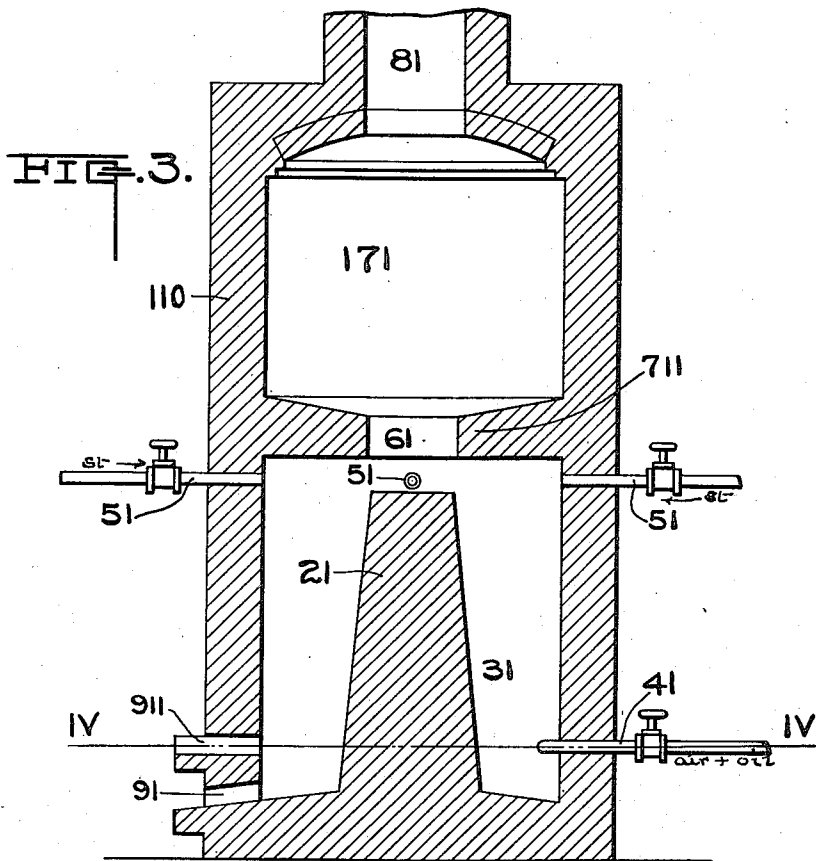

WITNESSES=

W. H. Lieber
Ella Brickell

Jules H. Hirt
BY *H. J. DeWitt*

INVENTOR—

ATTORNEY.

UNITED STATES PATENT OFFICE.

JULES H. HIRT, OF EL PASO, TEXAS, ASSIGNOR, BY MESNE ASSIGNMENTS, TO ALLIS-CHALMERS COMPANY, OF MILWAUKEE, WISCONSIN, A CORPORATION OF NEW JERSEY.

GAS-PRODUCER.

1,064,906.

Specification of Letters Patent. Patented June 17, 1913.

Application filed February 14, 1910. Serial No. 543,725.

To all whom it may concern:

Be it known that I, JULES H. HIRT, a citizen of the United States, residing at El Paso, in the county of El Paso and State of Texas, have invented a certain new and useful Improvement in Gas-Producers, of which the following is a specification.

This invention relates to improvements in apparatus for making producer gas.

The object of the invention is to provide a producer for making gas from the combustion of a continuous stream of gas-forming combustible material mixed with air and the subsequent combination of gases formed by the decomposition of steam or other moisture and recombination of the resulting gases with the gases evolved by the said combustion.

Another object of the invention is to so construct the producer that the producer gas made therein will be high in percentage of carbon monoxid and methane or marsh gas, and low in percentage of carbon dioxid.

The accompanying drawing illustrates two embodiments of the invention and from a study of the same as described in the specification, a clear conception of the invention may be had.

In the drawing,—Figure 1 is a central vertical section of one form of gas producer; Fig. 2 is a section of the producer shown in Fig. 1 taken on line 2—2 of said figure; Fig. 3 is a central vertical section of a modified form of gas producer; and Fig. 4 is a transverse section of the producer of Fig. 3 taken on the line 4—4 of that figure.

Referring to the producer shown in Figs. 1 and 2 of the drawing, the outer shell 1 is preferably circular and is so mounted as to open up at the bottom into a water seal 10. A chamber 3 is formed in the lower part of the shell 1 and opens at the bottom into the water seal 10 and near the top into the off-take pipe 4. The chamber 3 is of reduced diameter at the top and there communicates with the lower end of hollow column 2 which extends upwardly within the shell 1 to a point near the top of the hollow interior portion of the shell 1. This hollow interior portion of the shell 1 is formed into two chambers 6, 5, by an annular ledge 71 projecting inwardly from the shell 1. The chambers 6, 5, are annular in form by reason of the location of the hollow columns 2 within the shell 1. An annular

communicating passage 7 is formed between the ledge 71 and the outside of column 2 and constitutes a centrally disposed passage through which said column extends. A tangentially disposed inlet 11 for gas-forming combustible material mixed with air is formed in the shell 1 near the bottom of chamber 5. Other tangentially disposed valve controlled inlets 12 are passed through the shell 1 near the top of chamber 5. Radial slag ports 9 pierce the lower end of column 2 from the bottom of chamber 5. Poke holes 91 pierce the shell 1 so as to register with the slag ports 9. These poke holes 91 will normally be closed by any convenient means not shown. The floor 8 of chamber 5 is slightly inclined with its lowest parts adjacent slag ports 9.

Referring to the producer shown in Figs. 3 and 4 of the drawing, the shell 110 is closed at the bottom instead of opening into a water seal, and the lower chamber therein is omitted. The column 21 is in this case solid and extends centrally up from the bottom of the shell 110. The shell 110 is divided interiorly into two chambers 31, 171, by an annular ledge 711 projecting inwardly from the shell 110. A column 21 extends upwardly to a point adjacent central opening 61 in the annular ledge 711. The upper chamber 171 opens into off-take pipe 81 at the top. A tangentially disposed valved inlet 41 pierces shell 110 near the bottom of chamber 31. Other tangentially disposed inlets 51 pierce the shell 110 near the top of chamber 31. A slag port 91 through shell 110 communicates with chamber 31 at the bottom thereof. A poke hole 911 also pierces shell 110 adjacent slag port 91.

Operation: Referring to the producer shown in Figs. 1 and 2 of the drawing, finely divided gas-forming combustible material is introduced under pressure through the inlet 11 into combustion chamber 5, sufficient air to produce complete combustion being supplied until a high temperature is attained in the said chamber. The volume of air admitted is then decreased in such degree that carbon dioxid ceases to be produced and the resultant gas is carbon monoxid at the temperature of incandescence. The highest temperature is attained in the upper part of the combustion chamber 5 and the gases and material swirl about column 2 within said chamber, and the resultant gas or gases pass

through annular passage 7, and swirling about column 2 in chamber 6, thence pass downwardly through column 2, chamber 3, and out through off-take pipe 4 to any point desired for storage or use. Steam or other form of moisture or any other endothermic agent admitted through inlets 12 to the upper part of chamber 5, increases the swirling action of the combustible material and gases about column 2, and at the high temperature decomposes in the presence of the highly heated carbon, forming hydrogen, carbon monoxid, and methane or marsh gas. The formation of the marsh gas is made possible, or its decomposition is prevented by the introduction of the steam or other form of moisture or endothermic agent, undoubtedly due to the reduction of the temperature by its introduction. This is proven by the results of analyses disclosing that the gas produced contains a higher percentage of carbon monoxid and methane or marsh gas, and a smaller percentage of carbon dioxide than has heretofore been possible to obtain in a gas producer. The reduction of temperature of course serves to preserve the walls of the furnace from destruction by the high temperatures attained. The central location of the annular passage 7 as compared with the major portion of the combustion chamber 5, together with the swirling of the combustible material and gases in the combustion chamber 5, prevent the passage of solid materials from the combustion chamber. This feature as disclosed herein is claimed in application 465,424, filed Nov. 30, 1908, and the corresponding process in application Serial No. 543,726, filed Feb. 14, 1910. Any excess of such solid material, and also the fused impurities and ash, pass through slag ports 9 and drop in melted condition into the water in water seal 10. Should there be any clogging of the slag ports 9, this may be remedied by the insertion of a poker through these ports by introducing same through poke holes 91 after opening the latter.

Referring to the producer shown in Figs. 3 and 4 of the drawing, finely divided gas-forming combustible material and air are introduced through inlet 41 producing a swirl thereof in chamber 31 about central column 21, are ignited in any convenient way, and complete combustion to carbon dioxide gas

takes place and heats the interior of the chamber 31 to a high temperature. At this time the volume of air is decreased in such degree that carbon dioxide ceases to be produced and the resulting gas is carbon monoxid in incandescent state. This passes through opening 61 to chamber 171 and thence through off-take pipe 81 to any point for storage or use. Into the upper part of chamber 31 steam or other form of moisture or any other suitable endothermic agent is admitted through inlets 51 serving the same functions and producing similar results to those attained by the admission of steam through inlets 12 in the producer shown in Figs. 1 and 2. Excess solid combustible material, fused impurities and ash are removed through slag port 91 to the exterior of the producer. Poke hole 911 may be used for the introduction of a poker to break up slag and clear slag port 91.

Actual test has demonstrated that gas may be generated within fifteen minutes after starting the apparatus, and that two tons of finely divided material can be gasified in one hour.

It should be understood that it is not desired to be limited to the exact details of construction shown and described, for obvious modifications will occur to a person skilled in the art.

It is claimed and desired to secure by Letters Patent,—

The combination in a gas producer, of a central column within said producer forming an annular vertically disposed gas generating chamber free of obstruction by heat-retaining substance, an obliquely directed inlet to said chamber, an annular ledge projecting from the wall of said chamber, said ledge leaving a centrally disposed outlet passage from said chamber and said column being in line with and obstructing said passage, a moisture inlet to said chamber at a point adjacent said obstructed passage, a second chamber with which said obstructed passage communicates and an outlet passage from said second chamber.

In testimony whereof, I affix my signature in the presence of two witnesses.

JULES H. HIRT.

Witnesses:

LEON E. HIRT,
C. CADENA.