



(43) International Publication Date
24 January 2013 (24.01.2013)

(51) International Patent Classification:
G02B 19/00 (2006.01) *F24J 2/00* (2006.01)
G02B 6/00 (2006.01)

(21) International Application Number:
PCT/CN2012/078894

(22) International Filing Date:
19 July 2012 (19.07.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
13/187,327 20 July 2011 (20.07.2011) US

(71) Applicant (for all designated States except US): **HONG KONG APPLIED SCIENCE AND TECHNOLOGY RESEARCH INSTITUTE CO., LTD.** [CN/CN]; 3rd Floor, Bio-Informatics Centre, 2, Science Park West Avenue, Hong Kong, Science Park, Shatin, N.T., Hong Kong (CN).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ZHOU, Wei** [CN/CN]; Room 2503, Block 14, Huang Yuyuan, Futian District, Shenzhen, Guangdong (CN). **LU, Ming** [CN/CN]; 16F., No.4-5, Aly. 97, Ln. 110, Huqian St., Xizhi Dist., New Taipei City, Taiwan 221 (CN). **HUANG, Xuyan** [CN/CN]; 5/F, Block B, Tin Ma Court, Wong Tai Sin, Hong Kong (CN).

(74) Agent: **CHINA TRUER IP**; Suite 713, Block B, Jia Zhao Ye Centre, Shangbu Road, Futian District, Shenzhen, Guangdong 518031 (CN).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: LIGHT CONCENTRATION SYSTEM

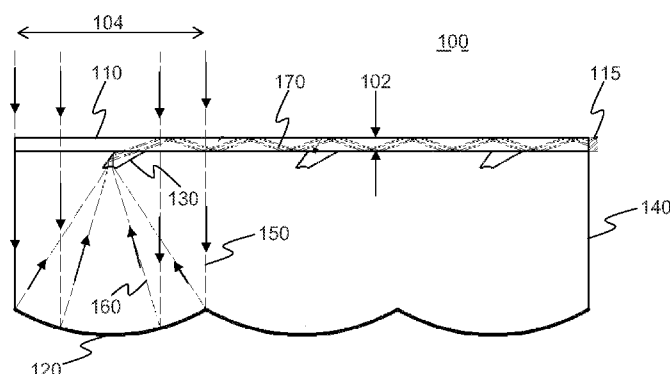


FIG. 1

(57) Abstract: A light concentration system (100) comprises a light concentrator (120) to convert incident light (150) to converging light (160), and a light collimating and directing element (130) to receive the converging light (160), reduce the angle of convergence of the converging light (160), and direct the angle-reduced converging light to a light guide (110) to transmit the directed light (170).

Light Concentration System

FIELD:

The subject matter disclosed herein relates to an optical system, and more
5 particularly, to a concentrating photovoltaic system for light energy concentration.

BACKGROUND:

Though sunlight, the energy source of solar power generation, is virtually free and abundant, these benefits of sunlight may be offset by a relatively high expense associated
10 with solar power generating photovoltaic (PV) cells. Also, corresponding to relatively low efficiency of such PV cells, a relatively large area may be occupied by PV cells in order to generate a desired amount of electrical power. Accordingly, improvements in efficiency of PV cells may lead to reduced cost for solar power generation and/or increased capacity to generate solar power.

15 A concentrating photovoltaic (CPV) system may operate by focusing sunlight via optical elements onto relatively small solar cells to reduce use of costly solar cell materials, for example. CPV technology is a relatively important method for converting sun energy into electricity.

BRIEF DESCRIPTION OF THE DRAWINGS

Non-limiting and non-exhaustive embodiments will be described with reference to the following objects, wherein like reference numerals refer to like parts throughout the various objects unless otherwise specified.

5 FIG. 1 is a cross-section of a light concentration system, according to an embodiment.

 FIG. 2 is a perspective view of a light concentration system, according to an embodiment.

10 FIG. 3 is a cross-section of a portion of a light concentration system, according to an embodiment.

 FIG. 4 is a cross-section of a light concentration system, according to another embodiment.

 FIGS. 5-17 are cross-sections of a portion of a light concentration system, according to embodiments.

15

DETAILED DESCRIPTION

In the following detailed description, numerous specific details are set forth to provide a thorough understanding of claimed subject matter. However, it will be understood by those skilled in the art that claimed subject matter may be practiced
5 without these specific details. In other instances, methods, apparatuses, or systems that would be known by one of ordinary skill have not been described in detail so as not to obscure claimed subject matter.

Reference throughout this specification to "one embodiment" or "an embodiment" may mean that a particular feature, structure, or characteristic described in connection
10 with a particular embodiment may be included in at least one embodiment of claimed subject matter. Thus, appearances of the phrase "in one embodiment" or "an embodiment" in various places throughout this specification are not necessarily intended to refer to the same embodiment or to any one particular embodiment described. Furthermore, it is to be understood that particular features, structures, or characteristics
15 described may be combined in various ways in one or more embodiments. In general, of course, these and other issues may vary with the particular context of usage. Therefore, the particular context of the description or the usage of these terms may provide helpful guidance regarding inferences to be drawn for that context.

In an embodiment, a light concentrating system may comprise one or more light
20 concentrators and a light guiding structure. Such a system may focus sunlight, for example, via optical elements onto relatively small photovoltaic (PV) cells to convert sun energy into electricity. Light concentrators may concentrate incident sun light onto light collimation and/or directing elements. For example, a light collimation and/or directing element may collimate concentrated incident light into relatively small convergence
25 angles and direct the collimated light to a light guiding structure, as described in further detail below. One advantage, among others, provided by performing such collimation may be in that light loss due to decoupling effects may be eliminated or reduced in a light guide structure to transport light to an energy conversion element. In an implementation, an energy conversion element to convert light into different forms of energy, such as
30 electricity and thermal, for example, may comprise PV cells and/or heat exchange devices, though claimed subject matter is not so limited.

In an embodiment, one or more light collimating and/or directing elements may be located at intervals external to a light guide so that the light collimating and/or directing elements are outside an optical path of light travelling in the light guide. Locating light collimating and/or directing elements in such a way may provide an advantage in that light collimating and/or directing elements need not block light travelling in a light guide. As a counter example, light collimating and/or directing elements physically located inside a light guide may block portions of light as the light travels along the light guide. In an implementation, a light guide, such as a rod type of light guide, may be used to transmit light toward an energy conversion element physically and/or optically attached at an end region of the light guide. Light from more than one light concentrator may share the same light guide, though claimed subject matter is not so limited.

In some embodiments, a light collimating and/or directing element may be combined into a single optical element, called a collimation and directing element (CDE). For example, a CDE may include at least one surface located relatively close to a focus point of a light concentrator to receive light from the light concentrator.

Light concentrators to collect light over a relatively large area and concentrate the collected light into a relatively small area may comprise refractive lenses or a combination of refractive lens (e.g., compound lenses), and/or Fresnel lenses, just to name a few examples. Such light concentrators may have an associated focal length determining a distance at which light reflecting from (or transmitting through) the light concentrators may be focused. Additionally, such light concentrators may have an associated numerical aperture (N.A.) determining an angle of convergence of a cone of light reflecting from the light concentrators. Such an angle of convergence may be described in terms of an f-number: An f-number (sometimes called focal ratio, f-ratio, f-stop, or relative aperture, for example) may express a focal length divided by an effective aperture diameter of a light concentrator, for example. An f-number may comprise a dimensionless number that is a quantitative measure of lens speed or steepness of a cone of light, for example. Light concentrators may concentrate light by converging light at a particular f-number and focusing at a particular focal length. Optical elements downstream of such light concentrators may be arranged based, at least in part, on a focal

length and/or N.A. of the light concentrators, for example. An array of such light concentrators may comprise one or more light concentrators arranged in any number of possible patterns. In a particular example, such an array may comprise light concentrators arranged in rows and columns.

5 In an embodiment, a method to collect and/or concentrate light may comprise collecting and focusing incident light onto a light collimating element to increase an f-number of the incident light. The method may further comprise steering the f-number-increased light received from the light collimating element through a light guide, and transmitting the steered light to an energy converting device via the light guide. In one
10 implementation, the light collimating element may perform the light steering. In another implementation, a light directing element may perform the light steering. Increasing an f-number of incident light may be performed by a curved surface of an optical element. A method may further comprise combining steered light from a plurality of light collimating elements.

15 FIG. 1 is a cross-section of a light concentration system 100, according to an embodiment. System 100 may comprise an arrangement of optical elements such as lenses, mirrors, waveguides, and so on, to concentrate light spread over an area defined by a length 104 into a substantially smaller area defined by a length 102, for example. In particular, system 100 may include one or more light concentrators 120 to convert
20 incident light 150 to a converging cone of light 160. Light concentrator 120 may comprise a curved mirror, such as a parabolic or spherical reflector, for example. In one implementation, a curved mirror may comprise any type of material, such as glass, plastic, or metal that may include one or more reflective coatings. Light 150, which may comprise substantially parallel light from the sun, may impinge on a curved surface of
25 light concentrator 120 and be reflected into a cone of converging light 160. For example, light 150 reflected from light concentrator 120 may be focused into a cone of light 160 having a particular f-number. Light 160 may be focused toward a CDE 130 optically attached to a light guide 110. Such a CDE is described in further detail below. CDE 130 may direct light that it receives into light guide 110, which may carry the directed light
30 170 to an energy conversion element 115, for example. Light beams from more than one concentrator may share a light guide. Energy conversion element may comprise one or

more devices able to convert concentrated light to another form of energy, such as electricity (e.g., via photovoltaic cells) or heat (e.g., via a heat exchanger), just to name a few examples. In a particular implementation, a structure to provide physical support to one or more light concentrators 120 and/or light guide 110 may include element 140,
5 which may comprise a rigid material to maintain a constant distance between light concentrators 120 and light guide 110, for example.

In an implementation, CDE 130 may be selected to be relatively small to reduce light blocking of incident light 150. However, a size and dimensions of CDE 130 may be sufficiently large to meet design tolerances involving, for example, angle deviation of
10 incident light 150, CDE placement or alignment with light concentrator 120, reflecting angles of interior surfaces of the CDE, and/or size of a collimating portion of the CDE to receive light from light concentrator 120.

FIG. 2 is a perspective view of a light concentration system 200, according to an embodiment. System may be similar to system 100 shown in FIG. 1, for example. Light
15 concentrators 221, 222, and 223 may focus light into CDEs 231, 232, and 233, respectively. The light concentrators may comprise parabolic or spherical reflectors positioned to reflect converging light to the CDEs. Light received by CDEs 231, 232, 233 may be coupled into light guide 210. Light guide 210 may comprise any of a number of types of light guides, such as a rod-type light guide, for example. Once coupled into
20 light guide 210, light may travel along the inside of light guide 210 by way of total internal reflection, for example, to reach energy conversion element 215. Of course, such details of a light concentration system are merely examples, and claimed subject matter is not so limited.

FIG. 3 is a cross-section of a portion of a light concentration system, according to
25 an embodiment 300. CDE 330, optically attached to a light guide 310, may comprise an optical element including a light collimator 335 and a light director 338. Such an optical element may comprise quartz, sapphire, plastic, or other optical material, for example. In a particular implementation, light collimator 335 may comprise a concave depression in a surface of CDE 330. Light director 338 may comprise a flat reflective interior surface of
30 CDE 330. In one implementation, a flat reflective interior surface of CDE 330 may reflect light by total internal reflection. In another implementation, a flat reflective

surface of CDE 330 may comprise a reflective coating to reflect light internally in CDE330, for example. In one implementation, light 360 entering light collimator 335 may be collimated to produce parallel light 365. In another implementation, light 360 entering light collimator 335 may be collimated to produce light 365 having a reduced convergence angle or increased f-number compared to light 360. For a specific example, an angle of convergence of light 360 may be about 60.0 degrees and an angle of convergence of light 365 may be about 20.0 degrees, though claimed subject matter is not so limited. Collimating light using a light collimator such as 335, for example, may provide benefits. For example, after collimation, a light path may be more easily controlled to avoid or to reduce decoupling effects.

Light director 338 may reflect light 365 at a particular angle based, at least in part, on an angle 333 between a surface of light guide 310 and a reflecting surface of light director 338. Thus, light director 338 may reflect light 365 at a particular angle so that the reflected light 370 enters light guide 310 at an angle 375 that allows total internal reflection to occur in light guide 310. Light 370 may travel along the interior of light guide 310 toward an energy converting element, for example, as shown in FIG. 1.

An optical interface 312 between CDE 330 and light guide 310 may comprise an adhesive having optical properties to hold CDE 330 to light guide 310. For example, an epoxy or other adhesive having relatively high transmittance may adhere CDE 330 and light guide 310 to one another. In other implementations, CDE 330 may be attached to light guide 310 by methods other than an adhesive. For example, straps, bolts, or other hardware (not shown) may be used to attach CDE 330 to light guide 310, though claimed subject matter is not so limited.

FIG. 4 is a cross-section of a light concentration system 400, according to another embodiment. Substantially collimated incident light 460 transmits through a support structure 405 that physically supports secondary mirrors 425. Light 460 then impinges on a light concentrator 420 comprising a parabolic or spherical reflecting surface, for example. Converging light 465 reflected from light concentrator 420 may be directed toward secondary mirror 425 that folds a light cone into aperture 428 in light concentrator 420. After passing through aperture 428, light 468 reflected from secondary mirror 425 may impinge on CDE 430, which may reduce a cone angle of light 468 and direct the

resulting light into light guide 410. For example, a cone angle of light 468 may be reduced from about 60.0 to about 20.0 degrees or less. Resulting light 470 may travel along the interior of light guide 410 toward an energy converting element 415, for example.

5 In a particular implementation, a structure to provide physical support to one or more light concentrators 420, secondary mirrors 425, and/or light guide 410 may include element 440, which may comprise a rigid material to maintain a constant distance between elements in system 400, for example. Support structure 405 may comprise a piece of glass or other rigid material that is transparent to light.

10 FIG. 5 is a cross-section of a portion of a light concentration system, according to an embodiment 500. CDE 530, optically attached to a light guide 510, may comprise an optical element including a light collimator 535 and a light director 538. In a particular implementation, light collimator 535 may comprise a concave depression in a surface of CDE 530. Light director 538 may comprise a curved reflective interior surface of CDE
15 530. Light director 538 may comprise any of a number of materials, such as glass, Polymethyl methacrylate (PMMA), or polycarbonate (PC), just to name a few examples. In one implementation, a curved reflective interior surface of CDE 530 may reflect light by total internal reflection. In another implementation, a curved reflective surface of CDE 530 may comprise a reflective coating to reflect light internally in CDE 530. In one
20 implementation, light 560 entering light collimator 535 may be collimated to produce parallel light 565. In another implementation, light 560 entering light collimator 535 may be collimated to produce light 565 having a reduced convergence angle or increased f-number compared to light 560. Light director 538 may reflect light 565 at a particular angle based, at least in part, on a shape or curvature of the reflecting surface of light
25 director 538. Thus, light director 538 may reflect light 565 at a particular angle so that the reflected light 570 enters light guide 510 with an angle 575 that allows total internal reflection to occur in light guide 510. Light 570 may travel along the interior of light guide 510 toward an energy converting element, for example, as shown in FIG. 1.

FIG. 6 is a cross-section of a portion of a light concentration system, according to
30 an embodiment 600. CDE 630, optically attached to a light guide 610, may comprise an optical element including a curved surface 638, which may implement functions of a light

collimator and/or a light director. As such, light 660 impinging on surface 638 may be both collimated and directed upon reflection. In one implementation, CDE 630 may be integrated with light guide 610 so that CDE 630 and light guide 610 comprise a single piece of optical material, for example. In another implementation, CDE 630 and light
5 guide 610 may comprise separate pieces that are optically attached, for example. In such a case, light guide 610 may include at least two opposing plane surfaces, wherein transmitted light may travel from an entry-end surface (e.g., where CDE 630 may be located) toward an exit-end surface (e.g., where an energy conversion element may be located). Though claimed subject matter is not so limited, CDE 630 may be larger than
10 light guide 610. Such a curved surface 638 may comprise a cylindrical, spherical, parabolic, or free form shape, just to name a few examples. Surface 638 may comprise any of a number of materials, such as glass, Polymethyl methacrylate (PMMA), or polycarbonate (PC), just to name a few examples. In one implementation, curved surface 638 may reflect light by total internal reflection. In another implementation, curved
15 surface 638 may comprise a reflective coating to reflect light internally in CDE 630. Curved surface 638 may reflect light 665 at a particular angle based, at least in part, on a shape or curvature of the reflecting surface of curved surface 638 so that the reflected light 670 enters light guide 610 with an angle that allows total internal reflection to occur in light guide 610. Light 670 may travel along the interior of light guide 610 toward an
20 energy converting element, for example, as shown in FIG. 1.

FIG. 7 is a cross-section of a portion of a light concentration system, according to an embodiment 700. Embodiment 700 may be similar to embodiment 300 shown in FIG. 3, except that CDE 730 and light guide 710 may be separated by a gap 734. Such a gap may be filled with air, for example. CDE 730 may comprise an optical element including
25 a light collimator 735 and a light director 738. Such an optical element may comprise quartz, sapphire, or other optical material, for example. In a particular implementation, light collimator 735 may comprise a concave depression in a surface of CDE 730. Light director 738 may comprise a flat reflective interior surface of CDE 730.

FIG. 8 is a cross-section of a portion of a light concentration system, according to
30 an embodiment 800. A light collimator 830, optically attached to a light guide 810, may comprise a concave depression 835 in a surface of light collimator 830. Light director

812 may comprise a flat reflective interior surface at an end region of light guide 810. In one implementation, such a flat reflective interior surface may reflect light by total internal reflection. In another implementation, a flat reflective surface of light director 812 may comprise a reflective exterior coating to reflect light internally in light guide 810. In one implementation, light 860 entering light collimator 830 may be collimated to produce parallel light 865. In another implementation, light 860 entering light collimator 830 may be collimated to produce light 865 having a reduced convergence angle or increased f-number compared to light 860. Light director 812 may reflect light 865 at a particular angle based, at least in part, on an angle 833 of the reflecting surface of light director 812 with respect to a surface of light guide 810. Thus, light director 812 may reflect light 865 at a particular angle so that the reflected light 870 travels in light guide 810 with an angle that allows total internal reflection to occur in light guide 810. Light 870 may travel along the interior of light guide 810 toward an energy converting element, for example, as shown in FIG. 1.

FIG. 9 is a cross-section of a portion of a light concentration system, according to an embodiment 900. A light collimator 930, optically attached to a light guide 910, may comprise a convex lens. Light director 912 may comprise a flat reflective interior surface at an end region of light guide 910. In one implementation, such a flat reflective interior surface may reflect light by total internal reflection. In another implementation, a flat reflective surface of light director 912 may comprise a reflective exterior coating to reflect light internally in light guide 910. In one implementation, depending at least in part on a focal length of light collimator 930, light 960 entering light collimator 930 may be collimated to produce parallel light 965. In another implementation, again depending at least in part on a focal length of light collimator 930, light 960 entering light collimator 930 may be collimated to produce light 965 having a reduced convergence angle or increased f-number compared to light 960. Light director 912 may reflect light 965 at a particular angle based, at least in part, on an angle 933 of the reflecting surface of light director 912 with respect to a surface of light guide 910. Thus, light director 912 may reflect light 965 at a particular angle so that the reflected light 970 travels in light guide 910 with an angle that allows total internal reflection to occur in light guide 910. Light

970 may travel along the interior of light guide 910 toward an energy converting element, for example, as shown in FIG. 1.

FIG. 10 is a cross-section of a portion of a light concentration system, according to an embodiment 1000. A light collimator 1030, optically attached to a light guide 1010, may comprise a concave lens (e.g., a concave cylindrical lens). Light director 1012 may comprise a flat reflective interior surface at an end region of light guide 1010. In one implementation, such a flat reflective interior surface may reflect light by total internal reflection. In another implementation, a flat reflective surface of light director 1012 may comprise a reflective exterior coating to reflect light internally in light guide 1010. In one implementation, depending at least in part on a focal length of light collimator 1030, light 1060 entering light collimator 1030 may be collimated to produce parallel light 1065. In another implementation, again depending at least in part on a focal length of light collimator 1030, light 1060 entering light collimator 1030 may be collimated to produce light 1065 having a reduced convergence angle or increased f-number compared to light 1060. Light director 1012 may reflect light 1065 at a particular angle based, at least in part, on an angle 1033 of the reflecting surface of light director 1012 with respect to a surface of light guide 1010. Thus, light director 1012 may reflect light 1065 at a particular angle so that the reflected light 1070 travels in light guide 1010 with an angle that allows total internal reflection to occur in light guide 1010. Light 1070 may travel along the interior of light guide 1010 toward an energy converting element, for example, as shown in FIG. 1.

FIG. 11 is a cross-section of a portion of a light concentration system, according to an embodiment 1100. A light collimator 1130, optically attached to a light guide 1110, may comprise a convex lens (e.g., a convex cylindrical lens). Light director 1112 may comprise a flat reflective interior surface at an end region of light guide 1110. In one implementation, such a flat reflective interior surface may reflect light by total internal reflection. In another implementation, a flat reflective surface of light director 1112 may comprise a reflective exterior coating to reflect light internally in light guide 1110. In one implementation, depending at least in part on a focal length of light collimator 1130, light 1160 entering light collimator 1130 may be collimated to produce parallel light 1165. In another implementation, again depending at least in part on a focal length of

light collimator 1130, light 1160 entering light collimator 1130 may be collimated to produce light 1165 having a reduced convergence angle or increased f-number compared to light 1160. Light director 1112 may reflect light 1165 at a particular angle based, at least in part, on an angle 1133 of the reflecting surface of light director 1112 with respect to a surface of light guide 1110. Thus, light director 1112 may reflect light 1165 at a particular angle so that the reflected light 1170 travels in light guide 1110 with an angle that allows total internal reflection to occur in light guide 1110. Light 1170 may travel along the interior of light guide 1110 toward an energy converting element, for example, as shown in FIG. 1.

FIG. 12 is a cross-section of a portion of a light concentration system, according to an embodiment 1200. A light collimator 1230, optically attached to a light guide 1210, may comprise a multi-sided prism. Light director 1212 may comprise a flat reflective interior surface at an end region of light guide 1210. In one implementation, such a flat reflective interior surface may reflect light by total internal reflection. In another implementation, a flat reflective surface of light director 1212 may comprise a reflective exterior coating to reflect light internally in light guide 1210. In one implementation, depending at least in part on a focal length of light collimator 1230, light 1260 entering light collimator 1230 may be collimated to produce parallel light 1265. In another implementation, again depending at least in part on a focal length of light collimator 1230, light 1260 entering light collimator 1230 may be collimated to produce light 1265 having a reduced convergence angle or increased f-number compared to light 1260. Light director 1212 may reflect light 1265 at a particular angle based, at least in part, on an angle 1233 of the reflecting surface of light director 1212 with respect to a surface of light guide 1210. Thus, light director 1212 may reflect light 1265 at a particular angle so that the reflected light 1270 travels in light guide 1210 with an angle that allows total internal reflection to occur in light guide 1210. Light 1270 may travel along the interior of light guide 1210 toward an energy converting element, for example, as shown in FIG. 1.

FIG. 13 is a cross-section of a portion of a light concentration system, according to an embodiment 1300. A light collimator 1330 may be built into light guide 1310. In particular, light collimator 1330 may comprise a concave depression in a surface of light

guide 1310. Light director 1312 may comprise a prism that is optically attached to a surface of light guide 1310. In one implementation, light director 1312 may comprise an optical element that is not integrated with light guide 1310. Light 1360 entering light collimator 1330 may be collimated to produce light 1365 having a reduced convergence angle or increased f-number compared to light 1360. Light director 1312 may reflect light 1365 at a particular angle so that reflected light 1370 travels in light guide 1310 with an angle that allows total internal reflection to occur in light guide 1310. Light 1370 may travel along the interior of light guide 1310 toward an energy converting element, for example, as shown in FIG. 1. FIG. 14 is a cross-section of a portion of a light concentration system, according to an embodiment 1400. Surface 1412 may comprise a light collimator and a light director, so that light impinging on surface 1412 may be both collimated and directed upon reflection. Surface 1412 may comprise a concave-curved reflective interior surface of an end region of light guide 1410. In one implementation, such a reflective interior surface may reflect light by total internal reflection. In another implementation, a surface 1412 may comprise a reflective exterior coating to reflect light internally in light guide 1410. In one implementation, light 1460 reflecting from surface 1412 may be collimated to produce parallel light 1465. In another implementation, light 1460 reflecting from surface 1412 may be collimated to produce light 1465 having a reduced convergence angle or increased f-number compared to light 1460. Surface 1412 may reflect light 1460 at a particular angle based, at least in part, on a shape or curvature of surface 1412. Thus, surface 1412 may reflect light 1460 at a particular angle so that the reflected light 1465 travels in light guide 1410 with an angle that allows total internal reflection to occur in light guide 1410. Light 1470 may travel along the interior of light guide 1410 toward an energy converting element, for example, as shown in FIG. 1.

FIG. 15 is a cross-section of a portion of a light concentration system, according to an embodiment 1500. Surface 1512 may comprise a light collimator and a light director, so that light impinging on surface 1512 may be both collimated and directed upon reflection. Surface 1512 may comprise a convex-curved reflective interior surface of an end region of light guide 1510. In one implementation, such a reflective interior surface may reflect light by total internal reflection. In another implementation, a surface 1512 may comprise a reflective exterior coating to reflect light internally in light guide 1510.

In one implementation, light 1560 reflecting from surface 1512 may be collimated to produce parallel light 1565. In another implementation, light 1560 reflecting from surface 1512 may be collimated to produce light 1565 having a reduced convergence angle or increased f-number compared to light 1560. Surface 1512 may reflect light 1560 at a particular angle based, at least in part, on a shape or curvature of surface 1512. Thus, surface 1512 may reflect light 1560 at a particular angle so that the reflected light 1565 travels in light guide 1510 with an angle that allows total internal reflection to occur in light guide 1510. Light 1570 may travel along the interior of light guide 1510 toward an energy converting element, for example, as shown in FIG. 1.

FIG. 16 is a cross-section of a portion of a light concentration system, according to an embodiment 1600. A light collimator 1635 and a light director 1612 may be built into light guide 1610. In particular, light collimator 1635 may comprise a concave depression in a surface of light guide 1610. Light director 1612 may comprise a flat reflective interior surface formed by an angular notch in another surface of light guide 1610. In one implementation, light 1660 entering light collimator 1635 (and light guide 1610) may be collimated to produce parallel light 1665. In another implementation, light 1660 entering light collimator 1635 may be collimated to produce light 1665 having a reduced convergence angle or increased f-number compared to light 1660. Light director 1612 may reflect light 1665 at a particular angle so that reflected light 1670 travels in light guide 1610 with an angle that allows total internal reflection to occur in light guide 1610. Light 1670 may travel along the interior of light guide 1610 toward an energy converting element, for example, as shown in FIG. 1.

FIG. 17 is a cross-section of a portion of a light concentration system, according to an embodiment 1700. A light collimator 1730 may comprise a convex lens that need not be integrated with light guide 1710. In particular, light collimator 1730 may comprise a convex lens optically contacting a surface of light guide 1710. Light director 1712 may comprise a prism that is optically contacting a surface of light guide 1710. In one implementation, light director 1712 may comprise an optical element that is not integrated with light guide 1710. Light 1760 entering light collimator 1730 may be collimated to produce light 1765 having a reduced convergence angle or increased f-number compared to light 1760. Light director 1712 may reflect light 1765 at a particular

angle so that reflected light 1770 travels in light guide 1710 with an angle that allows total internal reflection to occur in light guide 1710. Light 1770 may travel along the interior of light guide 1710 toward an energy converting element, for example, as shown in FIG. 1. One skilled in the art will realize that a virtually unlimited number of variations to the above descriptions is possible, and that the examples and the accompanying figures are merely to illustrate one or more particular implementations.

The terms, “and,” “and/or,” and “or” as used herein may include a variety of meanings that also is expected to depend at least in part upon the context in which such terms are used. Typically, “or” as well as “and/or” if used to associate a list, such as A, B or C, is intended to mean A, B, and C, here used in the inclusive sense, as well as A, B or C, here used in the exclusive sense. In addition, the term “one or more” as used herein may be used to describe any feature, structure, or characteristic in the singular or may be used to describe some combination of features, structures, or characteristics. Though, it should be noted that this is merely an illustrative example and claimed subject matter is not limited to this example.

While there has been illustrated and described what are presently considered to be example embodiments, it will be understood by those skilled in the art that various other modifications may be made, and equivalents may be substituted, without departing from claimed subject matter. Additionally, many modifications may be made to adapt a particular situation to the teachings of claimed subject matter without departing from the central concept described herein. Therefore, it is intended that claimed subject matter not be limited to the particular embodiments disclosed, but that such claimed subject matter may also include all embodiments falling within the scope of the appended claims, and equivalents thereof.

CLAIMS

What is claimed is:

1. An apparatus comprising:
 - a light concentrator to convert incident light to converging light;
 - 5 a light collimating element to receive said converging light and to reduce an angle of convergence of said converging light; and
 - a light directing element to direct said reduced-angle converging light to a light guide to transmit said directed light.
- 10 2. The apparatus of claim 1, wherein said light collimating element includes at least one curved surface to perform said reducing the angle of convergence of said converging light.
- 15 3. The apparatus of claim 1, wherein said light collimating element includes a multi-sided prism to perform said reducing the angle of convergence of said converging light.
- 20 4. The apparatus of claim 1, wherein said light directing element comprises a reflecting interior surface to perform said directing said reduced-angle converging light into said light guide.
- 25 5. The apparatus of claim 1, wherein a single optical element comprises said light collimating element and said light directing element.
- 30 6. The apparatus of claim 5, wherein said single optical element comprises at least one curved convex or concave surface to perform at least one function of said reducing the angle of convergence of said converging light and said directing said reduced-angle converging light into said light guide.
7. The apparatus of claim 5, further comprising a gap between said light guide and said single optical element.

8. The apparatus of claim 1, wherein said light directing element and said light guide comprise a single optical element.

5 9. The apparatus of claim 1, wherein said light collimating element and said light guide comprise a single optical element.

10 10. The apparatus of claim 1, wherein said light collimating element, said light directing element, and said light guide comprise a single optical element.

11. The apparatus of claim 10, wherein said single optical element comprises at least one curved surface to perform at least one function of said reducing the angle of convergence of said converging light and said directing said reduced-angle converging light into said light guide.

15 12. The apparatus of claim 1, wherein said light collimating element is located external to said light guide.

20 13. The apparatus of claim 1, wherein said light directing element is located external to said light guide.

14. The apparatus of claim 1, wherein said light guide comprises a rod-type light guide.

25 15. The apparatus of claim 14, wherein said light guide includes at least two opposing plane surfaces, wherein said transmitted light travels from an entry-end surface toward an exit-end surface.

30 16. The apparatus of claim 1, further comprising an energy conversion element to receive said reduced-angle converging light via said light guide.

17. The apparatus of claim 16, wherein said energy conversion element comprises at least one device to convert said received light to other forms of energy.

18. The apparatus of claim 1, wherein said light concentrator comprises a curved
5 mirror.

19. The apparatus of claim 18, wherein said light concentrator further comprises a secondary curved mirror.

10 20. The apparatus of claim 1, wherein said light concentrator comprises a refractive lens.

21. The apparatus of claim 1, wherein said light guide comprises a shaped end having a curved surface, and wherein said shaped end comprises said light collimating
15 element and said light directing element.

22. The apparatus of claim 1, wherein a side of said light guide comprises a notch and another side of said light guide comprises a convex or concave shaped indentation, and wherein said notch comprises said light directing element and said indentation
20 comprises said light collimating element.

23. The apparatus of claim 1, wherein said light collimating element and said light directing element are located close to a focus point of said light concentrator.

25 24. A method comprising:
collecting and focusing incident light onto a light collimating element to increase an f-number of said incident light;
steering said f-number-increased light received from said light collimating
element through a light guide; and
30 transmitting said steered light to an energy converting device via said light guide.

25. The method of claim 24, wherein said light collimating element performs said light steering.

26. The method of claim 25, wherein a light directing element performs said light steering..
5

27. The method of claim 24, wherein said increasing said f-number of said incident light is performed by a curved surface of an optical element.

10 28. The method of claim 25, further comprising combining steered light from a plurality of said light collimating elements.

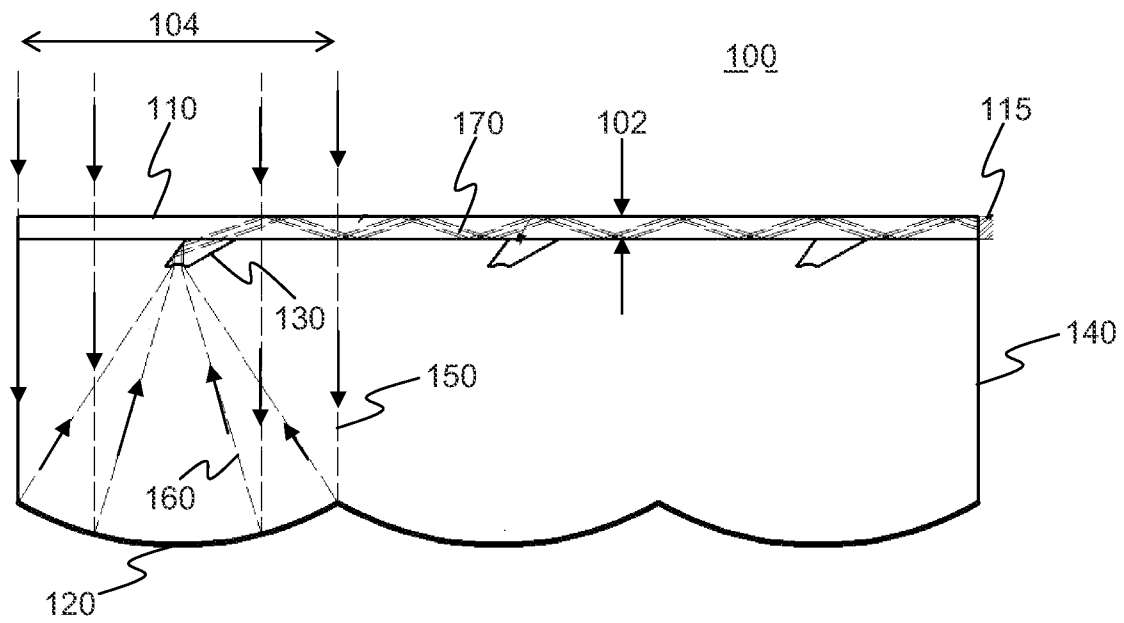


FIG. 1

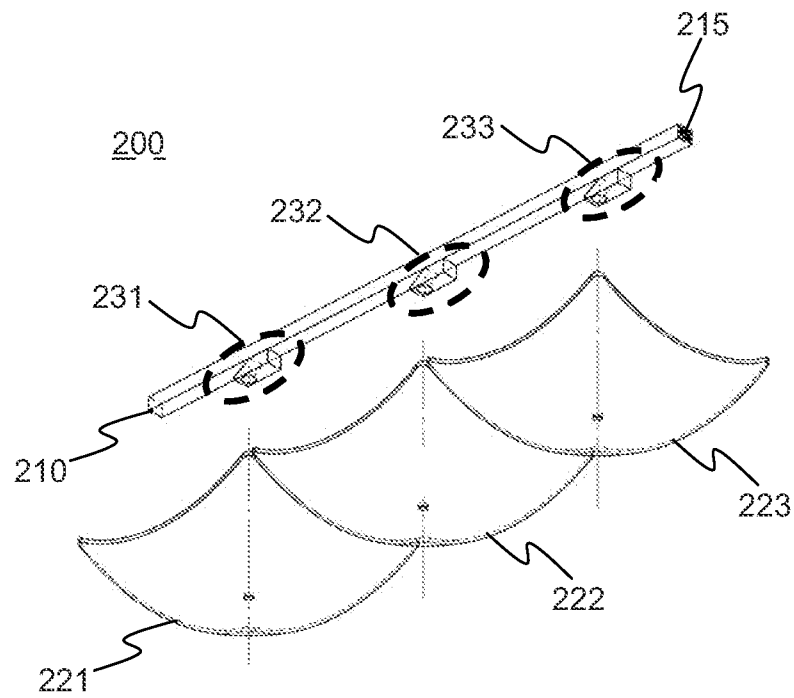


FIG. 2

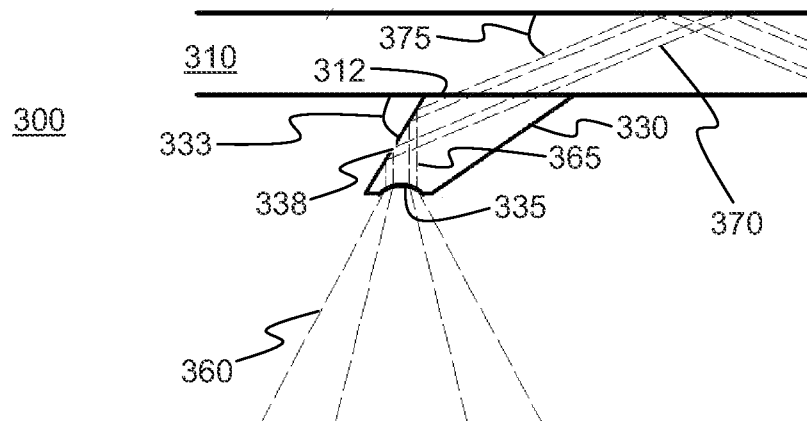


FIG. 3

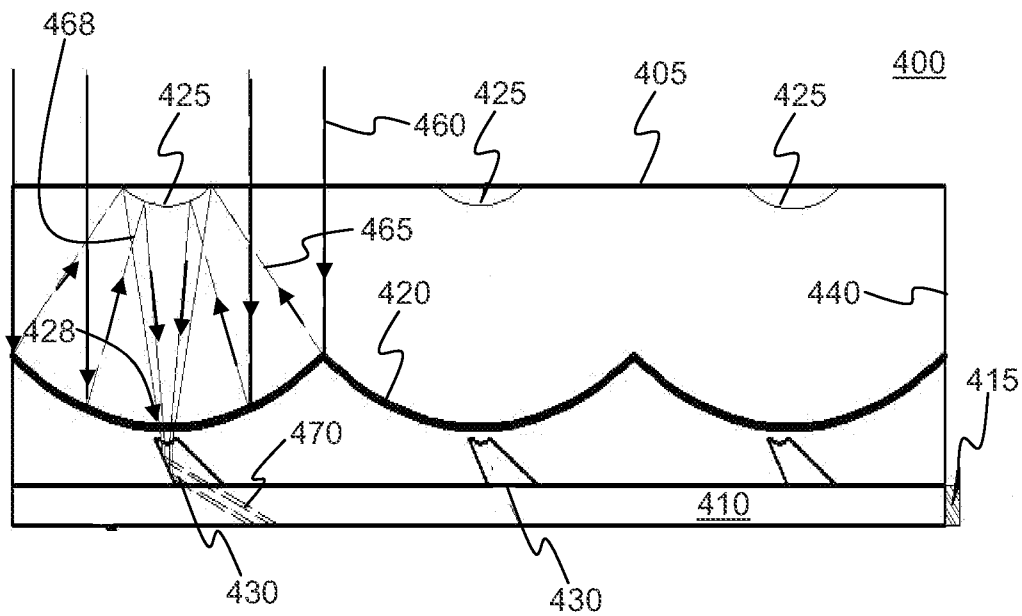


FIG. 4

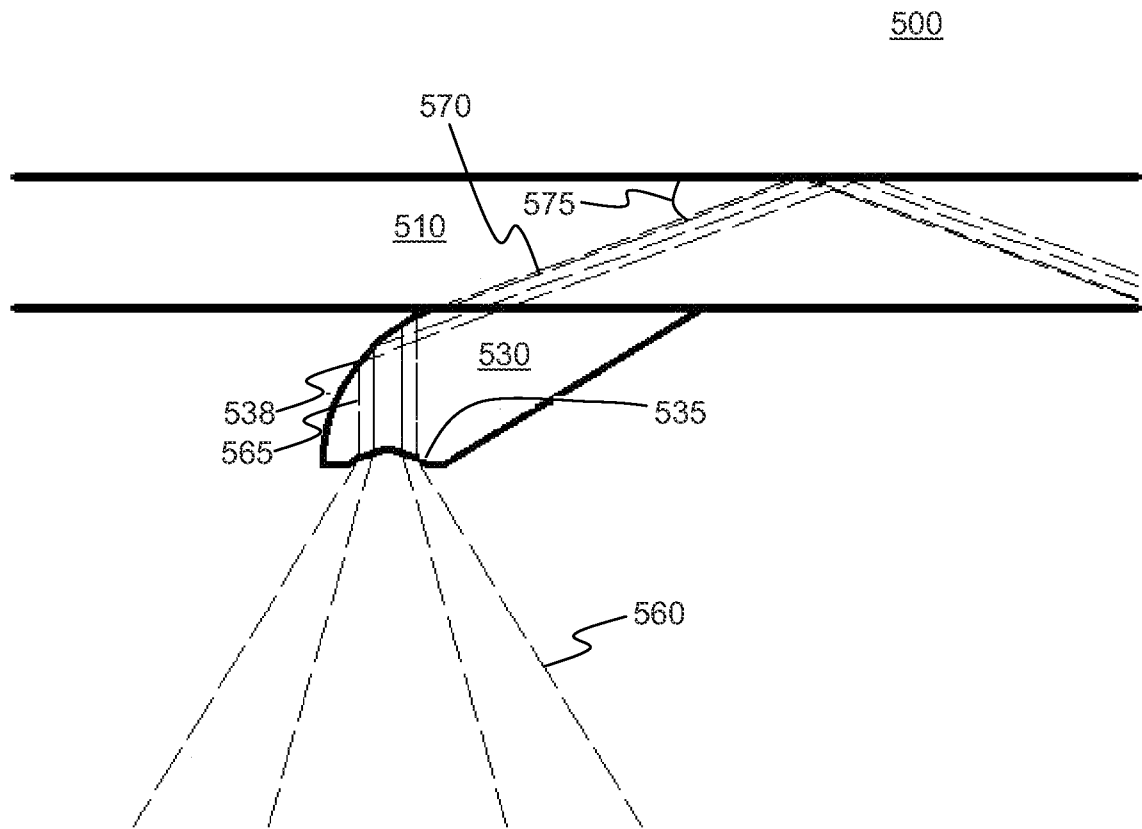


FIG. 5

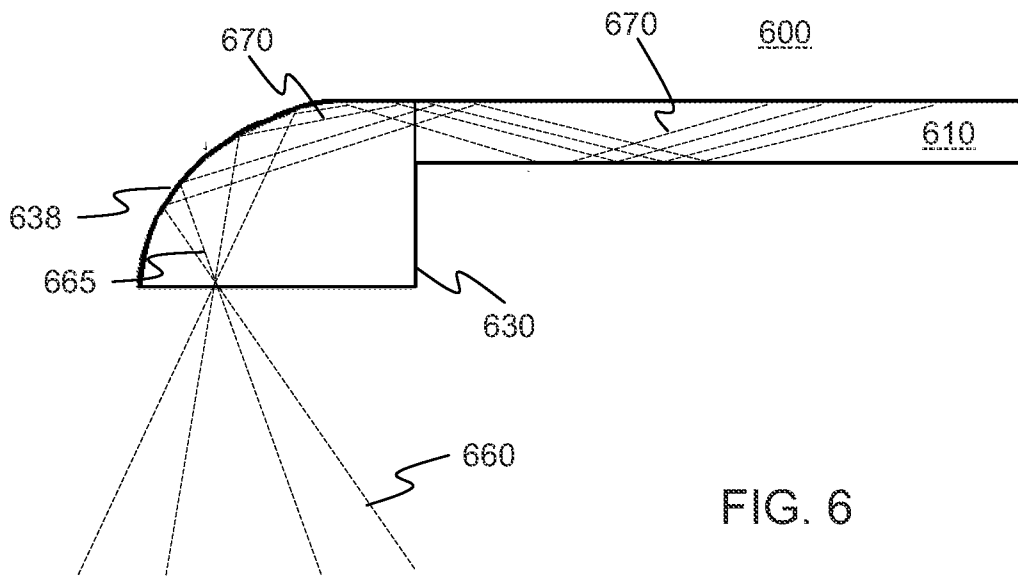


FIG. 6

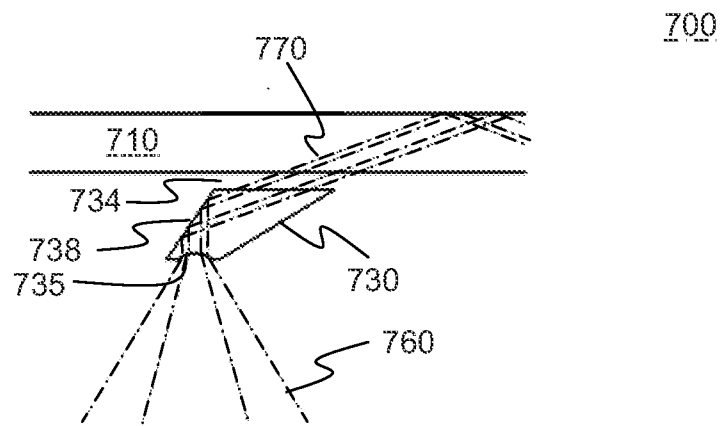


FIG. 7

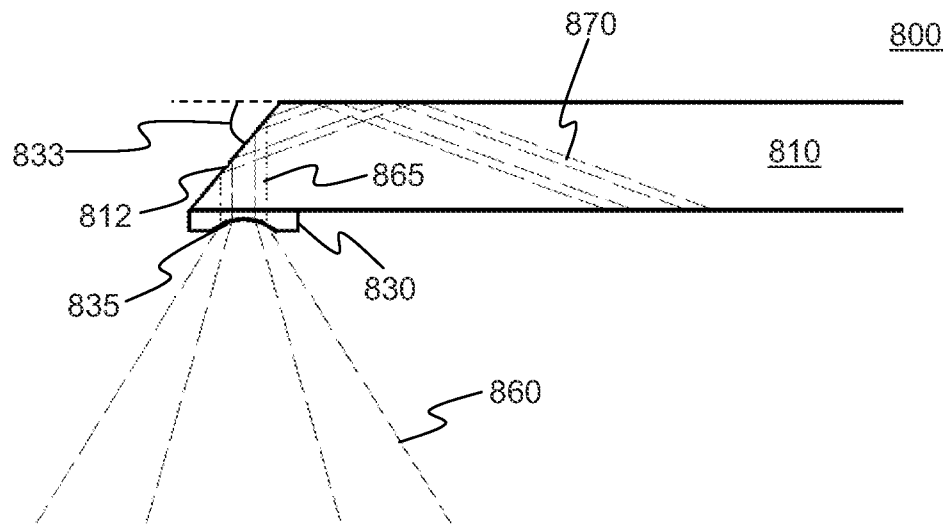


FIG. 8

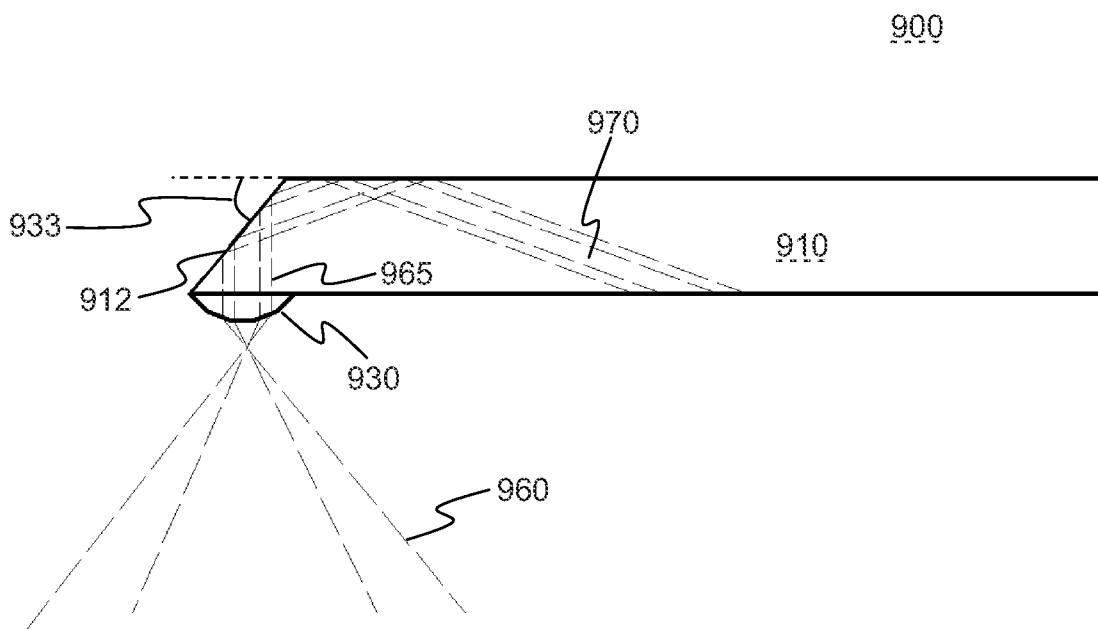
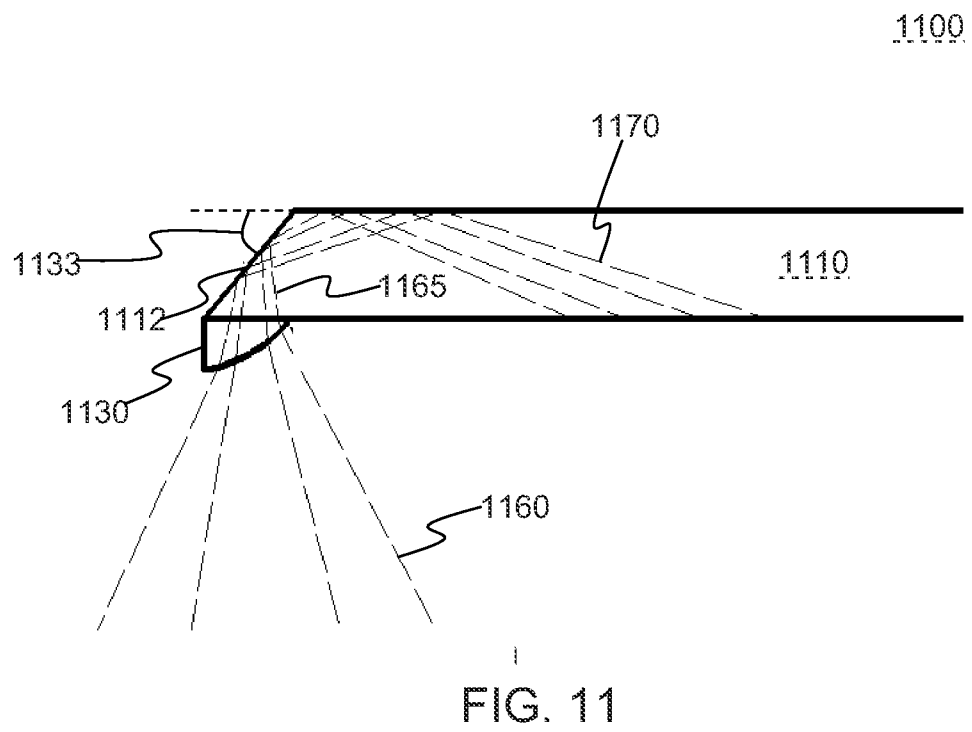
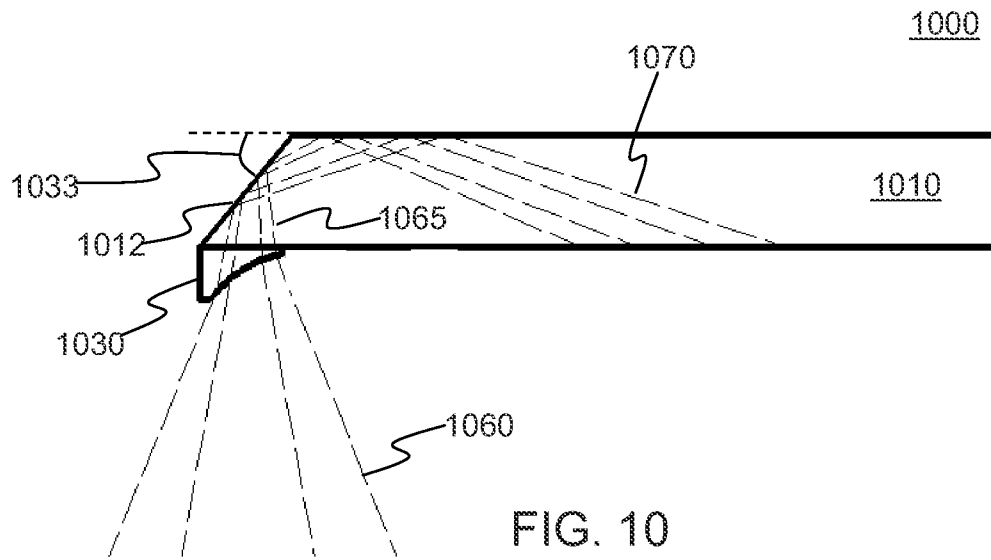


FIG. 9



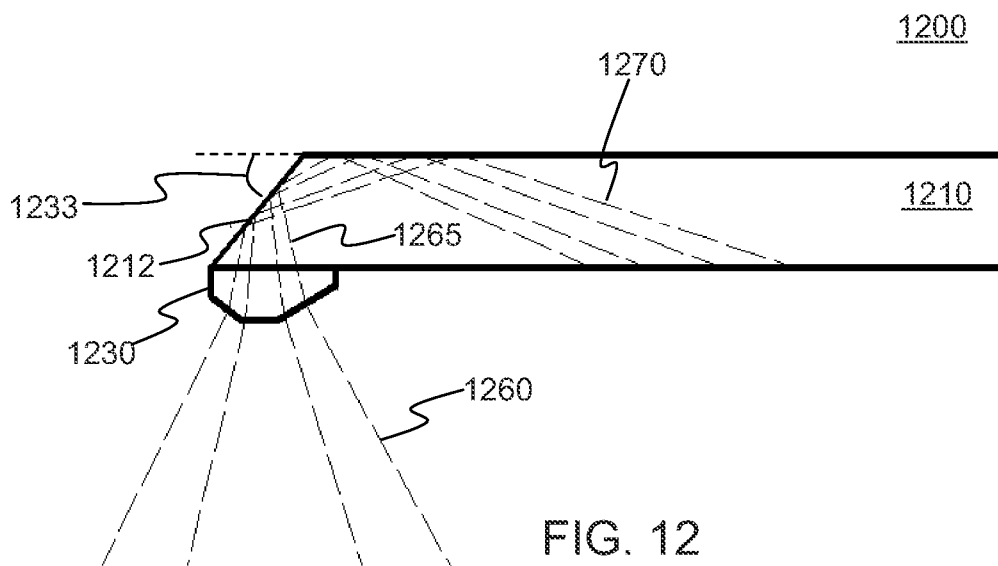


FIG. 12

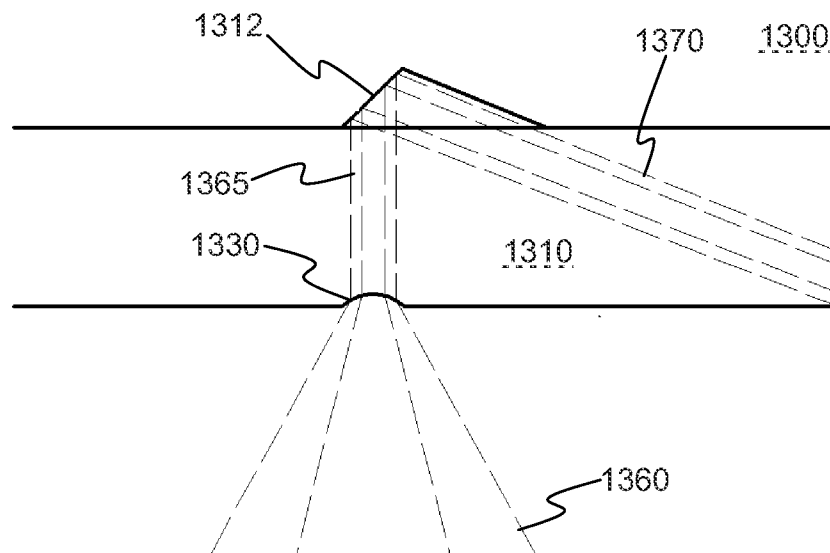


FIG. 13

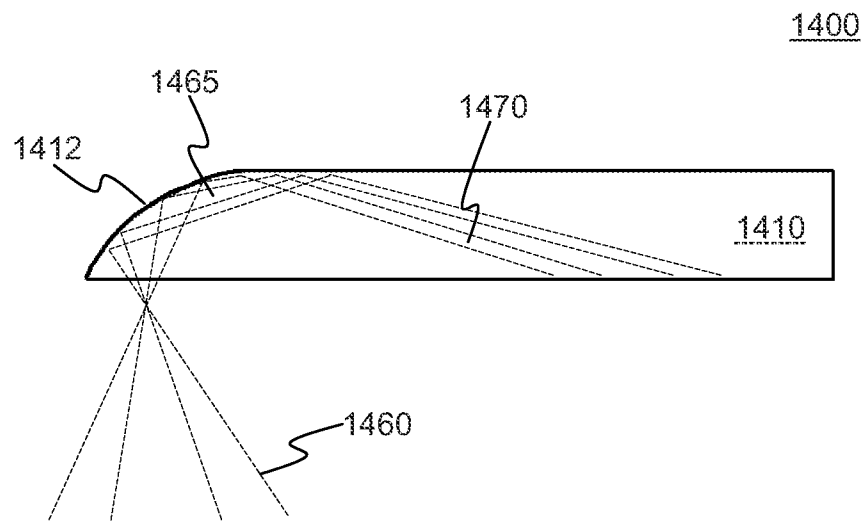


FIG. 14

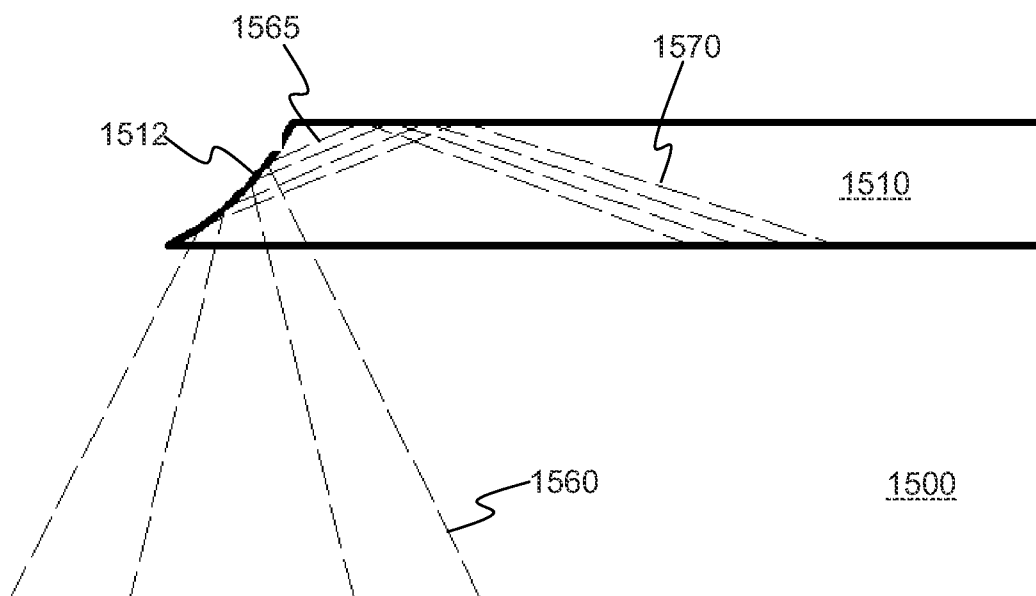


FIG. 15

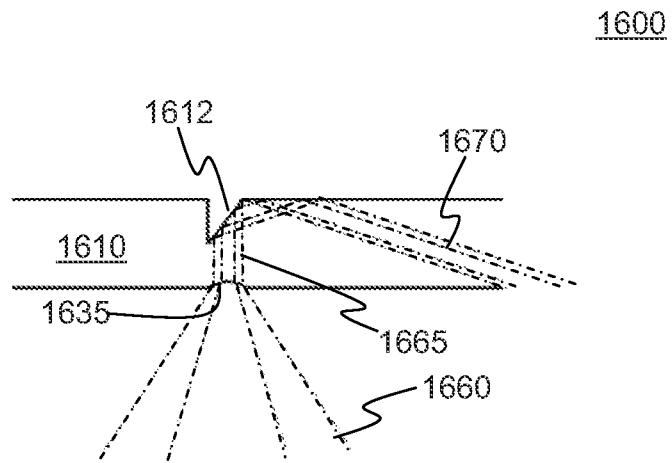


FIG. 16

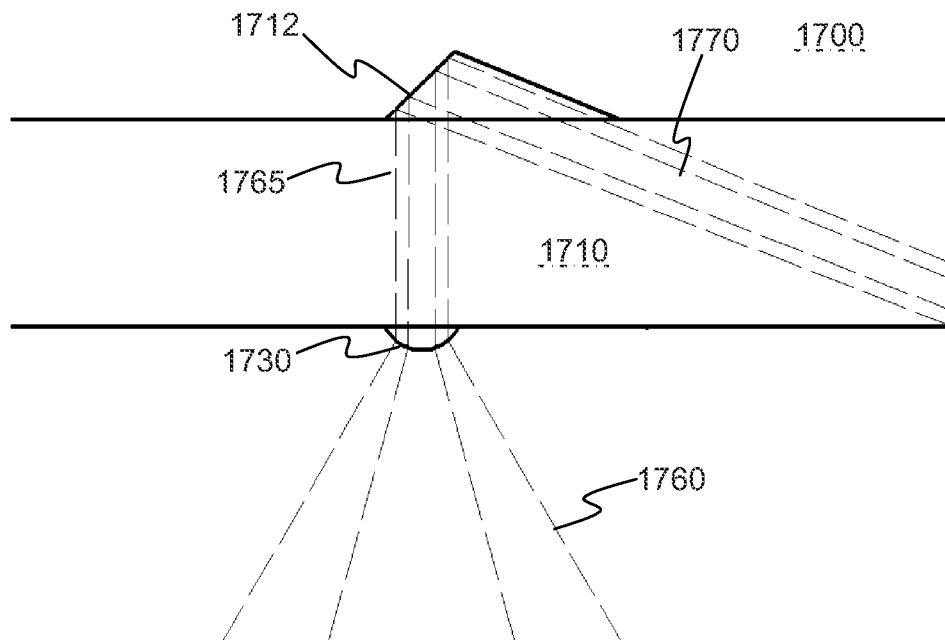


FIG. 17

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2012/078894

A. CLASSIFICATION OF SUBJECT MATTER

See the extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: G02B19, G02B6, G02B17, F24J2, F21S11, F21V5, F21V7, F21V8, F21V13, G02B27

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNABS, CNTXT, VEN: concentrat+, converg+, collect+, condens+, focus+, collimat+, parallel, light, ray, direct+, guid+, steer+, turn+, solar, sun, photovoltaic, PV

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
PX	US2011/0315862A1 (HONG KONG APPLIED SCIENCE AND TECHNOLOGY RESEARCH INSTITUTE CO. LTD.) 29 Dec. 2011 (29.12.2011) claims 1-28	1-28
E	CN102608739A (ZHANG, Mengzhu) 25 Jul. 2012 (25.07.2012) claims 1-5, paragraphs 3-30 in the description, figures 1-8	1-2, 4-7, 12-18, 20, 23-28
X	CN101174027A (BEIJING PARAGON TECHNOLOGY CO LTD) 07 May 2008 (07.05.2008) line 22, page 7- line 22, page 10 in the description, figures 1-3	1-7, 12-20, 23-28
Y		8-11, 21, 22

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim (S) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search
19 Oct. 2012 (19.10.2012)Date of mailing of the international search report
08 Nov. 2012 (08.11.2012)Name and mailing address of the ISA/CN
The State Intellectual Property Office, the P.R.China
6 Xitucheng Rd., Jimen Bridge, Haidian District, Beijing, China
100088
Facsimile No. 86-10-62019451

Authorized officer

GAO, Jie

Telephone No. (86-10)62085766

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2012/078894

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CN101561553A (FENG, Yi'an) 21 Oct. 2009 (21.10.2009) pages 1-3 in the description, figures 1-7	1-7, 12-20, 23-28
Y		8-11, 21, 22
Y	US2010/0116319A1 (ABENGOA SOLAR NEW TECHNOLOGIES S.A.) 13 May 2010 (13.05.2010) paragraphs 62-76 in the description, figures 7-8, 11-14	8-11, 21, 22
X	CN1580667A (ZHAO, Xiaofeng) 16 Feb. 2005 (16.02.2005) line 4, page 11, line 1, page 12- line 21, page 17 in the description, figures 1-6	1-7, 12-20, 23-28
Y		8-11, 21, 22
X	CN101922672A (CHANGZHOU INSTITUTE OF TECHNOLOGY) 22 Dec. 2010 (22.12.2010) paragraphs 21-25 in the description, figures 2, 4	1-7, 12-20, 23-28
Y		8-11, 21, 22
Y	CN102122061A (SHARP KK) 13 Jul. 2011 (13.07.2011) paragraphs 64-81 in the description, figures 1-10	8-11, 21, 22

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CN2012/078894

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
US2011/0315862A1	29.12.2011	CN102313975A	11.01.2012
CN102608739A	25.07.2012	none	
CN101174027A	07.05.2008	none	
CN101561553A	21.10.2009	none	
US2010/0116319A1	13.05.2010	US2010116336A	13.05.2010
		WO2010056382A	20.05.2010
		WO2010056405A	20.05.2010
		EP2356380A	17.08.2011
		EP2356379A	17.08.2011
		ES2364665AB	12.09.2011
		CN102272537A	07.12.2011
		CN102272538A	07.12.2011
CN1580667A	16.02.2005	CN100370194C	20.02.2008
		WO2005043049A	12.05.2005
		AU2003284805A	19.05.2005
		EP1679478A	12.07.2006
		JP2007524055A	23.08.2007
		JP4420902B2	24.02.2010
		US2008087276A	17.04.2008
		US7975685B	12.07.2011
CN101922672A	22.12.2010	none	
CN102122061A	13.07.2011	US2011162712A	07.07.2011
		EP2348342A	27.07.2011

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2012/078894

A. CLASSIFICATION OF SUBJECT MATTER

G02B19/00 (2006.01) i

G02B6/00 (2006.01) i

F24J2/00 (2006.01) i