




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification⁶ : E21B 19/20, 19/14, 19/16</p>	<p>A1</p>	<p>(11) International Publication Number: WO 99/30000</p> <p>(43) International Publication Date: 17 June 1999 (17.06.99)</p>
<p>(21) International Application Number: PCT/NL97/00667</p> <p>(22) International Filing Date: 5 December 1997 (05.12.97)</p> <p>(71) Applicant (for all designated States except US): WELL ENGINEERING PARTNERS B.V. [NL/NL]; Tynaarlosestraat 68, NL-9481 AE Vries (NL).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): KAMPHORST, Herman [NL/DE]; Sportstrasse 8, D-48529 Nordhorn (DE). BÖTTGER, Dietrich [DE/NL]; Vogelzand 2275, NL-1788 GD Den Helder (NL). VAN WEICHEM, Gustaaf, Louis [NL/NL]; Kamille 7, NL-2811 RD Reeuwijk (NL).</p> <p>(74) Agent: SMULDERS, Th., A., H., J.; Vereenigde Octrooibureaux, Nieuwe Parklaan 97, NL-2587 BN The Hague (NL).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>

(54) Title: HANDLING OF TUBE SECTIONS IN A RIG FOR SUBSOIL DRILLING

(57) Abstract

A drive unit (1) for a subsoil drilling rig comprises a drive unit (5), an engagement unit (12) for releasably engaging a tube section (13) extending therefrom in a drilling direction and a gripper (15) movable relative to the engagement unit (12) between a first position for gripping a tube engaged by the engagement unit (12) and a second position for gripping a tube section (13) in a transfer position. Supplied tube sections (13) can be handled reliably and movements of supplied tube sections (13) can be controlled accurately. Co-ordination of positions and movements between the supplied tube sections (13) and the drive unit (1) is simplified. A drilling rig incorporating such a drive unit (1) and a method employing such a drive unit (1) are described as well.

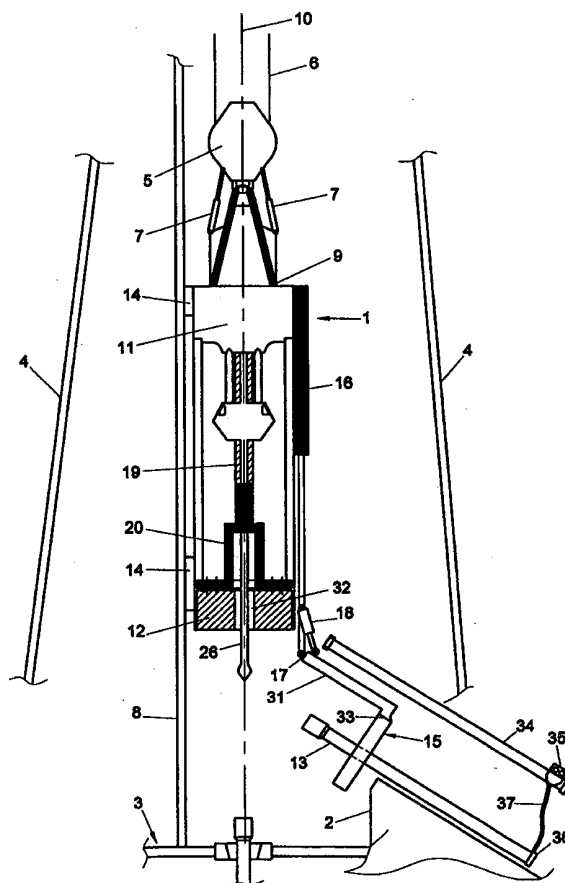

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Vict Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Title: Handling of tube sections in a rig for subsoil drilling.

TECHNICAL FIELD

This invention relates to a drive unit, a drilling rig for subsoil drilling, and to a method of handling tube sections using such equipment. Handling of tube sections occurs, for
5 example, in the course of placing and removing a casing in a bore hole in the lithosphere and in the course of drilling a bore hole and tripping (removing and/or reintroducing a string of joints into a bore hole).

10 BACKGROUND ART

Conventionally, handling of, for instance, casing sections in a rotary well drilling rig is carried out in the following manner. Starting from a situation in which a string of casing is suspended from a spider at the rig
15 floor and extends downwards in a bore hole, a protecting and guiding device is mounted to the connector forming the top end of the casing string suspended from the spider. Then a next casing section is attached to a joint elevator, which is cable mounted to a drive unit, and hoisted into a
20 vertical orientation freely suspended above the floor of the well head as the block carrying the drive unit is lifted. During lifting, the casing section is guided to prevent damage of the external, unprotected thread at its bottom end. A stabbing board is moved toward the tube
25 string elevator mounted to the drive unit. Subsequently, the block is slowly moved down and the thread at the bottom end of the section to be attached is guided by a roustabout into the casing connector at the top end of the string suspended from the bottom spider elevator. Then
30 the protecting and guiding device is removed and the block moves down further until the casing section to be attached stands on thread on the string to which it is to be attached. Then a casing tong is moved into an operating position and the casing section is moved to and fro at its
35 top end and rotated until the thread at its lower end and

the thread at the top end of the casing string is projecting from the bore hole mate. This involves close cooperation of the person orienting the casing to be attached (the stabber) and the person operating the casing tong
5 (also known as Weatherford tong).

After the connection between the casing section and the casing string has been made, the block moves down and the stabber guides the top end of the casing into the tube string elevator. Then the joint elevator is disengaged and
10 the stabbing board is moved back into its parking position. Then the casing tongs are activated and the casing is rotated until the threads fully mate and the required make-up torque is reached. The casing tong is then moved back to its parking position.

15 If the casing string needs to be washed down, the block is lowered somewhat further, so that the top end of the newly attached case joint is introduced into a sealing for providing a sealed high pressure mud supply to the casing string (an example of such a coupling apparatus is
20 described in international patent application WO 92/11486). Then the newly attached casing section is filled with mud or, if the casing needs to be washed down, mud at a pressure of up to about 60 bar is circulated down the casing to wash down the casing.

25 To lower the casing string with the newly attached casing section into the bore hole, the casing string is briefly lifted, which allows the spider to disengage, and the block carrying the drive unit from which the string is suspended is lowered to just above the floor. Finally, the spider
30 engages the string again and the block is lowered a little more to allow the tube string elevator to disengage. Then the above cycle is repeated until the entire casing string in the well is completed.

The connection and disconnection between drill pipe
35 sections and a drill pipe string in a bore hole involves a slightly different method of making up and breaking the

connections and of suspending the string from the drive unit. However, irrespective of the type of tube sections which are connected or disconnected, these methods are cumbersome, time-consuming and laborious. A very important
5 disadvantage of the laborious nature of these methods is that many persons have to be present in an area where there is a high risk of accidents in terms of falling objects, explosions and the like. Other problems include limited
10 visibility of the upper end of a casing section as it is introduced in the tube string elevator.

In United States Patent 3,766,991 a drive unit according to the introductory portion of claim 1 and a method according to the introductory portion of claim 13 are described. In the particular drive unit as described, the device for
15 engaging the tube sections and the drive connected thereto are tiltable to allow the introduction of tube sections into the engaging unit from the side. This, however, entails the disadvantage of a complex and expensive construction of the drive unit, in particular if tube
20 sections of sizes typically used as drill or casing tubes of an oil or gas well are to be handled, and requires a precise positioning of the tube section to be introduced from the side relative to the engagement unit of the drive unit which is suspended by cables, and a close co-
25 ordination of the feeding of tube sections and the vertical movement of the drive unit. Such methods are inherently time-consuming, which has a negative effect on the productivity of a rig.

30 SUMMARY OF THE INVENTION

It is an object of the present invention to make handling of tube sections in a rig for subsoil drilling safer and more efficient without entailing the disadvantage of a complex and expensive construction of the drive unit.

35 According to the present invention, this object is achieved by providing a drive unit according to claim 1. Other

embodiments of the invention are formed by a rig for subsoil drilling according to claim 10 and a method for handling tube sections in a rig for subsoil drilling according to claim 13.

5 By providing the drive unit with a gripper which is movable relative to the engagement unit of the drive unit between a first position for gripping a tube extending along the tube string axis and engaged by the engagement unit, and a second position for gripping a tube radially directed
10 towards the tube string axis, supplied tube sections can be gripped and movements of supplied tube sections relative to the engagement unit in the drive unit can be guided and controlled accurately until the tube sections are engaged by the engagement unit. It is not necessary to tilt the
15 engagement unit, and co-ordination of positions and movements between the supplied tube sections and the drive unit is simplified.

Particularly advantageous embodiments are described in the dependent claims. Further objects, embodiments and details
20 of the present invention are set forth in the description below and the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figs. 1-3 are schematic and partial side views of a drive
25 unit and a tube transfer system of a drilling rig according to one embodiment of the present invention, and Fig. 4 is a partial cut-away side view of a circulation cap for sealing off a top end of a tube section.

30 MODES FOR CARRYING OUT THE INVENTION

In Figs. 1-3 a rotary well drilling rig with a drive unit 1, a tube section transfer device in the form of a ramp 2, a rig floor 3 and a portion of a support tower 4 are shown. The drive unit 1 is suspended from a hoisting block 5
35 carried by hoisting cables 6. Compensators 7 are provided between the block 5 and the drive unit 1 for controlling

relative movements of the block 5 and the drive unit 1. A guide 8 is provided for guiding the drive unit 1.

Together with a suspension loop 9, the compensators 7 form a connecting structure connecting the drive unit 1 to the
5 block 5 which can lift and lower the drive unit 1 along the guide 8. The drive unit 1 includes a motor unit 11 for driving rotation of a tube string suspended from the drive unit 1. It is observed that in the present example the tube string axis 10 and the guide 8 extend vertically. However,
10 in some applications, such as the drilling of tunnels, the tube string axis and the guide may be in a slanting orientation or even extend in a horizontal plane.

Furthermore, various alternatives for lifting and lowering the drive unit can be provided. Instead of hoisting cables,
15 for instance a hydraulic lifting structure can be provided to lift and lower the drive unit.

The example described relates to the handling of casing sections but, generally, it can also be applied to the handling of other tube sections, such as drill pipe
20 sections. Each of the sections can, in principle, consist of one or more joints.

For engaging tube sections, the drive unit 1 includes an engagement unit 12 for releasably engaging a casing section 13 extending downwards therefrom along the tube string axis
25 10. In this example, the engagement unit 12 is provided in the form of a rotatable tube string elevator for retaining the casing section in axial direction and for exerting a torque about the axis 10 on the engaged casing section. To ensure that sufficient friction is provided between the
30 tube string elevator and a casing section to transfer the make-up torque while only the casing section is suspended from the spider elevator, the tube string elevator is of the type adapted for actively inducing clamping forces between the claws of the spider elevator and the casing
35 sections. Such clamping means are known in the art as a fixedly mounted part of the drive unit and therefore not

described in further detail. Alternatively, the engagement unit can, for example, be provided with a conical thread adapted for engaging a conical thread of a drill pipe or other tube section to retain the tube section both axially and rotationally or with a tube string elevator and a wrench separate therefrom.

The drive unit 1 is further equipped with guide runners 14 for guiding the drive unit 1 along the guide 8.

In order to engage a casing section 13 radially fed towards the tube string axis 10 and lift the casing section 13 into a position suspended along that tube string axis 10, the proposed drive unit 1 is provided with a gripper 15. The gripper 15 is mounted to the drive unit 1 in movable relationship to the engagement unit 12 between a first position, shown in Fig. 3, for gripping a casing 13 extending along the tube string axis 10 and engaged in the engagement unit 12, and a second position, shown in Fig. 1, for gripping a casing section 13 projecting radially towards the tube string axis 10.

The ramp 2 is adapted for bringing tube sections 13 in a predetermined transfer position, shown in Fig. 1, corresponding to the second position of the gripper 15. Such ramps are also known in the art and therefore not described in further detail. In the present example, a guide rail 34 is arranged above the ramp 2. A runner 35 is movably mounted to the guide rail 34 to travel along the guide rail 34 and carries a tube section carrier 36 suspended from a cable or rod 37 attached to the runner 35. In operation, the rig shown operates as is described hereinafter for a single cycle of handling one casing section. First, a casing section 13 is brought in the transfer position shown in Fig. 1, in which position the casing section 13 is directed radially in the direction of the tube string axis 10. In this example, the casing section 13 is also directed upwards to reduce the angle over which the casing section is to be tilted to be

oriented parallel to the tube string axis 10. The trailing end of the casing section 13 is held by the tube section carrier 36 suspended from the guide rail 34. The casing section 13 can be brought in the transfer position at any
5 time prior to the moment at which it is to be gripped by the gripper 15 and after a previous casing section has been brought in line with the drive unit 1 and the bore hole axis 10.

The casing section 13 in the transfer position is gripped
10 by the gripper 15, so that a connection to the drive unit 1 is established. It is noted that since the path of movement of the gripper 15 is accurately controlled, a precise control of the position where the gripper 15 grips the casing section 13 in a transfer position supported by the
15 ramp is provided in a simple manner by accurately controlling the position in longitudinal direction of the casing section 13 in the transfer position supported by the ramp 2.

If casing sections of different lengths are to be installed
20 in a random order or if tolerances of the length of the casings are relatively wide, it is advantageous if the gripper arm 31 or the ramp 2 is provided with a sensor for sensing the position of the front end of a casing section which is being fed to the transfer position.

25 Subsequently, the drive unit 1 is lifted, entraining the casing section 13, and the gripper 15 is moved from the second position gripping the casing section 13 in the transfer position to the first position gripping the casing section 13 in the position vertically suspended from the
30 engagement unit 12 as shown in Fig. 3. While the drive unit 1 is lifted, the gripper 15 is entrained by the lifting drive unit 1, so that the main displacement of the gripper 15 along the tube string axis is obtained by travelling along with the rest of the drive unit 1. During this
35 movement a major part of the weight of the casing section is carried by the tube section carrier 36, so that the

moment the gripper 15 has to exert to perform the required movement is substantially reduced. Since the tube section carrier 36 is translatable along the guide rail 34 and freely pivotable, it does not interfere with the movement
5 of the casing section determined by the gripper 15 but nevertheless supports the casing section 13 to assist the gripper 15.

The gripper 15 is actively controlled to move and guide the casing sections from the transfer position into engagement
10 with the engagement unit 12, vertically suspending therefrom. Thus, the process of fetching and connecting a casing section 13 is substantially simplified and requires little or no manual labour in a hazardous area. Since the casing sections 13 are aligned and positioned relative to
15 the engagement unit 12 by a gripping member 15 which forms part of the same drive unit 1 as the engagement unit 12, it is relatively easy to achieve an accurate axial positioning and alignment between the casing 13 and the engagement unit 12. Furthermore, requirements regarding the accuracy of the
20 transfer position of the casing sections 13 (Fig. 1) are relatively low, because the final positioning and alignment can be provided by the gripper 15 of the drive unit 1.

The gripper 15 is translatable along the tube string axis
10 relative to the engagement unit 12 for moving a casing section along that tube string axis 10. This allows first
25 moving the gripper 15 from the position gripping the casing section 13 in the transfer position (Fig. 1) to a position in line with and under the engagement unit 12 (Fig. 2) and subsequently moving the gripper 15 upward to a position in
30 which the casing section 13 is engaged by the engagement unit 12 (Fig. 3). Apart from providing a simple form of movement which is simple to control, this also ensures that the casing sections 13 are accurately in line with the engagement unit 12 before being engaged thereby.

35 Movement of the gripper 15 relative to the engagement unit 12 along the tube string axis 10 is achieved in a simple

manner by an operating cylinder 16 parallel to the tube string axis. For driving pivotal movement of the gripper 15 about a hinge 17, a second operating cylinder 18 is provided. In order to avoid loading the cylinder 16 parallel to the tube string axis with transverse loads when a casing section is being lifted with the gripper in the position for gripping the casing section 13 in the transfer position shown in Fig. 1, a traveller (not shown) can be provided which guides the hinge 17 along the drive unit 1.

5

10 Between the engagement unit 12 and the motor unit 11 a cross-over 19 is provided for transferring rotational movement about the drill string axis 10 imparted by the motor unit 11 to a circulation cap 20 which in turn carries the engagement unit 12. The circulation cap 20 is shown in more detail in Fig. 4.

The main purpose of the circulation cap 20 is to seal off a top end 21 of a casing section 13 engaged by the engagement unit 12. The circulation cap 20 according to the present example includes a cylindrical bore 22 with a circumferential recess 23 retaining a circumferential high pressure seal 24 and a passage 25 for feeding mud to the top casing section 13. In this example a mud filling tube 26 extends downward through the mud feeding passage 25. The circulation cap 20 is adapted to provide a venting passage 27 to vent the top end 21 of the casing section 13 in a first operating condition for normal filling of a newly connected casing section 13. The circumferential seal 24 is adapted to close off the venting passage 27 in a second operating condition for urging high pressure mud, for instance at a pressure of 40-75 bar, or higher, into the casing section 13.

20

25

30

It is noted that, in principle, instead of or in addition to the internally facing seal 24 also an externally facing seal can be provided in the circulation cap.

35 Compared with conventional drilling rigs in which the top end 21 of the topmost casing is clear under the cap in the

first operating condition and in a higher position projecting into the circulation cap to engage the cap in the second operating condition, the cap 20 with a closable venting passage 27 provides the advantage that the casing sections 13 can always be engaged to the engaging unit 12 in the same position, independently of the need to subsequently wash down the casing string. In connection with the use of a movable gripper 15 to move the casing sections 13 into engagement with the engaging unit 12, this provides the advantage that the gripper can always be operated in the same manner to bring the casing section 13 into the same position before the engaging unit 12 engages the positioned casing section 13. This simplifies the control of the movement of the gripper. A general advantage, independent of the use of a movable gripper to bring tube sections into engagement with an engaging unit of the drive unit, of using a cap 20 with a closable venting unit is that the single engagement position of the casing sections allows the engaging unit to be more compact in axial direction which, in turn, allows lowering the casing string further down relative to the floor 3 of the rig. This facilitates work at the top end of a casing string suspending from the floor 3, since the top end will project less far above the floor 3.

The closable venting passage can be provided in many forms, for instance in the form of a separate passage in the cap with a valve in that passage. In the present example, in the first operating condition for filling the newly connected casing section with mud, the passage 27 for venting the top end 21 of the casing section 13 extends past the circumferential seal 24, more specifically between the circumferential seal 24 and the casing section 13. To be able to close the venting passage 27 the circumferential seal 24 is radially expandable, and a structure 28, 30 (schematically shown) for expanding the circumferential seal 24 is provided. The use of an expandable seal 24

provides the advantage that wear of the seal 24 is reduced because contact between the seal 24 and a casing section 13 occurs only if circulation of high pressure mud is required.

5 According to the present example, the circumferential seal 24 contains an inflatable chamber 29. The structure for expanding the circumferential seal 24 is formed by a compressor 28 and a channel 30 communicating with the chamber 29 for transferring a pressurized fluid to the
10 chamber 29. By providing an inflatable seal as the expandable seal, the desired expandability is achieved in a simple manner with very few moving parts exposed to mud. The movability of the gripper can be controlled in many ways. As is shown in Figs. 1-3, the gripper 15 is mounted
15 to a manipulating arm 31, which allows accurate control of the pivoting and translating movement of the gripper 15 and forms a simple cost-effective construction.

Specifically for the handling of casing sections, which typically have fine threads at the ends thereof, the
20 engagement unit 12 includes engagement surfaces 32 arranged around an opening coaxial with the tube string axis 10 for engagement of the outside of a casing section 13 and the engagement unit 12 is rotatably driven by the motor unit 11. By engaging the casing section 13 from the outside, the
25 need of threaded engagement between fine threads of the drive unit 1 and the top end of each casing section 13 is avoided and by rotating the engagement unit 12, the connection between a casing unit to be connected and a casing string suspended from the rig floor 3 can be made
30 without employing separate casing tongs, which have to be brought into an operating position and returned for each casing section 13 which is to be connected and disconnected. Furthermore, rotational movement about the drilling axis 10 which is imparted to the casing string by
35 the drive unit 1 from which it is suspended is advantageous

for facilitating further insertion of the casing string into the bore hole.

It is noted, however, that the use of a movable gripper 15 for bringing casing sections or other tube sections into engagement with the engaging unit is also advantageous if making up and breaking the connections between the casing sections and the string is carried out using conventional tongs.

The gripper 15 as shown has an entry 33 facing upwards if the gripper 15 is in the position shown in Fig. 1 for gripping a casing section projecting radially towards the tube string axis 10. This provides the advantage that a projecting end of a casing section 13 to be gripped can be entered into the gripper 13 without reversing upward movement of the gripper 15 entrained by the top lift unit 1.

The proposed drive unit and drilling rig are also advantageous for removing casing sections or drill pipe sections from a string in a bore hole. The operation then includes the steps of gripping a casing section 13 to be removed and released from the string in a position held by the engagement unit 12 and lowering the drive unit 1 and moving the gripper 15 until the casing section 13 is in the transfer position.

CLAIMS

1. A drive unit for a subsoil drilling rig comprising:
a connecting structure (7, 9) for connection to a lifting means (5);
a motor unit (11) for driving a connected tube section
5 extending along a tube string axis (10);
an engagement unit (12) for releasably engaging a tube section (13) extending along said tube string axis (10);
and
guide runners (14) for guiding the drive unit (1) along a
10 guide;
the drive unit (1) being adapted for engaging a tube section (13) radially directed towards said tube string axis (10) and lifting said tube section (13) into a position extending along said tube string axis (10);
15 **characterized by:**
a gripper (15), guide means (17, 31) for guiding movements of said gripper (15), and drive means (16, 18) for driving movements of said gripper (15), said guide means (17, 31), said drive means (16, 18) being adapted for moving said
20 gripper (15) between a first position for gripping a tube section (13) extending along said tube string axis (10) and engaged by said engagement unit (12) and a second position for gripping a tube section (13) radially directed towards said tube string axis (10).
- 25 2. A drive unit according to claim 1, wherein the gripper (15) is translatable along said tube string axis (10) relative to the engagement unit (12) for moving a tube section (13) along said tube string axis (10).
3. A drive unit according to claim 2, further including
30 an operating cylinder (16) extending in the direction of the tube string axis (10) for driving movement of said gripper (15) parallel to said tube string axis (10).
4. A drive unit according to any one of the preceding claims, further including a circulation cap (20) for

sealing off a proximal end (21) of a tube section (13) engaged by said engagement unit (12), said circulation cap (20) including a circumferential high pressure seal (24) and a passage (25) for feeding mud to the proximal tube section (13) sealed off by said circulation cap (20), said circulation cap being adapted to provide a venting passage (27) to vent said top end (21) of said tube section (13) in a first operating condition and to close off said venting passage (27) in a second operating condition.

5
10 5. A drive unit according to claim 4, wherein, in said first operating condition, said passage for venting said top end of said tube section (13) extends past said circumferential seal (24) and wherein said means for closing said venting passage (27) include said
15 circumferential seal (24) which is expandable and means (28, 30) for expanding said circumferential seal (24).

6. A drive unit according to claim 5, wherein said circumferential seal (24) contains an inflatable chamber (29) and wherein said means for expanding said
20 circumferential seal are formed by a pressure source (28) and a channel (30) connecting said pressure source (28) to said chamber (29) for transferring a pressurized fluid to said chamber (29).

7. A drive unit according to any one of the preceding
25 claims, wherein said gripper (15) is mounted to a pivotable manipulating arm (31).

8. A drive unit according to any one of the preceding claims, wherein said engagement unit (12) includes engagement surfaces (32) arranged around an opening coaxial
30 with said tube string axis (10) for engagement of the outside of a tube section (13) and wherein said engagement unit (12) is rotatably drivable.

9. A drive unit according to any one of the preceding claims, wherein said gripper (15) has an entry (33) facing
35 away from the drilling direction if said gripper (15) is in

said position for gripping a tube section (13) projecting radially towards said tube string axis (10).

10. A subsoil drilling rig comprising a drive unit (1) according to any one of the preceding claims, a tube
5 section transfer device (2) for bringing tube sections (13) in said predetermined transfer position corresponding to said second position of said gripper (15), and a guide (8) for guiding the drive unit (1) along the tube string axis (10).

10 11. A drilling rig according to claim 10, wherein said transfer device (2) includes a pivotably suspended tube section carrier (36).

12. A drilling rig according to claim 11, wherein said
15 transfer device (2) further includes a linear guide (34) oriented radially relative to said tube string axis (10), said tube section carrier (36) being guided along said guide (34).

13. A method for handling tube sections (13) in a subsoil
20 drilling rig including a drive unit (1) for driving a connected tube section extending along a tube string axis (10) in a drilling direction comprising, for handling each tube section (13), the steps of:

providing the tube section (13) in a transfer position directed radially towards said tube string axis (10);

25 gripping the tube section (13) in said transfer position;

moving said drive unit (1) opposite to said drilling direction while entraining the tube section (13) until said tube section (13) is held by said drive unit (1) in a position coaxial with said tube string axis (10);

30 **characterized in that**

the tube section (13) is engaged by a gripper (15) of said drive unit (1); and

said gripper (15) is moved and guided from a position gripping said tube section (13) in said transfer position
35 to a position gripping the tube section (13) in a position extending coaxial with said tube string axis (10), said

gripper (15) being entrained by said drive unit (1) moving opposite to said drilling direction.

14. A method according to claim 13, wherein said gripper (15) is first moved from said position gripping said tube section (13) in said transfer position to a position gripping said tube section (13) in a position in line with said tube string axis (10) and wherein said gripper (15) is moved upward to a position in which the tube section (13) is engaged by an engagement unit (12) of said drive unit (12).

15. A method according to claim 13 or 14, further comprising, for removing a tube section (13) from a string, the steps of:
gripping said tube section (13) in a position extending coaxially with said tube string axis (10); and
lowering said drive unit (1) and moving said gripper (15) until said tube section (13) is in said transfer position.

1/4


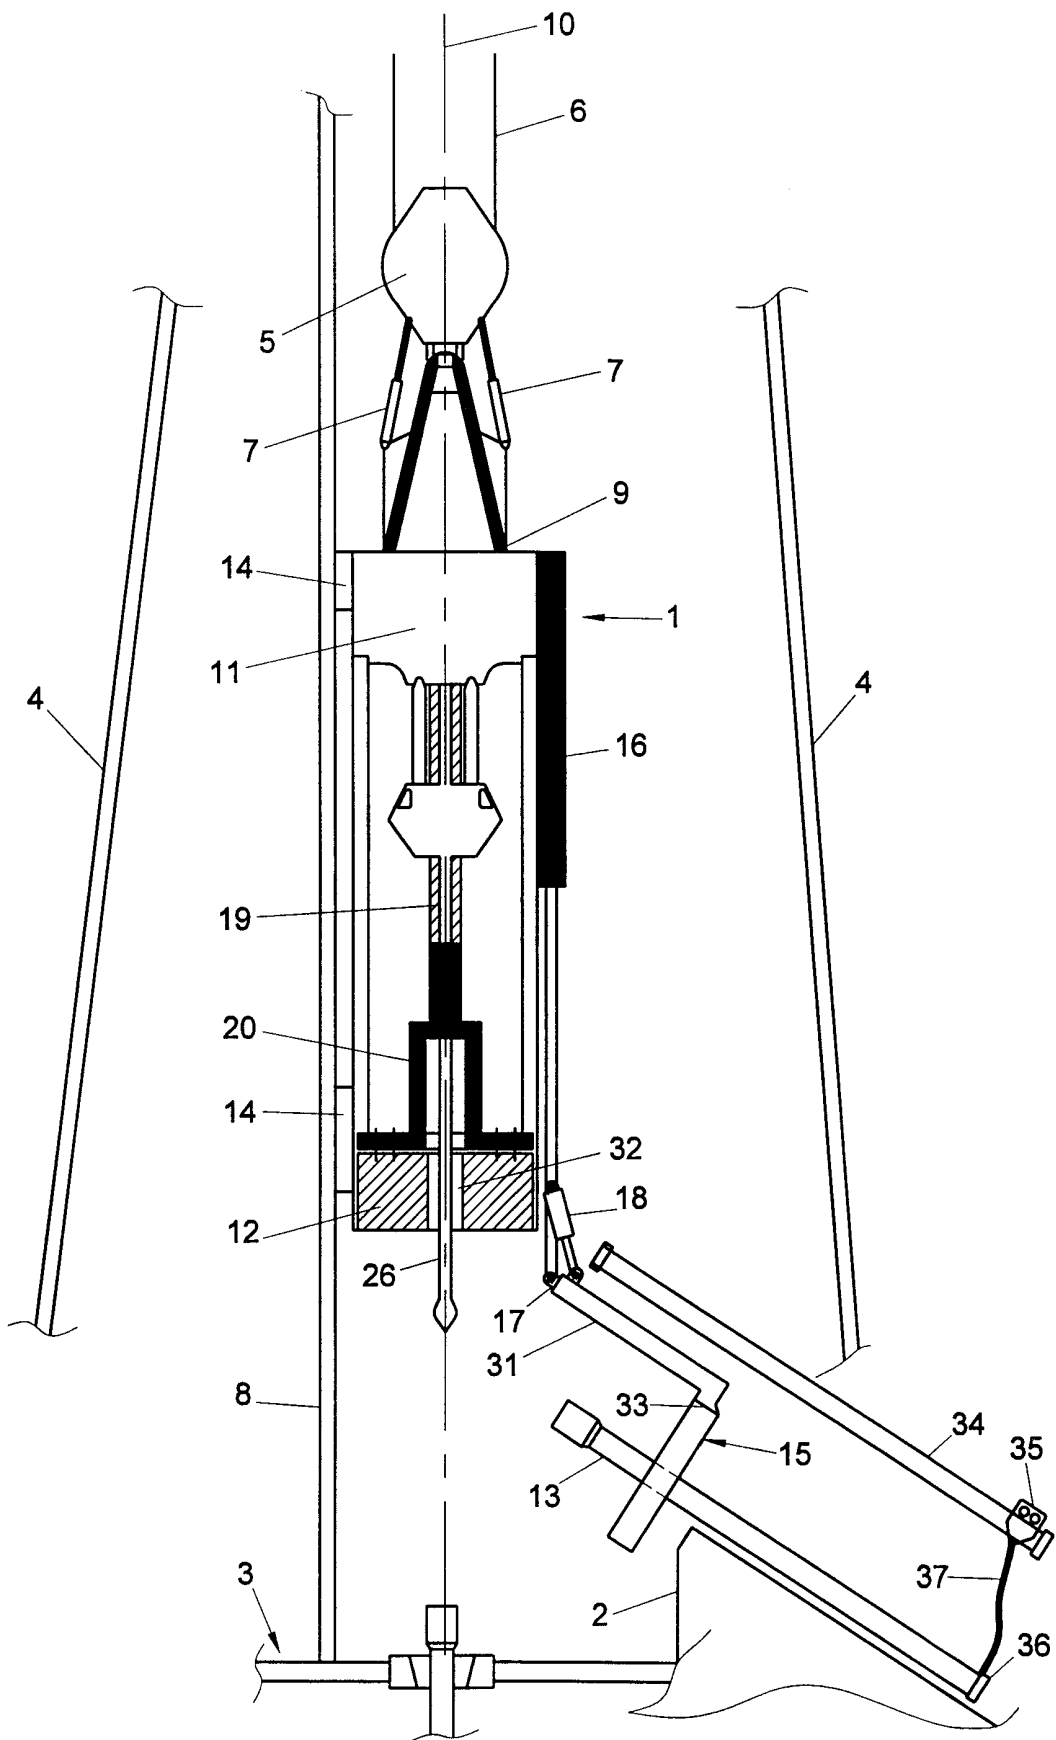


Fig. 1

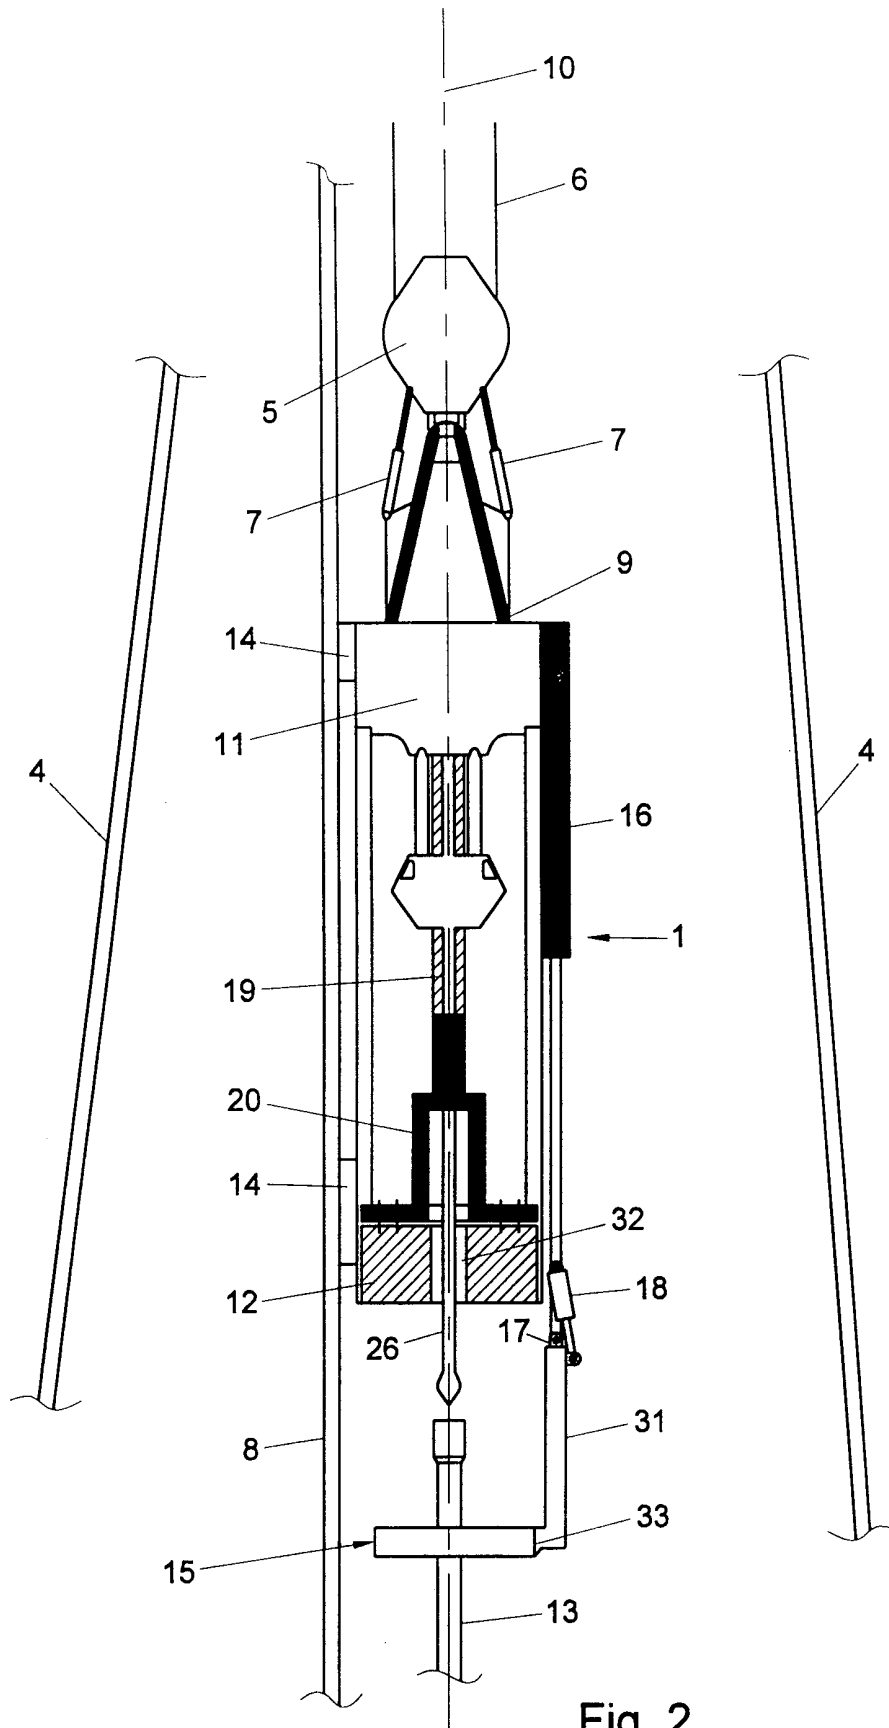

3/4

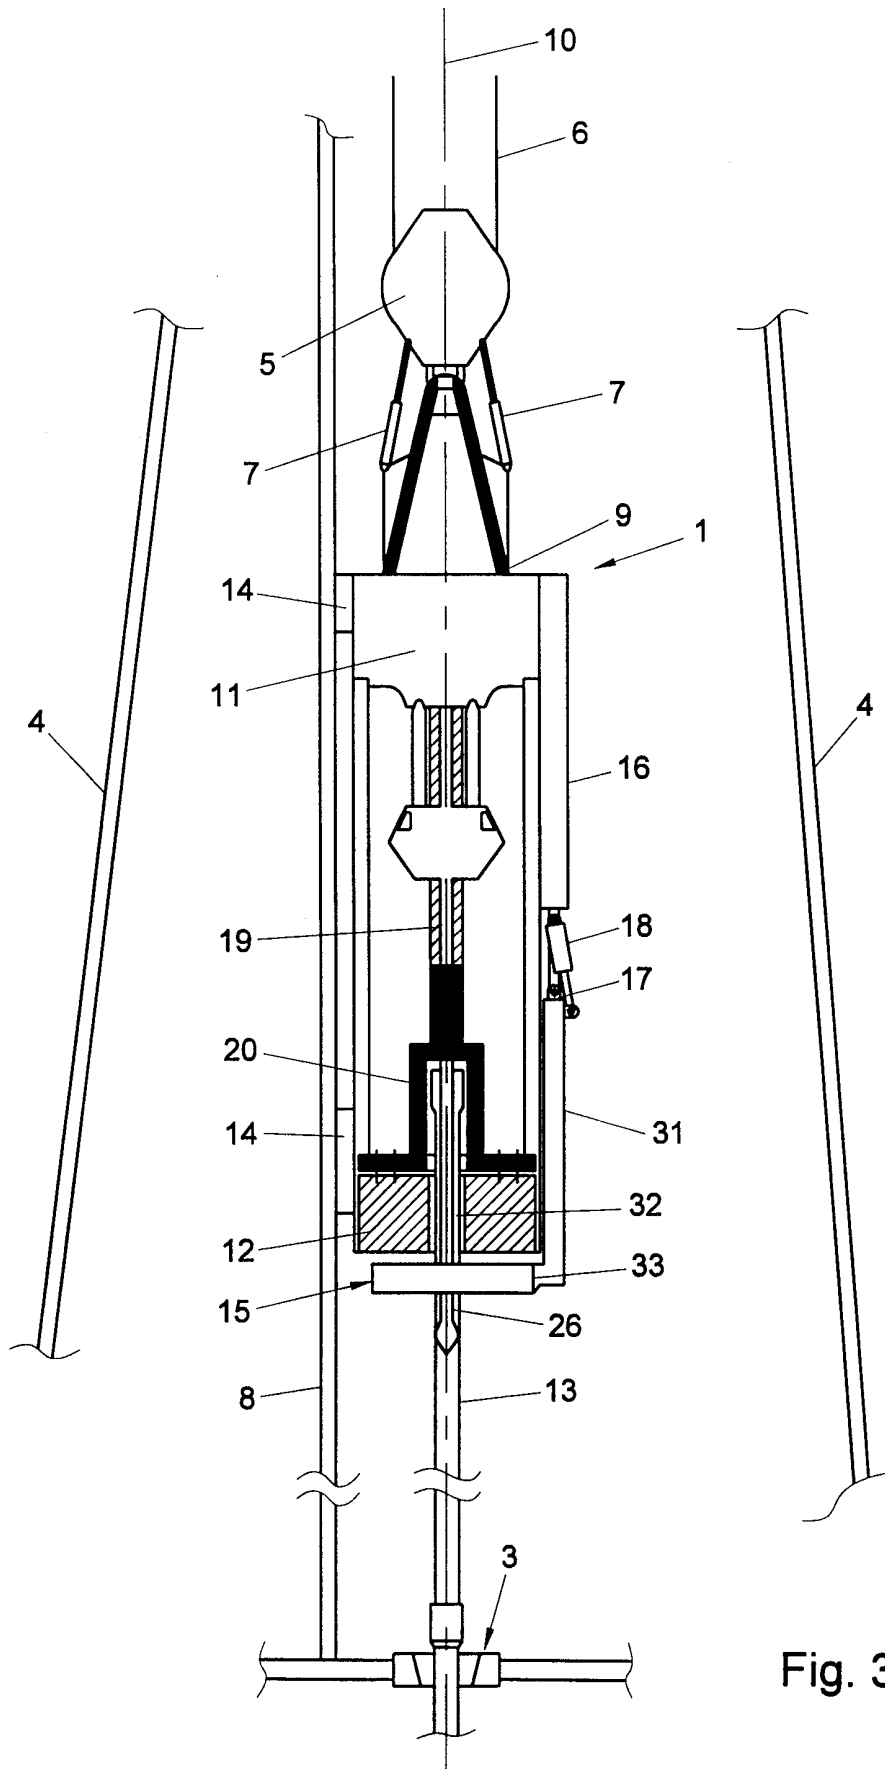


Fig. 3

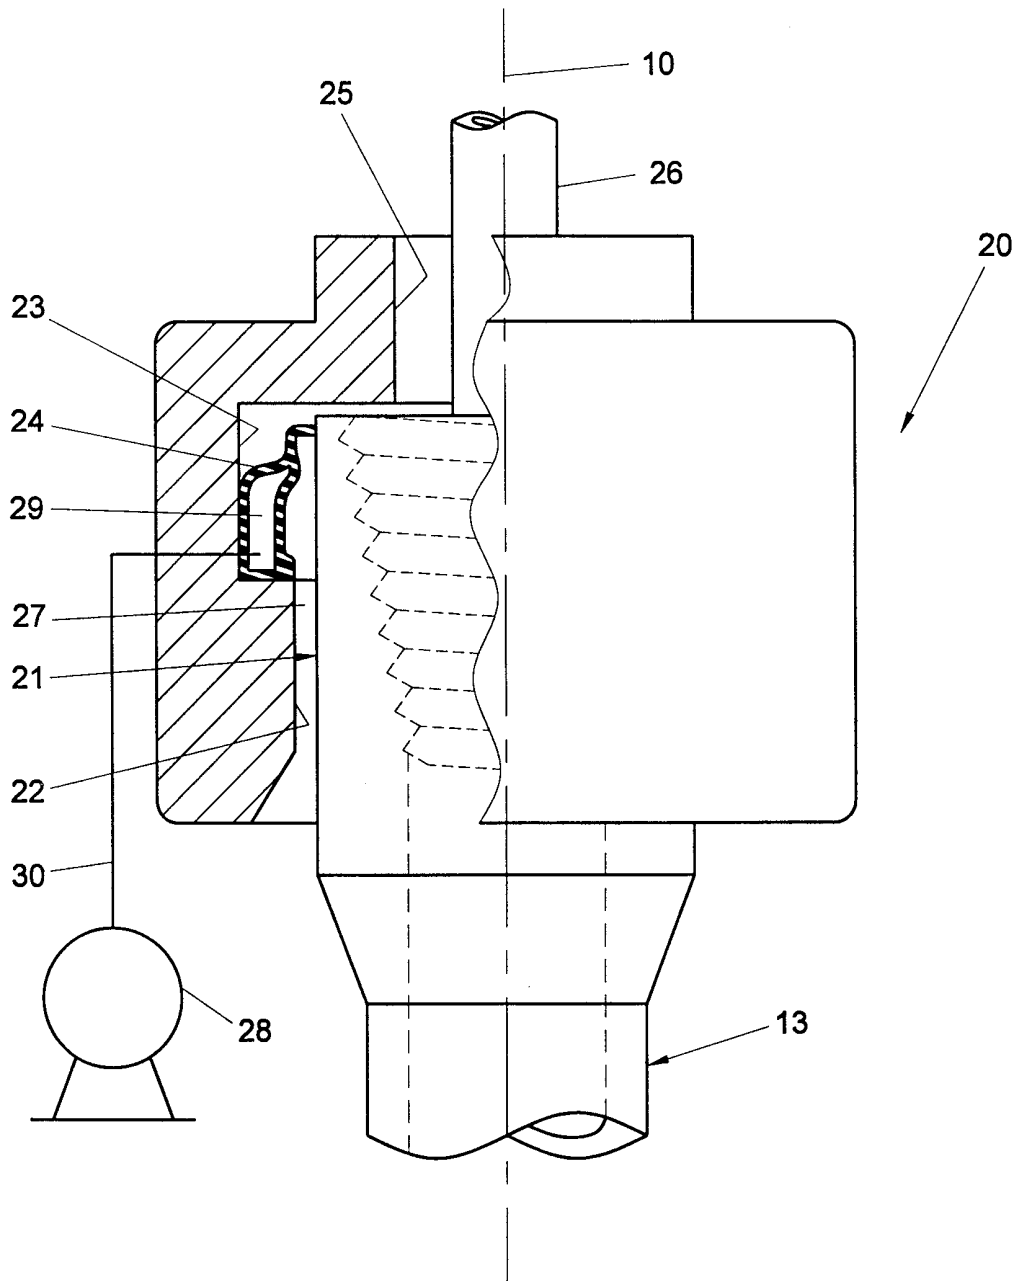


Fig. 4

INTERNATIONAL SEARCH REPORT

International Application No

PCT/NL 97/00667

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 E21B19/20 E21B19/14 E21B19/16

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 403 897 A (WILLIS CLYDE A) 13 September 1983 see the whole document ---	1, 7, 9, 13-15
X	US 3 766 991 A (BROWN C) 23 October 1973 see column 4, line 64 - column 6, line 40 see figures 10-14 ---	10, 11, 13, 15
X	US 3 780 883 A (BROWN C) 25 December 1973 see the whole document ---	13, 15
X	US 3 706 347 A (BROWN CICERO C) 19 December 1972 see the whole document -----	13, 15

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

17 August 1998

Date of mailing of the international search report

24/08/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Schouten, A

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/NL 97/00667

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4403897 A	13-09-1983	NONE	
US 3766991 A	23-10-1973	NONE	
US 3780883 A	25-12-1973	US 3706347 A US 3792783 A	19-12-1972 19-02-1974
US 3706347 A	19-12-1972	US 3780883 A US 3792783 A	25-12-1973 19-02-1974