

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 January 2002 (24.01.2002)

PCT

(10) International Publication Number
WO 02/06828 A2

(51) International Patent Classification⁷: G01N 33/48

Diego, CA 92126 (US). **CHATELIER, Ron** [US/US]; 11816 Westview Parkway, Apartment 174, San Diego, CA 92126 (US). **BECK, Thomas** [AU/AU]; 121 Keda Circuit, North Richmond, New South Wales 2756 (AU).

(21) International Application Number: PCT/US01/21964

(22) International Filing Date: 12 July 2001 (12.07.2001)

(74) Agent: **DELANEY, Karoline, A.**; Knobbe, Martens, Olson & Bear, LLP, 620 Newport Center Drive, 16th Floor, Newport Beach, CA 92660 (US).

(25) Filing Language: English

(26) Publication Language: English

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EC, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(30) Priority Data:
09/615,691 14 July 2000 (14.07.2000) US
09/616,433 14 July 2000 (14.07.2000) US
09/616,512 14 July 2000 (14.07.2000) US
09/616,556 14 July 2000 (14.07.2000) US

(71) Applicant (*for all designated States except US*): **USF FILTRATION AND SEPARATIONS GROUP INC.** [US/US]; 2118 Greenspring Drive, Timonium, MD 21093 (US).


(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **HODGES, Alastair** [AU/US]; 11752 Westview Parkway, Apartment 6, San

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: HEMOGLOBIN SENSOR

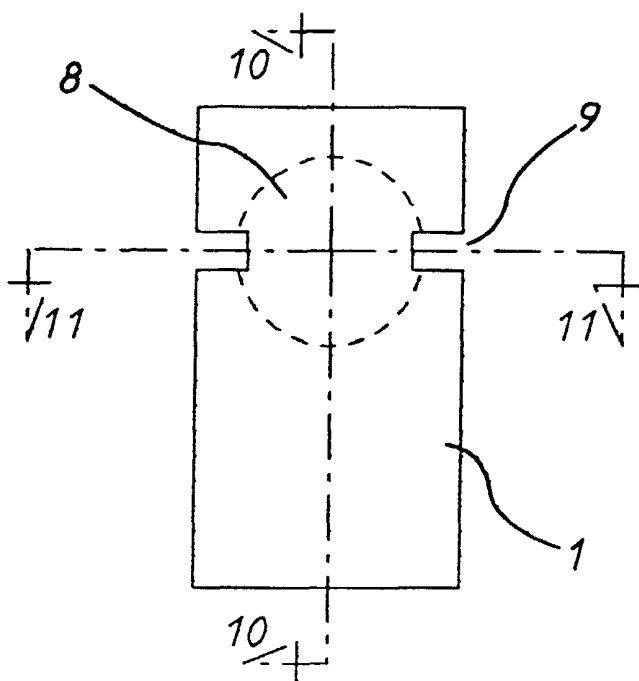

(57) Abstract: The present invention relates to a device and method for measuring hemoglobin in a fluid sample. The device comprises a disposable electrochemical cell, such as a thin layer electrochemical cell 1, containing a reagent capable of being reduced by hemoglobin. A suitable fluid sample that may be analyzed according the present invention is whole blood. If the hemoglobin to be analyzed is present in red blood cells, a lysing agent may be added to the sample to release the hemoglobin prior to analysis.

WO 02/06828 A2



Published:

— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

HEMOGLOBIN SENSOR

Field of the Invention

The present invention relates to a device and method for measuring the level of hemoglobin in a blood sample. The device comprises a disposable electrochemical cell containing an agent which lyses red blood cells and a reagent capable of being reduced by hemoglobin.

Background of the Invention

Hemoglobin is a respiratory molecule found in red blood cells. It is responsible for transporting oxygen from the lungs to body cells and for transporting carbon dioxide from body cells to the lungs. Hemoglobin has a molecular weight of 68,000 and contains four polypeptide chains. Each chain binds to a heme group which consists of a tetrapyrrole ring chelated to an Fe^{+2} ion. In the lungs, the iron atoms of the hemoglobin molecule reversibly combine with an oxygen molecule, which is then transported to body cells as blood circulates. The oxygen is released from the hemoglobin molecule in the tissues, then the oxygen-free hemoglobin molecule picks up carbon dioxide which is transported back to the lungs, where it is released.

Hemoglobin is produced in cells in the bone marrow that become red blood cells. Certain illnesses result in a deficiency of hemoglobin, such as anemia and sickle cell disease. Still other diseases, such as polycythemia or erythrocytosis, result in excessive levels of hemoglobin. Therefore, as an aid in the diagnosis or monitoring of such diseases, a method and device for determining the concentration of hemoglobin in whole blood is desirable.

Numerous methods and devices for the determination of hemoglobin are known. These methods include both direct analysis, i.e., analysis without prior modification of the hemoglobin, and indirect analysis. An example of a direct analysis method is the Tallquist Method, wherein a measurement of the transmission or reflection optical density of the red color imparted by oxyhemoglobin, one form of hemoglobin, is obtained. An example of an indirect analysis method is Drabkin's Method. In this method, the iron in hemoglobin is oxidized with a ferricyanide to form methemoglobin, which is converted with a cyanide to cyanmethemoglobin, which is then measured spectrometrically. Both of these methods have the disadvantage of requiring expensive analytical instrumentation and complicated sample preparation. Therefore, a quick, simple, and inexpensive device and method for measuring hemoglobin that overcomes the deficiencies of prior art methods is desirable.

Summary of the Invention

A device and method are provided for measuring hemoglobin with a disposable sensing element, suitable for a single use, that can be combined with a meter to give a robust, fast, and easy to use test that is amenable to field as well as laboratory use. In particular, an electrochemical sensor is provided that utilizes a redox agent that reacts with hemoglobin to produce an electrochemically detectable signal. The method of preferred embodiments measures total hemoglobin, oxygenated plus unoxygenated, in contrast to spectrophotometric methods wherein the hemoglobin is converted to a single form in a separate chemical step, e.g., oxidation of hemoglobin containing Fe^{+2} to methemoglobin containing Fe^{+3} . Measurement of hemoglobin by the method of the preferred embodiments is not dependent upon the extent of glycosylation or oxygenation of the hemoglobin present in the sample.

In a first aspect, a device for detecting a presence or an absence of hemoglobin in an aqueous sample is provided, the device including an electrochemical cell having a sensing chamber, a first electrode, a second electrode, an aperture for admitting the sample into the sensing chamber, and a reagent contained within the sensing chamber wherein the reagent is capable of being reduced by hemoglobin to generate an electrical signal indicative of the presence or absence of hemoglobin. The electrochemical cell may be designed to be disposed of after use in a single experiment.

In one aspect of this embodiment, first electrode is a sensing electrode. The sensing electrode may be platinum, palladium, carbon, indium oxide, tin oxide, gold, iridium, copper, steel, silver, or mixtures thereof. The first electrode may be formed by a technique including sputtering, vapor coating, screen printing, thermal evaporation, ink jet printing, ultrasonic spraying, slot coating, gravure printing or lithography.

In another aspect of this embodiment, the second electrode is a counter electrode. The second electrode may be a metal in contact with a metal salt, for example, silver in contact with silver chloride, silver in contact with silver bromide, silver in contact with silver iodide, mercury in contact with mercurous chloride, and mercury in contact with mercurous sulfate. The second electrode may also be a reference electrode.

In another aspect of this embodiment, the electrochemical cell further includes a third electrode, which may be a reference electrode. The third electrode may include a metal in contact with a metal salt, for example, silver in contact with silver chloride, silver in contact with silver bromide, silver in contact with silver iodide, mercury in contact with mercurous chloride, and mercury in contact with mercurous sulfate.

In another aspect of this embodiment, the reagent may include dichromate, vanadium oxides, permanganate, electroactive organometallic complexes, quinones, dichlorophenolindophenol, and ferricyanide. A buffer, such as a phosphate, carbonate, alkali metal salt of mellitic acid, or alkali metal salt of citric acid, may be contained within the sensing chamber. The sensing chamber further includes a red blood cell lysing agent, for example, one selected from ionic detergents, nonionic detergents, proteolytic enzymes, lipases, saponin, sodium dodecyl sulfate, cetyl trimethylammonium bromide, or polyethoxylated octylphenol.

In another aspect of this embodiment, the sample includes whole blood.

In another aspect of this embodiment, the sensing chamber further includes a support contained within the sensing chamber, for example, mesh, nonwoven sheet, fibrous filler, macroporous membrane, sintered powder, or combinations thereof. The reagent, red blood cell lysing agent, and/or buffer may be contained within or supported on the support.

In another aspect of this embodiment, the second electrode is mounted in opposing relationship a distance of less than about 500 microns from the first electrode; less than about 150 microns from the first electrode; or less than about 150 microns and greater than about 50 microns from the first electrode.

In another aspect of this embodiment, the device includes an interface for communication with a meter. The interface may communicate a voltage or a current. The electrochemical cell may be a thin layer electrochemical cell.

In a second aspect, a method for detecting a presence or an absence of hemoglobin in an aqueous sample is provided, the method including providing a device including an electrochemical cell having a sensing chamber, a first electrode, a second electrode, an aperture for admitting the sample into the sensing chamber, and a reagent contained within the sensing chamber, wherein the reagent is capable of being reduced by hemoglobin to generate an electrical signal indicative of the presence or absence of hemoglobin; providing an aqueous sample; allowing the sample to flow through the aperture and into the sensing chamber, such that the first and second electrodes are substantially covered; and obtaining an electrochemical measurement indicative of the presence or absence of hemoglobin present in the sample.

In one aspect of this embodiment, the electrochemical cell is designed to be disposed of after use in a single experiment, or may be a thin layer electrochemical cell. The electrochemical measurement may be an amperometric measurement, a potentiometric measurement, a coulometric measurement, or a quantitative measurement.

In a third aspect, a method is provided for measuring hemoglobin in a fluid whole blood sample, the whole blood sample containing red blood cells, the red blood cells containing hemoglobin, wherein the method includes providing a device including an electrochemical cell having a sensing chamber, a first electrode, a second electrode, an aperture for admitting the sample into the sensing chamber; a reagent contained within the sensing chamber and capable of being reduced by hemoglobin; and a red blood cell lysing agent contained within the sensing chamber; placing the whole blood sample in the sensing chamber, whereby the lysing agent contained within the sensing chamber releases hemoglobin from the red blood cells, whereby the hemoglobin thus released reduces the reagent; and obtaining an electrochemical measurement indicative of the level of hemoglobin present in the whole blood sample.

In one aspect of this embodiment, the electrochemical cell is designed to be disposed of after use in a single experiment, or may be a thin layer electrochemical cell.

In one aspect of this embodiment, the method further includes obtaining an electrochemical measurement indicative of the presence or absence of hemoglobin in the sample by applying a negative potential to the first electrode; measuring a current generated by reaction of the reagent and hemoglobin; analyzing the current to give a result, the result including a time required for substantial lysis of the red blood cells or a derived final value for the current; calculating a percentage of the reaction completed as a function of time based on the result of the analyzing step; reversing the potential on the first electrode; measuring a transient current; and determining a diffusion coefficient and a concentration of a reduced form of the reagent based on the transient current.

In a fourth aspect, a method of manufacture of a device for detecting the presence or absence of hemoglobin in an aqueous sample is provided, the device including an electrochemical cell having a sensing chamber, a first electrode, a second electrode, an aperture for admitting the sample into the sensing chamber, and a reagent contained within the sensing chamber, and wherein the reagent is capable of being reduced by hemoglobin to generate an electrical signal indicative of the presence or absence of hemoglobin, the method including forming an aperture extending through a sheet of electrically resistive material, the aperture defining a side wall of the sensing chamber; mounting a first layer having a first electrode to a first side of the sheet and extending over the aperture whereby to

define a first sensing chamber end wall, the first electrode facing the first side of the sheet; mounting a second layer having a second electrode to a second side of the sheet and extending over the aperture whereby to define a second sensing chamber end wall in substantial overlying registration with the first layer, the second electrode facing the second side of the sheet, whereby the sheet and layers form a strip; providing an aperture in the strip to permit entry
5 of sample into the sensing chamber; and providing a reagent capable of being reduced by hemoglobin, wherein the reagent is contained within the sensing chamber.

In one aspect of this embodiment, the method further includes the step of providing a vent in the strip to permit the escape of air displaced from the sensing chamber as sample fills the sensing chamber.

In another aspect of this embodiment, the aperture is of a rectangular cross-section.

10 In another aspect of this embodiment, at least one of the electrodes includes a noble metal, such as palladium, platinum, and silver. At least one of the electrodes may be a sputter coated metal deposit. The electrodes may be adhered to the sheet, for example, by an adhesive such as a heat activated adhesive, pressure sensitive adhesive, heat cured adhesive, chemically cured adhesive, hot melt adhesive, and hot flow adhesive.

In another aspect of this embodiment, the method may include the step of providing a buffer and/or a red
15 blood cell lysing agent contained within the sensing chamber. The reagent and/or buffer may be printed onto at least one wall of the sensing chamber. A support contained within the sensing chamber may also be provided, such as mesh, fibrous filler, macroporous membrane, sintered powder, or combinations thereof. The reagent may be supported on or contained within the support.

In another aspect of this embodiment, at least the sheet or one of the layers includes a polymeric material
20 selected from polyester, polystyrene, polycarbonate, polyolefin, and mixtures thereof, or polyethylene terephthalate.

In another aspect of this embodiment, the second electrode is mounted in opposing relationship a distance of less than about 500 microns from the first electrode; less than about 150 microns from the first electrode; or less than about 150 microns and greater than about 50 microns from the first electrode.

In another aspect of this embodiment, the electrochemical cell is designed to be disposed of after use in a
25 single experiment.

Brief Description of the Drawings

FIG. 1 shows a plan view of an electrochemical cell.

FIG. 2 shows a cross-section view on line 10-10 of FIG. 1.

FIG. 3 shows an end-section view on line 11-11 of FIG. 1.

30 Detailed Description of the Preferred Embodiments

The following description and examples illustrate a preferred embodiment of the present invention in detail. Those of skill in the art will recognize that there are numerous variations and modifications of this invention that are encompassed by its scope. Accordingly, the description of a preferred embodiment should not be deemed to limit the scope of the present invention.

Methods and devices for obtaining electrochemical measurements of fluid samples are discussed further in copending U.S. patent application no 09/615,691, filed on July 14, 2000, entitled "ANTIOXIDANT SENSOR," copending U.S. patent application no 09/616,433, filed on July 14, 2000, entitled "IMMUNOSENSOR," and copending U.S. patent application no 09/616,556, filed on July 14, 2000, entitled "ELECTROCHEMICAL METHOD FOR
5 MEASURING CHEMICAL REACTION RATES," each of which is incorporated herein by reference in its entirety.

The Sample

In preferred embodiments, a method and device for measuring hemoglobin levels in a fluid whole blood sample is provided. If the whole blood sample is not in liquid form, i.e., dried blood, it can be analyzed after solid sample is mixed into a suitable fluid, e.g., water. Whole blood contained within a solid tissue sample may be analyzed after
10 extraction using techniques well known in the art.

Prior to its analysis, hemoglobin is released from the red blood cells in which it is contained. This may be accomplished by pretreating the whole blood sample with a lysing agent prior to its introduction into the electrochemical cell. Alternatively, a lysing agent may be contained within the electrochemical cell itself. Other agents may also be used to pretreat the sample. For example, pH may be adjusted to a desired level by means of a
15 buffer or neutralizing agent, or a substance that renders interfering species nonreactive may be added.

The Electrochemical Cell

The electrochemical cell is preferably disposable and designed for use in a single experiment. In a preferred embodiment, the electrochemical cell is a thin layer sensor such as that disclosed in U.S. 5,942,102 (incorporated herein by reference in its entirety). A preferred embodiment of such an electrochemical cell is illustrated in FIGS. 1, 2,
20 and 3. The cell illustrated in FIGS. 1, 2, and 3 includes a polyester core 4 having a circular aperture 8. Aperture 8 defines a cylindrical cell side wall 12. Adhered to one side of core 4 is a polyester sheet 1 having a sputter coating of palladium 2. The sheet is adhered by means of an adhesive 3 to core 4 with palladium 2 adjacent core 4 and covering aperture 8. A second polyester sheet 7 having a second sputter coating of palladium 6 is adhered by means of contact adhesive 5 to the other side of core 4 and covering aperture 8. There is thereby defined a cell having cylindrical side
25 wall 12 closed on each end by palladium metal 2, 6. The assembly is notched at 9 to provide for a solution to be admitted to the cell or to be drawn in by wicking or capillary action and to allow air to escape. The metal films 2, 6 are connected with suitable electrical connections or formations whereby potentials may be applied and currently measured.

Such a thin layer electrochemical cell is prepared by first forming an aperture extending through a sheet of
30 electrically resistive material, the aperture defining a side wall of the electrochemical cell. Suitable electrically resistive materials, which may be used in the sheet containing the aperture, or in other layers in the cell, include, for example, materials such as polyesters, polystyrenes, polycarbonates, polyolefins, polyethylene terephthalate, mixtures thereof, and the like. In a preferred embodiment, the aperture in the sheet is rectangular, however other shapes, e.g., circular, may be used as well.

After the aperture is formed, a first thin electrode layer is then mounted on one side of the sheet of electrically resistive material, extending over the aperture and forming an end wall. The layer may be adhered to the sheet, for example, by means of an adhesive. Suitable adhesives include, for example, heat activated adhesives, pressure sensitive adhesives, heat cured adhesives, chemically cured adhesives, hot melt adhesives, hot flow adhesives, and the like. The electrode layer is prepared by coating (e.g., by sputter coating) a sheet of electrically resistive material with a suitable metal, for example, palladium.

A second thin electrode layer is then mounted on the opposite side of the electrically resistive material, also extending over the aperture, so as to form a second end wall. In a preferred embodiment, the electrode layers are mounted in opposing relationship at a distance of less than about 1 millimeter, desirably less than about 800 microns, more desirably less than about 600, or preferably less than about 500 microns, more preferably less than about 300 to 150 microns, more preferably less than 150 microns, and most preferably between 25, 40, 50, 100 and 150 microns. A second aperture or ingress is then provided for liquid to enter the cell. Such an ingress can be provided by forming a notch along one edge of the device which extends through the electrode layers and aperture. The electrode layers are provided with connection means allowing the sensors to be placed in a measuring circuit.

Chemicals for use in the cell, such as redox reagents, lysing agents, buffers, and other substances, may be supported on the cell electrodes or walls, on one or more independent supports contained within cell, or may be self supporting. If the chemicals are to be supported on the cell electrodes or walls, the chemicals may be applied by use of application techniques well known in the art, such as ink jet printing, screen printing, lithography, ultrasonic spraying, slot coating, gravure printing, and the like. Suitable independent supports may include, but are not limited to, meshes, nonwoven sheets, fibrous fillers, macroporous membranes, and sintered powders. The chemicals for use in the cell may be supported on or contained within a support.

In a preferred embodiment, the materials used within the cell as well as the materials used to construct the cell are in a form amenable to mass production, and the cells themselves are designed to be able to be used for a single experiment then disposed of.

According to the preferred embodiments a disposable cell is one that is inexpensive enough to produce that it is economically acceptable to be used only for a single test. Secondly, that the cell may conveniently only be used for a single test. Inconveniently in this context means that steps such as washing and/or reloading of reagents would need to be taken to process the cell after a single use to render it suitable for a subsequent use.

Economically acceptable in this context means that the perceived value of the result of the test to the user is the same or greater than the cost of the cell to purchase and use, the cell purchase price being set by the cost of supplying the cell to the user plus an appropriate mark up. For many applications, this requires that the cells have relatively low materials costs and simple fabrication processes. For example, the electrode materials of the cells should be inexpensive, such as carbon, or be used in sufficiently small amounts such that expensive materials may be used. Screen printing carbon or silver ink is a process suitable for forming electrodes with relatively inexpensive materials. However, if it is desired to use electrode materials such as platinum, palladium, gold or iridium, methods

with better material utilization, such as sputtering or evaporative vapor coating, are more suitable as they may give extremely thin films. The substrate materials for the disposable cells also are preferably inexpensive. Examples of such inexpensive materials are polymers such as polyvinylchloride, polyimide, polyester and coated papers and cardboard.

5 Cell assembly methods also are preferably amenable to mass production. These methods include fabricating multiple cells on cards and separating the card into individual strips subsequent to the main assembly steps, and web fabrication where the cells are produced on a continuous web, which is subsequently separated into individual strips. Card processes are most suitable when close spatial registration of multiple features is required for the fabrication and/or when stiff cell substrate materials are to be used. Web processes are most suitable when the down web
10 registration of features is not as critical and flexible webs may be used.

The convenient single use requirement for the disposable cell is desirable so that users are not tempted to try to reuse the cell and possibly obtain an inaccurate test result. The single use requirement for the cell may be stated in user instructions accompanying the cell. More preferably, the cell may also be fabricated such that using the cell more than once is difficult or not possible. This may be accomplished, for example, by including reagents that are washed
15 away or consumed during the first test and so are not functional in a second test. Alternatively, the signal of the test may be examined for indications that reagents in the cell have already reacted, such as an abnormally high initial signal, and the test aborted. Another method includes providing a means for breaking electrical connections in the cell after the first test in a cell has been completed.

The Electrodes

20 At least one of the electrodes in the cell is a sensing electrode, defined as an electrode sensitive to the amount of oxidized redox agent. In the case of a potentiometric sensor wherein the potential of the sensing electrode is indicative of the level of hemoglobin present, a second electrode acting as reference electrode is present which acts to provide a reference potential.

In the case of an amperometric sensor wherein the sensing electrode current is indicative of the level of
25 hemoglobin in the sample, at least one other electrode is present which functions as a counter electrode to complete the electrical circuit. This second electrode may also function as a reference electrode. Alternatively, a separate electrode may perform the function of a reference electrode.

Materials suitable for the sensing, counter, and reference electrodes are compatible with the redox reagents present in the device. Compatible materials will not react chemically with the redox reagent or any other substance
30 present in the cell. Examples of such suitable materials include, but are not limited to, platinum, palladium, carbon, indium oxide, tin oxide, mixed indium/tin oxides, gold, silver, iridium and mixtures thereof. These materials may be formed into electrode structures by any suitable method, for example, by sputtering, vapor coating, screen printing, thermal evaporation or lithography. In preferred embodiments, the material is sputtered or screen printed to form the electrode structures.

Non-limiting examples of materials suitable for use in the reference electrode include metal/metal salt systems such as silver in contact with silver chloride, silver bromide or silver iodide, and mercury in contact mercurous chloride or mercurous sulfate. The metal may be deposited by any suitable method and then brought into contact with the appropriate metal salt. Suitable methods include, for example, electrolysis in a suitable salt solution or chemical
5 oxidation. Such metal/metal salt systems provide better potential control in potentiometric measurement methods than do single metal component systems. In a preferred embodiment, the metal/metal salt electrode systems are used as a separate reference electrode in an amperometric sensor.

The Lysing Agent

Suitable red blood cell lysing agents include detergents, both ionic and non-ionic, proteolytic enzymes, and
10 lipases. Suitable ionic detergents include, for example, sodium dodecyl sulfate and cetyl trimethylammonium bromide. Non-limiting examples of proteolytic enzymes include trypsin, chymotrypsin, pepsin, papain, and Pronase E, a very active enzyme having broad specificity. Nonionic surfactants suitable for use include, e.g., ethoxylated octylphenols, including the Triton X Series available from Rohm & Haas of Philadelphia, Pennsylvania. In a preferred embodiment, saponins, i.e., plant glycosides that foam in water, are used as the lysing agent.

The Redox Reagent

Suitable redox reagents include those which are capable of oxidizing hemoglobin. Examples of redox reagents suitable for use in analyzing hemoglobin include, but are not limited, to salts of ferricyanide, dichromate, vanadium
20 oxides, permanganate, and electroactive organometallic complexes. Organic redox reagents such as dichlorophenolindophenol, and quinones are also suitable. In a preferred embodiment, the redox reagent for analyzing hemoglobin is ferricyanide.

The Buffer

Optionally, a buffer may be present along with the redox reagent in dried form in the electrochemical cell. If a buffer is used, it is present in an amount such that the resulting pH level is suitable for adjusting the oxidizing potential of the redox reagent to a level suitable for oxidizing hemoglobin but not other species that it is not desired to
25 detect. The buffer is present in a sufficient amount so as to substantially maintain the pH of the sample at the desired level during the test. Examples of buffers suitable for use include phosphates, carbonates, alkali metal salts of mellitic acid, and alkali metal salts of citric acid. The choice of buffer will depend on the desired pH. The buffer is selected so as not to react with the redox reagent.

Other Substances Present Within The Cell

In addition to redox reagents and buffers, other substances may also be present within the electrochemical
30 cell. Such substances include, for example, viscosity enhancers and low molecular weight polymers. Hydrophilic substances may also be contained within the cell, such as polyethylene glycol, polyacrylic acid, dextran, and surfactants such as those marketed by Rohm & Haas Company of Philadelphia, Pennsylvania, under the trade name Triton™ or by ICI Americas Inc. of Wilmington, Delaware, under the trade name Tween™. Such substances may
35 enhance the fill rate of the cell, provide a more stable measurement, and inhibit evaporation in small volume samples.

Method for Measuring Hemoglobin Concentration

In measuring hemoglobin present in a whole blood sample, the sample is introduced into the sensor cell, whereupon the sample dissolves the dried reagents and other substances present in the sensor cell. If the sample has not been pretreated with a lysing agent, a lysing agent present in the sensor cell releases hemoglobin from the red blood cells. The redox reagent then reacts with hemoglobin present in the sample to form the reduced form of the redox reagent. In the case of a potentiometric sensor, the resulting ratio of oxidized to reduced form of the redox reagent fixes the potential of the sensing electrode relative to the reference electrode. This potential is then used as a measure of the concentration of the hemoglobin originally in the sample.

In a preferred embodiment, the sensing cell is operated as an amperometric sensor. According to this embodiment, the reduced redox reagent formed by reaction with hemoglobin is electrochemically oxidized at the sensing electrode. The current resulting from this electrochemical reaction is then used to measure the concentration of hemoglobin originally in the sample. In other embodiments, the sensor is operated in potentiometric or coulometric mode.

The cell's electrodes are used to produce an electrical signal, i.e., a voltage or current, readable by an attached meter. In a preferred embodiment, an interface for connecting the cell to the meter is provided. The meter may display the measurement in a visual, audio or other form, or may store the measurement in electronic form.

In a preferred embodiment where ferricyanide is used as the reagent, a typical concentration of hemoglobin, e.g., 14 g/dL, would yield a ferrocyanide concentration of 8.2 mM upon oxidation. The minimum detectable limit in a preferred embodiment of the method and device is approximately 0.1 mM.

Measuring Hemoglobin Using First and Second Potential Application Steps

In a preferred embodiment, substantially complete lysis of all red blood cells is achieved before measurement of hemoglobin. However, a rapid hemoglobin measurement may be obtained even if the lysis step proceeds slowly by using a first and second potential application step.

In such an embodiment, a sensor configuration as described above is used, e.g., a sensor wherein the bottom electrode is palladium, upon which the dried reagents are deposited, and wherein the top electrode is a gold electrode. The first potential is applied by applying a -0.3 V potential at zero time to set the gold electrode as the working electrode. As the red blood cells begin to lyse and the ferricyanide reacts with released hemoglobin, the current will slowly increase. The increase in current can be used in a number of ways: to assess the time required for full lysis and reaction, to extrapolate the signal to longer times, or to assess the fraction of hemoglobin reacted at a given time. The first method gives some quality assurance, and the second and third methods yield a shorter test.

After the first potential has been applied and current has been measured, the potential can be reversed to +0.3 V and the reverse transient current can be measured and analyzed using electrochemical methods known in the art, e.g., as disclosed in U.S. Application No. 08/981385 filed April 17, 1998, and U.S. 5,942,102 (both incorporated herein by reference in their entirety), to calculate the diffusion coefficient and concentration of ferrocyanide.

The first potential application may also be used to subtract interferences. The ferricyanide reacts more quickly with interfering substances which are free in the plasma than with hemoglobin which is packaged in red blood cells. The ratio of the minimum to maximum (or extrapolated) currents resulting from the first potential application may be used to yield the concentration of reduced mediator measured by the second potential pulse (at +0.3 V), thereby yielding a more accurate, corrected concentration of hemoglobin. The simplest correction would be:

$$[\text{Hb}]' = [\text{Hb}] * (1 - i_{\text{min}}/i_{\text{max}})$$

wherein $[\text{Hb}]'$ is the corrected concentration of hemoglobin, $[\text{Hb}]$ is the uncorrected concentration of hemoglobin, i_{min} is the measured current and i_{max} is the extrapolated current resulting from the first potential application.

Obtaining Other Electrochemical Measurements Using The Hemoglobin Sensor

10 In certain embodiments, information relating to the rate of a chemical reaction that yields at least one electroactive product can be obtained using the sensor by ensuring that the chemical reaction is localized at a site remote from the electrode used to electrochemically react the electroactive product(s).

The site of the chemical reaction is sufficiently removed from the electrode such that the mass transfer of the electroactive species from the chemical reaction site to the electrode effectively controls the current flowing at the electrode at any time. This arrangement ensures a substantially linear electroactive species concentration gradient between the chemical reaction site and the electrode. The concentration of the electroactive species is maintained at effectively zero at the electrode by the electrochemical reaction taking place there. The time course of the magnitude of this concentration gradient will therefore be substantially determined only by the time course of the concentration of the electroactive specie(s) at the chemical reaction site and the diffusion coefficient(s) of the electroactive reaction product(s) in the liquid medium. Since the current flowing at the electrode is proportional to the concentration gradient of the electroactive specie(s) at the electrode, the time course of this current will reflect the time course of the chemical reaction occurring at the remote site. This allows the current measured at the electrode (or charge passed if the current is integrated) to be used as a convenient measure of the rate and extent of the chemical reaction taking place.

25 An example of a suitable method for ensuring that the chemical reaction is remote from the working electrode is to immobilize one or more of the reaction components on a solid surface remote from the electrode. The reaction component(s) can be immobilized by incorporating them in a polymeric matrix that is dried on or otherwise attached to the solid surface. The reaction component(s) can also be tethered directly to the solid surface either by chemical or physical bonding. Alternatively one or more of the reaction components can simply be dried onto the solid surface without special immobilization means. In this situation one or more of the reaction components is sufficiently low in mobility, in the liquid matrix filling the electrochemical cell, that it does not migrate substantially from the position where it was dried during the time period that the electrochemical current can be usefully monitored to perform the required measurement. In this context substantial migration means that the slowest moving component required for the chemical reaction approaches closely enough to the working electrode that Cottrell type depletion kinetics begin to effect the time course of the current flowing at the electrode.

The range of separation distance between the chemical reaction site and the working electrode in preferred embodiments is desirably less than about 1 cm, preferably less than 5 mm, more preferably between 5, 10, 50, 100, 200, 500 microns and 5 mm, more preferably between 5, 10, 50, 100, 200 and 500 microns, and most preferably between 5, 10, 50, 100 and 200 microns.

5 As well as the working electrode, at least a counter electrode in contact with the liquid sample is provided to complete the electrochemical circuit. Optionally the counter electrode can function as a combined counter/reference electrode or a separate reference electrode can be provided. In a preferred embodiment, the working electrode and counter electrode are desirably spaced apart at a distance greater than about 300 microns, preferably at a distance greater than about 500 microns, more preferably at a distance between about 500 microns and 10 mm, more
10 preferably at a distance between about 500 microns and 1, 2, 5 mm, and most preferably between 1 mm and 2, 5, 10 mm.

The working electrode is constructed of materials that do not react chemically with any component with which it will come into contact during use to an extent that interferes with the current response of the electrode. If the working electrode is to be used as an anode then examples of suitable materials are platinum, palladium, carbon,
15 carbon in combination with inert binders, iridium, indium oxide, tin oxide, mixtures of indium and tin oxide. If the working electrode is to be used as a cathode then in addition to the material listed above other suitable materials are steel, stainless steel, copper, nickel, silver and chromium.

Examples of materials suitable for the counter electrode are platinum, palladium, carbon, carbon in combination with inert binders, iridium, indium oxide, tin oxide, mixture of indium and tin oxide, steel, stainless steel,
20 copper, nickel, chromium, silver and silver coated with a substantially insoluble silver salt such as silver chloride, silver bromide, silver iodide, silver ferrocyanide, silver ferricyanide.

The site of the chemical reaction can be localized on a bare wall or on the counter electrode, remote from the working electrode. The site of the chemical reaction can be on the same plane as the working electrode or more preferably in a plane facing and substantially parallel to the working electrode.

25 A sensor suitable for use with certain embodiments includes a working electrode and a counter electrode which are disposed on an electrically insulating substrate. On a second substrate is disposed a layer of chemical reactants, where at least one of the reactants is substantially immobilized on the substrate. In use, the space between walls of the sensor is filled with a liquid containing a substance which is capable of reacting with the reagents to produce at least one electroactive species. The products of the chemical reaction diffuse towards the working
30 electrode where the electroactive specie(s) are electrochemically reacted to produce a current. The magnitude of the current or the charge passed at a particular time, or the time course of the current or charge passed can then be used to obtain a measure of the rate or extent of the chemical reaction occurring at the reactant layer.

In another embodiment of the sensor, the reactants are disposed on the counter electrode which is disposed on an electrically resistive substrate. In this embodiment the materials of construction of the counter electrode are
35 inert to reaction with any of the components of the reactants disposed on the electrode.

The method of obtaining an electrochemical measurement described above may be applied to any suitable electrochemical system, including hemoglobin. An example of the method as applied to a typical, albeit different, electrochemical system is measuring glucose in whole blood using the enzyme PQQ dependent glucose dehydrogenase (GDH_{pqq}) and a redox mediator. In this reaction glucose in the blood reacts with GDH_{pqq} to form gluconic acid. In the process, the PQQ in the enzyme is reduced. A mediator, such as potassium ferricyanide, then oxidizes the PQQ in the enzyme and forms ferrocyanide. The enzyme in the oxidized form can then react with further glucose. The net effect of this reaction is to produce two ferrocyanide molecules for each glucose molecule reacted. Ferrocyanide is an electroactive species, and so can be oxidized at an electrode to produce a current. Other suitable enzymes for this reaction are glucose oxidase (GOD) or NAD dependent glucose dehydrogenase. For other reactions, lactate dehydrogenase and alcohol dehydrogenase may be used. Other suitable redox mediators include ferrocinium, osmium complexes with bipyridine, and benzophenone.

The reaction of glucose in whole blood with the enzyme can be slow, taking up to a few minutes to go to completion. Also, the higher the haematocrit of the blood sample, the slower the reaction. The haematocrit of the blood is the volume fraction of red cells in the whole blood sample. For example, a solution containing 50 mg/ml GDH_{pqq}, 0.9 M potassium ferricyanide and 50 mM buffer at pH 6.5 was deposited on the counter electrode and the water removed to leave a dried reactant layer. In this layer the GDH_{pqq} is large enough to be effectively immobilized on the counter electrode, whereas the ferricyanide can mix more evenly throughout the liquid in the electrochemical cell. The blood sample was introduced into the cell and a potential of +300 mV immediately applied between the working electrode and the counter electrode. Although a potential of +300 mV is most preferred for oxidizing ferrocyanide, the potential is desirably between +40 mV and +600 mV, preferably between +50 mV and +500 mV, and more preferably between +200 mV and +400 mV. In the cell, the working electrode consisted of a layer of gold sputtered onto a polyester substrate and the counter electrode consisted of a layer of palladium sputtered onto a polyester substrate.

Current traces were recorded for blood samples of different haematocrits, showing a faster rate of reaction in lower haematocrit blood, i.e., 20%, 42%, and 65% haematocrit in blood. The glucose level in each blood sample was approximately the same, namely 5.4 mM for the 65% haematocrit sample, 5.5 mM for the 42% haematocrit sample, and 6.0 mM for the 20% haematocrit sample.

The current measured can be approximately given by the equation:

$$i = -FADc/L$$

where i is the current, F is Faraday's constant (96486.7 C/mole), A is the electrode area, D is the diffusion coefficient of the ferrocyanide in the sample, C is the concentration of ferrocyanide at the reaction site and L is the distance between the reaction site and the electrode. The reaction rate, given by the rate of change of C with time is therefore given by:

$$dC/dt = -(L/FAD)di/dt.$$

For the reactions discussed above, between 6 and 8 seconds for the 20%, 42%, and 65% haematocrit samples, the average di/dt was 3.82, 2.14 and 1.32 microamps/second, respectively. The diffusion coefficients of ferrocyanide for these samples were 2.0×10^{-6} , 1.7×10^{-6} and 1.4×10^{-6} cm^2/sec for 20%, 42%, and 65% haematocrit samples, respectively. The electrode area was 0.1238 cm^2 and L was 125 microns. These values yield reaction rates of 2.0, 1.3, and 0.99 mM/second for the 20%, 42%, and 65% haematocrit samples, respectively.

The method as described above for measuring the reaction of glucose in blood may be suitably modified to apply to other electrochemical systems, including hemoglobin, as will be appreciated by one skilled in the art.

The above description discloses several methods and materials of the present invention. This invention is susceptible to modifications in the methods and materials, as well as alterations in the fabrication methods and equipment. Such modifications will become apparent to those skilled in the art from a consideration of this disclosure or practice of the invention disclosed herein. Consequently, it is not intended that this invention be limited to the specific embodiments disclosed herein, but that it cover all modifications and alternatives coming within the true scope and spirit of the invention as embodied in the attached claims.

WHAT IS CLAIMED IS:

1. A device for detecting a presence or an absence of hemoglobin in an aqueous sample, the device comprising an electrochemical cell having a sensing chamber, a first electrode, a second electrode, an aperture for admitting the sample into the sensing chamber, and a reagent contained within the sensing chamber wherein the reagent is capable of being reduced by hemoglobin to generate an electrical signal indicative of the presence or absence of hemoglobin.
2. The device of claim 1, wherein the electrochemical cell is designed to be disposed of after use in a single experiment.
3. The device of claim 1, wherein the first electrode comprises a sensing electrode.
4. The device of claim 1, wherein the first electrode comprises a material selected from the group consisting of platinum, palladium, carbon, indium oxide, tin oxide, gold, iridium, copper, steel, silver, and mixtures thereof.
5. The device of claim 1, wherein the first electrode is formed by a technique selected from the group consisting of sputtering, vapor coating, screen printing, thermal evaporation, ink jet printing, ultrasonic spraying, slot coating, gravure printing and lithography.
6. The device of claim 1, wherein the second electrode comprises a counter electrode.
7. The device of claim 1, wherein the second electrode comprises a metal in contact with a metal salt.
8. The device of claim 7, wherein the metal in contact with a metal salt is selected from the group consisting of silver in contact with silver chloride, silver in contact with silver bromide, silver in contact with silver iodide, mercury in contact with mercurous chloride, and mercury in contact with mercurous sulfate.
9. The device of claim 7, the electrochemical cell further comprising a third electrode.
10. The device of claim 9, wherein the third electrode comprises a reference electrode.
11. The device of claim 1, wherein the second electrode comprises a reference electrode.
12. The device of claim 1, wherein the reagent is selected from the group consisting of dichromate, vanadium oxides, permanganate, electroactive organometallic complexes, quinones, and dichlorophenolindophenol.
13. The device of claim 1, wherein the reagent comprises ferricyanide.
14. The device of claim 1, the sensing chamber further comprising a buffer, wherein the buffer is contained within the sensing chamber.
15. The device of claim 14, wherein the buffer is selected from the group consisting of phosphates, carbonates, alkali metal salts of mellitic acid, and alkali metal salts of citric acid.
16. The device of claim 1, the sensing chamber further comprising a red blood cell lysing agent.
17. The device of claim 16, wherein the lysing agent is selected from the group consisting of ionic detergents, nonionic detergents, proteolytic enzymes, and lipases, saponin, sodium dodecyl sulfate, cetyl trimethylammonium bromide, polyethoxylated octylphenol, and mixtures thereof.
18. The device of claim 1, wherein the sample comprises whole blood.

19. The device of claim 1, wherein the second electrode is mounted in opposing relationship a distance of less than about 500 microns from the first electrode.
20. The device of claim 1, wherein the second electrode is mounted in opposing relationship a distance of less than about 150 microns from the first electrode.
- 5 21. The device according to claim 1, wherein the second electrode is mounted in opposing relationship a distance of less than about 150 microns and greater than about 50 microns from the first electrode.
22. The device of claim 1, further comprising an interface for communication with a meter.
23. The device of claim 31, wherein the interface communicates a voltage or a current.
24. The device of claim 1, wherein the electrochemical cell comprises a thin layer electrochemical cell.
- 10 25. A method for detecting a presence or an absence of hemoglobin in an aqueous sample, the method comprising:
- providing a device comprising an electrochemical cell having a sensing chamber, a first electrode, a second electrode, an aperture for admitting the sample into the sensing chamber, and a reagent contained within the sensing chamber, wherein the reagent is capable of being reduced by hemoglobin to generate an electrical signal indicative of
- 15 the presence or absence of hemoglobin;
- providing an aqueous sample;
- allowing the sample to flow through the aperture and into the sensing chamber, such that the first and second electrodes are substantially covered; and
- obtaining an electrochemical measurement indicative of the presence or absence of hemoglobin present in the
- 20 sample.
26. A method for measuring hemoglobin in a fluid whole blood sample, the whole blood sample containing red blood cells, the red blood cells containing hemoglobin, wherein the method comprises:
- providing a device comprising an electrochemical cell having a sensing chamber, a first electrode, a second electrode, an aperture for admitting the sample into the sensing chamber; a reagent contained within the sensing
- 25 chamber and capable of being reduced by hemoglobin; and a red blood cell lysing agent contained within the sensing chamber;
- placing the whole blood sample in the sensing chamber, whereby the lysing agent contained within the sensing chamber releases hemoglobin from the red blood cells, whereby the hemoglobin thus released reduces the reagent; and
- 30 obtaining an electrochemical measurement indicative of the level of hemoglobin present in the whole blood sample.
27. The method of claim 26, wherein the step of obtaining an electrochemical measurement indicative of the presence or absence of hemoglobin in the sample comprises:
- applying a positive potential to the first electrode;
- 35 measuring a current generated by reaction of the reagent and hemoglobin;

analyzing the current to give a result, the result comprising a time required for substantial lysis of the red blood cells or a derived final value for the current;

calculating a percentage of the reaction completed as a function of time based on the result of the analyzing step;

5 reversing the potential on the first electrode;

measuring a transient current; and

determining a diffusion coefficient and a concentration of a reduced form of the reagent based on the transient current.

28. A method of manufacture of a device for detecting the presence or absence of hemoglobin in an aqueous sample, the device comprising an electrochemical cell having a sensing chamber, a first electrode, a second electrode, an aperture for admitting the sample into the sensing chamber, and a reagent contained within the sensing chamber, and wherein the reagent is capable of being reduced by hemoglobin to generate an electrical signal indicative of the presence or absence of hemoglobin, the method comprising:

15 forming an aperture extending through a sheet of electrically resistive material, the aperture defining a side wall of the sensing chamber;

mounting a first layer having a first electrode to a first side of the sheet and extending over the aperture whereby to define a first sensing chamber end wall, the first electrode facing the first side of the sheet;

20 mounting a second layer having a second electrode to a second side of the sheet and extending over the aperture whereby to define a second sensing chamber end wall in substantial overlying registration with the first layer, the second electrode facing the second side of the sheet, whereby the sheet and layers form a strip;

providing an aperture in the strip to permit entry of sample into the sensing chamber; and

providing a reagent capable of being reduced by hemoglobin, wherein the reagent is contained within the sensing chamber.

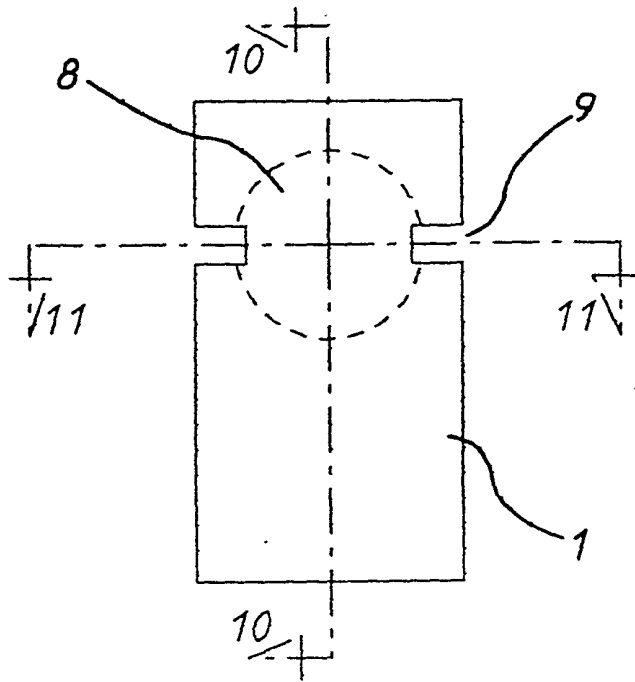


FIG. 1

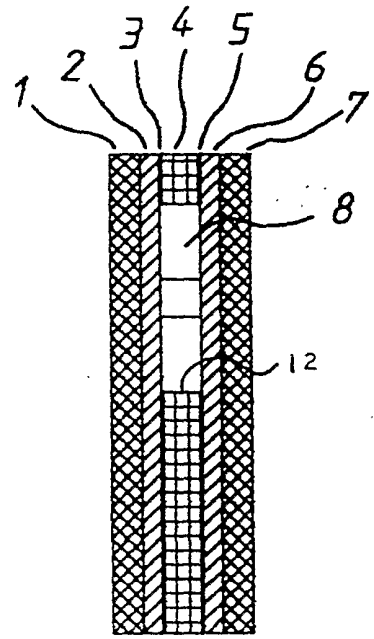


FIG. 2

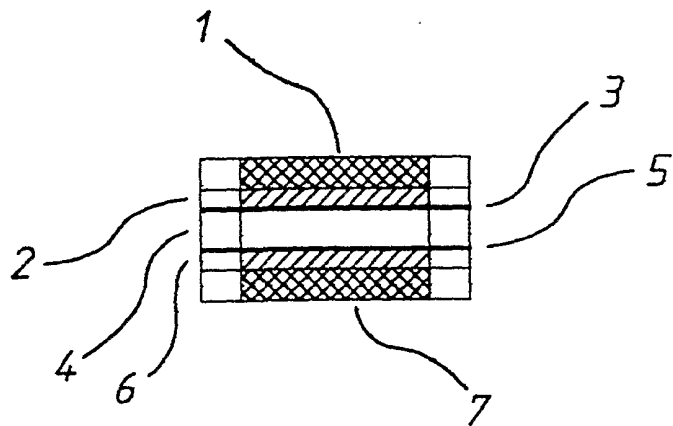


FIG. 3